

PowerXL DC1



PowerXL DG1



Enclosed 18-Pulse Drive



| | | |
|--|--|------------------|
| 2.1 | Product Overview | V6-T2-2 |
| OEM Drives | | |
| 2.2 | PowerXL DE1 Series | V6-T2-9 |
| 2.3 | PowerXL DC1 Series Drives | V6-T2-15 |
| 2.4 | PowerXL DA1 Series Drives | V6-T2-25 |
| 2.5 | M-Max Series Drives | V6-T2-36 |
| General Purpose Industrial Drives | | |
| 2.6 | PowerXL DG1 Series Drives | |
| | DG1 Drives | V6-T2-48 |
| | DG1 Enclosed Drives | V6-T2-74 |
| 2.7 | SVX Drives | |
| | SVX Drives | V6-T2-102 |
| | SVX Enclosed Drives | V6-T2-140 |
| General Purpose HVAC Drives | | |
| 2.8 | PowerXL DH1 Series Drives | |
| | PowerXL DH1 Series Drives | V6-T2-175 |
| | PowerXL DH1 Series Enclosed Drives | V6-T2-195 |
| 2.9 | H-Max Series Drives | |
| | H-Max Drives | V6-T2-223 |
| | H-Max IntelliPass and IntelliDisconnect Drives | V6-T2-235 |
| Performance Drives | | |
| 2.10 | SPX Drives | V6-T2-257 |
| 2.11 | Clean Power Drives | |
| | Product Overview | V6-T2-298 |
| | Enclosed Passive Filtered Drives | |
| | EGF Drives | V6-T2-305 |
| | CFX Drives | V6-T2-325 |
| | HCX Enclosed 12-Pulse Drives | V6-T2-351 |
| | CPX Enclosed 18-Pulse Drives | V6-T2-355 |
| | RGX Enclosed Regenerative Drives | V6-T2-379 |
| 2.12 | LCX Liquid Cooled Drives | V6-T2-392 |
| 2.13 | SPA/SPN/SPI Common DC Bus Drives | V6-T2-408 |

Revision notes

Volume 6—Solid-State Motor Control, CA08100007E

Tab 2—Adjustable Frequency Drives

| Revision date | Section | Change page(s) | Description |
|---------------|---------|----------------|--------------------------------------|
| 11/01/2018 | 2.8 | V6-T2-195 | Content edit, insert new bullet text |



Powering Business Worldwide

2.1

Adjustable Frequency Drives

Product Overview

2

A Drive For Any Application

Your application might call for an ultra-compact solution, clean power or future configurability.

Whether it is a standard product from the catalog or a custom-enclosed variable frequency drive (VFD) solution, Eaton delivers.

Eaton drives are designed for industrial, HVAC, water/wastewater treatment, machinery OEM and other application demands.

Whether designing a new industrial complex, renovating an existing structure or developing a new machine, Eaton has the right product for your application.

PowerXL® Family



| Application | DE1 | DC1 | DA1 | DH1 | DG1 | EGF (Filtered) |
|-----------------------------|-----|-----|-----|------|------|----------------|
| Single-phase input | Yes | Yes | Yes | Yes | Yes | — |
| Maximum 230 V hp | 3 | 15 | 7.5 | 125 | 125 | 125 |
| Maximum 480 V hp | 10 | 30 | 15 | 250 | 1000 | 250 |
| Maximum 575 V hp | — | — | 20 | 250 | 800 | 250 |
| OEM drives | | | | | | |
| General purpose HVAC drives | | | | | | |
| General purpose industrial | | | | | | |
| Performance | | | | | | |
| Low harmonic | | | | | | |

9000X Family























| Application | M-Max | H-Max | SVX | SPX | LCX | SPI | CFX (Filtered) | HCX (12-Pulse) | CPX (18-Pulse) | RGX (AFE) |
|-----------------------------|-------|-------|------|------|------|------|----------------|----------------|----------------|-----------|
| Single-phase input | Yes | — | Yes | Yes | — | — | — | — | — | — |
| Maximum 230 V hp | 15 | 125 | 125 | 125 | — | — | 100 | 60 | 200 | — |
| Maximum 480 V hp | 25 | 250 | 250 | 2200 | 3200 | 2400 | 400 | 125 | 800 | 900 |
| Maximum 575 V hp | 7.5 | 200 | 200 | 2300 | 2800 | 2200 | 400 | — | 800 | 750 |
| OEM drives | | | | | | | | | | |
| General purpose HVAC drives | | | | | | | | | | |
| General purpose industrial | | | | | | | | | | |
| Performance | | | | | | | | | | |
| Low harmonic | | | | | | | | | | |



- = Open drive standard
- = Enclosed drive standard
- = Enclosed—consult Enclosed Drives Plant (Watertown, WI)

A History of Drives

Throughout the years, Eaton's drive offering has evolved as technology has changed. Some drives are no longer available, but are listed below for reference and aid in finding the drive in our current offering that fits your application. If needed, please contact the Drives Technical Resource Center (1-877-ETN-CARE, option 2, option 6) for assistance in finding the current drive to suit your needs.

Legacy Product Offering

| |  |  |  |  |  |  |  |  |
|-----------------------------|---|--|---|---|---|--|---|---|
| Application | HVX | SLX | NFX | GVX | MVX | SV | HV | CP (18-Pulse) |
| Single-phase input | Yes | — | Yes | Yes | Yes | Yes | Yes | — |
| Maximum 230 V hp | 75 | 40 | 2 | 50 | 7.5 | 100 | 150 | — |
| Maximum 480 V hp | 150 | 100 | — | 125 | 10 | 1100 | 1000 | 800 |
| Maximum 575 V hp | — | 100 | — | 125 | 10 | 800 | 700 | — |
| OEM drives | |  |  | | | | | |
| General purpose HVAC drives |  |  | | | | |  | |
| General purpose industrial | |  | |  | |  | | |
| Performance | | | |  |  | | |  |
| Low harmonic | | | | | | | |  |
| Current product offering | H-Max | DG1 | DE1 | DC1 / DG1 | DC1 / DA1 | DG1 | H-Max | CPX |

 = Open drive standard
 = Legacy product; no longer available

2.1

Adjustable Frequency Drives

Product Overview

Product Selection Guide

2

OEM Drives

PowerXL DE1 Series



Page V6-T2-9

Applications

Machinery OEM variable speed starter

Description

The DE1 VSS is a variable speed starter that brings the simplicity of a electromechanical starter with the additional functionality of a variable frequency drive. The DE1 offers simple installation in a compact, keypad-less design. With the use of the intuitive plug-in configuration module or the integration of SmartWire-DT®, the DE1 is the simplest solution for variable speed. The VSS is great for HVAC, material handling and general MOEM applications.

Offering/Range

Single-phase to three-phase
230 V to 3 hp
Three-phase to three-phase
230 V to 3 hp
Three-phase to three-phase
480 V to 10 hp

Enclosure

Open IP20

PowerXL DC1 Series



Page V6-T2-15

Applications

General-purpose microdrive
Machinery OEM drive

Description

The DC1 VFD is a compact VFD with only 14 basic parameters, SmartWire-DT® and EtherNet/IP connectivity and outstanding ease of mounting and installation. The DC1 is perfect for quick commissioning and is ideal for panel builders. The newest version adds support for sensorless vector control and permanent magnet motor compatibility. This drive supports single-phase motor applications, and an IP66 offering provides unique mounting with integrated disconnect and cover controls.

Offering/Range

Single-phase to single-phase
115 V to 0.75 hp
230 V to 1.5 hp
Single-phase to three-phase
115 V to 1.5 hp
230 V to 5 hp
Three-phase to three-phase
230 V to 15 hp
480 V to 30 hp

Enclosure

Open IP20, IP66

PowerXL DA1 Series



Page V6-T2-25

Applications

High-performance microdrive
Machinery OEM drive

Description

The DA1 VFD is the perfect match for demanding OEM applications. High-performance processor, safe torque off, multiple fieldbus protocols including SmartWire-DT, sensorless vector control and the possibility to operate permanent magnet motors are sure to leave a lasting impression. The DA1 includes an IP66 offering as well.

Offering/Range

Single-phase to three-phase
230 V to 3 hp
Three-phase to three-phase
230 V to 7.5 hp
480 V to 15 hp
600 V to 20 hp

Enclosure

Open IP20, IP66

M-Max Series



Page V6-T2-36

Applications

General-purpose microdrive

Description

The M-Max™ VFD is a compact microdrive with a broad power range, perfectly suited for machinery applications in many industries: food and beverage, HVAC, packaging, pumping, general machine and more.

Offering/Range

Single-phase to three-phase
115 V to 1.5 hp
230 V to 3 hp
Three-phase to three-phase
230 V to 15 hp
480 V to 25 hp
575 V to 7.5 hp

Enclosure

Open IP20, IP21
Open NEMA 1

Product Selection Guide

General Purpose Industrial Drives

PowerXL DG1 Series



Page V6-T2-48

Applications

General-purpose drive

Description

The DG1 general-purpose drives are part of the Eaton next-generation PowerXL series of adjustable frequency drives specifically engineered for today's more demanding commercial and industrial applications. With an industry-leading energy-efficiency algorithm, high short-circuit current rating and robust design, the DG1 offers customers increased efficiency, safety and reliability.

Offering/Range

Single-phase to three-phase
230 V to 40 hp
480 V to 60 hp

Three-phase to three-phase
230 V to 125 hp
480 V to 1000 hp
575 V to 800 hp

Enclosure

Open IP00, IP20, IP21, IP54
Open NEMA 1, 12
Enclosed NEMA 1, 12, 3R
Consult Eaton for NEMA 4X

SVX



Page V6-T2-102

Applications

General-purpose drive

Description

The SVX VFD is a general-purpose, compact, modular solution for variable speed applications and offers a variety of features and application capabilities. With a reliable design, quick startup and flexibility with options, the SVX provides a great solution for customer's commercial and industrial applications.

Offering/Range

Single-phase to three-phase
230 V to 40 hp
480 V to 60 hp

Three-phase to three-phase
230 V to 125 hp
480 V to 2200 hp
575 V to 2300 hp

Enclosure

Open IP20, IP21, IP54
Open NEMA 1, 12
Enclosed NEMA 1, 12, 3R
AGSVX (agriculture config)
Consult Eaton for NEMA 4X

General Purpose HVAC Drives

PowerXL DH1 Series



Page V6-T2-175

Applications

General-purpose HVAC drive

Description

The DH1 HVAC/R drives are part of the Eaton next generation PowerXL series of variable frequency drives specifically engineered to exceed the demands of the HVAC/R market. With an industry-leading energy efficiency algorithm, high short-circuit current rating and robust design, the DH1 offers customers increased efficiency, safety and reliability.

Offering/Range

Single-phase to three-phase
230 V to 40 hp
480 V to 60 hp

Three-phase to three-phase
230 V to 125 hp
480 V to 250 hp
575 V to 250 hp

Enclosure

Open IP21, IP54
Open NEMA 1, 12

Enclosed PowerXL DH1 Series



Page V6-T2-195

Applications

General-purpose HVAC drive

Description

The enclosed DH1 HVAC/R drives are part of the Eaton next generation PowerXL series of variable frequency drives specifically engineered to exceed the demands of the HVAC/R market. The enclosed DH1 construction features allow for easy installation, reliable operation and serviceability with additional onboard wire space and removable conduit plates with knockouts.

Offering/Range

Three-phase to three-phase
208 V to 100 hp
230 V to 125 hp
480 V to 250 hp
575 V to 250 hp

Enclosure

Enclosed NEMA 1, 12, 3R
EHC—Compact Disconnect
EHD—Disconnect
EHB—Bypass

Product Selection Guide

2

Performance Drives

SPX



Page V6-T2-257

Applications

High-performance drive

Description

The SPX VFD is a compact, modular solution for high-performance variable speed applications. When high performance is critical to a customer's application, the SPX VFD is the ideal choice. They are equipped with high processing power, capable of closed loop feedback, safe torque off, permanent magnet motor operation and very precise motor control.

Offering/Range

Single-phase to three-phase
230 V to 40 hp
480 V to 60 hp
Three-phase to three-phase
230 V to 125 hp
480 V to 2200 hp
575 V to 2300 hp

Enclosure

Open IP20, IP21, IP54
Open NEMA 1, 12
Enclosed NEMA 1, 12, 3R
AGSVX (agriculture config)
Consult Eaton for NEMA 4X

Low Harmonic Drives Passive Filtered—EGF



Page V6-T2-305

Applications

Filtered drive

Description

Eaton's enclosed passive filtered drives use tuned passive filters to significantly reduce line harmonics at the drive input terminals.

Offering/Range

208 V: 0.75–100 hp
230 V: 0.75–125 hp
480 V: 1–250 hp

Enclosure

Enclosed NEMA 1, 12, 3R
Consult Eaton for NEMA 4X

Passive Filtered—CFX



Page V6-T2-325

Applications

Filtered drive

Description

The CFX VFD uses a tuned passive filter to significantly reduce the line harmonics generated by a standard 6-pulse drive. Designed for small to mid-sized drive applications, the CFX, in conjunction with the CPX, offers the user a tiered approach to harmonic mitigation.

Offering/Range

Three-phase to three-phase
230 V to 100 hp
480 V to 400 hp
575 V to 400 hp

Enclosure

Enclosed NEMA 1, 12, 3R
Consult Eaton for NEMA 4X

Product Selection Guide

Performance Drives

Low Harmonic Drives

12-Pulse—HCX



Page V6-T2-351

Applications

12-pulse drive

Description

The enclosed HCX drive is specifically tailored for HVAC applications where clean power is necessary. The enclosed HCX drive uses Eaton's SVX drive with a 12-pulse phase shifting transformer to deliver a substantial reduction in voltage and current harmonics.

Offering/Range

208 V: 7.5 to 60 hp
230 V: 7.5 to 60 hp
480 V: 25 to 125 hp

Enclosure

Enclosed NEMA 1, 12

18-Pulse—CPX



Page V6-T2-355

Applications

18-pulse drive

Description

The CPX VFD uses advanced 18-pulse clean power technology that significantly reduces line harmonics at the drive input terminals and is designed to exceed IEEE 519-1992 requirements. Delivering true power factor and reducing harmonic distortion prevents upstream transformer overheating and overloading of breakers and feeders, enabling the application of variable frequency drives on generators and other high-impedance power systems.

Offering/Range

Three-phase to three-phase
230 V to 200 hp
480 V to 800 hp
575 V to 800 hp
(Consult Eaton for larger hp)

Enclosure

Enclosed NEMA 1, 12, 3R
Consult Eaton for NEMA 4X

Regenerative—RGX



Page V6-T2-379

Applications

Regenerative drive

Description

The RGX is an enclosed solution to meet the needs of customer's regenerative load applications. It combines Eaton's comprehensive family of DC common DC bus drive products together with the necessary circuit protection and filtering to give the customer an all-in-one package. The RGX is available in 480 V and 575 V configurations in sizes up through 900 hp.

Offering/Range

Three-phase to three-phase
480 V: 900 hp
575 V: 750 hp

Enclosure

Enclosed NEMA 1

Product Selection Guide

2

Performance Drives

Low Harmonic Drives

LCX



Page V6-T2-392

Applications

Liquid cooled drive

Description

The LCX VFD is well suited for locations when air-cooling would be difficult or expensive or when space is at a premium. These extremely compact drives are suitable for ships, mines and heavy industry.

Offering/Range

Three-phase to three-phase
480 V to 3200 hp
575 V to 2800 hp

Enclosure

Open IP00

SPA/SPN/SPI



Page V6-T2-408

Applications

Common DC bus drive
Active front end drive
Regenerative drive

Description

Eaton offers a comprehensive range of common DC bus VFD products. This includes a number of front-end units and inverter units in the entire power range. Common DC bus drives are used in a multitude of applications and combinations. Drives that are braking can transfer the energy directly to the drives in a motoring mode.

Offering/Range

Three-phase to three-phase
480 V to 2400 hp
575 V to 2200 hp

Enclosure

Open IP00, IP21
Open NEMA 1

PowerXL DE1 Series



Product Description

Eaton's PowerXL® DE1 variable speed starter offers the advantages of both a motor starter and a variable frequency drive in a single device. The DE1 is a compact and easy-to-use device with the ability to change the speed of the motor with the simplicity of a contactor starter. With 14 basic parameters, SmartWire-DT® connectivity and an intuitive configuration module, the DE1 setup and commissioning is easy for any panel builder and MOEM. The DE1 was designed for customers who have concerns of the complexity of a VFD but still require variable frequency and advanced motor protection.

Models rated at 480 volts, three-phase, 50/60 Hz are available in sizes ranging from 0.5 to 10 hp. Models rated at 230 volts, single-phase in/three-phase out, 50/60 Hz are available in sizes ranging from 0.33 to 3 hp.

The DE1 VSS is designed without a keypad to provide a simplistic, cost effective solution. Units are shipped without a keypad. In order to change parameters, there are accessories such as the configuration module that can change up to 5 parameters or connectivity products to connect to the drivesConnect PC Tool.

Features

- Compact, space-saving design
- Rugged design rated up to 60 °C without derating
- DIN rail and screw mountable
- Narrow footprint for true side-by-side installation
- Rated for group motor applications
- Low capacitor design for low harmonics
- Control terminal blocks
 - Three digital inputs
 - One digital/analog (programmable) input
 - One relay output
- Contactor style power wiring
- RS-485/Modbus as standard
- Efficient, simple design without a keypad
 - Three indicating LEDs for fault and condition status
- Reliable design—
 - 150% for 60 s
 - 175% for 2 s
- SmartWire-DT and EtherNet/IP ready for expanding communication gateways

Contents

Description

PowerXL DE1 Series

| | <i>Page</i> |
|---|-----------------|
| Catalog Number Selection | V6-T2-10 |
| Product Selection | V6-T2-10 |
| Accessories | V6-T2-11 |
| Technical Data and Specifications | V6-T2-12 |
| Dimensions | V6-T2-14 |

Standards and Certifications

Product

- Complies with EN 61800-3

Safety

- IEC 61800-5-1
- CE
- UL
- CSA/cUL
- cTick
- UKRSekpro
- GOST R
- RoHS compliant



2.2


Adjustable Frequency Drives

PowerXL DE1 Series

Catalog Number Selection

2

DE1 Series Variable Speed Starter

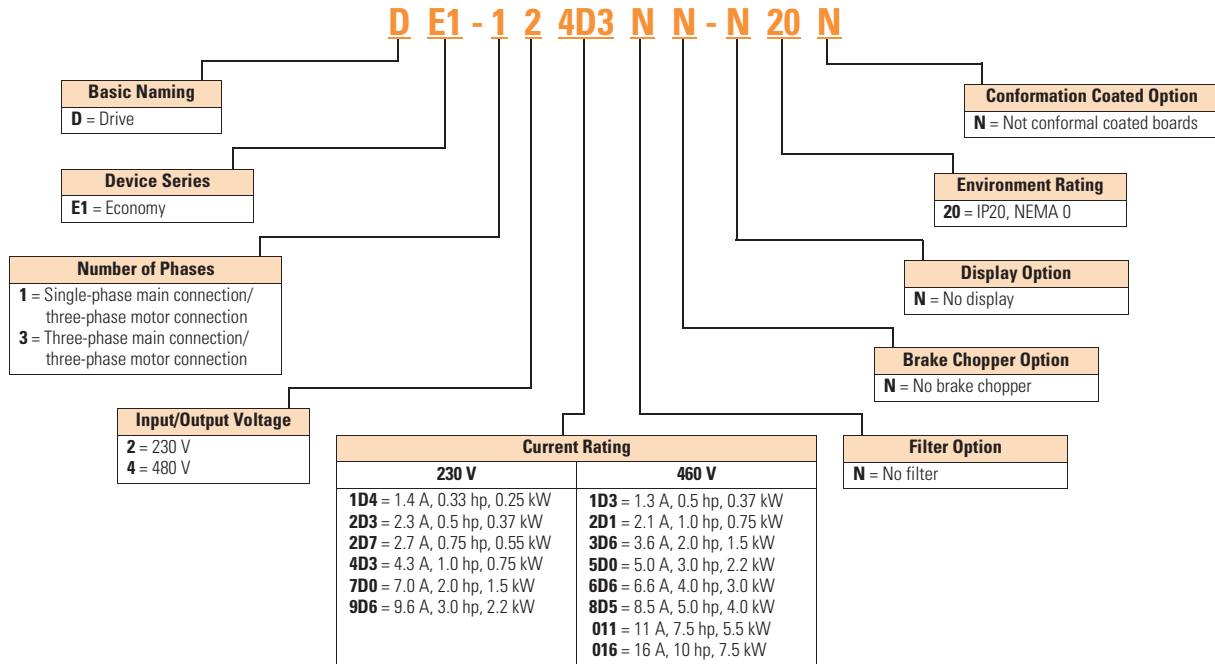

Product Selection

IP20

DE1 Series IP20 Enclosure Drives



| hp ^① | kW | Volts | 100% Continuous Current In (A) | Frame Size | Catalog Number ^② |
|-----------------|------|---|--------------------------------|------------|-----------------------------|
| 0.33 | 0.25 | 200–240 V single-phase in ^③ / 230 V three-phase out | 1.4 | 1 | DE1-121D4NN-N20N |
| 0.5 | 0.37 | | 2.3 | 1 | DE1-122D3NN-N20N |
| 0.75 | 0.55 | | 2.7 | 1 | DE1-122D7NN-N20N |
| 1 | 0.75 | | 4.3 | 1 | DE1-124D3NN-N20N |
| 2 | 1.5 | | 7 | 1 | DE1-127D0NN-N20N |
| 3 | 2.2 | | 9.6 | 2 | DE1-129D6NN-N20N |
| 0.5 | 0.37 | 380–480 V three-phase in/ 480 V three-phase out | 1.3 | 1 | DE1-341D3NN-N20N |
| 1 | 0.75 | | 2.1 | 1 | DE1-342D1NN-N20N |
| 2 | 1.5 | | 3.6 | 1 | DE1-343D6NN-N20N |
| 3 | 2.2 | | 5 | 2 | DE1-345D0NN-N20N |
| 4 | 3 | | 6.6 | 2 | DE1-346D6NN-N20N |
| 5 | 4 | | 8.5 | 2 | DE1-348D5NN-N20N |
| 7.5 | 5.5 | | 11.3 | 2 | DE1-34011NN-N20N |
| 10 | 7.5 | | 16 | 2 | DE1-34016NN-N20N |

Notes

- ① For all applications, select the unit such that the motor current is less than or equal to the rated continuous output current.
- ② These are constant torque/high overload rated drives.
- ③ For 230 V three-phase applications, refer to the three-phase to single-phase application note (AP040108EN) to properly set up the system.

Accessories

DE1 Series

PC Communication Kit and Copy/Paste Module

| Description | Catalog Number |
|--|----------------------|
| Bluetooth copy/paste communication stick | DX-COM-STICK2 |
| USB to RJ45 panel mount kit | DX-COM-PCKIT |
| USB to RJ45 PC Tool cable | DX-CBL-PC-3M0 |

Keypad Options

| Description | Catalog Number |
|--|----------------------|
| LED remote keypad—7-segment display, IP54 rated | DX-KEY-LED2 ① |
| Configuration module—plug-in unit, DIP switch and dial control | DXE-EXT-SET |

Extension Cables and Data Cable Splitter

| Description | Catalog Number |
|---|---------------------------|
| RJ45 communication cable w/terminating resistor | EASY-NT-R |
| RS-485 data cable, RJ45, 0.5 m | DX-CBL-RJ45-0M5 |
| RS-485 data cable, RJ45, 1.0 m | DX-CBL-RJ45-1M0 |
| RS-485 data cable, RJ45, 3.0 m | DX-CBL-RJ45-3M0 |
| RS-485 three-way data cable splitter, RJ45 | DX-SPL-RJ45-3SL |
| RS-485 data cable splitter, RJ45, (1 connector to 2 socket) | DX-SPL-RJ45-2SL1PL |

Communication Modules

| Description | Catalog Number |
|---|---------------------------|
| SmartWire-DT interface for DE1 and DC1 IP20 | DX-NET-SWD3 |
| Dual EtherNet/IP interface for DE1 and DC1 IP20 | DX-NET-ETHERNET2-2 |

Commoning Links ②

| Description | Max. Devices Used | Catalog Number |
|--------------------------|-------------------|-------------------|
| 460 V, three-phase link | 3xFS1 | XTCEXCLK3B |
| | 2xFS1 + 1xFS2 | |
| | 2xFS2 | |
| | 4xFS1 | XTCEXCLK4B |
| | 3xFS1 + 1xFS2 | |
| | 1xFS1 + 2xFS2 ③ | |
| | 5xFS1 | XTCEXCLK5B |
| | 4xFS1 + 1xFS2 | |
| | 2xFS1 + 2xFS2 ③ | |
| 3xFS2 ③ | | |
| 460 V, incoming terminal | — | XTCEXITB ④ |

Notes

- ① Includes 1 m RS-485 data cable.
- ② Commoning links can be used to connect multiple line side 460 V DE1 units for use in group motor applications.
- ③ These combinations may result in the total of the individual input currents exceeding the three-phase commoning link's and incoming connection block's ampacity (35 A).
- ④ Required for group motor applications when using the 460 V commoning links.

Technical Data and Specifications

DE1 Series

Ratings

PowerXL DE1 Basic Controller Standard Ratings

| Description | Specification |
|----------------------------|---|
| Protections | |
| Overload protection | 150% for 60s for every 600 seconds |
| Overvoltage protection | Yes |
| Undervoltage protection | Yes |
| Ground fault protection | Yes |
| Overtemperature protection | Yes |
| Motor overload protection | Yes |
| Motor stall protection | Yes |
| Short-circuit protection | 100 kAIC with Type J fuses, 65 kAIC with PKZM, 10 kAIC with FAZ |

Programmable Parameters

| Description |
|--|
| 14 Standard operation parameters |
| Programmable start function |
| DC-brake at start and stop |
| Adjustable switching frequency |
| Autorestart function after fault |
| Protections and supervisions |
| Power section fault indication |
| External fault |
| Fieldbus communication |
| Analog input range selection, signal scaling and filtering |
| Four preset speed reference |

Specifications

PowerXL DE1 Series

| Description | Specification |
|-------------------------------------|--|
| Input Ratings | |
| Input voltage (V_{in}) | $\pm 10\%$ |
| Input frequency (f_{in}) | 50/60 Hz (variation up to 48–62 Hz) |
| Connection to power | Maximum of one time every 30 seconds |
| Output Ratings | |
| Output voltage | 0 to V_{in} |
| Continuous output current | Continuous rated current I_N at ambient temperature max. 140 °F (60 °C), 150% for 60 seconds, 175% for 2 seconds |
| Output frequency | 0 to 500 Hz |
| Frequency resolution | 0.1 Hz |
| Initial output current (I_{IH}) | 175% for 2s for every 20 seconds Torque depends on motor |
| Control Characteristics | |
| Operation mode | U/f control, slip compensation |
| Switching frequency | 4 to 32 kHz |
| Voltage reference | 10 Vdc (max. 10 mA) |
| Field weakening point | 0 to 500 Hz |
| Acceleration time | 0.1 to 600 seconds |
| Deceleration time | 0.1 to 600 seconds |
| Ambient Conditions | |
| Ambient operating temperature | -10 °C to $+50\text{ °C}$, for 60 °C there is no derating required ^① |
| Storage temperature | -40 °C to $+70\text{ °C}$ |
| Relative humidity | 0 to 95% RH, noncondensing, non-corrosive, no dripping water |
| Enclosure class | IP20 (FS1–FS3) |

Note

^① All units do not require derating except for the 10 hp 460 V unit which may require derating depending on the switching frequency used.

Standards—DE1 Series Variable Speed Starter**I/O Specifications**

- Digital inputs DI1–DI4 are programmable
- Relay output is programmable
- DI3 and DI4 can be programmed to be digital, thermistor or analog

Includes:


- Four inputs (three digital and one digital/analog)
- Analog input
 - 4–20 mA
 - 0–10 V
- One relay output
- RS-485 interface

Reliability

- Pretested components
- Computerized testing
- Robust design rated to 60 °C

DE1 Series I/O Interface

| Terminal | Signal | Factory Preset | Description |
|----------|---------|--------------------------------|--|
| 0 V | 0 V | — | Reference potential 0 V connection |
| +0 V | +24 Vdc | — | Control voltage for DI1-DI4 Maximum load 100 mA Reference potential V |
| 1 | DI1 | FWD | +10 to 24 V |
| 2 | DI2 | REV | +10 to 24 V |
| 3 | DI3 | Fixed frequency FF1 | +10 to 24 V |
| | Ther. | Thermistor | Fixed frequency FF1 External fault: Trip at 3600 Ω Reset at 1600 Ω |
| 4 | DI4 | Digital Input 4 | Frequency reference value +10 to 24 V |
| | AI1 | Analog Input | Frequency reference value 0 to 10 V 0/4–20 mA Can be switched with parameter P16 |
| 13 | K13 | Relay 1, normally open contact | Active = RUN Maximum switching load: 250 Vac/6 A or 30 Vdc/5 A |
| 14 | K14 | Relay 1, normally open contact | Active = RUN Maximum switching load: 250 Vac/6 A or 30 Vdc/5 A |

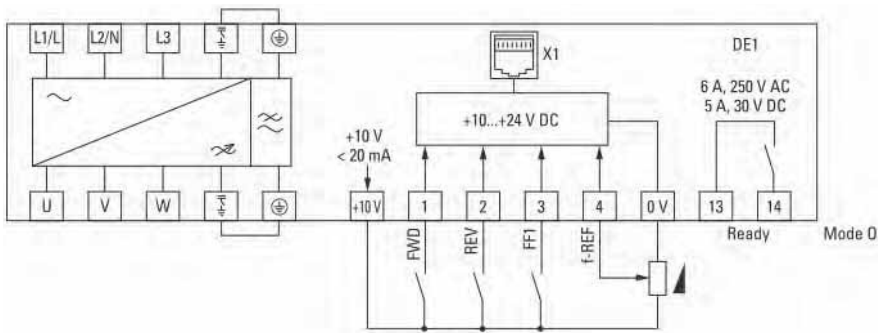

2.2


Adjustable Frequency Drives

PowerXL DE1 Series

Dimensions

Approximate Dimensions in Inches (mm)

2 DE1, Sizes FS1 and FS2, Degree of Protection IP20/NEMA 0

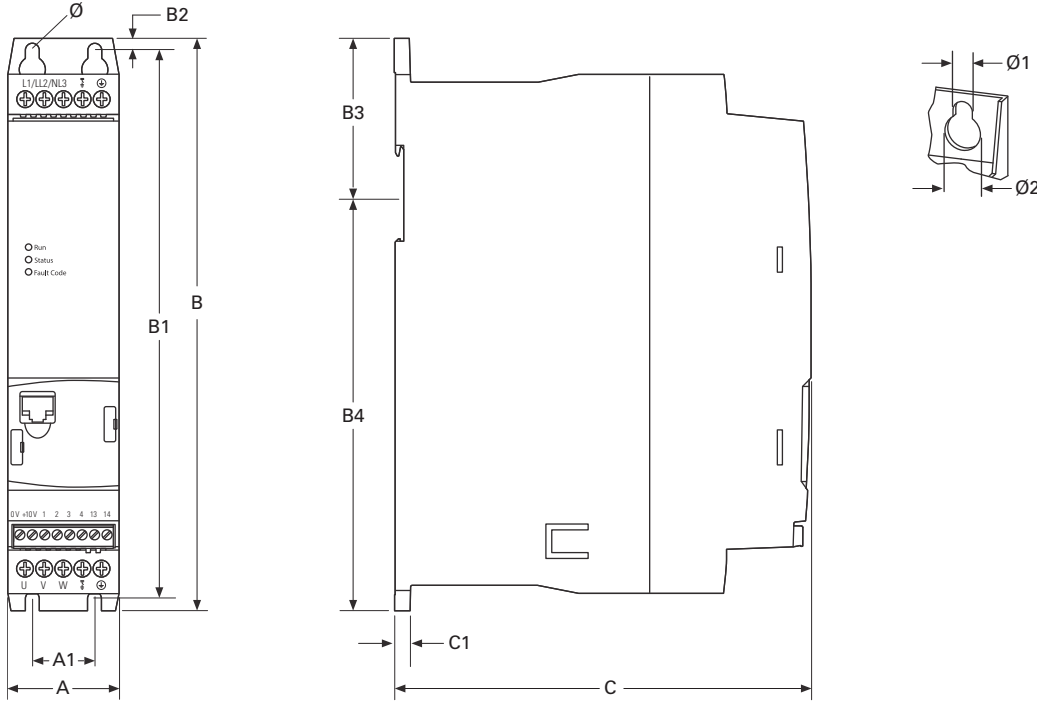

| Frame Size | A | A1 | B | B1 | B2 | B3 | B4 |
|------------|-------------|-------------|--------------|--------------|------------|-------------|--------------|
| FS1 | 1.77 (45.0) | 0.98 (25.0) | 9.09 (231.0) | 8.66 (220.0) | 0.20 (5.1) | 2.52 (64.0) | 6.54 (166.1) |
| FS2 | 3.54 (90.0) | 1.97 (50.0) | 9.09 (231.0) | 8.66 (220.0) | 0.20 (5.1) | 2.52 (64.0) | 6.54 (166.1) |

| Frame Size | C | C1 | Ø1 | Ø2 | Weight lbs (kg) |
|------------|--------------|------------|------------|-------------|-----------------|
| FS1 | 6.65 (169.0) | 0.26 (6.6) | 0.20 (5.1) | 0.39 (10.0) | 2.29 (1.04) |
| FS2 | 6.65 (169.0) | 0.26 (6.6) | 0.20 (5.1) | 0.39 (10.0) | 3.70 (1.68) |

PowerXL DC1 Series Drives



Product Description

Eaton's PowerXL® DC1 variable frequency drives are the next generation of drives specifically engineered for today's machinery applications.

The DC1 is compact with only 14 basic parameters, SmartWire-DT® and EtherNet/IP connectivity, and outstanding ease of mounting and installation. The newest version adds support for sensorless vector control and permanent magnet motor compatibility. The DC1 is perfect for quick commissioning and is ideal for panel builders. This drive supports single-phase motor applications, and detachable terminal blocks make control wiring much easier.

Models rated at 480 volts, three-phase, 50/60 Hz are available in sizes ranging from 1 to 30 hp. Models rated at 240 volts, single- or three-phase, 50/60 Hz are available in sizes ranging from 0.5 to 15 hp. Models rated at 115 volts, single-phase, 50/60 Hz are available in the 0.5 to 3 hp size range.

Features

- Compact, space-saving design
- Rugged and reliable—175% for 2 s, 50 °C rated
- DIN rail and screw mountable (FS1 and FS2)
- Side-by-side installation
- Industry-leading efficiency delivers energy savings to the customer
- Optional integrated EMC filters make the unit suitable for commercial and industrial networks
- Brake chopper as standard in frames 2 and higher
- Temperature-controlled fan
- RS-485/Modbus® and CANopen™ as standard
- PI controller as standard
- SmartWire capability
- Dual EtherNet/IP communication module
- Removable I/O terminal blocks
- Contactor style power wiring
- Designed for shaded-pole, single-phase motors and permanent split capacitor single-phase motors
- Sensorless vector control
- Permanent magnet motor compatibility

Standards and Certifications

Product

- Complies with EN61800-3 (2004)

EMC (At Default Settings)

- EMC Category C1, C2 and C3 at default settings (1 m, 5 m, 25 m)

Safety^①

- 61800-5-1
- EN 60529
- CE
- UL
- cUL
- UkrSepro
- c-Tick
- RoHS compliant



Note

- ① See unit nameplate for more detailed approvals.

Contents

Description

| | <i>Page</i> |
|---|-----------------|
| PowerXL DC1 Series Drives | |
| Catalog Number Selection | V6-T2-16 |
| Product Selection | V6-T2-17 |
| Accessories | V6-T2-19 |
| Technical Data and Specifications | V6-T2-21 |
| Dimensions | V6-T2-23 |

2.3


Adjustable Frequency Drives

PowerXL DC1 Series Drives

Catalog Number Selection

2

DC1 Series Adjustable Frequency AC Drives

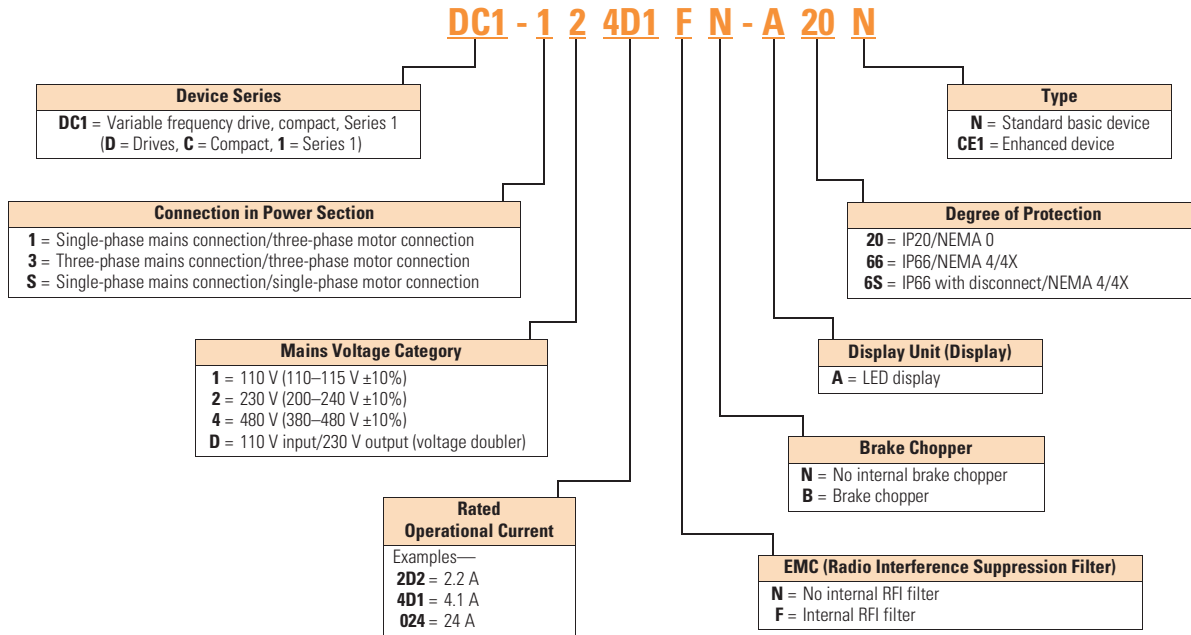

Product Selection

IP20

DC1 Series IP20 Enclosure Drives ^①

| hp ^② | kW | Volts | 100% Continuous Current In (A) | Frame Size ^③ | Catalog Number |
|-----------------|------|---|--------------------------------|-------------------------|---------------------------------|
| 0.5 | 0.37 | 115 V single-phase in/ ^④ | 7 | 1 | DC1-S17D0NN-A20N |
| 0.75 | 0.55 | 115 V single-phase out | 10.5 | 2 | DC1-S1011NB-A20N |
| 0.5 | 0.37 | 200–240 V single-phase in/ ^④ | 4.3 | 1 | DC1-S24D3NN-A20N ^⑤ |
| 1 | 0.75 | 200–240 V single-phase out | 7 | 1 | DC1-S27D0NN-A20N ^⑤ |
| 1.5 | 1.1 | | 10 | 2 | DC1-S2011NB-A20N ^⑤ |
| 0.5 | 0.37 | 115 V single-phase in/ | 2.3 | 1 | DC1-1D2D3NN-A20CE1 |
| 1 | 0.75 | 230 V three-phase out | 4.3 | 1 | DC1-1D4D3NN-A20CE1 |
| 1.5 | 1.1 | | 5.8 | 2 | DC1-1D5D8NB-A20CE1 |
| 0.5 | 0.37 | 200–240 V single-phase in/ | 2.3 | 1 | DC1-122D3NN-A20CE1 ^⑤ |
| 1 | 0.75 | 230 V three-phase out | 4.3 | 1 | DC1-124D3NN-A20CE1 ^⑤ |
| 2 | 1.5 | | 7 | 1 | DC1-127D0NN-A20CE1 ^⑤ |
| 2 | 1.5 | | 7 | 2 | DC1-127D0NB-A20CE1 ^⑤ |
| 3 | 2.2 | | 10.5 | 2 | DC1-12011NB-A20CE1 ^⑤ |
| 5 | 4 | | 15 | 3 | DC1-12015NB-A20CE1 |
| 0.5 | 0.37 | 200–240 V three-phase in/ | 2.3 | 1 | DC1-322D3NN-A20CE1 |
| 1 | 0.75 | 230 V three-phase out | 4.3 | 1 | DC1-324D3NN-A20CE1 |
| 2 | 1.5 | | 7 | 1 | DC1-327D0NN-A20CE1 |
| 2 | 1.5 | | 7 | 2 | DC1-327D0NB-A20CE1 ^⑤ |
| 3 | 2.2 | | 10.5 | 2 | DC1-32011NB-A20CE1 ^⑤ |
| 5 | 4 | | 18 | 3 | DC1-32018NB-A20CE1 ^⑤ |
| 7.5 | 5.6 | | 24 | 4 | DC1-32024NB-A20CE1 ^⑤ |
| 10 | 7.5 | | 30 | 4 | DC1-32030NB-A20CE1 ^⑤ |
| 15 | 11 | | 46 | 4 | DC1-32046NB-A20CE1 ^⑤ |
| 1 | 0.75 | 380–480 V three-phase in/ | 2.2 | 1 | DC1-342D2NN-A20CE1 ^⑤ |
| 2 | 1.5 | 480 V three-phase out | 4.1 | 1 | DC1-344D1NN-A20CE1 ^⑤ |
| 2 | 1.5 | | 4.1 | 2 | DC1-344D1NB-A20CE1 ^⑤ |
| 3 | 2.2 | | 5.8 | 2 | DC1-345D8NB-A20CE1 ^⑤ |
| 5 | 4 | | 9.5 | 2 | DC1-349D5NB-A20CE1 ^⑤ |
| 7.5 | 5.5 | | 14 | 3 | DC1-34014NB-A20CE1 ^⑤ |
| 10 | 7.5 | | 18 | 3 | DC1-34018NB-A20CE1 ^⑤ |
| 15 | 11 | | 24 | 3 | DC1-34024NB-A20CE1 ^⑤ |
| 20 | 15 | | 30 | 4 | DC1-34030NB-A20CE1 ^⑤ |
| 25 | 18.5 | | 39 | 4 | DC1-34039FB-A20N ^⑤ |
| 30 | 22 | | 46 | 4 | DC1-34046FB-A20N ^⑤ |

Notes

- ① These are constant torque/high overload rated drives.
- ② For all applications, select the unit such that the motor current is less than or equal to the rated continuous output current.
- ③ Brake chopper circuit available as standard in frames 2, 3 and 4.
- ④ Only for use with shaded pole or split capacitor single-phase motors.
- ⑤ RFI version available. Substitute with DC1-*****F*.**** for this option.

2.3

Adjustable Frequency Drives

PowerXL DC1 Series Drives

2

IP66 NEMA 4/4X Interior DC1 Drive

The IP66 version of the DC1 is a unique solution to allow for mounting the drive outside of a control panel or next to a motor for distributed control.

“-A66...” Option

This version comes with the keypad that is similar to that of IP20 version. There are no additional cover controls to address security concerns.

“-A6S...” Option

This version has an integrated potentiometer, a forward/off/reverse switch and a disconnect switch with lock-off capability with the standard keypad. This allows for reduced labor and materials when compared to a IP20 solution in separate enclosure.

IP66



IP66S



DC1 Series IP66 Enclosure Drives ^①

| hp ^② | kW | Volts | 100% Continuous Current In (A) | Frame Size ^③ | Catalog Number |
|-----------------|------|--|--------------------------------|-------------------------|----------------------------------|
| 0.5 | 0.37 | 115 V single-phase in/ 115 V single-phase out | 7 | 1 | DC1-S17D0NN-A6SN ^④ |
| 0.75 | 0.55 | | 10.5 | 2 | DC1-S1011NB-A6SN ^④ |
| 0.5 | 0.37 | 200–240 V single-phase in/ 200–240 V single-phase out | 4.3 | 1 | DC1-S24D3NN-A6SN ^{④⑤} |
| 1 | 0.75 | | 7 | 1 | DC1-S27D0NN-A6SN ^{④⑤} |
| 1.5 | 1.1 | | 10 | 2 | DC1-S2011NB-A6SN ^{④⑤} |
| 0.5 | 0.37 | 115 V single-phase in/ 230 V three-phase out | 2.3 | 1 | DC1-1D2D3NN-A6SCE1 ^④ |
| 1 | 0.75 | | 4.3 | 1 | DC1-1D4D3NN-A6SCE1 ^④ |
| 1.5 | 1.1 | | 5.8 | 2 | DC1-1D5D8NB-A6SCE1 ^④ |
| 0.5 | 0.37 | 200–240 V single-phase in/ 230 V three-phase out | 2.3 | 1 | DC1-122D3NN-A6SCE1 ^{④⑤} |
| 1 | 0.75 | | 4.3 | 1 | DC1-124D3NN-A6SCE1 ^{④⑤} |
| 2 | 1.5 | | 7 | 1 | DC1-127D0NN-A6SCE1 ^{④⑤} |
| 2 | 1.5 | | 7 | 2 | DC1-127D0NB-A6SCE1 ^{④⑤} |
| 3 | 2.2 | | 10.5 | 2 | DC1-12011NB-A6SCE1 ^{④⑤} |
| 5 | 4 | | 15 | 3 | DC1-12015NB-A6SCE1 ^④ |
| 0.5 | 0.37 | 200–240 V three-phase in/ 230 V three-phase out | 2.3 | 1 | DC1-322D3NN-A6SCE1 ^④ |
| 1 | 0.75 | | 4.3 | 1 | DC1-324D3NN-A6SCE1 ^④ |
| 2 | 1.5 | | 7 | 1 | DC1-327D0NN-A6SCE1 ^④ |
| 2 | 1.5 | | 7 | 2 | DC1-327D0NB-A6SCE1 ^{④⑤} |
| 3 | 2.2 | | 10.5 | 2 | DC1-32011NB-A6SCE1 ^{④⑤} |
| 5 | 4 | | 18 | 3 | DC1-32018NB-A6SCE1 ^{④⑤} |
| 1 | 0.75 | 380–480 V three-phase in/ 460 V three-phase out | 2.2 | 1 | DC1-342D2NN-A6SCE1 ^{④⑤} |
| 2 | 1.5 | | 4.1 | 1 | DC1-344D1NN-A6SCE1 ^{④⑤} |
| 2 | 1.5 | | 4.1 | 2 | DC1-344D1NB-A6SCE1 ^{④⑤} |
| 3 | 2.2 | | 5.8 | 2 | DC1-345D8NB-A6SCE1 ^{④⑤} |
| 5 | 4 | | 9.5 | 2 | DC1-349D5NB-A6SCE1 ^{④⑤} |
| 7.5 | 5.5 | | 14 | 3 | DC1-34014NB-A6SCE1 ^{④⑤} |
| 10 | 7.5 | | 18 | 3 | DC1-34018NB-A6SCE1 ^{④⑤} |

Notes

- ① These are constant torque/high overload rated drives.
- ② For all applications, select the unit such that the motor current is less than or equal to the rated continuous output current.
- ③ Brake chopper circuit available as standard in frames 2, 3 and 4.
- ④ Non-disconnect version available. Substitute with -A66....
- ⑤ RFI version available. Substitute with DC1-*****F*..... for this option.

Accessories

DC1 Series

PC Communication Kit and Copy/Paste Module

| Description | Catalog Number |
|--|----------------------|
| Bluetooth copy/paste communication stick | DX-COM-STICK2 |
| USB to RJ45 panel mount kit | DX-COM-PCKIT |
| USB to RJ45 PC Tool cable | DX-CBL-PC-3M0 |

Encoder Feedback Plug-In Option Module and Miscellaneous Cards

| Description | Catalog Number |
|---|-----------------------|
| Local control/test option card | DXC-EXT-LOCSIM |
| HVACO drive running and tripped relay output card | DXC-EXT-2R01A0 |
| Dual relay output card | DXC-EXT-2R0 |
| 110 V logic input card | DXC-EXT-IO110 |
| 230 V logic input card | DXC-EXT-IO230 |

Remote Keypad

| Description | Catalog Number |
|---|---------------------------------|
| LED remote keypad—7-segment display, IP54 rated | DX-KEY-LED2 ^① |
| OLED remote keypad—full text display, multi-line text, multi-language, IP54 hand/auto buttons | DX-KEY-OLED ^① |

Brake Resistor (FR2 and FR3)

| Description | Catalog Number |
|--------------------------------------|-------------------|
| DC1, DA1 internal mount 200 W, 100 R | DX-BR3-100 |

Extension Cables and Data Cable Splitter

| Description | Catalog Number |
|---|---------------------------|
| RJ45 communication cable w/terminating resistor | EASY-NT-R |
| RS-485 data cable, RJ45, 0.5 m | DX-CBL-RJ45-0M5 |
| RS-485 data cable, RJ45, 1.0 m | DX-CBL-RJ45-1M0 |
| RS-485 data cable, RJ45, 3.0 m | DX-CBL-RJ45-3M0 |
| RS-485 three-way data cable splitter, RJ45 | DX-SPL-RJ45-3SL |
| RS-485 data cable splitter, RJ45, (1 connector to 2 socket) | DX-SPL-RJ45-2SL1PL |

Communication Modules

| Description | Catalog Number |
|---|---------------------------|
| SmartWire-DT interface for DE1 and DC1 IP20 | DX-NET-SWD3 |
| Dual EtherNet/IP interface for DE1 and DC1 IP20 | DX-NET-ETHERNET2-2 |

Optional Communication Modules

| Description | Catalog Number |
|---|---------------------------|
| EtherNet/IP plug-in interface module ^② | DX-NET-ETHERNET2-2 |

Notes

- ^① Includes 1 m RS-485 data cable.
- ^② Available June 2016.

2.3

Adjustable Frequency Drives

PowerXL DC1 Series Drives

2

Line and Load Reactors

A line and load reactor is a three-phase inductance filter that can be placed on the line and load side of the AFD to help improve the harmonic performance of the system. Consult the factory for additional filtering options and further technical details.


DR1 Line Reactor

A line reactor helps to provide a moderate reduction in current harmonics similar to a DC choke. It also provides increased input protection for AFD and its semiconductors from line transients helping to extend the life of the AFD.

DR2 Output Reactor

An output filter is used to reduce the transient voltage (dV/dt) at the motor terminals. The output filter is recommended for cable lengths exceeding 100 ft (30 m) with a drive of 3 hp and above and for cable lengths of 33 ft (10 m) with a drive of 2 hp and below.

Line and Load Reactors—Catalog Number Selection

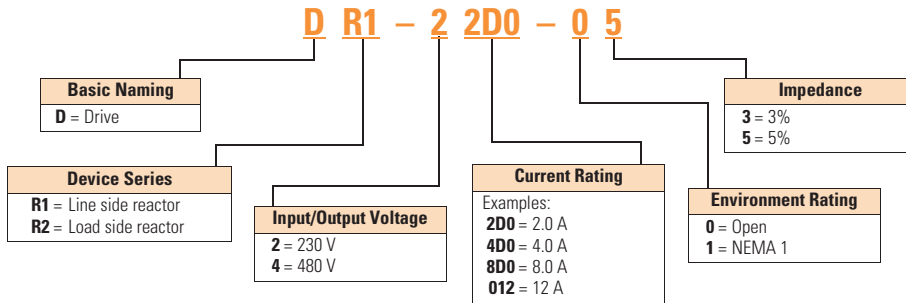

Line and Load Reactors—230 V

| hp (CT) | Open Load Reactor | | Line Reactor | | NEMA 1 Load Reactor | | Line Reactor | |
|---------|-------------------|-------------|--------------|-------------|---------------------|-------------|--------------|-------------|
| | 3% | 5% | 3% | 5% | 3% | 5% | 3% | 5% |
| 0.5 | DR2-22D0-03 | DR2-22D0-05 | DR1-22D2-03 | DR1-22D2-05 | DR2-22D0-13 | DR2-22D0-15 | DR1-22D2-13 | DR1-22D2-15 |
| 1 | DR2-24D0-03 | DR2-28D0-05 | DR1-24D2-03 | DR1-24D2-05 | DR2-24D0-13 | DR2-28D0-15 | DR1-24D2-13 | DR1-24D2-15 |
| 1.5 | DR2-28D0-03 | DR2-28D0-05 | DR1-26D0-03 | DR1-26D0-05 | DR2-28D0-13 | DR2-28D0-15 | DR1-26D0-13 | DR1-26D0-15 |
| 2 | DR2-28D0-03 | DR2-28D0-05 | DR1-26D8-03 | DR1-26D8-05 | DR2-28D0-13 | DR2-28D0-15 | DR1-26D8-13 | DR1-26D8-15 |
| 3 | DR2-2012-03 | DR2-2012-05 | DR1-29D6-03 | DR1-29D6-05 | DR2-2012-13 | DR2-2012-15 | DR1-29D6-13 | DR1-29D6-15 |
| 5 | DR2-2018-03 | DR2-2018-05 | DR1-2015-03 | DR1-2015-05 | DR2-2018-13 | DR2-2018-15 | DR1-2015-13 | DR1-2015-15 |
| 7.5 | DR2-2025-03 | DR2-2025-05 | DR1-2022-03 | DR1-2022-05 | DR2-2025-13 | DR2-2025-15 | DR1-2022-13 | DR1-2022-15 |
| 10 | DR2-2035-03 | DR2-2035-05 | DR1-2028-03 | DR1-2028-05 | DR2-2035-13 | DR2-2035-15 | DR1-2028-13 | DR1-2028-15 |
| 15 | DR2-2045-03 | DR2-2045-05 | DR1-2042-03 | DR1-2042-05 | DR2-2045-13 | DR2-2045-15 | DR1-2042-13 | DR1-2042-15 |

Line and Load Reactors—480 V

| hp (CT) | Open Load Reactor | | Line Reactor | | NEMA 1 Load Reactor | | Line Reactor | |
|---------|-------------------|-------------|--------------|-------------|---------------------|-------------|--------------|-------------|
| | 3% | 5% | 3% | 5% | 3% | 5% | 3% | 5% |
| 1 | DR2-42D0-03 | DR2-42D0-05 | DR1-42D1-03 | DR1-42D1-05 | DR2-42D0-13 | DR2-42D0-15 | DR1-42D1-13 | DR1-42D1-15 |
| 2 | DR2-44D0-03 | DR2-44D0-05 | DR1-43D4-03 | DR1-43D4-05 | DR2-44D0-13 | DR2-44D0-15 | DR1-43D4-13 | DR1-43D4-15 |
| 3 | DR2-48D0-03 | DR2-48D0-05 | DR1-44D8-03 | DR1-44D8-05 | DR2-48D0-13 | DR2-48D0-15 | DR1-44D8-13 | DR1-44D8-15 |
| 5 | DR2-48D0-03 | DR2-48D0-05 | DR1-47D6-03 | DR1-47D6-05 | DR2-48D0-13 | DR2-48D0-15 | DR1-47D6-13 | DR1-47D6-15 |
| 7.5 | DR2-4012-03 | DR2-4012-05 | DR1-4011-03 | DR1-4011-05 | DR2-4012-13 | DR2-4012-15 | DR1-4011-13 | DR1-4011-15 |
| 10 | DR2-4018-03 | DR2-4018-05 | DR1-4014-03 | DR1-4014-05 | DR2-4018-13 | DR2-4018-15 | DR1-4014-13 | DR1-4014-15 |
| 15 | DR2-4025-03 | DR2-4025-05 | DR1-4021-03 | DR1-4021-05 | DR2-4025-13 | DR2-4025-15 | DR1-4021-13 | DR1-4021-15 |
| 20 | DR2-4025-03 | DR2-4025-05 | DR1-4027-03 | DR1-4027-05 | DR2-4025-13 | DR2-4025-15 | DR1-4027-13 | DR1-4027-15 |
| 25 | DR2-4035-03 | DR2-4035-05 | DR1-4034-03 | DR1-4034-05 | DR2-4035-13 | DR2-4035-15 | DR1-4034-13 | DR1-4034-15 |
| 30 | DR2-4045-03 | DR2-4045-05 | DR1-4040-03 | DR1-4040-05 | DR2-4045-13 | DR2-4045-15 | DR1-4040-13 | DR1-4040-15 |

Technical Data and Specifications

DC1 Series

Ratings

PowerXL DC1 Basic Controller IP20 Standard Ratings

| Description | Specification |
|--------------------------------|------------------------------------|
| Protections | |
| Overload protection | 150% for 60s for every 600 seconds |
| Overvoltage protection | Yes |
| Undervoltage protection | Yes |
| Ground fault protection | Yes |
| Overtemperature protection | Yes |
| Motor overload protection | Yes |
| Motor stall protection | Yes |
| Short-circuit withstand rating | 100 kAIC with Type J fuses |

Programmable Parameters

| Description |
|--|
| Built-in Help card |
| 14 Standard operation parameters |
| Reference scaling |
| Programmable start and stop functions |
| DC-brake at start and stop |
| Programmable V/Hz curve |
| Adjustable switching frequency |
| Autorestart function after fault |
| Protections and supervisions |
| Power section fault indication |
| External fault |
| Fieldbus communication |
| Second deceleration time |
| Analog input range selection, signal scaling and filtering |
| PI controller |
| Skip frequencies |

Specifications

PowerXL DC1 Series Drives

| Description | Specification |
|---|--|
| Input Ratings | |
| Input voltage (V_{in}) | $\pm 10\%$ |
| Input frequency (f_{in}) | 50/60 Hz (variation up to 48–62 Hz) |
| Connection to power | Maximum of one time every 30 seconds |
| Output Ratings | |
| Output voltage | 0 to V_{in} ^① |
| Continuous output current | Continuous rated current I_N at ambient temperature max. 122 °F (50 °C), 150% for 60 seconds, 175% for 2 seconds |
| Output frequency | 0 to 500 Hz |
| Frequency resolution | 0.1 Hz |
| Initial output current (I_{H}) | 175% for 2s for every 20 seconds Torque depends on motor |
| Control Characteristics | |
| Operation mode | U/f control, slip compensation |
| Switching frequency | 4 to 32 kHz |
| Voltage reference | 10 Vdc (max. 10 mA) |
| Field weakening point | 0 to 500 Hz |
| Acceleration time | 0.1 to 600 seconds |
| Deceleration time | 0.1 to 600 seconds |
| Brake Resistor (Minimum Values) ^② | |
| 230 V Series | FS2 and FS3 47 ohms |
| 400 V Series | FS2 100 ohms, FS3 47 ohms |
| Ambient Conditions | |
| Ambient operating temperature | +14 °F (–10 °C), no frost to +122 °F (+50 °C); Rated loadability I_N IP20—NEMA 0 |
| Storage temperature | –40 °F (–40 °C) to +140 °F (+60 °C) |
| Relative humidity | 0 to 95% RH, noncondensing, non-corrosive, no dripping water |
| Enclosure class | IP20 (FS1–FS4) |

Notes

^① Exception: 115 V single-phase in, 230 V three-phase out.

^② Only FS2, FS3 and FS4 drives are equipped with brake chopper circuit.

Standards—DC1 Series

2

I/O Specifications

- Digital inputs DI1–DI4 are programmable
- Digital, relay and analog outputs are programmable

Includes:


- Four inputs (two digital and two digital/analog)
- Analog inputs
 - 4–20 mA
 - 0–10 V
- One output (analog or digital)
- One relay output
- RS-485 interface

Reliability

- Pretested components
- Computerized testing
- Final test with full load
- Conformal-coated boards
- Eaton's Electrical Services & Systems: national network of AF drive specialists

DC1 Series I/O Interface


| Terminal | Signal | Factory Preset | Description |
|----------|---------|-----------------------------------|--|
| 1 | +24 Vdc | Control voltage for DI1–DI4 | — Maximum load 100 mA Reference potential V |
| 2 | DI1 | Digital Input 1 | Start Enable FWD |
| 3 | DI2 | Digital Input 2 | Start Enable REV |
| 4 | DI3 | Digital Input 3 | Fixed frequency FF1 |
| | AI2 | Analog Input 2 | Fixed frequency FF1 |
| | | | Digital: 8–30 V (high) Analog: 0 to +10 V ($R_i > 72 \text{ k}\Omega$) 0/4–20 mA ($R_B = 500 \Omega$) Can be switched with parameter P-16 |
| 5 | +10 Vdc | Reference voltage, Output (+10 V) | — Maximum load 10 mA Reference potential 0 V |
| 6 | AI1 | Analog Input 1 | Frequency reference value (fixed frequency) |
| | DI4 | Digital Input 5 | Frequency reference value (fixed frequency) |
| | | | Analog: 0 to +10 V ($R_i > 72 \text{ k}\Omega$) 0/4–20 mA ($R_B = 500 \Omega$) Can be switched with parameter P-16 |
| 7 | 0 V | Reference potential | — 0 V = connection terminal 9 |
| 8 | AO1 | Analog Output 1 | Output frequency |
| | DO1 | Digital Output 1 | Output frequency |
| | | | Analog: 0 to +10 V, maximum 20 mA Can be switched with parameter P-25 Digital: 8 to +24 V |
| 9 | 0 V | Reference potential | — 0 V connection terminal 7 |
| 10 | K13 | Relay 1, normally open contact | Active = RUN |
| 11 | K14 | Relay 1, normally open contact | Active = RUN |
| | | | Maximum switching load: 250 Vac/6 A or 30 Vdc/5 A |

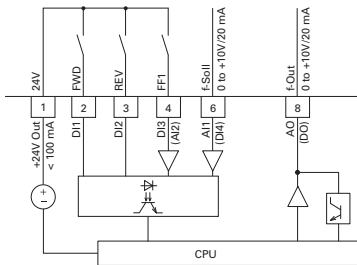

Dimensions


Approximate Dimensions in Inches (mm)

DC1, Sizes FS1–FS4, Degree of Protection IP20/NEMA 0

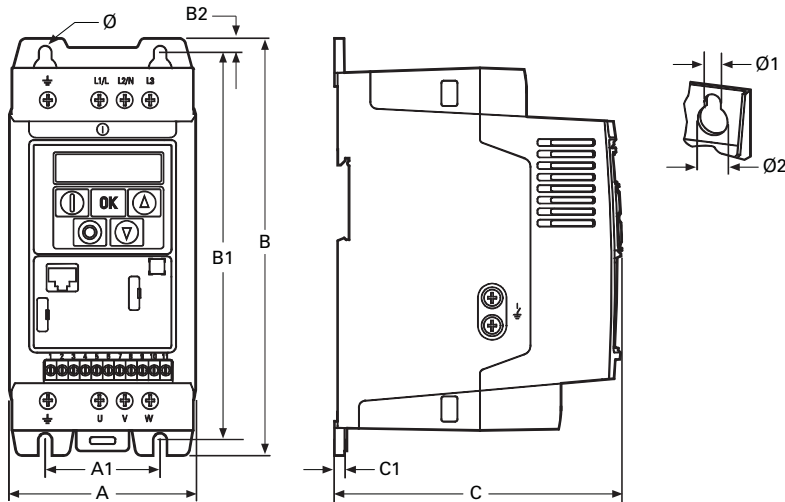

| Frame Size | A | A1 | B | B1 | B2 | C | C1 | Ø1 | Ø2 | Weight lbs (kg) |
|------------|------------|------------|---------------|-------------|-------------|------------|----------|----------|-------------|-----------------|
| FS1 | 3.19 (81) | 1.97 (50) | 7.24 (184) | 6.69 (170) | 0.28 (7) | 4.88 (124) | 0.16 (4) | 0.24 (6) | 0.47 (12) | 2.43 (1.1) |
| FS2 | 4.21 (107) | 2.95 (75) | 9.09 (231) | 8.46 (215) | 0.31 (8) | 5.98 (152) | 0.20 (5) | 0.24 (6) | 0.47 (12) | 5.73 (2.6) |
| FS3 | 5.08 (129) | 3.94 (100) | 10.75 (273) | 10.04 (255) | 0.33 (8.5) | 6.89 (175) | 0.20 (5) | 0.24 (6) | 0.47 (12) | 8.82 (4.0) |
| FS4 | 6.81 (173) | 4.92 (125) | 16.48 (418.5) | 15.75 (400) | 0.41 (10.5) | 8.31 (211) | 0.16 (4) | 0.31 (8) | 0.57 (14.5) | 18.52 (8.4) |

DC1, Sizes FS1–FS3, Degree of Protection IP66/NEMA 4

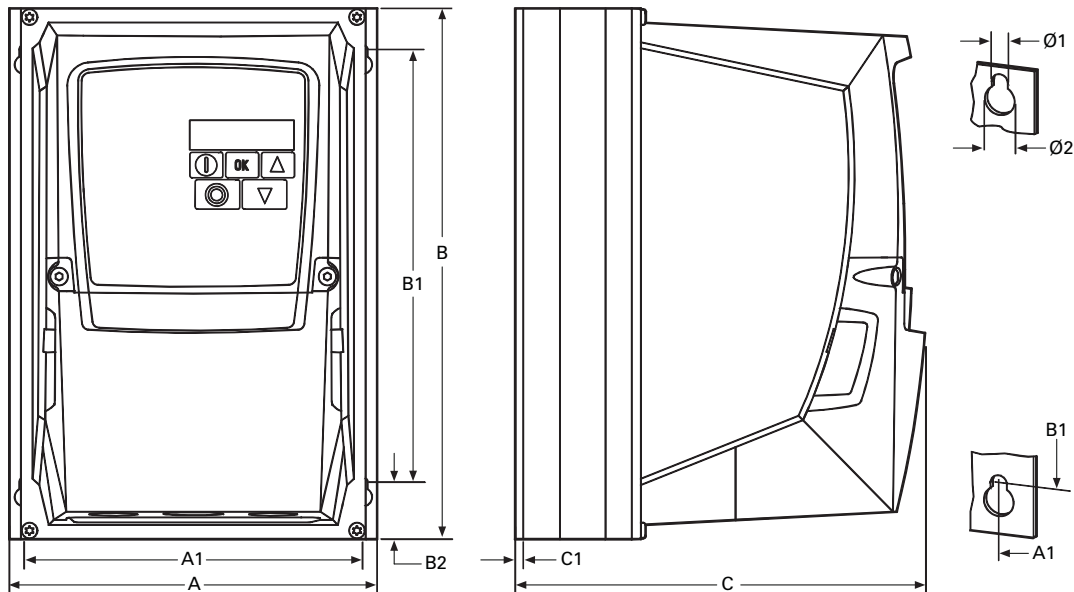

| Frame Size | A | A1 | B | B1 | B2 | C | C1 | Ø1 | Ø2 | Weight lbs (kg) |
|------------|------------|--------------|-------------|------------|-----------|------------|------------|------------|------------|-----------------|
| FS1 | 6.34 (161) | 5.85 (148.5) | 9.13 (232) | 7.44 (189) | 0.98 (25) | 7.24 (184) | 0.14 (3.5) | 0.16 (4) | 0.31 (8) | 6.17 (2.8) |
| FS2 | 7.40 (188) | 6.93 (176) | 10.12 (257) | 7.87 (200) | 1.10 (28) | 7.56 (192) | 0.14 (3.5) | 0.17 (4.2) | 0.33 (8.5) | 11.02 (5.0) |
| FS3 | 8.27 (210) | 7.78 (197.5) | 12.20 (310) | 9.92 (252) | 1.30 (33) | 9.45 (240) | 0.14 (3.5) | 0.17 (4.2) | 0.33 (8.5) | 18.08 (8.2) |

2.3


Adjustable Frequency Drives

PowerXL DC1 Series Drives

Approximate Dimensions in Inches (mm)

2

DC1, Sizes FS1–FS3, Degree of Protection IP66/NEMA 4, with Local Controls

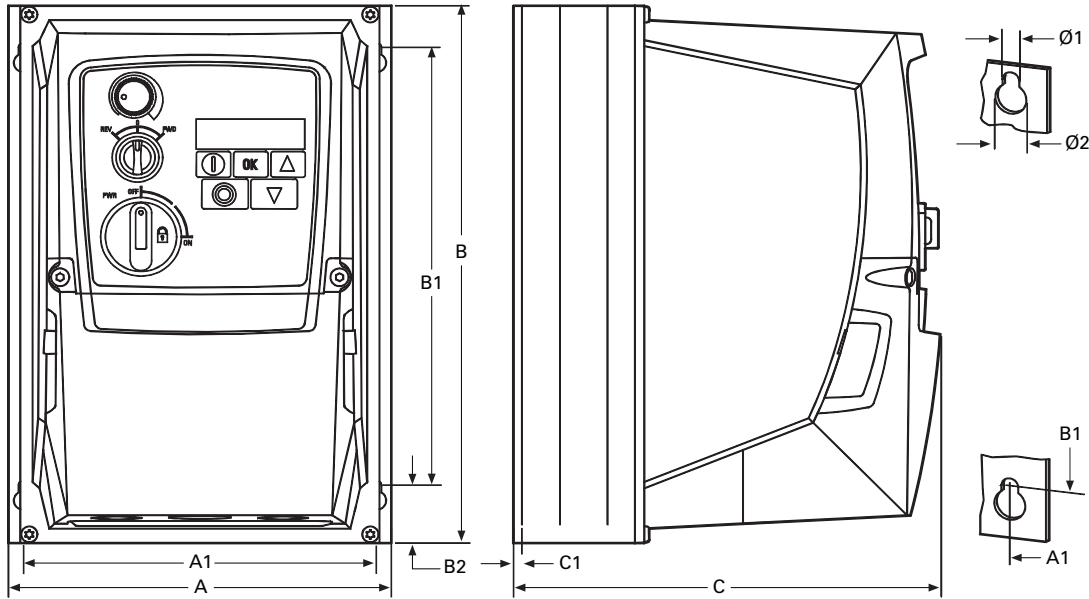

| Frame Size | A | A1 | B | B1 | B2 | C | C1 | Ø1 | Ø2 | Weight lbs (kg) |
|------------|------------|--------------|-------------|------------|-----------|------------|------------|------------|------------|-----------------|
| FS1 | 6.34 (161) | 5.85 (148.5) | 9.13 (232) | 7.44 (189) | 0.98 (25) | 7.24 (184) | 0.14 (3.5) | 0.16 (4) | 0.31 (8) | 6.17 (2.8) |
| FS2 | 7.40 (188) | 6.93 (176) | 10.12 (257) | 7.87 (200) | 1.10 (28) | 7.56 (192) | 0.14 (3.5) | 0.17 (4.2) | 0.33 (8.5) | 11.02 (5.0) |
| FS3 | 8.27 (210) | 7.78 (197.5) | 12.20 (310) | 9.92 (252) | 1.30 (33) | 9.45 (240) | 0.14 (3.5) | 0.17 (4.2) | 0.33 (8.5) | 18.08 (8.2) |

PowerXL DA1 Series Drives



Product Description

Eaton's PowerXL® DA1 variable frequency drives are the next generation of drives specifically engineered for today's machinery applications.

DA1 is the perfect match for demanding OEM applications. High-performance processor, safe torque off, multiple fieldbus protocols including SmartWire-DT, sensorless vector control and the possibility to operate permanent magnet motors are sure to leave a lasting impression.

Models rated at 480 volts, three-phase, 50/60 Hz are available in sizes ranging from 1 to 15 hp. Models rated at 240 volts, single- or three-phase, 50/60 Hz are available in sizes ranging from 0.5 to 7.5 hp. Models rated at 575 volts, three-phase, 50/60 Hz are available in sizes ranging from 1 to 20 hp.

Features

- Compact, space-saving design
- Rugged and reliable—200% for 4s 50 °C rated
- DIN rail and screw mountable (FS1 and FS2)
- Side-by-side installation
- Industry-leading efficiency delivers energy savings to the customer
- Integrated EMC filters make the unit suitable for commercial and industrial networks
- Communication cards that integrate into the drive—
 - EtherNet/IP
 - DeviceNet
 - PROFIBUS-DP
 - EtherCAT
 - PROFINET
 - Modbus TCP
 - BACnet
- Brake chopper as standard
- Temperature-controlled fan
- RS-485/Modbus® and CANopen™ as standard
- PID controller as standard
- SmartWire capability
- Removable I/O terminal blocks
- Contactor style power wiring
- 200% torque at zero speed
- Designed to run surface mounted (SPM) and rotor in-built (IPM) permanent magnet motors
- PLC programming
- Closed loop
- Conformal coated boards

Standards and Certifications

Product

- Complies with EN61800-3 (2004)

EMC (At Default Settings)

- EMC Category C1, C2 and C3 at default settings (1 m, 5 m, 25 m)

Safety^①

- 61800-5-1
- EN 60529
- CE
- UL
- cUL
- DNV
- UkrSepro
- c-Tick
- RoHS compliant



Note

- ① See unit nameplate for more detailed approvals.

Contents

Description

| | <i>Page</i> |
|---|-----------------|
| PowerXL DA1 Series Drives | |
| Catalog Number Selection | V6-T2-26 |
| Product Selection | V6-T2-27 |
| Accessories | V6-T2-29 |
| Technical Data and Specifications | V6-T2-32 |
| Dimensions | V6-T2-34 |

2.4


Adjustable Frequency Drives

PowerXL DA1 Series Drives

Catalog Number Selection

2

DA1 Series Adjustable Frequency AC Drives

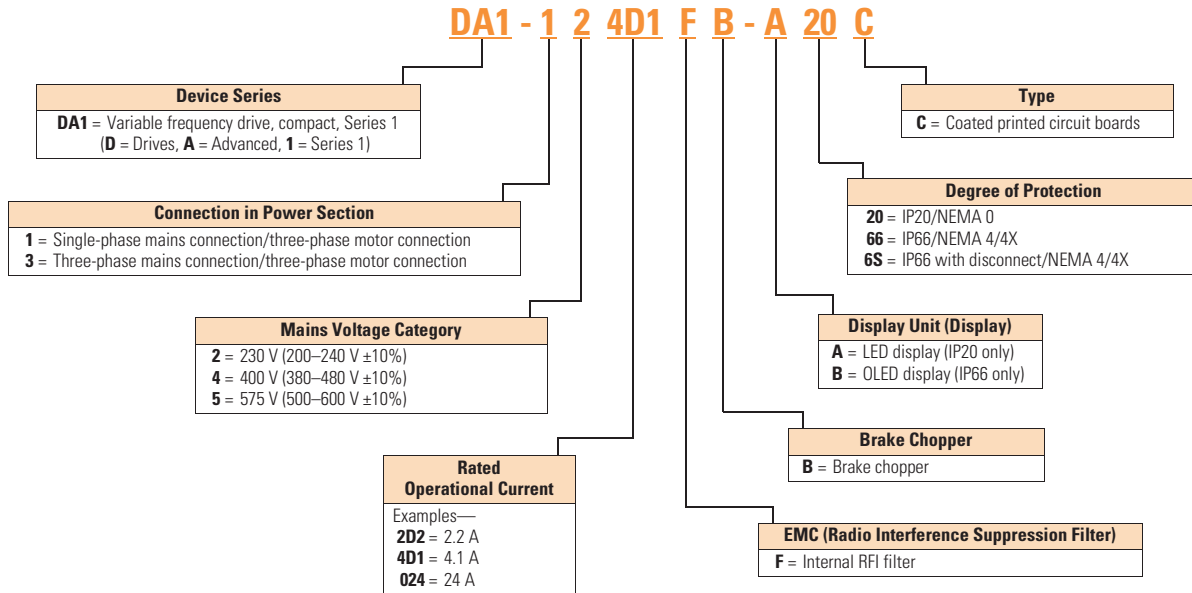

Product Selection

IP20

DA1 Series IP20 Enclosure Drives ^①

| hp ^② | kW | Volts | 100% Continuous Current In (A) | Frame Size ^③ | Catalog Number |
|-----------------|------|---|--------------------------------|-------------------------|------------------|
| 1 | 0.75 | 200–240 V single-phase in/ 230 V three-phase out | 4.3 | 2 | DA1-124D3FB-A20C |
| 2 | 1.5 | | 7 | 2 | DA1-127D0FB-A20C |
| 3 | 2.2 | | 10.5 | 2 | DA1-12011FB-A20C |
| 1 | 0.75 | 200–240 V three-phase in/ 230 V three-phase out | 4.3 | 2 | DA1-324D3FB-A20C |
| 2 | 1.5 | | 7 | 2 | DA1-327D0FB-A20C |
| 3 | 2.2 | | 10.5 | 2 | DA1-32011FB-A20C |
| 5 | 4 | | 18 | 3 | DA1-32018FB-A20C |
| 7.5 | 5.5 | | 24 | 3 | DA1-32024FB-A20C |
| 1 | 0.75 | 380–480 V three-phase in/ 460 V three-phase out | 2.2 | 2 | DA1-342D2FB-A20C |
| 2 | 1.5 | | 4.1 | 2 | DA1-344D1FB-A20C |
| 3 | 2.2 | | 5.8 | 2 | DA1-345D8FB-A20C |
| 5 | 4 | | 9.5 | 2 | DA1-349D5FB-A20C |
| 7.5 | 5.5 | | 14 | 3 | DA1-34014FB-A20C |
| 10 | 7.5 | | 18 | 3 | DA1-34018FB-A20C |
| 15 | 11 | | 24 | 3 | DA1-34024FB-A20C |
| 1 | 0.75 | 500–600 V three-phase in/ 575 V three-phase out | 2.1 | 2 | DA1-352D1NB-A20C |
| 2 | 4.5 | | 3.1 | 2 | DA1-353D1NB-A20C |
| 3 | 2.2 | | 4.1 | 2 | DA1-354D1NB-A20C |
| 5 | 4 | | 6.5 | 2 | DA1-356D5NB-A20C |
| 7.5 | 5.5 | | 9 | 2 | DA1-359D0NB-A20C |
| 10 | 7.5 | | 12 | 3 | DA1-35012NB-A20C |
| 15 | 11 | | 17 | 3 | DA1-35017NB-A20C |
| 20 | 15 | | 22 | 3 | DA1-35022NB-A20C |

Notes

- ① These are constant torque/high overload rated drives.
- ② For all applications, select the unit such that the motor current is less than or equal to the rated continuous output current.
- ③ Brake chopper circuit available as standard in frames 2 and 3.

2.4

Adjustable Frequency Drives

PowerXL DA1 Series Drives

2

IP66 NEMA 4/4X Interior DA1 Drive

The IP66 version of the DA1 is a unique solution to allow for mounting the drive outside of a control panel or next to a motor for distributed control.

“-B66C” Option

This version comes with the OLED keypad. There are no additional cover controls to address security concerns.

“-B6SC” Option

This version has an integrated potentiometer, a forward/off/reverse switch and a disconnect switch with lock-off capability with the OLED keypad. This allows for reduced labor and materials when compared to a IP20 solution in separate enclosure.

IP66



IP66S



DA1 Series IP66 Enclosure Drives ^①

IP66 NEMA 4/4X Interior DA1 Drive

| hp ^② | kW | Volts | 100% Continuous Current In (A) | Frame Size ^③ | Catalog Number |
|-----------------|------|---|--------------------------------|-------------------------|-------------------------------|
| 1 | 0.75 | 200–240 V single-phase in/ 230 V three-phase out | 4.3 | 2 | DA1-124D3FB-B6SC ^④ |
| 2 | 1.5 | | 7 | 2 | DA1-127D0FB-B6SC ^④ |
| 3 | 2.2 | | 10.5 | 2 | DA1-12011FB-B6SC ^④ |
| 1 | 0.75 | 200–240 V three-phase in/ 230 V three-phase out | 4.3 | 2 | DA1-324D3FB-B6SC ^④ |
| 2 | 1.5 | | 7 | 2 | DA1-327D0FB-B6SC ^④ |
| 3 | 2.2 | | 10.5 | 2 | DA1-32011FB-B6SC ^④ |
| 5 | 4 | | 18 | 3 | DA1-32018FB-B6SC ^④ |
| 1 | 0.75 | 380–480 V three-phase in/ 460 V three-phase out | 2.2 | 2 | DA1-342D2FB-B6SC ^④ |
| 2 | 1.5 | | 4.1 | 2 | DA1-344D1FB-B6SC ^④ |
| 3 | 2.2 | | 5.8 | 2 | DA1-345D8FB-B6SC ^④ |
| 5 | 4 | | 9.5 | 2 | DA1-349D5FB-B6SC ^④ |
| 7.5 | 5.5 | | 14 | 3 | DA1-34014FB-B6SC ^④ |
| 10 | 7.5 | | 18 | 3 | DA1-34018FB-B6SC ^④ |
| 1 | 0.75 | 500–600 V three-phase in/ 575 V three-phase out | 2.1 | 2 | DA1-352D1NB-B6SC |
| 2 | 4.5 | | 3.1 | 2 | DA1-353D1NB-B6SC |
| 3 | 2.2 | | 4.1 | 2 | DA1-354D1NB-B6SC |
| 5 | 4 | | 6.5 | 2 | DA1-356D5NB-B6SC |
| 7.5 | 5.5 | | 9 | 2 | DA1-359D0NB-B6SC |
| 10 | 7.5 | | 12 | 3 | DA1-35012NB-B6SC |
| 15 | 11 | | 17 | 3 | DA1-35017NB-B6SC |

Notes

- ① These are constant torque/high overload rated drives.
- ② For all applications, select the unit such that the motor current is less than or equal to the rated continuous output current.
- ③ Brake chopper circuit available as standard in frames 2 and 3.
- ④ Non-disconnect version available. Substitute with **-B66C**.

Accessories

DA1 Series

PC Communication Kit and Copy/Paste Module

| Description | Catalog Number |
|--|----------------------|
| Bluetooth copy/paste communication stick | DX-COM-STICK2 |
| USB to RJ45 panel mount kit | DX-COM-PCKIT |
| USB to RJ45 PC Tool cable | DX-CBL-PC-3M0 |

Optional Communication Modules

| Description | Catalog Number |
|--------------------------------------|---------------------------|
| DeviceNet plug-in interface module | DX-NET-DEVICENET |
| PROFIBUS-DP plug-in interface module | DX-NET-PROFIBUS |
| EtherNet/IP plug-in interface module | DX-NET-ETHERNET-2 |
| EtherCAT plug-in interface module | DX-NET-ETHERCAT-2 |
| PROFINET plug-in interface module | DX-NET-PROFINET-2 |
| Modbus TCP plug-in interface module | DX-NET-MOVBUSTCP-2 |
| BACnet/IP plug-in interface module | DX-NET-BACNETIP-2 |

Encoder Feedback Plug-In Option Module and Miscellaneous Cards

| Description | Catalog Number |
|---|-----------------------|
| Expansion card: 3 relay outputs | DXA-EXT-3RO |
| Encoder feedback plug-in option module | DXA-EXT-ENCOD |
| Expansion card: 3 digital inputs and 1 relay output | DXA-EXT-3DI1RO |

Remote Keypad

| Description | Catalog Number |
|--|---------------------------------|
| LED remote keypad—7-segment display, IP54 rated | DX-KEY-LED2 ^① |
| OLED remote keypad—full text display, multi-line text, multi-language, IP54, hand/auto | DX-KEY-OLED ^① |

Extension Cables and Data Cable Splitter

| Description | Catalog Number |
|---|---------------------------|
| RJ45 communication cable w/terminating resistor | EASY-NT-R |
| RS-485 data cable, RJ45, 0.5 m | DX-CBL-RJ45-0M5 |
| RS-485 data cable, RJ45, 1.0 m | DX-CBL-RJ45-1M0 |
| RS-485 data cable, RJ45, 3.0 m | DX-CBL-RJ45-3M0 |
| RS-485 three-way data cable splitter, RJ45 | DX-SPL-RJ45-3SL |
| RS-485 data cable splitter, RJ45, (1 connector to 2 socket) | DX-SPL-RJ45-2SL1PL |

SmartWire Modules

| Description | Catalog Number |
|-------------------------------------|--------------------|
| SmartWire-DT interface for DA1 IP20 | DX-NET-SWD1 |

Note

^① Includes 1 m RS-485 data cable.

2.4

Adjustable Frequency Drives

PowerXL DA1 Series Drives

2

Line and Load Reactors

A line and load reactor is a three-phase inductance filter that can be placed on the line and load side of the AFD to help improve the harmonic performance of the system. Consult the factory for additional filtering options and further technical details.


DR1 Line Reactor

A line reactor helps to provide a moderate reduction in current harmonics similar to a DC choke. It also provides increased input protection for AFD and its semiconductors from line transients helping to extend the life of the AFD.

DR2 Output Reactor

An output filter is used to reduce the transient voltage (dV/dt) at the motor terminals. The output filter is recommended for cable lengths exceeding 100 ft (30 m) with a drive of 3 hp and above and for cable lengths of 33 ft (10 m) with a drive of 2 hp and below.

Line and Load Reactors—Catalog Number Selection

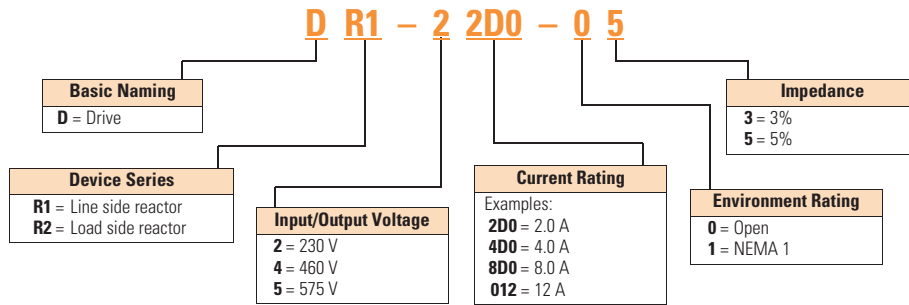

Line and Load Reactors—230 V

| hp (CT) | Open Load Reactor | | Line Reactor | | NEMA 1 Load Reactor | | Line Reactor | |
|---------|-------------------|-------------|--------------|-------------|---------------------|-------------|--------------|-------------|
| | 3% | 5% | 3% | 5% | 3% | 5% | 3% | 5% |
| 1 | DR2-24D0-03 | DR2-28D0-05 | DR1-24D2-03 | DR1-24D2-05 | DR2-24D0-13 | DR2-28D0-15 | DR1-24D2-13 | DR1-24D2-15 |
| 2 | DR2-28D0-03 | DR2-28D0-05 | DR1-26D8-03 | DR1-26D8-05 | DR2-28D0-13 | DR2-28D0-15 | DR1-26D8-13 | DR1-26D8-15 |
| 3 | DR2-2012-03 | DR2-2012-05 | DR1-29D6-03 | DR1-29D6-05 | DR2-2012-13 | DR2-2012-15 | DR1-29D6-13 | DR1-29D6-15 |
| 5 | DR2-2018-03 | DR2-2018-05 | DR1-2015-03 | DR1-2015-05 | DR2-2018-13 | DR2-2018-15 | DR1-2015-13 | DR1-2015-15 |
| 7.5 | DR2-2025-03 | DR2-2025-05 | DR1-2022-03 | DR1-2022-05 | DR2-2025-13 | DR2-2025-15 | DR1-2022-13 | DR1-2022-15 |

Line and Load Reactors—480 V

| hp (CT) | Open Load Reactor | |
|---------|-------------------|-------------|
| | 3% | 5% |
| | 1 | DR2-42D0-03 |
| 2 | DR2-44D0-03 | DR2-44D0-05 |
| 3 | DR2-48D0-03 | DR2-48D0-05 |
| 5 | DR2-48D0-03 | DR2-48D0-05 |
| 7.5 | DR2-4012-03 | DR2-4012-05 |
| 10 | DR2-4018-03 | DR2-4018-05 |
| 15 | DR2-4025-03 | DR2-4025-05 |

| Line Reactor | |
|--------------|-------------|
| 3% | 5% |
| DR1-42D1-03 | DR1-42D1-05 |
| DR1-43D4-03 | DR1-43D4-05 |
| DR1-44D8-03 | DR1-44D8-05 |
| DR1-47D6-03 | DR1-47D6-05 |
| DR1-4011-03 | DR1-4011-05 |
| DR1-4014-03 | DR1-4014-05 |
| DR1-4021-03 | DR1-4021-05 |

| NEMA 1 Load Reactor | |
|---------------------|-------------|
| 3% | 5% |
| DR2-42D0-13 | DR2-42D0-15 |
| DR2-44D0-13 | DR2-44D0-15 |
| DR2-48D0-13 | DR2-48D0-15 |
| DR2-48D0-13 | DR2-48D0-15 |
| DR2-4012-13 | DR2-4012-15 |
| DR2-4018-13 | DR2-4018-15 |
| DR2-4025-13 | DR2-4025-15 |

| Line Reactor | |
|--------------|-------------|
| 3% | 5% |
| DR1-42D1-13 | DR1-42D1-15 |
| DR1-43D4-13 | DR1-43D4-15 |
| DR1-44D8-13 | DR1-44D8-15 |
| DR1-47D6-13 | DR1-47D6-15 |
| DR1-4011-13 | DR1-4011-15 |
| DR1-4014-13 | DR1-4014-15 |
| DR1-4021-13 | DR1-4021-15 |

Line and Load Reactors—575 V

| hp (CT) | Open Load Reactor | |
|---------|-------------------|-------------|
| | 3% | 5% |
| | 1 | DR2-52D0-03 |
| 2 | DR2-54D0-03 | DR2-54D0-05 |
| 3 | DR2-54D0-03 | DR2-54D0-05 |
| 5 | DR2-58D0-03 | DR2-58D0-05 |
| 7.5 | DR2-58D0-03 | DR2-58D0-05 |
| 10 | DR2-5012-03 | DR2-5012-05 |
| 15 | DR2-5018-03 | DR2-5018-05 |
| 20 | DR2-5025-03 | DR2-5025-05 |

| Line Reactor | |
|--------------|-------------|
| 3% | 5% |
| DR1-51D7-03 | DR1-51D7-05 |
| DR1-52D7-03 | DR1-52D7-05 |
| DR1-53D9-03 | DR1-53D9-05 |
| DR1-56D1-03 | DR1-56D1-05 |
| DR1-59D0-03 | DR1-59D0-05 |
| DR1-5011-03 | DR1-5011-05 |
| DR1-5017-03 | DR1-5017-05 |
| DR1-5022-03 | DR1-5022-05 |

| NEMA 1 Load Reactor | |
|---------------------|-------------|
| 3% | 5% |
| DR2-52D0-13 | DR2-52D0-15 |
| DR2-54D0-13 | DR2-54D0-15 |
| DR2-54D0-13 | DR2-54D0-15 |
| DR2-58D0-13 | DR2-58D0-15 |
| DR2-58D0-13 | DR2-58D0-15 |
| DR2-5012-13 | DR2-5012-15 |
| DR2-5018-13 | DR2-5018-15 |
| DR2-5025-13 | DR2-5025-15 |

| Line Reactor | |
|--------------|-------------|
| 3% | 5% |
| DR1-51D7-13 | DR1-51D7-15 |
| DR1-52D7-13 | DR1-52D7-15 |
| DR1-53D9-13 | DR1-53D9-15 |
| DR1-56D1-13 | DR1-56D1-15 |
| DR1-59D0-13 | DR1-59D0-15 |
| DR1-5011-13 | DR1-5011-15 |
| DR1-5017-13 | DR1-5017-15 |
| DR1-5022-13 | DR1-5022-15 |

Technical Data and Specifications

DA1 Series

2

Ratings

PowerXL DA1 Basic Controller IP20 Standard Ratings

| Description | Specification |
|--------------------------------|------------------------------------|
| Protections | |
| Overload protection | 150% for 60s for every 600 seconds |
| Overvoltage protection | Yes |
| Undervoltage protection | Yes |
| Ground fault protection | Yes |
| Overtemperature protection | Yes |
| Motor overload protection | Yes |
| Motor stall protection | Yes |
| Short-circuit withstand rating | 100 kAIC with Type J fuses |

Programmable Parameters

| Description |
|--|
| Built-in Help card |
| 14 Standard operation parameters |
| Reference scaling |
| Programmable start and stop functions |
| DC-brake at start and stop |
| Programmable V/Hz curve |
| Adjustable switching frequency |
| Autorestart function after fault |
| Protections and supervisions |
| Power section fault indication |
| External fault |
| Fieldbus communication |
| Safe torque off (STO) function |
| Analog input range selection, signal scaling and filtering |
| PI controller |
| Skip frequencies |

Specifications

PowerXL DA1 Series Drives

| Description | Specification |
|--|--|
| Input Ratings | |
| Input voltage (V_{in}) | $\pm 10\%$ |
| Input frequency (f_{in}) | 50/60 Hz (variation up to 48–62 Hz) |
| Connection to power | Maximum of one time every 30 seconds |
| Output Ratings | |
| Output voltage | 0 to V_{in} ① |
| Continuous output current | Continuous rated current I_N at ambient temperature max. 122 °F (50 °C), 150% for 60 seconds, 200% for 4 seconds |
| Output frequency | 0 to 500 Hz |
| Frequency resolution | 0.1 Hz |
| Initial output current (I_{hi}) | 200% for 4s for every 40 seconds Torque depends on motor |
| Control Characteristics | |
| Operation mode | U/f control, slip compensation, sensorless vector control (SLV), vector control with feedback (CLV) |
| Switching frequency | 4 to 32 kHz |
| Voltage reference | 10 Vdc (max. 10 mA) |
| Field weakening point | 0 to 500 Hz |
| Acceleration time | 0.1 to 600 seconds |
| Deceleration time | 0.1 to 600 seconds |
| Brake Resistor (Minimum Values) ② | |
| 230 V Series | FS2 and FS3 15 ohms |
| 400 V Series | FS2 33 ohms, FS3 22 ohms |
| Ambient Conditions | |
| Ambient operating temperature | +14 °F (–10 °C), no frost to +122 °F (+50 °C): Rated loadability I_N IP20—NEMA 0 |
| Storage temperature | –40 °F (–40 °C) to +140 °F (+60 °C) |
| Relative humidity | 0 to 95% RH, noncondensing, non-corrosive, no dripping water |
| Enclosure class | IP20 (FS2 and FS3) |

Notes

- ① Exception: 115 V single-phase in, 230 V three-phase out.
 ② Only FS2 and FS3 drives are equipped with brake chopper circuit.

Standards—DA1 Series

I/O Specifications

- Digital inputs D11–D15 are programmable
- Digital, relay and analog outputs are programmable

Includes:

- Five inputs (three digital and two digital/analog)
- Analog inputs
 - 4–20 mA
 - 0–10 V
- Two outputs (analog or digital)
- Two relay outputs
- RS-485 interface

Reliability


- Pretested components
- Computerized testing
- Final test with full load
- Conformal-coated boards
- Eaton's Electrical Services & Systems: national network of AF drive specialists

DA1 Series I/O Interface

| Terminal | Signal | Factory Preset | Description |
|----------|---------|-----------------------------------|---|
| 1 | +24 Vdc | Control voltage for D11–D15 | Maximum load 100 mA Reference potential V |
| 2 | D11 | Digital Input 1 | Start Enable FWD ① |
| 3 | D12 | Digital Input 2 | Start Enable REV ① |
| 4 | D13 | Digital Input 3 | Fixed frequency FF1/FF2 ① |
| 5 | +10 Vdc | Reference voltage, Output (+10 V) | Maximum load 10 mA Reference potential 0 V |
| 6 | A11 | Analog Input 1 | Frequency reference value ① |
| | D14 | Digital Input 5 | Frequency reference value ① |
| 7 | 0 V | Reference potential | 0 V = connection terminal 9 |
| 8 | A01 | Analog Output 1 | Output frequency |
| | D01 | Digital Output 1 | Output frequency |
| 9 | 0 V | Reference potential | 0 V connection terminal 7 |
| 10 | D14 | Digital Input 4 | Fixed frequency FF2 ① |
| | A12 | Analog Input 2 | Fixed frequency FF2 ① |
| 11 | A02 | Analog output 2 | Output current ① |
| | D02 | Digital output 2 | Output current ① |
| 12 | STO+ | Safe Torque Off + | Enable = +24 V |
| 13 | STO- | Safe Torque Off - | Enable = 0 V |
| 14 | K11 | Relay 1, changeover contact | Active = FAULT ① |
| 15 | K14 | Relay 1, changeover contact (N/O) | Active = FAULT ① |
| 16 | K12 | Relay 1, changeover contact (N/C) | Active = FAULT ① |
| 17 | K23 | Relay 2, N/O contact | Active = FAULT ① |
| 18 | K24 | Relay 2, N/C contact | Active = FAULT ① |

Note

① Programmable function.

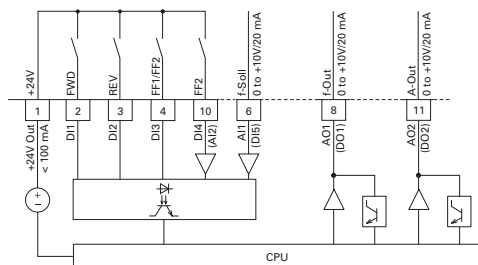

2.4


Adjustable Frequency Drives

PowerXL DA1 Series Drives

Dimensions


Approximate Dimensions in Inches (mm)

2 DA1, Sizes FS2 and FS3, Degree of Protection IP20/NEMA 0

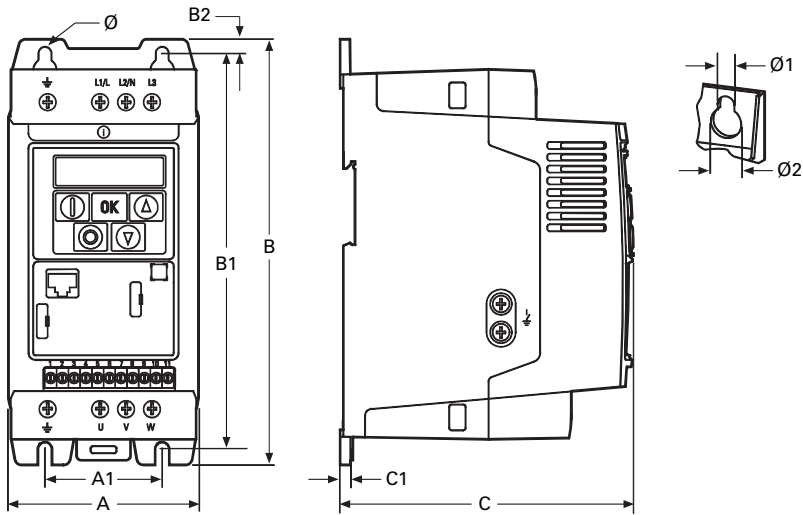

| Frame Size | A | A1 | B | B1 | B2 | C | C1 | Ø1 | Ø2 | Weight lbs (kg) |
|------------|--------------|--------------|---------------|---------------|------------|--------------|------------|------------|-------------|-----------------|
| FS2 | 4.21 (107.0) | 2.95 (75.0) | 9.09 (231.0) | 8.46 (215.0) | 0.31 (8.0) | 7.32 (186.0) | 0.20 (5.0) | 0.24 (6.0) | 0.47 (12.0) | 3.97 (1.8) |
| FS3 | 5.16 (131.0) | 3.94 (100.0) | 10.75 (273.0) | 10.04 (255.0) | 0.33 (8.5) | 8.03 (204.0) | 0.20 (5.0) | 0.24 (6.0) | 0.47 (12.0) | 7.72 (3.5) |


DA1, Sizes FS2 and FS3, Degree of Protection IP66/NEMA 4

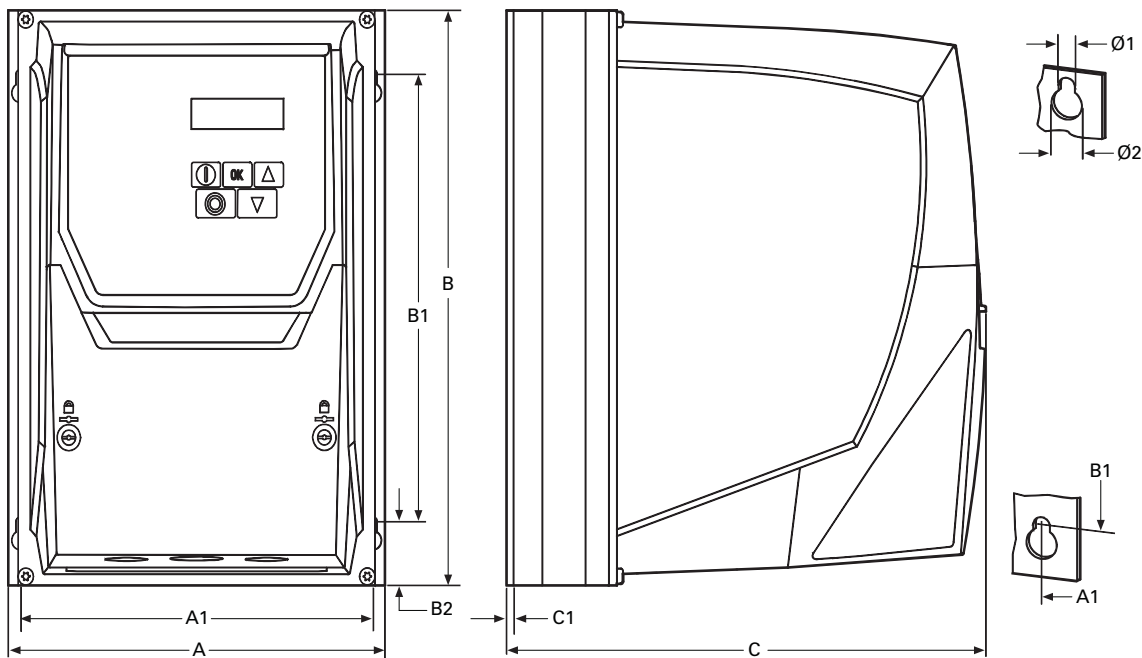

| Frame Size | A | A1 | B | B1 | B2 | C | C1 | Ø1 | Ø2 | Weight lbs (kg) |
|------------|--------------|--------------|---------------|--------------|-------------|---------------|------------|------------|------------|-----------------|
| FS2 | 7.40 (188.0) | 6.93 (176.0) | 10.12 (257.0) | 7.87 (200.0) | 0.79 (20.0) | 9.42 (239.3) | 0.14 (3.5) | 0.16 (4.2) | 0.33 (8.5) | 10.4 (4.5) |
| FS3 | 8.29 (211.0) | 7.78 (198.0) | 12.20 (310.0) | 9.90 (252.0) | 0.98 (25.0) | 10.48 (266.3) | 0.14 (3.5) | 0.16 (4.2) | 0.33 (8.5) | 15.9 (7.0) |

Approximate Dimensions in Inches (mm)

DA1, Sizes FS2 and FS3, Degree of Protection IP66/NEMA 4, with Local Controls

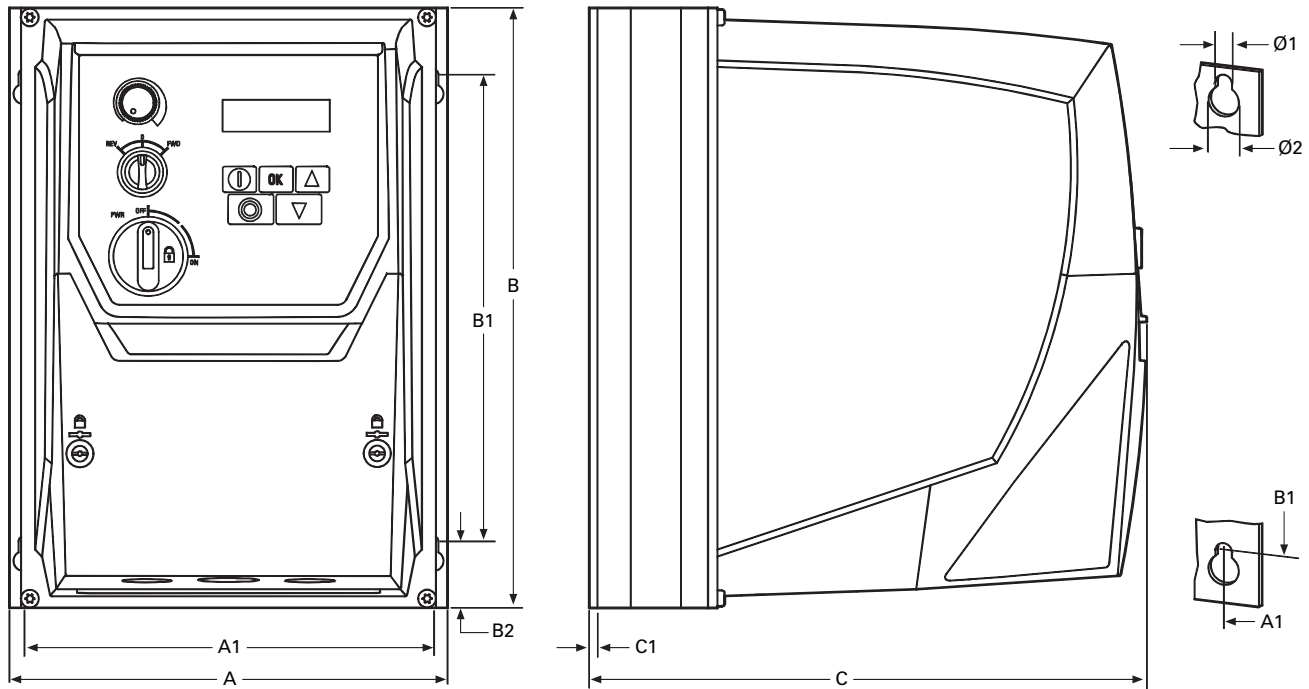

| Frame Size | A | A1 | B | B1 | B2 | C | C1 | Ø1 | Ø2 | Weight lbs (kg) |
|------------|--------------|--------------|---------------|--------------|-------------|---------------|------------|------------|------------|-----------------|
| FS2 | 7.40 (188.0) | 6.93 (176.0) | 10.12 (257.0) | 7.87 (200.0) | 0.79 (20.0) | 9.42 (239.3) | 0.14 (3.5) | 0.16 (4.2) | 0.33 (8.5) | 10.6 (4.8) |
| FS3 | 8.29 (211.0) | 7.78 (198.0) | 12.20 (310.0) | 9.90 (252.0) | 0.98 (25.0) | 10.48 (266.3) | 0.14 (3.5) | 0.16 (4.2) | 0.33 (8.5) | 16.1 (7.3) |

M-Max Series Drives for Machinery Applications

2



Product Description

Eaton's M-Max™ Series Sensorless Vector Adjustable Frequency AC Drives are the next generation of drives specifically engineered for today's machinery applications. These micro-processor-based drives have standard features that can be programmed to tailor the drive's performance to suit a wide variety of application requirements. The M-Max product line uses a 32-bit microprocessor and insulated gate bipolar transistors (IGBTs) that provide quiet motor operation, high motor efficiency, and smooth low-speed performance. The size and simplicity of the M-Max make it ideal for hassle-free installation. Models rated at 575 volts, three-phase, 50/60 Hz are available in sizes ranging from 1 to 7-1/2 hp. Models rated at 480 volts, three-phase, 50/60 Hz are available in sizes ranging from 1/2 to 25 hp. Models rated at 240 volts, single- or three-phase, 50/60 Hz are available in sizes ranging from 1/4 to 15 hp. Models rated at 115 volts, single-phase, 50/60 Hz are available in the 1/4 to 1-1/2 hp size range.

The standard drive includes a digital display, and operating and programming keys on a visually appealing, efficient application programming interface. The display provides drive monitoring, as well as adjustment and diagnostic information. The keys are used for digital adjustment and programming of the drive, as well as for operator control. Separate terminal blocks for control and power wiring are provided for customer connections.

Contents

Description

| | <i>Page</i> |
|---|-----------------|
| M-Max Series Drives | |
| Standards and Certifications | V6-T2-37 |
| Catalog Number Selection | V6-T2-37 |
| Product Selection | V6-T2-38 |
| Accessories | V6-T2-39 |
| Technical Data and Specifications | V6-T2-42 |
| Dimensions | V6-T2-44 |

Features

- Ease of use—preset application macros, startup wizard, diagnostic capabilities
- Compact, space-saving design
- Rugged and reliable—150% torque for one minute, 50C rated, conformal coated boards
- DIN rail and screw mountable
- Side-by-side installation
- Industry leading efficiency delivers energy savings to the customer
- Integrated 5% DC choke (FS4 and FS5)
- Integrated EMC filters make the unit suitable for commercial and industrial networks
- IP21 as standard, option for NEMA® 1 (FS4 and FS5)
- IP20 as standard, option for IP21 and NEMA 1 (FS1–FS3)
- Brake chopper as standard in three-phase, applications of frames 2 (FS2) and larger
- Temperature-controlled fan
- RS-485/Modbus® as standard
- PID controller as standard
- Several fieldbus options
 - PROFIBUS
 - DeviceNet
 - CANopen

Standards and Certifications

Product

- Complies with EN61800-3 (2004)

EMC (At Default Settings)

- EMC Category C2, C3, and C4 (Level H): With an internal RFI filter option

Safety^①


- 61800-5-1
- EN60204-1
- CE
- UL
- cUL
- IEC
- RoHS compliant



Note

- ^① See unit nameplate for more detailed approvals.

Catalog Number Selection

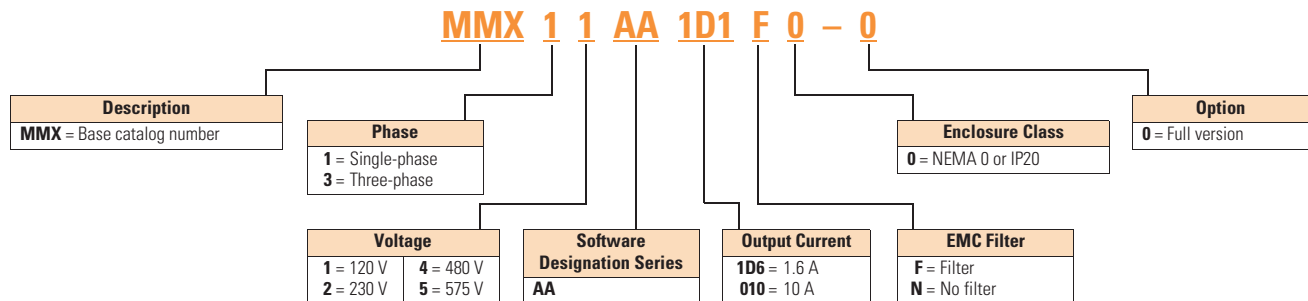

Product Selection

2

M-Max



M-Max Basic Controller

| hp ^① | Volts ^② | 100% Continuous Current I _N (A) | Nominal Input Current (A) | Frame Size | Catalog Number ^③ | |
|-----------------|--|--|---------------------------|------------|-----------------------------|-----------------------------|
| 1/4 | 100–120 V single-phase in 230 V three-phase out | 1.7 | 9.2 | FS2 | MMX11AA1D7N0-0 ^④ | |
| 1/2 | | 2.4 | 11.6 | | MMX11AA2D4N0-0 ^④ | |
| 3/4 | | 2.8 | 12.4 | | MMX11AA2D8N0-0 ^④ | |
| 1 | | 3.7 | 15 | | MMX11AA3D7N0-0 ^④ | |
| 1-1/2 | | 4.8 | 16.5 | | FS3 | MMX11AA4D8N0-0 ^④ |
| 1/4 | 200–240 V single-phase in 230 V three-phase out | 1.7 | 4.2 | FS1 | MMX12AA1D7N0-0 | |
| 1/2 | | 2.4 | 5.7 | | MMX12AA2D4N0-0 | |
| 3/4 | | 2.8 | 6.6 | | MMX12AA2D8N0-0 | |
| 1 | | 3.7 | 8.3 | | FS2 | MMX12AA3D7N0-0 |
| 1-1/2 | | 4.8 | 11.2 | | MMX12AA4D8N0-0 | |
| 2 | | 7 | 14.1 | | MMX12AA7D0N0-0 | |
| 3 | | 9.6 | 15.8 | FS3 | MMX12AA9D6N0-0 | |
| 1/4 | 200–240 V three-phase in 230 V three-phase out | 1.7 | 2.7 | FS1 | MMX32AA1D7N0-0 | |
| 1/2 | | 2.4 | 3.5 | | MMX32AA2D4N0-0 | |
| 3/4 | | 2.8 | 3.8 | | MMX32AA2D8N0-0 | |
| 1 | | 3.7 | 4.3 | | FS2 | MMX32AA3D7N0-0 |
| 1-1/2 | | 4.8 | 6.8 | | MMX32AA4D8N0-0 | |
| 2 | | 7 | 8.4 | | MMX32AA7D0N0-0 | |
| 3 | | 11 | 13.4 | FS3 | MMX32AA011N0-0 | |
| 5 | | 17 | 17 | FS4 | MMX32AA017N0-0 | |
| 7-1/2 | | 25 | 25 | | MMX32AA025N0-0 | |
| 10 | | 31 | 31 | FS5 | MMX32AA031N0-0 | |
| 15 | | 38 | 38 | | MMX32AA038N0-0 | |
| 1/2 | 380–480 V three-phase in 460 V three-phase out | 1.3 | 2.2 | FS1 | MMX34AA1D3N0-0 | |
| 3/4 | | 1.9 | 2.8 | | MMX34AA1D9N0-0 | |
| 1 | | 2.4 | 3.2 | | MMX34AA2D4N0-0 | |
| 1-1/2 | | 3.3 | 4 | | FS2 | MMX34AA3D3N0-0 |
| 2 | | 4.3 | 5.6 | | MMX34AA4D3N0-0 | |
| 3 | | 5.6 | 7.3 | | MMX34AA5D6N0-0 | |
| 4 | | 7.6 | 9.6 | FS3 | MMX34AA7D6N0-0 | |
| 5 | | 9 | 11.5 | | MMX34AA9D0N0-0 | |
| 7-1/2 | | 12 | 14.9 | | MMX34AA012N0-0 | |
| 10 | | 14 | 18.7 | | MMX34AA014N0-0 | |
| 10 | | 16 | 16 | FS4 | MMX34AA016N0-0 | |
| 15 | | 23 | 23 | | MMX34AA023N0-0 | |
| 20 | | 31 | 31 | FS5 | MMX34AA031N0-0 | |
| 25 | | 38 | 38 | | MMX34AA038N0-0 | |
| 1 | 575 V three-phase in 575 V three-phase out | 1.7 | 2.0 | FS3 | MMX35AA1D7N0-0 ^⑤ | |
| 2 | | 2.7 | 3.6 | | MMX35AA2D7N0-0 ^⑤ | |
| 3 | | 3.9 | 5.0 | | MMX35AA3D9N0-0 ^⑤ | |
| 5 | | 6.1 | 7.6 | | MMX35AA6D1N0-0 ^⑤ | |
| 7-1/2 | | 9.0 | 10.4 | | MMX35AA9D0N0-0 ^⑤ | |

Notes

- ^① Horsepower ratings are based on the use of a 240 V, 460 V, and 575 V NEMA B, four- or six-pole squirrel cage induction motor and are for reference only. Units are to be selected such that the motor current is less than or equal to the MMX rated continuous output current.
- ^② For 208 V, 380 V, or 415 V applications, select the unit such that the motor current is less than or equal to the MMX rated continuous output current.
- ^③ For EMC filtered unit, replace “NO-0” with “FO-0”.
- ^④ EMC filters are not available on MMX11 units.
- ^⑤ All 575 V units come with EMC filter standard.

Accessories

M-Max Copy/Paste Module

| Description | Catalog Number |
|---|-------------------|
| Module is plugged onto the front of the drive to provide: upload/download of all parameters, direct link to a PC via USB interface for parameter assignment via MaxConnect software, and copying of parameters for a series of devices or when exchanging devices. No PC required | MMX-COM-PC |

PC Cable

| Description | Catalog Number |
|--|---------------------|
| Remote download USB to RJ-45 cable with software driver disk | REM-USB-DOWN |

NEMA Type 1 Kits ^①

| Description | Catalog Number |
|--------------------------------------|---------------------|
| NEMA Type 1 and IP21 kit for frame 1 | MMX-IP21-FS1 |
| NEMA Type 1 and IP21 kit for frame 2 | MMX-IP21-FS2 |
| NEMA Type 1 and IP21 kit for frame 3 | MMX-IP21-FS3 |
| NEMA Type 1 for frame 4 | MMX-CKIT-FS4 |
| NEMA Type 1 for frame 5 | MMX-CKIT-FS5 |

Optional Communication Modules

Network cards require communication adapter.

| Description | Catalog Number |
|--|---------------------|
| Communication adapter kit (FS1–FS3) | MMX-NET-XA |
| PROFIBUS DP network card with serial connection ^② | XXM-NET-PS-A |
| PROFIBUS DP network card with Sub-D connection ^② | XXM-NET-PD-A |
| DeviceNet network card ^② | XXM-NET-DN-A |
| CANopen network card ^② | XXM-NET-CO-A |

Remote Keypad ^③

There are three components needed for a full remote keypad.

| Description | Catalog Number |
|--------------------------|--------------------------------------|
| Bezel and cable | OPTRMT-BP-HMAX ^③ |
| Remote copy/paste keypad | MMX-REMKEY-TEXT ^③ |
| VFD adapter | MMX-ADAPTER-RJ45 ^③ |

Notes

- ^① NEMA Type 1 kit provides conduit entry plate.
- ^② Requires communication adapter kit.
- ^③ All three components are required for remote keypad operation.

2.5

Adjustable Frequency Drives

M-Max Series Drives

2

Line and Load Reactors

A line and load reactor is a three-phase inductance filter that can be placed on the line and load side of the AFD to help improve the harmonic performance of the system. Consult the factory for additional filtering options and further technical details.


DR1 Line Reactor

A line reactor helps to provide a moderate reduction in current harmonics similar to a DC choke. It also provides increased input protection for AFD and its semiconductors from line transients helping to extend the life of the AFD.

DR2 Output Reactor

An output filter is used to reduce the transient voltage (dV/dt) at the motor terminals. The output filter is recommended for cable lengths exceeding 100 ft (30 m) with a drive of 3 hp and above and for cable lengths of 33 ft (10 m) with a drive of 2 hp and below.

Line and Load Reactors—Catalog Number Selection

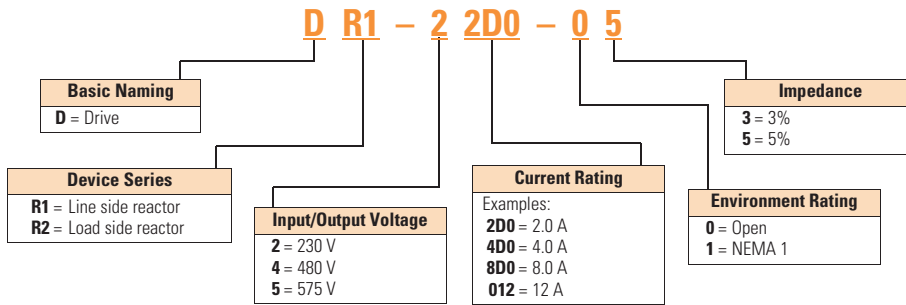

Line and Load Reactors—230 V

| hp (CT) | Open Load Reactor | | Line Reactor | | NEMA 1 Load Reactor | | Line Reactor | |
|---------|-------------------|-------------|--------------|-------------|---------------------|-------------|--------------|-------------|
| | 3% | 5% | 3% | 5% | 3% | 5% | 3% | 5% |
| 0.33 | DR2-22D0-03 | DR2-22D0-05 | DR1-21D7-03 | DR1-21D7-05 | DR2-22D0-13 | DR2-22D0-15 | DR1-21D7-13 | DR1-21D7-15 |
| 0.5 | DR2-22D0-03 | DR2-22D0-05 | DR1-22D2-03 | DR1-22D2-05 | DR2-22D0-13 | DR2-22D0-15 | DR1-22D2-13 | DR1-22D2-15 |
| 0.75 | DR2-24D0-03 | DR2-24D0-05 | DR1-23D2-03 | DR1-23D2-05 | DR2-24D0-13 | DR2-24D0-15 | DR1-23D2-13 | DR1-23D2-15 |
| 1 | DR2-24D0-03 | DR2-28D0-05 | DR1-24D2-03 | DR1-24D2-05 | DR2-24D0-13 | DR2-28D0-15 | DR1-24D2-13 | DR1-24D2-15 |
| 1.5 | DR2-28D0-03 | DR2-28D0-05 | DR1-26D0-03 | DR1-26D0-05 | DR2-28D0-13 | DR2-28D0-15 | DR1-26D0-13 | DR1-26D0-15 |
| 2 | DR2-28D0-03 | DR2-28D0-05 | DR1-26D8-03 | DR1-26D8-05 | DR2-28D0-13 | DR2-28D0-15 | DR1-26D8-13 | DR1-26D8-15 |
| 3 | DR2-2012-03 | DR2-2012-05 | DR1-29D6-03 | DR1-29D6-05 | DR2-2012-13 | DR2-2012-15 | DR1-29D6-13 | DR1-29D6-15 |
| 5 | DR2-2018-03 | DR2-2018-05 | DR1-2015-03 | DR1-2015-05 | DR2-2018-13 | DR2-2018-15 | DR1-2015-13 | DR1-2015-15 |
| 7.5 | DR2-2025-03 | DR2-2025-05 | DR1-2022-03 | DR1-2022-05 | DR2-2025-13 | DR2-2025-15 | DR1-2022-13 | DR1-2022-15 |
| 10 | DR2-2035-03 | DR2-2035-05 | DR1-2028-03 | DR1-2028-05 | DR2-2035-13 | DR2-2035-15 | DR1-2028-13 | DR1-2028-15 |
| 15 | DR2-2045-03 | DR2-2045-05 | DR1-2042-03 | DR1-2042-05 | DR2-2045-13 | DR2-2045-15 | DR1-2042-13 | DR1-2042-15 |

Line and Load Reactors—480 V

| hp (CT) | Open Load Reactor | |
|---------|-------------------|-------------|
| | 3% | 5% |
| | 0.5 | DR2-41D0-03 |
| 0.75 | DR2-42D0-03 | DR2-42D0-05 |
| 1 | DR2-42D0-03 | DR2-42D0-05 |
| 1.5 | DR2-44D0-03 | DR2-44D0-05 |
| 2 | DR2-44D0-03 | DR2-44D0-05 |
| 3 | DR2-48D0-03 | DR2-48D0-05 |
| 5 | DR2-48D0-03 | DR2-48D0-05 |
| 7.5 | DR2-4012-03 | DR2-4012-05 |
| 10 | DR2-4018-03 | DR2-4018-05 |
| 15 | DR2-4025-03 | DR2-4025-05 |
| 20 | DR2-4025-03 | DR2-4025-05 |
| 25 | DR2-4035-03 | DR2-4035-05 |

| Line Reactor | |
|--------------|-------------|
| 3% | 5% |
| DR1-41D1-03 | DR1-41D1-05 |
| DR1-41D6-03 | DR1-41D6-05 |
| DR1-42D1-03 | DR1-42D1-05 |
| DR1-43D0-03 | DR1-43D0-05 |
| DR1-43D4-03 | DR1-43D4-05 |
| DR1-44D8-03 | DR1-44D8-05 |
| DR1-47D6-03 | DR1-47D6-05 |
| DR1-4011-03 | DR1-4011-05 |
| DR1-4014-03 | DR1-4014-05 |
| DR1-4021-03 | DR1-4021-05 |
| DR1-4027-03 | DR1-4027-05 |
| DR1-4034-03 | DR1-4034-05 |

| NEMA 1 Load Reactor | |
|---------------------|-------------|
| 3% | 5% |
| DR2-41D0-13 | DR2-41D0-15 |
| DR2-42D0-13 | DR2-42D0-15 |
| DR2-42D0-13 | DR2-42D0-15 |
| DR2-44D0-13 | DR2-44D0-15 |
| DR2-44D0-13 | DR2-44D0-15 |
| DR2-48D0-13 | DR2-48D0-15 |
| DR2-48D0-13 | DR2-48D0-15 |
| DR2-4012-13 | DR2-4012-15 |
| DR2-4018-13 | DR2-4018-15 |
| DR2-4025-13 | DR2-4025-15 |
| DR2-4025-13 | DR2-4025-15 |
| DR2-4035-13 | DR2-4035-15 |

| Line Reactor | |
|--------------|-------------|
| 3% | 5% |
| DR1-41D1-13 | DR1-41D1-15 |
| DR1-41D6-13 | DR1-41D6-15 |
| DR1-42D1-13 | DR1-42D1-15 |
| DR1-43D0-13 | DR1-43D0-15 |
| DR1-43D4-13 | DR1-43D4-15 |
| DR1-44D8-13 | DR1-44D8-15 |
| DR1-47D6-13 | DR1-47D6-15 |
| DR1-4011-13 | DR1-4011-15 |
| DR1-4014-13 | DR1-4014-15 |
| DR1-4021-13 | DR1-4021-15 |
| DR1-4027-13 | DR1-4027-15 |
| DR1-4034-13 | DR1-4034-15 |

Line and Load Reactors—575 V

| hp (CT) | Open Load Reactor | |
|---------|-------------------|-------------|
| | 3% | 5% |
| | 1 | DR2-52D0-03 |
| 2 | DR2-54D0-03 | DR2-54D0-05 |
| 3 | DR2-54D0-03 | DR2-54D0-05 |
| 5 | DR2-58D0-03 | DR2-58D0-05 |
| 7.5 | DR2-58D0-03 | DR2-58D0-05 |

| Line Reactor | |
|--------------|-------------|
| 3% | 5% |
| DR1-51D7-03 | DR1-51D7-05 |
| DR1-43D4-03 | DR1-52D7-05 |
| DR1-53D9-03 | DR1-53D9-05 |
| DR1-56D1-03 | DR1-56D1-05 |
| DR1-59D0-03 | DR1-59D0-05 |

| NEMA 1 Load Reactor | |
|---------------------|-------------|
| 3% | 5% |
| DR2-52D0-13 | DR2-52D0-15 |
| DR2-54D0-13 | DR2-54D0-15 |
| DR2-54D0-13 | DR2-54D0-15 |
| DR2-58D0-13 | DR2-58D0-15 |
| DR2-58D0-13 | DR2-58D0-15 |

| Line Reactor | |
|--------------|-------------|
| 3% | 5% |
| DR1-51D7-13 | DR1-51D7-15 |
| DR1-52D7-13 | DR1-52D7-15 |
| DR1-53D9-13 | DR1-53D9-15 |
| DR1-56D1-13 | DR1-56D1-15 |
| DR1-59D0-13 | DR1-59D0-15 |

Technical Data and Specifications

Ratings

M-Max Basic Controller IP20 Standard Ratings

| Description | Specification |
|----------------------------|---|
| Protections | |
| Overcurrent protection | Trip limit $4.0 \times I_{fl}$ instantaneously |
| Overvoltage protection | 115/230 V series: 437 Vdc; 400 V series: 874 Vdc; 575 V series: 1048 Vdc trip level |
| Undervoltage protection | 115/230 V series: 183 Vdc; 400 V series: 333 Vdc; 575 V series: 460 Vdc trip level |
| Ground fault protection | Ground fault is tested before every start. In case of ground fault in motor or motor cable, only the frequency converter is protected |
| Overtemperature protection | Yes |
| Motor overload protection | Yes |
| Motor stall protection | Yes |
| Motor underload protection | Yes |
| Short-circuit protection | 100 kAIC with Type J fuses |

Programmable Parameters

| Description |
|--|
| Application macros: basic, pump, fan and high load (hoist) |
| Programmable start/stop and reverse signal logic (sinking or sourcing) |
| Reference scaling |
| Programmable start and stop functions |
| DC-brake at start and stop |
| Programmable V/Hz curve |
| Adjustable switching frequency |
| Autorestart function after fault |
| Protections and supervisions (all fully programmable; off, warning, fault) |
| Current signal input fault |
| External fault |
| Fieldbus communication |
| Eight preset speeds |
| Analog input range selection, signal scaling and filtering |
| PID controller |
| Skip frequencies |

Specifications

M-Max Series Drives

| Description | Specification |
|--|--|
| Input Ratings | |
| Input voltage (V_{in}) | +10%/–15% |
| Input frequency (f_{in}) | 50/60 Hz (variation up to 45–66 Hz) |
| Connection to power | Once per minute or less (typical operation) |
| Output Ratings | |
| Output voltage | 0 to V_{in} ① |
| Continuous output current | Continuous rated current I_N at ambient temperature max. 122 °F (50 °C), overload $1.5 \times I_N$ max. 1 min/10 min |
| Output frequency | 0 to 320 Hz |
| Frequency resolution | 0.01 Hz |
| Initial output current (I_{fl}) | Current $2 \times I_N$ for 2 seconds in every 20-second period Torque depends on motor |
| Control Characteristics | |
| Control method | Frequency control (V/Hz) open loop or sensorless vector control |
| Switching frequency | 1.5 to 16 kHz; default 4 kHz |
| Frequency reference | Analog input: resolution 0.1% (10-bit), accuracy $\pm 1\%$ V/Hz Panel reference: resolution 0.01 Hz |
| Field weakening point | 30 to 320 Hz |
| Acceleration time | 0 to 3000 sec |
| Deceleration time | 0 to 3000 sec |
| Braking torque | DC brake: $30\% \times T_n$ (without brake option) |
| Brake Resistor (Minimum Values) ② | |
| 230 V Series | FS2 35 ohms and FS3 26 ohms, FS4 14 ohms, FS5 9 ohms |
| 400 V Series | FS2 75 ohms and FS3 54 ohms, FS4 28 ohms, FS5 17 ohms |
| 575 V Series | FS3 103 ohms |
| Ambient Conditions | |
| Ambient operating temperature | 14 °F (–10 °C), no frost to 122 °F (+50 °C): Rated loadability I_N |
| Storage temperature | –40 °F (–40 °C) to 158 °F (70 °C) |
| Relative humidity | 0 to 95% RH, noncondensing, non-corrosive, no dripping water |
| Air quality | Chemical vapors: IEC 721-3-3, unit in operation, Class 3C2; Mechanical particles: IEC 721-3-3, unit in operation, Class 3S2 |
| Altitude | 100% load capacity (no derating) up to 3280 ft (1000 m); 1% derating for each 328 ft (100 m) above 3280 ft (1000 m); max. 6560 ft (2000 m) |
| Vibration | EN 60068-2-6; 3 to 150 Hz, displacement amplitude 1 mm (peak) at 3 to 15.8 Hz, max. acceleration amplitude 1G at 15.8 to 150 Hz |
| Shock | EN 50178, IEC 68-2-27 UPS Drop test (for applicable UPS weights); storage and shipping: max. 15 g, 11 ms (in package) |
| Enclosure class | IP20 (FS1–FS3) IP21 (FS4 and FS5) |

Notes

- ① Exception: 115 V single-phase in, 230 V three-phase out.
- ② Only three-phase FS2 and FS3 drives are equipped with brake chopper circuit.

Standards

I/O Specifications

- Digital inputs DI1–DI6 are freely programmable. The user can assign multiple functions to a single input
- Digital, relay, and analog outputs are freely programmable

Includes:

- Six digital inputs
- Two analog inputs
 - 4–20 mA
 - 0–10 V
- One analog output
- One digital output
- Two relay outputs
- RS-485 interface

Reliability

- Pretested components
- Computerized testing
- Final test with full load
- Conformal-coated boards
- Eaton's Electrical Services & Systems: national network of AF drive specialists

M-Max I/O Interface

| Terminal | Signal | Factory Preset | Description |
|----------|--------|---------------------------------|----------------------|
| 1 | +10 V | — | Ref. output voltage |
| 2 | AI1 | Freq. reference ^{P1} | Analog signal in 1 |
| 3 | GND | — | I/O signal ground |
| 6 | 24 V | — | 24 V output for DI's |
| 7 | GND | — | I/O signal ground |
| 8 | DI1 | Start forward ^{P1} | Digital input 1 |
| 9 | DI2 | Start reverse ^{P1} | Digital input 2 |
| 10 | DI3 | Preset speed ^{P1} | Digital input 3 |
| A | A | FB communication | RS-485 signal A |
| B | B | FB communication | RS-485 signal B |
| 4 | AI2 | PI actual value ^{P1} | Analog signal in 2 |
| 5 | GND | — | I/O signal ground |
| 13 | GND | — | I/O signal ground |
| 14 | DI4 | Preset speed B1 ^{P1} | Digital input 4 |
| 15 | DI5 | Fault reset ^{P1} | Digital input 5 |
| 16 | DI6 | Disable PI contr. ^{P1} | Digital input 6 |
| 18 | A0 | Output frequency ^{P1} | Analog output |
| 20 | DO | Active = READY ^{P1} | Digital signal out |
| 22 | R011 | Active = RUN ^{P1} | Relay out 1 |
| 23 | R012 | | |
| 24 | R021 | Active = FAULT ^{P1} | Relay out 2 |
| 25 | R022 | | |
| 26 | R023 | | |

Note

^{P1} Parameter-selectable function.

2.5

Adjustable Frequency Drives


M-Max Series Drives

Dimensions


Approximate Dimensions in Inches (mm)

2


Dimensions and Frame Sizes, FS1–FS3 (FS = Frame Size)

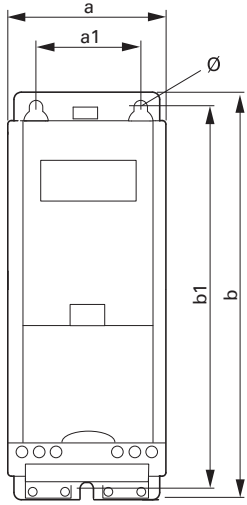


FS1

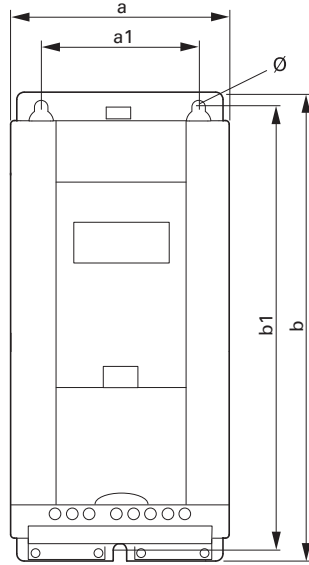

FS2

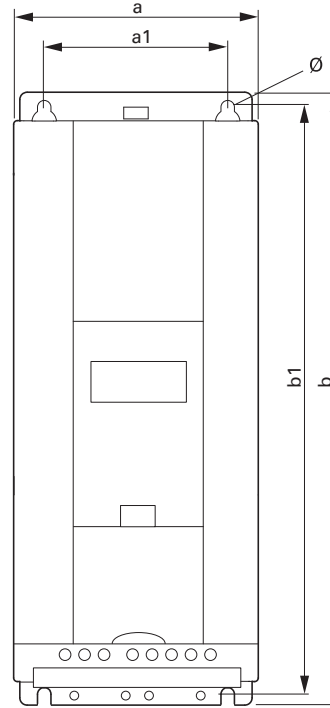


FS3

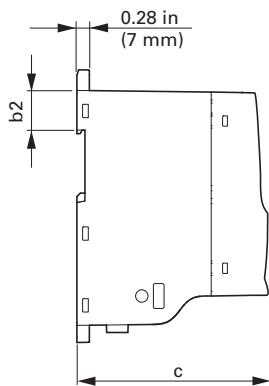

Approximate Dimensions in Inches (mm)

Dimensions and Frame Sizes, FS4 and FS5 (FS = Frame Size)

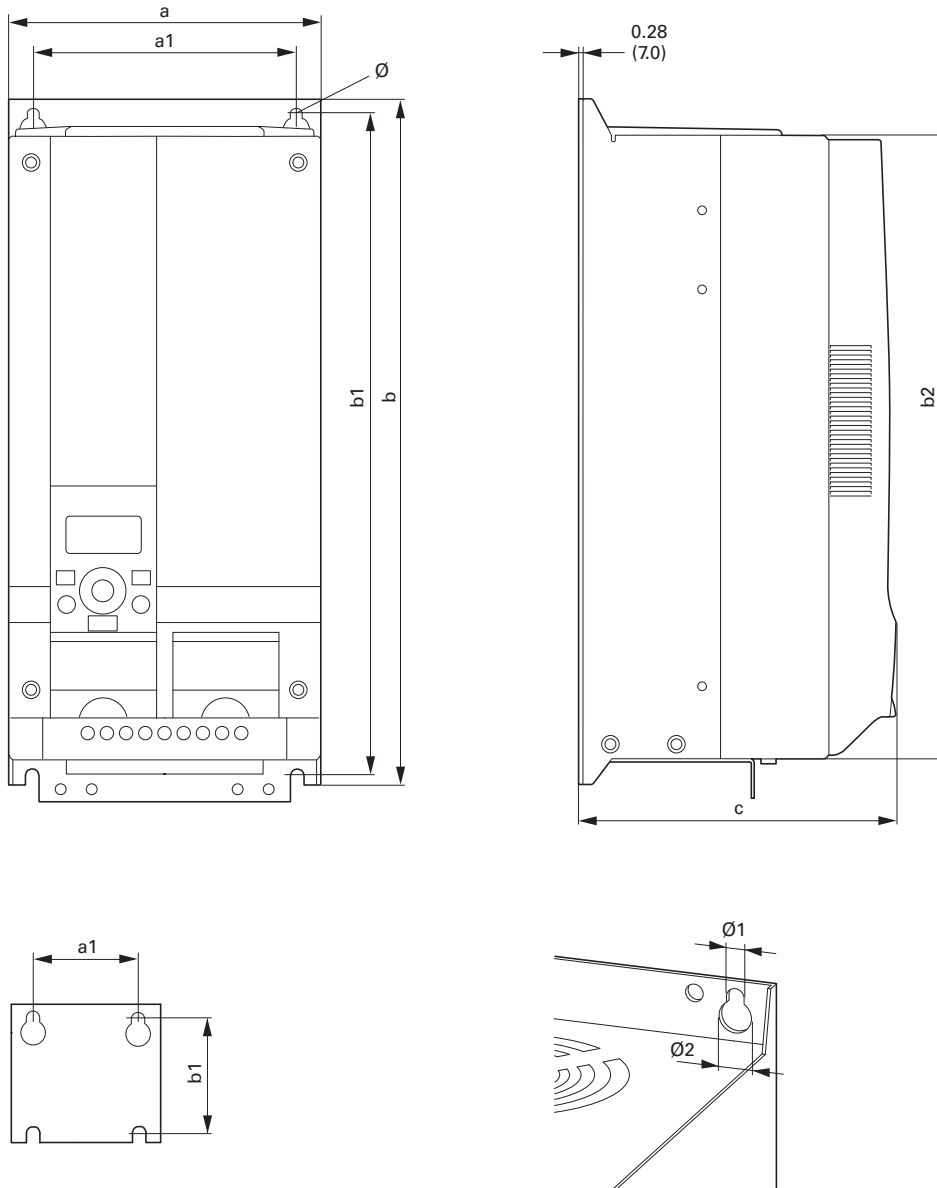

2.5

Adjustable Frequency Drives

M-Max Series Drives

Dimensions and Frame Sizes

Approximate Dimensions in inches (mm)


| Part Number | a | a1 | b | b1 | b2 | c | Ø, Ø1 | Ø2 | Installation Size |
|-------------|---------|---------|---------|---------|---------|---------|-------|--------|-------------------|
| MMX12AA1D7_ | 2.60 | 1.50 | 6.30 | 5.79 | 1.26 | 4.02 | 0.18 | — | FS1 |
| MMX12AA2D4_ | (66) | (38) | (160) | (147) | (32) | (102) | (4.5) | | |
| MMX12AA2D8_ | | | | | | | | | |
| MMX32AA1D7_ | | | | | | | | | |
| MMX32AA2D4_ | | | | | | | | | |
| MMX32AA2D8_ | | | | | | | | | |
| MMX34AA1D3_ | | | | | | | | | |
| MMX34AA1D9_ | | | | | | | | | |
| MMX34AA2D4_ | | | | | | | | | |
| MMX11AA1D7_ | 3.54 | 2.46 | 7.68 | 7.17 | 1.26 | 4.14 | 2.17 | — | FS2 |
| MMX11AA2D4_ | (90) | (62.5) | (195) | (182) | (32) | (105) | (5.5) | | |
| MMX11AA2D8_ | | | | | | | | | |
| MMX11AA3D7_ | | | | | | | | | |
| MMX12AA3D7_ | | | | | | | | | |
| MMX12AA4D8_ | | | | | | | | | |
| MMX12AA7D0_ | | | | | | | | | |
| MMX32AA3D7_ | | | | | | | | | |
| MMX32AA4D8_ | | | | | | | | | |
| MMX32AA7D0_ | | | | | | | | | |
| MMX34AA3D3_ | | | | | | | | | |
| MMX34AA4D3_ | | | | | | | | | |
| MMX34AA5D6_ | | | | | | | | | |
| MMX11AA4D8_ | 3.94 | 2.95 | 9.96 | 9.53 | 1.34 | 4.41 | 2.17 | — | |
| MMX12AA9D6_ | (100) | (75) | (253) | (242) | (34) | (112) | (5.5) | | |
| MMX32AA011_ | | | | | | | | | |
| MMX34AA7D6_ | | | | | | | | | |
| MMX34AA9D0_ | | | | | | | | | |
| MMX34AA012_ | | | | | | | | | |
| MMX34AA014_ | | | | | | | | | |
| MMX35AA1D7_ | | | | | | | | | |
| MMX35AA2D7_ | | | | | | | | | |
| MMX35AA3D9_ | | | | | | | | | |
| MMX35AA6D1_ | | | | | | | | | |
| MMX35AA9D0_ | | | | | | | | | |
| MMX32AA012_ | 6.50 | 5.51 | 14.57 | 13.82 | 13.27 | 6.61 | 0.28 | 0.55 | |
| MMX32AA017_ | (165.0) | (140.0) | (370.0) | (351.0) | (337.0) | (168.0) | (7.0) | (14.0) | |
| MMX32AA025_ | | | | | | | | | |
| MMX34AA016_ | | | | | | | | | |
| MMX34AA023_ | | | | | | | | | |
| MMX32AA031_ | 6.50 | 5.51 | 16.30 | 15.67 | 15.08 | 8.07 | 0.28 | 0.55 | FS5 |
| MMX32AA038_ | (165.0) | (140.0) | (414.0) | (398.0) | (383.0) | (205.0) | (7.0) | (14.0) | |
| MMX34AA031_ | | | | | | | | | |
| MMX34AA038_ | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |

Note

1 in = 25.4 mm, 1 mm = 0.0394 in

Approximate Dimensions in Inches (mm)

NEMA 1/IP21 M-Max Drives and Communication Adapter Kit

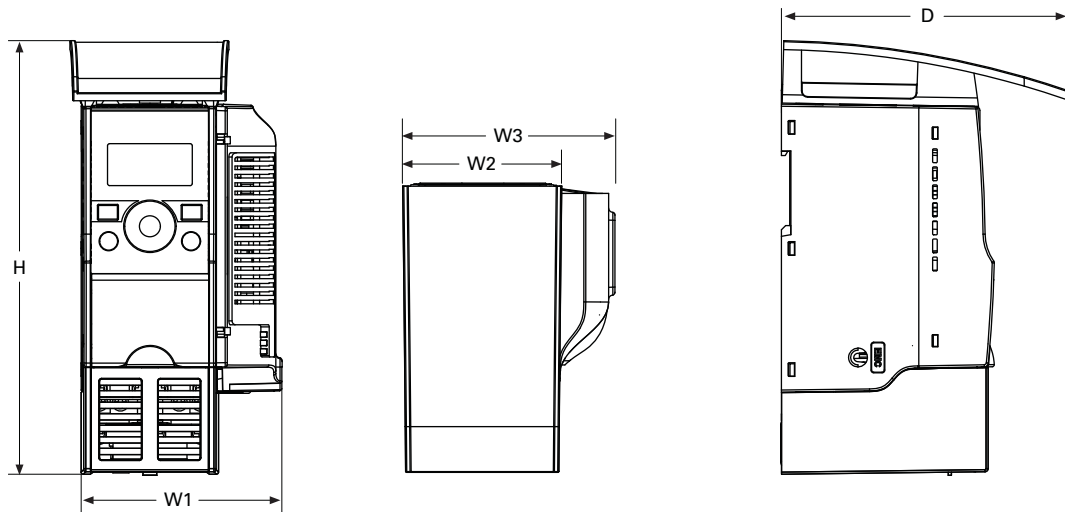

| Frame Type | H | W1 | W2 | W3 | D |
|------------|---------------|--------------|--------------|--------------|--------------|
| FS1 | 8.14 (206.7) | 3.77 (95.7) | 2.99 (75.9) | 3.98 (101.2) | 5.41 (137.5) |
| FS2 | 9.90 (251.5) | 4.72 (120.0) | 3.97 (100.8) | 4.94 (125.5) | 5.68 (144.2) |
| FS3 | 12.26 (311.5) | 5.12 (130.1) | 4.36 (110.8) | 5.33 (135.3) | 6.32 (160.5) |
| FS4 | 16.40 (416.6) | — | 6.50 (165.0) | — | 6.61 (166.0) |
| FS5 | 18.10 (460.1) | — | 6.50 (165.0) | — | 8.07 (205.0) |

DG1 General Purpose Drive

2



Contents

| Description | Page |
|------------------------------------|----------|
| PowerXL DG1 Series Drives | |
| Standards and Certifications | V6-T2-49 |
| Catalog Number Selection | V6-T2-49 |
| Product Selection | V6-T2-50 |
| Accessories | V6-T2-56 |
| Replacement Parts | V6-T2-63 |
| Technical Data and Specifications | V6-T2-67 |
| Dimensions | V6-T2-73 |
| PowerXL DG1 Series Enclosed Drives | V6-T2-74 |

PowerXL DG1 Series Drives

Product Description

The DG1 general purpose drives are part of Eaton's next generation PowerXL Series of adjustable frequency drives specifically engineered for today's more demanding commercial and industrial applications. The power unit makes use of the most sophisticated semiconductor technology and a highly modular construction that can be flexibly adapted to meet the customer's needs.

The control module was designed to include today's standard communication protocols and I/O while still having the modularity to add additional option cards.

Eaton's patented Active Energy Control is also a standard feature on DG1 drives, offering customers increased efficiency, safety and reliability.

These drives continue the tradition of robust performance and raise the bar on features and functionality, ensuring the best solution at the right price.

Product Range

230 V to 125 hp, 312 A, 90 kW

480 V to 1000 hp, 1180 A, 630 kW

575 V to 800 hp, 820 A, 597 kW

Features and Benefits

Hardware

- Brake chopper standard on Frames 0, 1, 2, 3
- Dual overload ratings
 - 110% variable torque (I_L)
 - 150% constant torque (I_H)
- Open Type/IP00 or IP20 or Type 1/IP21 or Type 12/IP54 enclosures available
- Integrated common mode reduction 5% DC link choke with input surge protection
- EMI/RFI filters standard on all drives—meets EMC Category C2
- Real-time clock—supports calendaring and PLC functionality
- Graphic LCD display and keypad—supports simple menu navigation as well as on-screen diagnostics and troubleshooting
- LOCAL/REMOTE operation from keypad and two configurable soft keys
- Conformal coated control and power boards standard

- Control logic can be powered from an external auxiliary control panel—internal drive functions and fieldbus if necessary
- Standard I/O:
 - 8DI, 1DO
 - 2AI, 2AO
 - 2FC, 1FA relays
- Standard communications:
 - EtherNet/IP, Modbus TCP
 - RS-485: Modbus RTU, BACnet MS/TP
- Seamless integration into EtherNet/IP networks via EIP-Assist I/O tag-generation tool
- Two expansion slots—intended to support additional I/O or communication protocols as necessary
- Quick disconnect terminals for I/O connections—supports fast easy installation
- Safe Torque Off (STO) built-in with functional safety SIL1 certification

Software

- Active energy control—minimizes energy losses in your motor, resulting in industry-leading energy efficiency for your application
- Quick Start Wizard upon initial power-up supports fast, easy installation
- Standard applications:
 - Standard
 - Multi-pump and fan Control
 - Multi-PID
 - Multi-purpose
- Copy/paste functionality on drive keypad—allows for fast setup of multiple drives
- Pre-programmed I/O—supports fast, easy installation for most applications
- Dynamic motor regenerative energy management
- Advanced PC Tool with diagnostic capabilities
- Two keypad software keys for easy menu navigation and shortcuts

Standards and Certifications

Product

- IEC/EN 61800-5-1
- IEC/EN 61800-5-2
- UL 508C
- IEC 61508
- EN 62061
- EN ISO 13849-1

EMC

- Immunity: IEC/EN 61800-3
- Category C2

Certification


- UL
- cUL
- CE
- C-Tick
- RoHS
- EAC
- Plenum rated




Catalog Number Selection

Catalog Number Selection is for illustrative purposes only and not to be used to create new catalog numbers.

PowerXL Series—DG1 General Purpose Drive

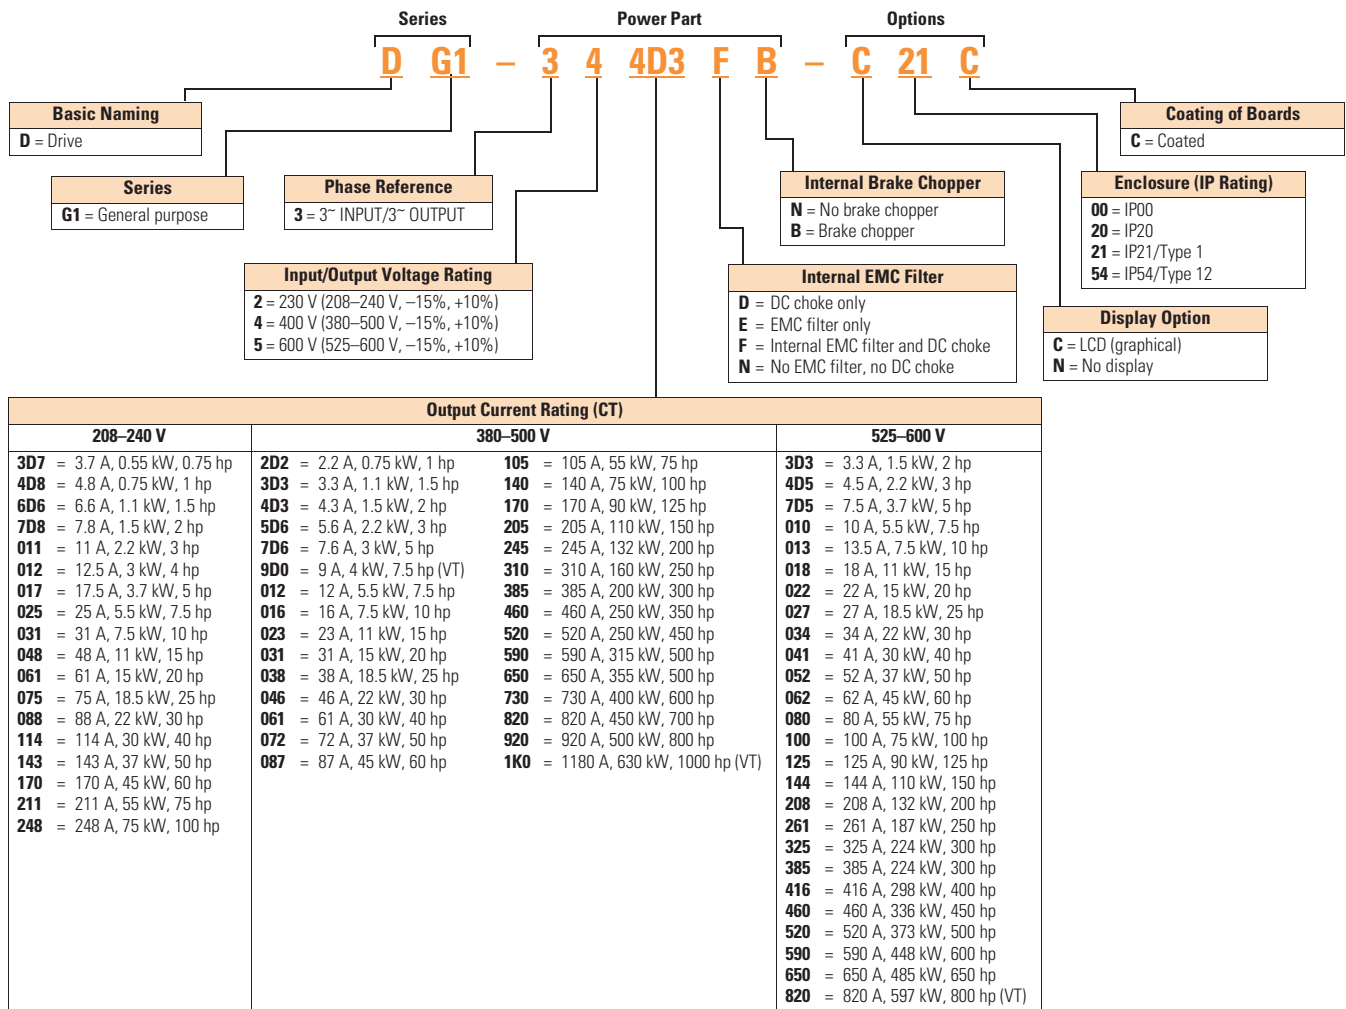

PowerXL Series—DG1 General Purpose Drive Option Boards

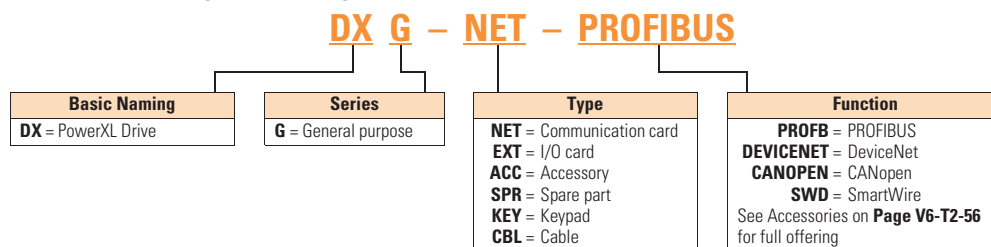

2.6

Adjustable Frequency Drives

PowerXL DG1 Series Drives

Product Selection

2

DG1 Series Drives—208–240 Volt

PowerXL Series—DG1

IP20



| Frame Size | Constant Torque (CT) / High Overload (I _H) | | | Variable Torque (VT) / Low Overload (I _L) | | | Catalog Number |
|------------|--|--------------------|--------------|---|--------------------|--------------|------------------|
| | 230 V, 50 Hz kW Rating | 230 V, 60 Hz hp | Current A | 230 V, 50 Hz kW Rating | 230 V, 60 Hz hp | Current A | |
| FR0 | 0.55 | 0.75 | 3.7 | 0.75 | 1 | 4.8 | DG1-323D7EB-C20C |
| | 0.75 | 1 | 4.8 | 1.1 | 1.5 | 6.6 | DG1-324D8EB-C20C |
| | 1.1 | 1.5 | 6.6 | 1.5 | 2 | 7.8 | DG1-326D6EB-C20C |

PowerXL Series—DG1

Type 1/IP21



| Frame Size | Constant Torque (CT) / High Overload (I _H) | | | Variable Torque (VT) / Low Overload (I _L) | | | Catalog Number |
|------------|--|--------------------|--------------|---|--------------------|--------------|------------------|
| | 230 V, 50 Hz kW Rating | 230 V, 60 Hz hp | Current A | 230 V, 50 Hz kW Rating | 230 V, 60 Hz hp | Current A | |
| FR1 | 0.55 | 0.75 | 3.7 | 0.75 | 1 | 4.8 | DG1-323D7FB-C21C |
| | 0.75 | 1 | 4.8 | 1.1 | 1.5 | 6.6 | DG1-324D8FB-C21C |
| | 1.1 | 1.5 | 6.6 | 1.5 | 2 | 7.8 | DG1-326D6FB-C21C |
| | 1.5 | 2 | 7.8 | 2.2 | 3 | 11 | DG1-327D8FB-C21C |
| | 2.2 | 3 | 11 | 3 | — | 12.5 | DG1-32011FB-C21C |
| FR2 | 3 | — | 12.5 | 3.7 | 5 | 17.5 | DG1-32012FB-C21C |
| | 3.7 | 5 | 17.5 | 5.5 | 7.5 | 25 | DG1-32017FB-C21C |
| | 5.5 | 7.5 | 25 | 7.5 | 10 | 31 | DG1-32025FB-C21C |
| FR3 | 7.5 | 10 | 31 | 11 | 15 | 48 | DG1-32031FB-C21C |
| | 11 | 15 | 48 | 15 | 20 | 61 | DG1-32048FB-C21C |
| FR4 | 15 | 20 | 61 | 18.5 | 25 | 75 | DG1-32061FN-C21C |
| | 18.5 | 25 | 75 | 22 | 30 | 88 | DG1-32075FN-C21C |
| | 22 | 30 | 88 | 30 | 40 | 114 | DG1-32088FN-C21C |
| FR5 | 30 | 40 | 114 | 37 | 50 | 143 | DG1-32114FN-C21C |
| | 37 | 50 | 143 | 45 | 60 | 170 | DG1-32143FN-C21C |
| | 45 | 60 | 170 | 55 | 75 | 211 | DG1-32170FN-C21C |
| FR6 | 55 | 75 | 211 | 75 | 100 | 261 | DG1-32211FN-C21C |
| | 75 | 100 | 248 | 90 | 125 | 312 | DG1-32248FN-C21C |

PowerXL Series—DG1

Type 12/IP54



| Frame Size | Constant Torque (CT) / High Overload (I _H) | | | Variable Torque (VT) / Low Overload (I _L) | | | Catalog Number |
|------------|--|--------------------|--------------|---|--------------------|--------------|------------------|
| | 230 V, 50 Hz kW Rating | 230 V, 60 Hz hp | Current A | 230 V, 50 Hz kW Rating | 230 V, 60 Hz hp | Current A | |
| FR1 | 0.55 | 0.75 | 3.7 | 0.75 | 1 | 4.8 | DG1-323D7FB-C54C |
| | 0.75 | 1 | 4.8 | 1.1 | 1.5 | 6.6 | DG1-324D8FB-C54C |
| | 1.1 | 1.5 | 6.6 | 1.5 | 2 | 7.8 | DG1-326D6FB-C54C |
| | 1.5 | 2 | 7.8 | 2.2 | 3 | 11 | DG1-327D8FB-C54C |
| | 2.2 | 3 | 11 | 3 | — | 12.5 | DG1-32011FB-C54C |
| FR2 | 3 | — | 12.5 | 3.7 | 5 | 17.5 | DG1-32012FB-C54C |
| | 3.7 | 5 | 17.5 | 5.5 | 7.5 | 25 | DG1-32017FB-C54C |
| | 5.5 | 7.5 | 25 | 7.5 | 10 | 31 | DG1-32025FB-C54C |
| FR3 | 7.5 | 10 | 31 | 11 | 15 | 48 | DG1-32031FB-C54C |
| | 11 | 15 | 48 | 15 | 20 | 61 | DG1-32048FB-C54C |
| FR4 | 15 | 20 | 61 | 18.5 | 25 | 75 | DG1-32061FN-C54C |
| | 18.5 | 25 | 75 | 22 | 30 | 88 | DG1-32075FN-C54C |
| | 22 | 30 | 88 | 30 | 40 | 114 | DG1-32088FN-C54C |
| FR5 | 30 | 40 | 114 | 37 | 50 | 143 | DG1-32114FN-C54C |
| | 37 | 50 | 143 | 45 | 60 | 170 | DG1-32143FN-C54C |
| | 45 | 60 | 170 | 55 | 75 | 211 | DG1-32170FN-C54C |
| FR6 | 55 | 75 | 211 | 75 | 100 | 261 | DG1-32211FN-C54C |
| | 75 | 100 | 248 | 90 | 125 | 312 | DG1-32248FN-C54C |

2.6

Adjustable Frequency Drives

PowerXL DG1 Series Drives

DG1 Series Drives—380–500 Volt

2

PowerXL Series—DG1 IP20



| Frame Size | Constant Torque (CT) / High Overload (I_H) | | | Variable Torque (VT) / Low Overload (I_L) | | | Catalog Number |
|------------|--|--------------------|--------------|---|--------------------|--------------|------------------|
| | 480 V, 50 Hz kW Rating | 480 V, 60 Hz hp | Current A | 480 V, 50 Hz kW Rating | 480 V, 60 Hz hp | Current A | |
| FR0 | 0.75 | 1 | 2.2 | 1.1 | 1.5 | 3.3 | DG1-342D2EB-C20C |
| | 1.1 | 1.5 | 3.3 | 1.5 | 2 | 4.6 | DG1-343D3EB-C20C |
| | 1.5 | 2 | 4.3 | 2.2 | 3 | 5.6 | DG1-344D3EB-C20C |
| | 2.2 | 3 | 5.6 | 3 | 5 | 7.6 | DG1-345D6EB-C20C |

PowerXL Series—DG1 Type 1/IP21



| Frame Size | Constant Torque (CT) / High Overload (I_H) | | | Variable Torque (VT) / Low Overload (I_L) | | | Catalog Number |
|------------|--|--------------------|--------------|---|--------------------|--------------|------------------|
| | 400 V, 50 Hz kW Rating | 460 V, 60 Hz hp | Current A | 400 V, 50 Hz kW Rating | 460 V, 60 Hz hp | Current A | |
| FR1 | 0.75 | 1 | 2.2 | 1.1 | 1.5 | 3.3 | DG1-342D2FB-C21C |
| | 1.1 | 1.5 | 3.3 | 1.5 | 2 | 4.3 | DG1-343D3FB-C21C |
| | 1.5 | 2 | 4.3 | 2.2 | 3 | 5.6 | DG1-344D3FB-C21C |
| | 2.2 | 3 | 5.6 | 3 | 5 | 7.6 | DG1-345D6FB-C21C |
| | 3 | 5 | 7.6 | 4 | — | 9 | DG1-347D6FB-C21C |
| | 4 | — | 9 | 5.5 | 7.5 | 12 | DG1-349D0FB-C21C |
| FR2 | 5.5 | 7.5 | 12 | 7.5 | 10 | 16 | DG1-34012FB-C21C |
| | 7.5 | 10 | 16 | 11 | 15 | 23 | DG1-34016FB-C21C |
| | 11 | 15 | 23 | 15 | 20 | 31 | DG1-34023FB-C21C |
| FR3 | 15 | 20 | 31 | 18.5 | 25 | 38 | DG1-34031FB-C21C |
| | 18.5 | 25 | 38 | 22 | 30 | 46 | DG1-34038FB-C21C |
| | 22 | 30 | 46 | 30 | 40 | 61 | DG1-34046FB-C21C |
| FR4 | 30 | 40 | 61 | 37 | 50 | 72 | DG1-34061FN-C21C |
| | 37 | 50 | 72 | 45 | 60 | 87 | DG1-34072FN-C21C |
| | 45 | 60 | 87 | 55 | 75 | 105 | DG1-34087FN-C21C |
| FR5 | 55 | 75 | 105 | 75 | 100 | 140 | DG1-34105FN-C21C |
| | 75 | 100 | 140 | 90 | 125 | 170 | DG1-34140FN-C21C |
| | 90 | 125 | 170 | 110 | 150 | 205 | DG1-34170FN-C21C |
| FR6 | 110 | 150 | 205 | 132 | 200 | 261 | DG1-34205FN-C21C |
| | 132 | 200 | 245 | 160 | 250 | 310 | DG1-34245FN-C21C |

PowerXL Series—DG1

Type 12/IP54



| Frame Size | Constant Torque (CT) / High Overload (I _H) | | | Variable Torque (VT) / Low Overload (I _L) | | | Catalog Number |
|------------|--|--------------------|--------------|---|--------------------|--------------|------------------|
| | 400 V, 50 Hz kW Rating | 460 V, 60 Hz hp | Current A | 400 V, 50 Hz kW Rating | 460 V, 60 Hz hp | Current A | |
| FR1 | 0.75 | 1 | 2.2 | 1.1 | 1.5 | 3.3 | DG1-342D2FB-C54C |
| | 1.1 | 1.5 | 3.3 | 1.5 | 2 | 4.3 | DG1-343D3FB-C54C |
| | 1.5 | 2 | 4.3 | 2.2 | 3 | 5.6 | DG1-344D3FB-C54C |
| | 2.2 | 3 | 5.6 | 3 | 5 | 7.6 | DG1-345D6FB-C54C |
| | 3 | 5 | 7.6 | 4 | — | 9 | DG1-347D6FB-C54C |
| | 4 | — | 9 | 5.5 | 7.5 | 12 | DG1-349D0FB-C54C |
| FR2 | 5.5 | 7.5 | 12 | 7.5 | 10 | 16 | DG1-34012FB-C54C |
| | 7.5 | 10 | 16 | 11 | 15 | 23 | DG1-34016FB-C54C |
| | 11 | 15 | 23 | 15 | 20 | 31 | DG1-34023FB-C54C |
| FR3 | 15 | 20 | 31 | 18.5 | 25 | 38 | DG1-34031FB-C54C |
| | 18.5 | 25 | 38 | 22 | 30 | 46 | DG1-34038FB-C54C |
| | 22 | 30 | 46 | 30 | 40 | 61 | DG1-34046FB-C54C |
| FR4 | 30 | 40 | 61 | 37 | 50 | 72 | DG1-34061FN-C54C |
| | 37 | 50 | 72 | 45 | 60 | 87 | DG1-34072FN-C54C |
| | 45 | 60 | 87 | 55 | 75 | 105 | DG1-34087FN-C54C |
| FR5 | 55 | 75 | 105 | 75 | 100 | 140 | DG1-34105FN-C54C |
| | 75 | 100 | 140 | 90 | 125 | 170 | DG1-34140FN-C54C |
| | 90 | 125 | 170 | 110 | 150 | 205 | DG1-34170FN-C54C |
| FR6 | 110 | 150 | 205 | 132 | 200 | 261 | DG1-34205FN-C54C |
| | 132 | 200 | 245 | 160 | 250 | 310 | DG1-34245FN-C54C |

PowerXL Series—DG1

Open Type/IP00



| Frame Size | Constant Torque (CT) / High Overload (I _H) | | | Variable Torque (VT) / Low Overload (I _L) | | | Catalog Number |
|------------|--|--------------------|--------------|---|--------------------|--------------|------------------|
| | 400 V, 50 Hz kW Rating | 460 V, 60 Hz hp | Current A | 400 V, 50 Hz kW Rating | 460 V, 60 Hz hp | Current A | |
| FR7 | 160 | 250 | 311 | 200 | 300 | 385 | DG1-34310FN-C00C |
| | 200 | 300 | 385 | 250 | 350 | 460 | DG1-34385FN-C00C |
| | 250 | 350 | 460 | 250 | 450 | 520 | DG1-34460FN-C00C |
| | 250 | 450 | 520 | 315 | 500 | 590 | DG1-34520FN-C00C |
| | 315 | 500 | 590 | 355 | 500 | 650 | DG1-34590FN-C00C |
| FR8 | 355 | 500 | 650 | 400 | 600 | 730 | DG1-34650FN-C00C |
| | 400 | 600 | 730 | 450 | 700 | 820 | DG1-34730FN-C00C |
| | 450 | 700 | 820 | 500 | 800 | 920 | DG1-34820FN-C00C |
| | 500 | 800 | 920 | 560 | 900 | 1040 | DG1-34920FN-C00C |
| | 500 | 800 | 920 | 630 | 1000 | 1180 | DG1-341K0FN-C00C |

2.6

Adjustable Frequency Drives

PowerXL DG1 Series Drives

DG1 Series Drives—575 Volt

2

PowerXL Series—DG1

Type 1/IP21



| Frame Size | Constant Torque (CT) / High Overload (I _H) | | | Variable Torque (VT) / Low Overload (I _L) | | | Catalog Number |
|------------|--|--------------------|--------------|---|--------------------|--------------|------------------|
| | 575 V, 60 Hz kW Rating | 575 V, 60 Hz hp | Current A | 575 V, 60 Hz kW Rating | 575 V, 60 Hz hp | Current A | |
| FR1 | 1.5 | 2 | 3.3 | 2.2 | 3 | 4.5 | DG1-353D3FB-C21C |
| | 2.2 | 3 | 4.5 | 3.7 | 5 | 7.5 | DG1-354D5FB-C21C |
| | 3.7 | 5 | 7.5 | 5.5 | 7.5 | 10 | DG1-357D5FB-C21C |
| FR2 | 5.5 | 7.5 | 10 | 7.5 | 10 | 13.5 | DG1-35010FB-C21C |
| | 7.5 | 10 | 13.5 | 11 | 15 | 18 | DG1-35013FB-C21C |
| | 11 | 15 | 18 | 15 | 20 | 22 | DG1-35018FB-C21C |
| FR3 | 15 | 20 | 22 | 18.5 | 25 | 27 | DG1-35022FB-C21C |
| | 18.5 | 25 | 27 | 22 | 30 | 34 | DG1-35027FB-C21C |
| | 22 | 30 | 34 | 30 | 40 | 41 | DG1-35034FB-C21C |
| FR4 | 30 | 40 | 41 | 37 | 50 | 52 | DG1-35041FN-C21C |
| | 37 | 50 | 52 | 45 | 60 | 62 | DG1-35052FN-C21C |
| | 45 | 60 | 62 | 55 | 75 | 80 | DG1-35062FN-C21C |
| FR5 | 55 | 75 | 80 | 75 | 100 | 100 | DG1-35080FN-C21C |
| | 75 | 100 | 100 | 90 | 125 | 125 | DG1-35100FN-C21C |
| | 90 | 125 | 125 | 110 | 150 | 144 | DG1-35125FN-C21C |
| FR6 | 110 | 150 | 144 | 150 | 200 | 208 | DG1-35144FN-C21C |
| | 132 | 200 | 208 | 187 | 250 | 250 | DG1-35208FN-C21C |

PowerXL Series—DG1

Type 12/IP54



| Frame Size | Constant Torque (CT) / High Overload (I _H) | | | Variable Torque (VT) / Low Overload (I _L) | | | Catalog Number |
|------------|--|--------------------|--------------|---|--------------------|--------------|------------------|
| | 575 V, 60 Hz kW Rating | 575 V, 60 Hz hp | Current A | 575 V, 60 Hz kW Rating | 575 V, 60 Hz hp | Current A | |
| FR1 | 1.5 | 2 | 3.3 | 2.2 | 3 | 4.5 | DG1-353D3FB-C54C |
| | 2.2 | 3 | 4.5 | 3.7 | 5 | 7.5 | DG1-354D5FB-C54C |
| | 3.7 | 5 | 7.5 | 5.5 | 7.5 | 10 | DG1-357D5FB-C54C |
| FR2 | 5.5 | 7.5 | 10 | 7.5 | 10 | 13.5 | DG1-35010FB-C54C |
| | 7.5 | 10 | 13.5 | 11 | 15 | 18 | DG1-35013FB-C54C |
| | 11 | 15 | 18 | 15 | 20 | 22 | DG1-35018FB-C54C |
| FR3 | 15 | 20 | 22 | 18.5 | 25 | 27 | DG1-35022FB-C54C |
| | 18.5 | 25 | 27 | 22 | 30 | 34 | DG1-35027FB-C54C |
| | 22 | 30 | 34 | 30 | 40 | 41 | DG1-35034FB-C54C |
| FR4 | 30 | 40 | 41 | 37 | 50 | 52 | DG1-35041FN-C54C |
| | 37 | 50 | 52 | 45 | 60 | 62 | DG1-35052FN-C54C |
| | 45 | 60 | 62 | 55 | 75 | 80 | DG1-35062FN-C54C |
| FR5 | 55 | 75 | 80 | 75 | 100 | 100 | DG1-35080FN-C54C |
| | 75 | 100 | 100 | 90 | 125 | 125 | DG1-35100FN-C54C |
| | 90 | 125 | 125 | 110 | 150 | 144 | DG1-35125FN-C54C |
| FR6 | 110 | 150 | 144 | 150 | 200 | 208 | DG1-35144FN-C54C |
| | 132 | 200 | 208 | 187 | 250 | 250 | DG1-35208FN-C54C |

PowerXL Series—DG1

Open Type/IP00



| Frame Size | Constant Torque (CT) / High Overload (I _H) | | | Variable Torque (VT) / Low Overload (I _L) | | | Catalog Number |
|------------|--|--------------------|--------------|---|--------------------|--------------|-------------------------|
| | 575 V, 60 Hz kW Rating | 575 V, 60 Hz hp | Current A | 575 V, 60 Hz kW Rating | 575 V, 60 Hz hp | Current A | |
| FR7 | 186.5 | 250 | 261 | 223.8 | 300 | 325 | DG1-35261FN-C00C |
| | 223.8 | 300 | 325 | 298.4 | 400 | 385 | DG1-35325FN-C00C |
| | 223.8 | 300 | 385 | 335.7 | 450 | 416 | DG1-35385FN-C00C |
| FR8 | 298.4 | 400 | 416 | 335.7 | 450 | 460 | DG1-35416FN-C00C |
| | 335.7 | 450 | 460 | 373 | 500 | 520 | DG1-35460FN-C00C |
| | 373 | 500 | 520 | 447.6 | 600 | 590 | DG1-35520FN-C00C |
| | 447.6 | 600 | 590 | 484.9 | 650 | 650 | DG1-35590FN-C00C |
| | 484.9 | 650 | 650 | 522.2 | 700 | 750 | DG1-35650FN-C00C |
| | 484.9 | 650 | 650 | 596.8 | 800 | 820 | DG1-35820FN-C00C |

Accessories

The PowerXL Series—DG1 drives can accommodate a wide selection of expander and adapter option boards to customize the drive for your application needs. The drive's control unit is designed to accept a total of two additional option boards.

The PowerXL Series—DG1 drives come with a factory-installed standard board configuration including the following:

- Standard I/O:
 - 8DI, 1DO
 - 2AI, 2AO
 - 2FC, 1FA relays
- Standard communications:
 - EtherNet/IP, Modbus TCP
 - RS-485: Modbus RTU, BACnet MS/TP

PowerXL Series—DG1 I/O Card Kits

| Description | Catalog Number |
|--|-------------------------|
| 3 x DI, 3 x DO, 1 x thermistor, 24 Vdc/EXT option card | DXG-EXT-3DI3DO1T |
| 1 x AI, 2 x AO (isolated to control board) option card | DXG-EXT-1AI2AO |
| 3 x relay dry contact (2NO + 1NO/NC) option card | DXG-EXT-3R0 |
| 3 x PT100 RTD thermistor input option card | DXG-EXT-THER1 |
| 6 x DI 240 Vac input option card | DXG-EXT-6DI |

PowerXL Series—DG1 Communication Card Kits

| Description | Catalog Number |
|--|--------------------------|
| PROFIBUS-DP communication card | DXG-NET-PROFB |
| CANopen communication card | DXG-NET-CANOPEN |
| DeviceNet communication card | DXG-NET-DEVICENET |
| PROFIBUS DB9 to 5-pin adapter card | DXG-NET-PROAD |
| SmartWire communication card and module IP20 | DXG-NET-SWD-IP20 |
| SmartWire communication card and module IP54 | DXG-NET-SWD-IP54 |

PowerXL Series—DG1 Keypad Kits

| Description | Catalog Number |
|--|------------------------|
| Standard keypad | DXG-KEY-LCD |
| Remote keypad kit (IP 54 rated keypad holder and 3 m cable) | DXG-KEY-RMTKIT |
| 1 m remote keypad cable | DXG-CBL-1M0 |
| 3 m remote keypad cable | DXG-CBL-3M0 |
| Remote keypad mounting holder only | DXG-KEY-HOLDER |
| Type 12/IP54 keypad hole plug (maintain rating without keypad) | DXG-KEY-N12PLUG |

PowerXL Series—DG1 Conversion and Flange Kits

The Type 12/IP54 option kit is used to convert a Type 1/IP21 to a Type 12/IP54 drive. The kit includes cover, fan and grommets.

Type 12/IP54 Conversion Kits ^①

| Description | Catalog Number |
|--------------------------------|---------------------------|
| Frame 1 230 V Type 12/IP54 kit | DXG-ACC-2FR1N12KIT |
| Frame 1 480 V Type 12/IP54 kit | DXG-ACC-4FR1N12KIT |
| Frame 2 Type 12/IP54 kit | DXG-ACC-FR2N12KIT |

The flange kit is used when the power section heat sink is mounted through the back panel of an enclosure. The kit includes hardware, top flange plate, bottom flange plate and two side flange plates.

Flange Kits

| Description | Catalog Number |
|---------------------------------|-------------------------|
| Frame 1 flange kit Type 12/IP54 | DXG-ACC-FR1N12FK |
| Frame 2 flange kit Type 12/IP54 | DXG-ACC-FR2N12FK |
| Frame 3 flange kit Type 12/IP54 | DXG-ACC-FR3N12FK |
| Frame 4 flange kit Type 12/IP54 | DXG-ACC-FR4N12FK |
| Frame 5 flange kit Type 12/IP54 | DXG-ACC-FR5N12FK |
| Frame 6 flange kit Type 12/IP54 | DXG-ACC-FR6N12FK |

PowerXL Series—DG1 Demo Units

Demo Units

| Description | Catalog Number |
|-------------------------------|------------------|
| DG1 control module demo stand | DG1-DEMO1 |
| DG1 full drive demo case | DG1-DEMO2 |

Note



^① NEMA 12 DG1 drives from W34 are available within 3 business days.

Power Xpert *inControl* Software

The PowerXL Series PC Tool is designed for programming, controlling and monitoring of the DG1 drives. Features include loading parameters that can be saved to a file or printed, setting references, starting and stopping the motor, monitoring signals in graphical or text form, and real-time display.

PowerXpert *inControl* Software

| Description | Catalog Number |
|---|-------------------------|
| Software kit (software, cable, manual) | DXG-ACC-SOFTWARE |
| Software cable (USB to keypad [RJ45]) | DXG-CBL-PCCABLE |
| Real-time clock battery (approximately 10,000 hours life) | DXG-ACC-RTBATT |

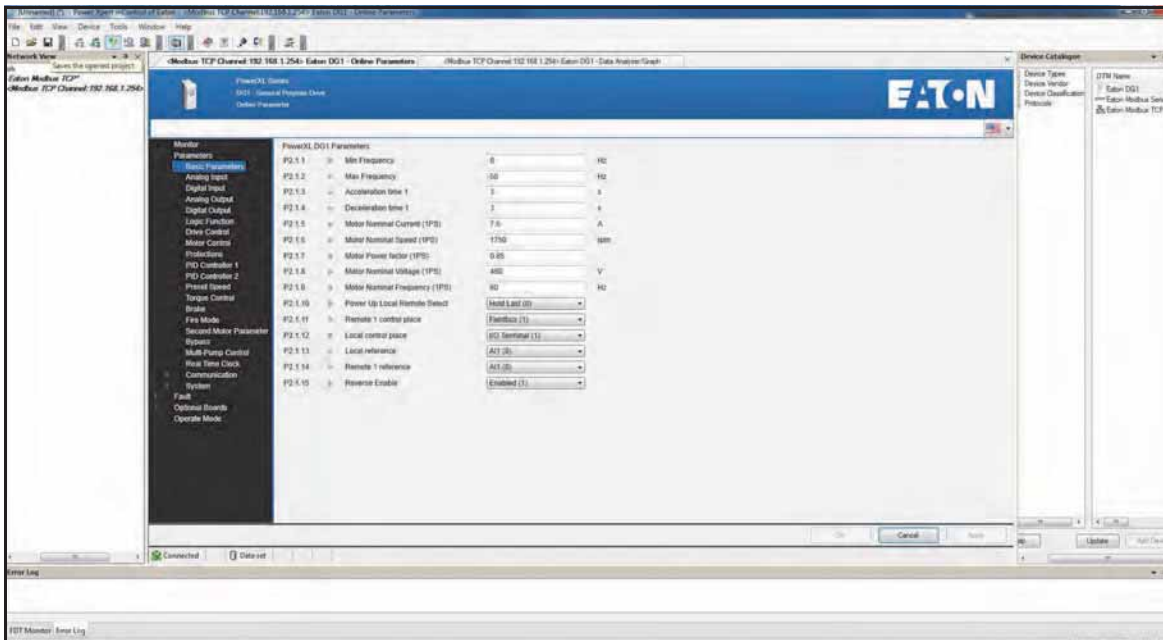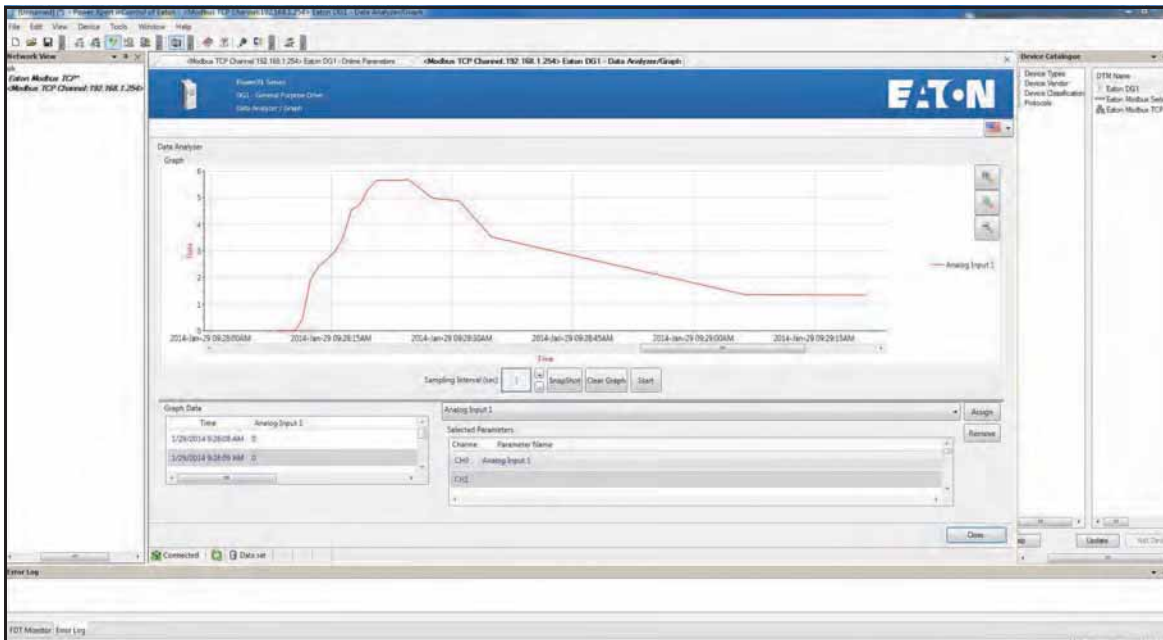

2.6

Adjustable Frequency Drives

PowerXL DG1 Series Drives

2

Brake Chopper Options

The brake chopper circuit option is used for applications that require dynamic braking. Dynamic braking resistors are not included with drive purchase. Consult the factory for additional dynamic braking resistor selections that are supplied separately. A list of common resistors are listed below and are complete indoor assemblies, include a pre-wired terminal block and a thermal switch, and are not UL Listed.


Duty Cycle

The duty cycle rating is based on a 60-second period. For example, the 20% duty cycle resistor can carry 100% current for 12 seconds out of every 60 seconds, while the 50% duty cycle resistor can carry 150% current for 30 seconds out of every 60 seconds.

Torque

If the braking torque required is less than 15%, dynamic braking is not required because the regenerated energy will be dissipated in the drive and motor losses.

Dynamic Brake Resistor—Catalog Number Selection

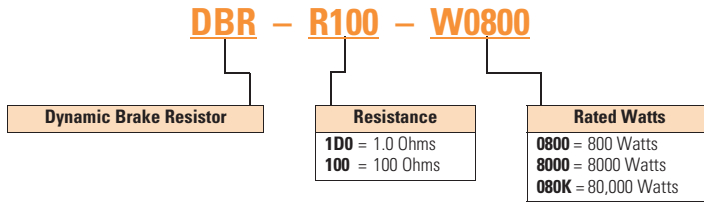

230 V Brake Resistors

| Drive hp (CT/I _H) | Minimum Ohms | 20% Duty Cycle, 100% Torque | | 50% Duty Cycle, 150% Torque | |
|----------------------------------|-----------------|-----------------------------|---------------------|-----------------------------|---------------------|
| | | Catalog Number | Dimensions (Inches) | Catalog Number | Dimensions (Inches) |
| 0.75 | 30.0 | DBR-R100-W0400 | 12W x 5D x 5H | DBR-R100-W0800 | 12W x 7D x 5H |
| 1 | 30.0 | DBR-R100-W0400 | 12W x 5D x 5H | DBR-R100-W0800 | 12W x 7D x 5H |
| 1.5 | 30.0 | DBR-R100-W0400 | 12W x 5D x 5H | DBR-R036-W1200 | 12W x 10D x 5H |
| 2 | 30.0 | DBR-R100-W0400 | 12W x 5D x 5H | DBR-R036-W1200 | 12W x 10D x 5H |
| 3 | 30.0 | DBR-R036-W0800 | 12W x 7D x 5H | DBR-R036-W2000 | 12W x 16D x 5H |
| 4 | 30.0 | DBR-R036-W0800 | 12W x 7D x 5H | DBR-R030-W2400 | 19W x 10D x 5H |
| 5 | 30.0 | DBR-R036-W0800 | 12W x 7D x 5H | DBR-R030-W2800 | 19W x 13D x 5H |
| 7.5 | 20.0 | DBR-R020-W1200 | 12W x 10D x 5H | DBR-R020-W4800 | 26.5W x 13D x 5H |
| 10 | 10.0 | DBR-R015-W1600 | 12W x 13D x 5H | DBR-R112-W6000 | 26.5W x 13D x 5H |
| 15 | 10.0 | DBR-R012-W2400 | 19W x 10D x 5H | DBR-R010-W9000 | 28W x 10D x 10H |
| 20 | 3.3 | DBR-R9D3-W3200 | 19W x 10D x 5H | DBR-R3D4-W012K | 28W x 10D x 10H |
| 25 | 3.3 | DBR-R5D5-W4000 | 26.5W x 10D x 5H | DBR-R5D1-W015K | 28W x 16D x 10H |
| 30 | 3.3 | DBR-R4D8-W4800 | 26.5W x 10D x 5H | DBR-R4D1-W020K | 28W x 16D x 10H |
| 40 | 1.4 | DBR-R004-W6000 | 26.5W x 13D x 5H | DBR-R3D4-W025K | 30W x 18D x 16H |
| 50 | 1.4 | DBR-R3D1-W7500 | 26.5W x 16D x 5H | DBR-R2D1-W030K | 30W x 18D x 24H |
| 60 | 1.4 | DBR-R2D8-W9000 | 26.5W x 16D x 5H | DBR-R002-W036K | 30W x 18D x 24H |
| 75 | 1.4 | DBR-R2D6-W012K | 28W x 10D x 10H | DBR-R1D5-W045K | 30W x 18D x 32H |
| 100 | 1.4 | DBR-R002-W015K | 28W x 16D x 10H | DBR-R1D4-W060K | 30W x 18D x 40H |

480 V Brake Resistors

| Drive hp (CT/l _H) | Minimum Ohms | 20% Duty Cycle, 100% Torque | | 50% Duty Cycle, 150% Torque | |
|----------------------------------|-----------------|-----------------------------|---------------------|-----------------------------|---------------------|
| | | Catalog Number | Dimensions (Inches) | Catalog Number | Dimensions (Inches) |
| 1 | 63.0 | DBR-R100-W0400 | 12W x 5D x 5H | DBR-R100-W0800 | 12W x 7D x 5H |
| 1.5 | 63.0 | DBR-R100-W0400 | 12W x 5D x 5H | DBR-R100-W1200 | 12W x 10D x 5H |
| 2 | 63.0 | DBR-R100-W0400 | 12W x 5D x 5H | DBR-R100-W1200 | 12W x 10D x 5H |
| 3 | 63.0 | DBR-R100-W0800 | 12W x 7D x 5H | DBR-R100-W2000 | 12W x 16D x 5H |
| 5 | 63.0 | DBR-R100-W0800 | 12W x 7D x 5H | DBR-R100-W2800 | 19W x 13D x 5H |
| 6 | 63.0 | DBR-R100-W1200 | 12W x 10D x 5H | DBR-R070-W4000 | 19W x 16D x 5H |
| 7.5 | 63.0 | DBR-R100-W1200 | 12W x 10D x 5H | DBR-R063-W4800 | 26.5W x 13D x 5H |
| 10 | 63.0 | DBR-R063-W1600 | 12W x 13D x 5H | DBR-R063-W6000 | 26.5W x 16D x 5H |
| 15 | 42.0 | DBR-R042-W2400 | 19W x 10D x 5H | DBR-R042-W9000 | 28W x 10D x 10H |
| 20 | 21.0 | DBR-R030-W3200 | 19W x 13D x 5H | DBR-R023-W012K | 28W x 13D x 10H |
| 25 | 21.0 | DBR-R030-W4000 | 19W x 16D x 5H | DBR-R021-W015K | 28W x 13D x 10H |
| 30 | 14.0 | DBR-R020-W4800 | 26.5W x 13D x 5H | DBR-R014-W020K | 30W x 18D x 24H |
| 40 | 6.5 | DBR-R112-W6000 | 26.5W x 13D x 5H | DBR-R007-W025K | 30W x 18D x 16H |
| 50 | 6.5 | DBR-R013-W7500 | 26.5W x 16D x 5H | DBR-R8D5-W030K | 30W x 18D x 24H |
| 60 | 6.5 | DBR-R010-W9000 | 28W x 10D x 10H | DBR-R7D3-W036K | 30W x 18D x 24H |
| 75 | 3.3 | DBR-R009-W012K | 28W x 13D x 10H | DBR-R3D3-W045K | 30W x 18D x 32H |
| 100 | 3.3 | DBR-R5D1-W015K | 28W x 16D x 10H | DBR-R004-W060K | 30W x 18D x 40H |
| 125 | 3.3 | DBR-R4D1-W020K | 28W x 16D x 10H | DBR-R004-W070K | 30W x 18D x 48H |
| 150 | 3.3 | DBR-R3D4-W025K | 30W x 18D x 16H | DBR-R3D5-W085K | 30W x 18D x 56H |
| 200 | 3.3 | DBR-R3D3-W030K | 30W x 18D x 24H | DBR-R3D3-W110K | 30W x 18D x 72H |
| 250 | 1.4 | DBR-R2D5-W036K | 30W x 18D x 24H | Ⓢ | — |
| 300 | 1.4 | DBR-R1D5-W045K | 30W x 18D x 32H | Ⓢ | — |
| 350 | 1.4 | DBR-R1D4-W060K | 30W x 18D x 40H | Ⓢ | — |
| 400 | 0.9 | DBR-R1D4-W060K | 30W x 18D x 40H | Ⓢ | — |
| 500 | 0.9 | DBR-R0D9-W080K | 30W x 18D x 48H | Ⓢ | — |
| 550 | 0.9 | DBR-R001-W085K | 30W x 18D x 56H | Ⓢ | — |

Note

Ⓢ Consult factory.

2.6

Adjustable Frequency Drives

PowerXL DG1 Series Drives

575 V Brake Resistors

2

| Drive hp (CT/l _H) | Minimum Ohms | 20% Duty Cycle, 100% Torque | | 50% Duty Cycle, 150% Torque | |
|----------------------------------|-----------------|-----------------------------|---------------------|-----------------------------|---------------------|
| | | Catalog Number | Dimensions (Inches) | Catalog Number | Dimensions (Inches) |
| 2 | 100.0 | DBR-R100-W0400 | 12W x 5D x 5H | DBR-R100-W1200 | 12W x 10D x 5H |
| 3 | 100.0 | DBR-R100-W0800 | 12W x 7D x 5H | DBR-R100-W2000 | 12W x 16D x 5H |
| 4 | 100.0 | DBR-R100-W0800 | 12W x 7D x 5H | DBR-R100-W2400 | 19W x 10D x 5H |
| 5 | 100.0 | DBR-R100-W0800 | 12W x 7D x 5H | DBR-R100-W2800 | 19W x 13D x 5H |
| 7.5 | 100.0 | DBR-R100-W1200 | 12W x 10D x 5H | DBR-R100-W4800 | 26.5W x 13D x 5H |
| 10 | 30.0 | DBR-R063-W1600 | 12W x 13D x 5H | DBR-R063-W6000 | 26.5W x 16D x 5H |
| 15 | 30.0 | DBR-R042-W2400 | 19W x 10D x 5H | DBR-R042-W9000 | 28W x 10D x 10H |
| 20 | 30.0 | DBR-R030-W3200 | 19W x 13D x 5H | DBR-R030-W012K | 28W x 13D x 10H |
| 25 | 30.0 | DBR-R030-W4000 | 19W x 16D x 5H | DBR-R030-W015K | 28W x 16D x 10H |
| 30 | 18.0 | DBR-R020-W4800 | 26.5W x 13D x 5H | DBR-R020-W020K | 30W x 18D x 16H |
| 40 | 18.0 | DBR-R030-W6000 | 26.5W x 16D x 5H | DBR-R184-W025K | 30W x 18D x 16H |
| 50 | 9.0 | DBR-R013-W7500 | 26.5W x 16D x 5H | DBR-R012-W030K | 30W x 18D x 24H |
| 60 | 9.0 | DBR-R010-W9000 | 28W x 10D x 10H | DBR-R010-W036K | 30W x 18D x 24H |
| 75 | 9.0 | DBR-R009-W012K | 28W x 13D x 10H | DBR-R009-W045K | 30W x 18D x 24H |
| 100 | 7.0 | DBR-R013-W015K | 28W x 16D x 10H | DBR-R8D4-W060K | 30W x 18D x 40H |
| 125 | 7.0 | DBR-R8D2-W020K | 30W x 18D x 10H | DBR-R007-W070K | 30W x 18D x 40H |
| 150 | 7.0 | DBR-R007-W025K | 30W x 18D x 16H | DBR-R006-W085K | 30W x 18D x 56H |
| 175 | 7.0 | DBR-R007-W030K | 30W x 18D x 24H | DBR-R007-W100K | 30W x 18D x 72H |
| 200 | 2.5 | DBR-R3D3-W030K | 30W x 18D x 24H | DBR-R2D6-W110K | 30W x 18D x 64H |
| 250 | 2.5 | DBR-R2D5-W036K | 30W x 18D x 24H | DBR-R003-W140K | 30W x 18D x 72H |
| 300 | 2.5 | DBR-R3D3-W045K | 30W x 18D x 32H | Ⓢ | — |
| 400 | 1.7 | DBR-R002-W060K | 30W x 18D x 48H | Ⓢ | — |
| 450 | 1.7 | DBR-R1D8-W070K | 30W x 18D x 48H | Ⓢ | — |
| 500 | 1.7 | DBR-R002-W080K | 30W x 18D x 56H | Ⓢ | — |

Note

Ⓢ Consult factory.

Line and Load Reactors

A line and load reactor is a three-phase inductance filter that can be placed on the line and load side of the AFD to help improve the harmonic performance of the system. Consult the factory for additional filtering options and further technical details.


DR1 Line Reactor

A line reactor helps to provide a moderate reduction in current harmonics similar to a DC choke. It also provides increased input protection for AFD and its semiconductors from line transients helping to extend the life of the AFD.

DR2 Output Reactor

An output filter is used to reduce the transient voltage (dV/dt) at the motor terminals. The output filter is recommended for cable lengths exceeding 100 ft (30 m) with a drive of 3 hp and above and for cable lengths of 33 ft (10 m) with a drive of 2 hp and below.

Line and Load Reactors—Catalog Number Selection

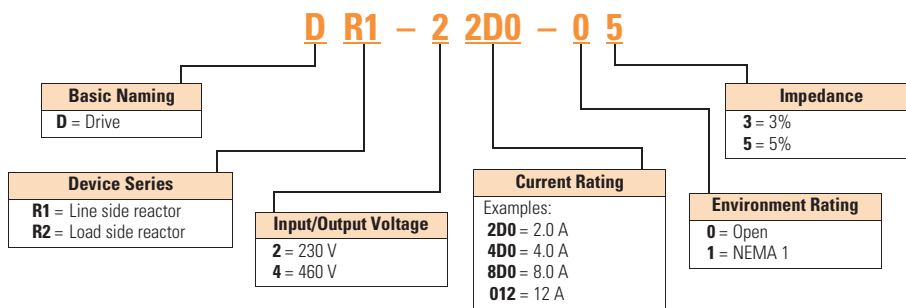

Line and Load Reactors—230 V

| hp (CT) | Open Line Reactor | | Load Reactor | | NEMA 1 Line Reactor | | Load Reactor | |
|---------|-------------------|-------------|--------------|-------------|---------------------|-------------|--------------|-------------|
| | 3% | 5% | 3% | 5% | 3% | 5% | 3% | 5% |
| 0.75 | DR1-23D2-03 | DR1-23D2-05 | DR2-24D0-03 | DR2-24D0-05 | DR1-23D2-13 | DR1-23D2-15 | DR2-24D0-13 | DR2-24D0-15 |
| 1 | DR1-24D2-03 | DR1-24D2-05 | DR2-24D0-03 | DR2-28D0-05 | DR1-24D2-13 | DR1-24D2-15 | DR2-24D0-13 | DR2-28D0-15 |
| 1.5 | DR1-26D0-03 | DR1-26D0-05 | DR2-28D0-03 | DR2-28D0-05 | DR1-26D0-13 | DR1-26D0-15 | DR2-28D0-13 | DR2-28D0-15 |
| 2 | DR1-26D8-03 | DR1-26D8-05 | DR2-28D0-03 | DR2-28D0-05 | DR1-26D8-13 | DR1-26D8-15 | DR2-28D0-13 | DR2-28D0-15 |
| 3 | DR1-29D6-03 | DR1-29D6-05 | DR2-2012-03 | DR2-2012-05 | DR1-29D6-13 | DR1-29D6-15 | DR2-2012-13 | DR2-2012-15 |
| 5 | DR1-2015-03 | DR1-2015-05 | DR2-2018-03 | DR2-2018-05 | DR1-2015-13 | DR1-2015-15 | DR2-2018-13 | DR2-2018-15 |
| 7.5 | DR1-2022-03 | DR1-2022-05 | DR2-2025-03 | DR2-2025-05 | DR1-2022-13 | DR1-2022-15 | DR2-2025-13 | DR2-2025-15 |
| 10 | DR1-2028-03 | DR1-2028-05 | DR2-2035-03 | DR2-2035-05 | DR1-2028-13 | DR1-2028-15 | DR2-2035-13 | DR2-2035-15 |
| 15 | DR1-2042-03 | DR1-2042-05 | DR2-2045-03 | DR2-2045-05 | DR1-2042-13 | DR1-2042-15 | DR2-2045-13 | DR2-2045-15 |
| 20 | DR1-2054-03 | DR1-2054-05 | DR2-2055-03 | DR2-2055-05 | DR1-2054-13 | DR1-2054-15 | DR2-2055-13 | DR2-2055-15 |
| 25 | DR1-2068-03 | DR1-2068-05 | DR2-2080-03 | DR2-2080-05 | DR1-2068-13 | DR1-2068-15 | DR2-2080-13 | DR2-2080-15 |
| 30 | DR1-2080-03 | DR1-2080-05 | DR2-2080-03 | DR2-2100-05 | DR1-2080-13 | DR1-2080-15 | DR2-2080-13 | DR2-2100-15 |
| 40 | DR1-2104-03 | DR1-2104-05 | DR2-2100-03 | DR2-2100-05 | DR1-2104-13 | DR1-2104-15 | DR2-2100-13 | DR2-2100-15 |
| 50 | DR1-2130-03 | DR1-2130-05 | DR2-2130-03 | DR2-2130-05 | DR1-2130-13 | DR1-2130-15 | DR2-2130-13 | DR2-2130-15 |
| 60 | DR1-2154-03 | DR1-2154-05 | DR2-2160-03 | DR2-2200-15 | DR1-2154-13 | DR1-2154-15 | DR2-2160-13 | DR2-2200-15 |
| 75 | DR1-2192-03 | DR1-2192-05 | DR2-2200-13 | DR2-2200-15 | DR1-2192-13 | DR1-2192-15 | DR2-2200-13 | DR2-2200-15 |
| 100 | DR1-2248-03 | DR1-2248-05 | DR2-2225-13 | DR2-2225-15 | DR1-2248-13 | DR1-2248-15 | DR2-2225-13 | DR2-2225-15 |

Line and Load Reactors—480 V

| hp (CT) | Open Line Reactor | |
|---------|-------------------|-------------|
| | 3% | 5% |
| 1 | DR1-42D1-03 | DR1-42D1-05 |
| 1.5 | DR1-43D0-03 | DR1-43D0-05 |
| 2 | DR1-43D4-03 | DR1-43D4-05 |
| 3 | DR1-44D8-03 | DR1-44D8-05 |
| 5 | DR1-47D6-03 | DR1-47D6-05 |
| 7.5 | DR1-4011-03 | DR1-4011-05 |
| 10 | DR1-4014-03 | DR1-4014-05 |
| 15 | DR1-4021-03 | DR1-4021-05 |
| 20 | DR1-4027-03 | DR1-4027-05 |
| 25 | DR1-4034-03 | DR1-4034-05 |
| 30 | DR1-4040-03 | DR1-4040-05 |
| 40 | DR1-4052-03 | DR1-4052-05 |
| 50 | DR1-4065-03 | DR1-4065-05 |
| 60 | DR1-4077-03 | DR1-4077-05 |
| 75 | DR1-4096-03 | DR1-4096-05 |
| 100 | DR1-4124-03 | DR1-4124-05 |
| 125 | DR1-4156-03 | DR1-4156-05 |
| 150 | DR1-4180-03 | DR1-4180-05 |
| 200 | DR1-4240-03 | DR1-4240-05 |
| 250 | DR1-4302-03 | DR1-4302-05 |
| 300 | DR1-4361-03 | DR1-4361-05 |
| 350 | DR1-4414-03 | DR1-4414-05 |
| 400 | DR1-4477-03 | DR1-4477-05 |
| 500 | DR1-4590-03 | DR1-4590-05 |
| 600 | DR1-4708-03 | DR1-4708-05 |

| Load Reactor | |
|--------------|-------------|
| 3% | 5% |
| DR2-42D0-05 | DR2-42D0-05 |
| DR2-44D0-05 | DR2-44D0-05 |
| DR2-44D0-03 | DR2-44D0-05 |
| DR2-48D0-03 | DR2-48D0-05 |
| DR2-48D0-03 | DR2-48D0-05 |
| DR2-4012-03 | DR2-4012-05 |
| DR2-4018-03 | DR2-4018-05 |
| DR2-4025-03 | DR2-4025-05 |
| DR2-4025-03 | DR2-4025-05 |
| DR2-4035-03 | DR2-4035-05 |
| DR2-4045-03 | DR2-4045-05 |
| DR2-4055-03 | DR2-4055-05 |
| DR2-4080-03 | DR2-4080-05 |
| DR2-4100-03 | DR2-4080-05 |
| DR2-4100-03 | DR2-4100-05 |
| DR2-4130-03 | DR2-4130-05 |
| DR2-4160-03 | DR2-4160-05 |
| DR2-4200-13 | DR2-4200-15 |
| DR2-4250-13 | DR2-4250-15 |
| DR2-4320-13 | DR2-4320-15 |
| DR2-4400-13 | DR2-4400-15 |
| DR2-4400-13 | DR2-4400-15 |
| DR2-4500-13 | DR2-4500-05 |
| DR2-4600-03 | DR2-4600-05 |
| DR2-4750-03 | DR2-4750-05 |

| NEMA 1 Line Reactor | |
|---------------------|-------------|
| 3% | 5% |
| DR1-42D1-13 | DR1-42D1-15 |
| DR1-43D0-13 | DR1-43D0-15 |
| DR1-43D4-13 | DR1-43D4-15 |
| DR1-44D8-13 | DR1-44D8-15 |
| DR1-47D6-13 | DR1-47D6-15 |
| DR1-4011-13 | DR1-4011-15 |
| DR1-4014-13 | DR1-4014-15 |
| DR1-4021-13 | DR1-4021-15 |
| DR1-4027-13 | DR1-4027-15 |
| DR1-4034-13 | DR1-4034-15 |
| DR1-4040-13 | DR1-4040-15 |
| DR1-4052-13 | DR1-4052-15 |
| DR1-4065-13 | DR1-4065-15 |
| DR1-4077-13 | DR1-4077-15 |
| DR1-4096-13 | DR1-4096-15 |
| DR1-4124-13 | DR1-4124-15 |
| DR1-4156-13 | DR1-4156-15 |
| DR1-4180-13 | DR1-4180-15 |
| DR1-4240-13 | DR1-4240-15 |
| DR1-4302-13 | DR1-4302-15 |
| DR1-4361-13 | DR1-4361-15 |
| DR1-4414-13 | DR1-4414-15 |
| DR1-4477-13 | DR1-4477-15 |
| DR1-4590-13 | DR1-4590-15 |
| DR1-4708-13 | DR1-4708-15 |

| Load Reactor | |
|--------------|-------------|
| 3% | 5% |
| DR2-42D0-13 | DR2-42D0-15 |
| DR2-44D0-13 | DR2-44D0-15 |
| DR2-44D0-13 | DR2-44D0-15 |
| DR2-48D0-13 | DR2-48D0-15 |
| DR2-48D0-13 | DR2-48D0-15 |
| DR2-4012-13 | DR2-4012-15 |
| DR2-4018-13 | DR2-4018-15 |
| DR2-4025-13 | DR2-4025-15 |
| DR2-4025-13 | DR2-4025-15 |
| DR2-4035-13 | DR2-4035-15 |
| DR2-4045-13 | DR2-4045-15 |
| DR2-4055-13 | DR2-4055-15 |
| DR2-4080-13 | DR2-4080-15 |
| DR2-4100-13 | DR2-4080-15 |
| DR2-4100-13 | DR2-4100-15 |
| DR2-4130-13 | DR2-4130-15 |
| DR2-4160-13 | DR2-4160-15 |
| DR2-4200-13 | DR2-4200-15 |
| DR2-4250-13 | DR2-4250-15 |
| DR2-4320-13 | DR2-4320-15 |
| DR2-4400-13 | DR2-4400-15 |
| DR2-4400-13 | DR2-4400-15 |
| DR2-4500-13 | DR2-4500-15 |
| DR2-4600-13 | DR2-4600-15 |
| DR2-4750-13 | DR2-4750-15 |

Line and Load Reactors—575 V

| hp (CT) | Open Line Reactor | |
|---------|-------------------|-------------|
| | 3% | 5% |
| 2 | DR1-52D7-03 | DR1-52D7-05 |
| 3 | DR1-53D9-03 | DR1-53D9-05 |
| 5 | DR1-56D1-03 | DR1-56D1-05 |
| 7.5 | DR1-59D0-03 | DR1-59D0-05 |
| 10 | DR1-5011-03 | DR1-5011-05 |
| 15 | DR1-5017-03 | DR1-5017-05 |
| 20 | DR1-5022-03 | DR1-5022-05 |
| 25 | DR1-5027-03 | DR1-5027-05 |
| 30 | DR1-5032-03 | DR1-5032-05 |
| 40 | DR1-5041-03 | DR1-5041-05 |
| 50 | DR1-5052-03 | DR1-5052-05 |
| 60 | DR1-5062-03 | DR1-5062-05 |
| 75 | DR1-5077-03 | DR1-5077-05 |
| 100 | DR1-5100-03 | DR1-5100-05 |
| 125 | DR1-5125-03 | DR1-5125-05 |
| 150 | DR1-5144-03 | DR1-5144-05 |
| 200 | DR1-5192-03 | DR1-5192-05 |
| 250 | DR1-5242-03 | DR1-5242-05 |
| 300 | DR1-5289-03 | DR1-5289-05 |
| 400 | DR1-5382-03 | DR1-5382-05 |
| 450 | DR1-5412-03 | DR1-5412-05 |
| 500 | DR1-5472-03 | DR1-5472-05 |
| 600 | DR1-5576-03 | DR1-5576-05 |

| Load Reactor | |
|--------------|-------------|
| 3% | 5% |
| DR2-54D0-03 | DR2-54D0-05 |
| DR2-54D0-03 | DR2-54D0-05 |
| DR2-58D0-03 | DR2-58D0-05 |
| DR2-58D0-03 | DR2-58D0-05 |
| DR2-5012-03 | DR2-5012-05 |
| DR2-5018-03 | DR2-5018-05 |
| DR2-5025-03 | DR2-5025-05 |
| DR2-5025-03 | DR2-5025-05 |
| DR2-5035-03 | DR2-5035-05 |
| DR2-5045-03 | DR2-5045-05 |
| DR2-5055-03 | DR2-5055-05 |
| DR2-5080-03 | DR2-5080-05 |
| DR2-5080-03 | DR2-5080-05 |
| DR2-5100-03 | DR2-5100-05 |
| DR2-5130-03 | DR2-5130-05 |
| DR2-5160-03 | DR2-5160-05 |
| DR2-5200-13 | DR2-5200-15 |
| DR2-5250-13 | DR2-5250-15 |
| DR2-5320-13 | DR2-5320-15 |
| DR2-5400-13 | DR2-5400-15 |
| DR2-5400-13 | DR2-5400-15 |
| DR2-5500-03 | DR2-5500-05 |
| DR2-5600-03 | DR2-5600-05 |

| NEMA 1 Line Reactor | |
|---------------------|-------------|
| 3% | 5% |
| DR1-52D7-13 | DR1-52D7-15 |
| DR1-53D9-13 | DR1-53D9-15 |
| DR1-56D1-13 | DR1-56D1-15 |
| DR1-59D0-13 | DR1-59D0-15 |
| DR1-5011-13 | DR1-5011-15 |
| DR1-5017-13 | DR1-5017-15 |
| DR1-5022-13 | DR1-5022-15 |
| DR1-5027-13 | DR1-5027-15 |
| DR1-5032-13 | DR1-5032-15 |
| DR1-5041-13 | DR1-5041-15 |
| DR1-5052-13 | DR1-5052-15 |
| DR1-5062-13 | DR1-5062-15 |
| DR1-5077-13 | DR1-5077-15 |
| DR1-5100-13 | DR1-5100-15 |
| DR1-5125-13 | DR1-5125-15 |
| DR1-5144-13 | DR1-5144-15 |
| DR1-5192-13 | DR1-5192-15 |
| DR1-5242-13 | DR1-5242-15 |
| DR1-5289-13 | DR1-5289-15 |
| DR1-5382-13 | DR1-5382-15 |
| DR1-5412-13 | DR1-5412-15 |
| DR1-5472-13 | DR1-5472-15 |
| DR1-5576-13 | DR1-5576-15 |

| Load Reactor | |
|--------------|-------------|
| 3% | 5% |
| DR2-54D0-13 | DR2-54D0-15 |
| DR2-54D0-13 | DR2-54D0-15 |
| DR2-58D0-13 | DR2-58D0-15 |
| DR2-58D0-13 | DR2-58D0-15 |
| DR2-5012-13 | DR2-5012-15 |
| DR2-5018-13 | DR2-5018-15 |
| DR2-5025-13 | DR2-5025-15 |
| DR2-5025-13 | DR2-5025-15 |
| DR2-5035-13 | DR2-5035-15 |
| DR2-5045-13 | DR2-5045-15 |
| DR2-5055-13 | DR2-5055-15 |
| DR2-5080-13 | DR2-5080-15 |
| DR2-5080-13 | DR2-5080-15 |
| DR2-5100-13 | DR2-5100-15 |
| DR2-5130-13 | DR2-5130-15 |
| DR2-5160-13 | DR2-5160-15 |
| DR2-5200-13 | DR2-5200-15 |
| DR2-5250-13 | DR2-5250-15 |
| DR2-5320-13 | DR2-5320-15 |
| DR2-5400-13 | DR2-5400-15 |
| DR2-5400-13 | DR2-5400-15 |
| DR2-5500-13 | DR2-5500-15 |
| DR2-5600-13 | DR2-5600-15 |

Replacement Parts

Frame 0

| Description | 230 V | 480 V | 575 V |
|---|-------------------|-------------------|----------------|
| | Catalog Number | Catalog Number | Catalog Number |
| Standard keypad | DXG-KEY-LCD | DXG-KEY-LCD | — |
| Main control board | DXG-SPR-CTRLBOARD | DXG-SPR-CTRLBOARD | — |
| Control module kit with keypad ^① | DXG-SPR-CTRLKIT | DXG-SPR-CTRLKIT | — |
| Main fan kit | DXG-SPR-FR0FAN | DXG-SPR-FR0FAN | — |
| Main power board | DXG-SPR-2FR0MPB | DXG-SPR-4FR0MPB | — |
| EMI kit for C2 | DXG-SPR-FR0EMCKIT | DXG-SPR-FR0EMCKIT | — |

Frame 1

| Description | 230 V | 480 V | 575 V |
|---|-------------------|-------------------|-------------------|
| | Catalog Number | Catalog Number | Catalog Number |
| Standard keypad | DXG-KEY-LCD | DXG-KEY-LCD | DXG-KEY-LCD |
| Main control board | DXG-SPR-CTRLBOARD | DXG-SPR-CTRLBOARD | DXG-SPR-CTRLBOARD |
| Control module kit with keypad ^① | DXG-SPR-CTRLKIT | DXG-SPR-CTRLKIT | DXG-SPR-CTRLKIT |
| Control board cover | DXG-SPR-BCOVER | DXG-SPR-BCOVER | DXG-SPR-BCOVER |
| Standard cover | DXG-SPR-FR1CVR | DXG-SPR-FR1CVR | DXG-SPR-FR1CVR |
| Main fan kit ^① | DXG-SPR-FR1FAN | DXG-SPR-FR1FAN | DXG-SPR-FR1FAN |
| Control fan | DXG-SPR-2FR1CF | DXG-SPR-4FR1CF | DXG-SPR-4FR1CF |
| Main power board | DXG-SPR-2FR1MPB | DXG-SPR-4FR1MPB | DXG-SPR-4FR1MPB |
| EMI board | DXG-SPR-2FR1EB | DXG-SPR-4FR1EB | DXG-SPR-4FR1EB |
| Middle chassis cover | DXG-SPR-FR1MCC | DXG-SPR-FR1MCC | DXG-SPR-FR1MCC |
| Outer housing | DXG-SPR-FR10H | DXG-SPR-FR10H | DXG-SPR-FR10H |
| UL conduit plate | DXG-SPR-FR1CPUL | DXG-SPR-FR1CPUL | DXG-SPR-FR1CPUL |
| IEC conduit plate | DXG-SPR-FR1CPIEC | DXG-SPR-FR1CPIEC | DXG-SPR-FR1CPIEC |

Frame 2

| Description | 230 V | 480 V | 575 V |
|---|-------------------|-------------------|-------------------|
| | Catalog Number | Catalog Number | Catalog Number |
| Standard keypad | DXG-KEY-LCD | DXG-KEY-LCD | DXG-KEY-LCD |
| Main control board | DXG-SPR-CTRLBOARD | DXG-SPR-CTRLBOARD | DXG-SPR-CTRLBOARD |
| Control module kit with keypad ^① | DXG-SPR-CTRLKIT | DXG-SPR-CTRLKIT | DXG-SPR-CTRLKIT |
| Control board cover | DXG-SPR-BCOVER | DXG-SPR-BCOVER | DXG-SPR-BCOVER |
| Standard cover | DXG-SPR-FR2CVR | DXG-SPR-FR2CVR | DXG-SPR-FR2CVR |
| Main fan kit ^① | DXG-SPR-FR2FAN | DXG-SPR-FR2FAN | DXG-SPR-FR2FAN |
| Control fan | DXG-SPR-FR2CF | DXG-SPR-FR2CF | DXG-SPR-FR2CF |
| Bus capacitor | DXG-SPR-2FR2BC | DXG-SPR-4FR24BC | DXG-SPR-4FR24BC |
| Main power board | DXG-SPR-2FR2MPB | DXG-SPR-4FR2MPB | DXG-SPR-4FR2MPB |
| EMI board | DXG-SPR-2FR2EB | DXG-SPR-4FR2EB | DXG-SPR-4FR2EB |
| Middle chassis cover | DXG-SPR-FR2MCC | DXG-SPR-FR2MCC | DXG-SPR-FR2MCC |
| Outer housing | DXG-SPR-FR20H | DXG-SPR-FR20H | DXG-SPR-FR20H |
| UL conduit plate | DXG-SPR-FR2CPUL | DXG-SPR-FR2CPUL | DXG-SPR-FR2CPUL |
| IEC conduit plate | DXG-SPR-FR2CPIEC | DXG-SPR-FR2CPIEC | DXG-SPR-FR2CPIEC |

Note

^① Factory recommended spare parts.

2.6

Adjustable Frequency Drives

PowerXL DG1 Series Drives

2

Frame 3

| Description | 230 V Catalog Number | 480 V Catalog Number | 575 V Catalog Number |
|---|-------------------------|-------------------------|-------------------------|
| Standard keypad | DXG-KEY-LCD | DXG-KEY-LCD | DXG-KEY-LCD |
| Main control board | DXG-SPR-CTRLBOARD | DXG-SPR-CTRLBOARD | DXG-SPR-CTRLBOARD |
| Control module kit with keypad ^① | DXG-SPR-CTRLKIT | DXG-SPR-CTRLKIT | DXG-SPR-CTRLKIT |
| Control board cover | DXG-SPR-BCOVER | DXG-SPR-BCOVER | DXG-SPR-BCOVER |
| Standard cover | DXG-SPR-FR3CVR | DXG-SPR-FR3CVR | DXG-SPR-FR3CVR |
| Main fan kit ^① | DXG-SPR-FR3FANKIT | DXG-SPR-FR3FANKIT | DXG-SPR-FR3FANKIT |
| Main fan | DXG-SPR-FR3FAN | DXG-SPR-FR3FAN | DXG-SPR-FR3FAN |
| Control fan | DXG-SPR-FR34CF | DXG-SPR-FR34CF | DXG-SPR-FR34CF |
| Bus capacitor | DXG-SPR-FR3BC | DXG-SPR-FR3BC | DXG-SPR-FR3BC |
| Main power board | DXG-SPR-2FR3MPB | DXG-SPR-4FR3MPB | DXG-SPR-4FR3MPB |
| EMI board | DXG-SPR-2FR3EB | DXG-SPR-4FR3EB | DXG-SPR-4FR3EB |
| Drive board | DXG-SPR-2FR3DB | DXG-SPR-4FR3DB | DXG-SPR-4FR3DB |
| Output board | DXG-SPR-FR3OB | DXG-SPR-FR3OB | DXG-SPR-FR3OB |
| Middle chassis cover | DXG-SPR-FR3MCC | DXG-SPR-FR3MCC | DXG-SPR-FR3MCC |
| Outer housing | DXG-SPR-FR3OH | DXG-SPR-FR3OH | DXG-SPR-FR3OH |
| UL conduit plate | DXG-SPR-FR3CPUL | DXG-SPR-FR3CPUL | DXG-SPR-FR3CPUL |
| IEC conduit plate | DXG-SPR-FR3CPIEC | DXG-SPR-FR3CPIEC | DXG-SPR-FR3CPIEC |

Frame 4

| Description | 230 V Catalog Number | 480 V Catalog Number | 575 V Catalog Number |
|---|-------------------------|-------------------------|-------------------------|
| Standard keypad | DXG-KEY-LCD | DXG-KEY-LCD | DXG-KEY-LCD |
| Main control board | DXG-SPR-CTRLBOARD | DXG-SPR-CTRLBOARD | DXG-SPR-CTRLBOARD |
| Control module kit with keypad ^① | DXG-SPR-CTRLKIT | DXG-SPR-CTRLKIT | DXG-SPR-CTRLKIT |
| Control board cover | DXG-SPR-BCOVER | DXG-SPR-BCOVER | DXG-SPR-BCOVER |
| Standard cover | DXG-SPR-FR4CVR | DXG-SPR-FR4CVR | DXG-SPR-FR4CVR |
| Main fan kit ^① | DXG-SPR-FR4FANKIT | DXG-SPR-FR4FANKIT | DXG-SPR-FR4FANKIT |
| Main fan | DXG-SPR-FR4FAN | DXG-SPR-FR4FAN | DXG-SPR-FR4FAN |
| Control fan | DXG-SPR-FR34CF | DXG-SPR-FR34CF | DXG-SPR-FR34CF |
| Bus capacitor | DXG-SPR-2FR4BC | DXG-SPR-4FR24BC | DXG-SPR-4FR24BC |
| Main power board | DXG-SPR-2FR4MPB | DXG-SPR-4FR4MPB | DXG-SPR-4FR4MPB |
| EMI board | DXG-SPR-2FR4EB | DXG-SPR-4FR4EB | DXG-SPR-4FR4EB |
| Softstart board | DXG-SPR-2FR4SB | DXG-SPR-4FR4SB | DXG-SPR-4FR4SB |
| IGBT module | DXG-SPR-2FR4IGBT | DXG-SPR-4FR4IGBT | DXG-SPR-4FR4IGBT |
| Rectifier module | DXG-SPR-2FR4RM | DXG-SPR-4FR4RM | DXG-SPR-4FR4RM |
| Brake chopper module | DXG-SPR-2FR4BCM | DXG-SPR-4FR4BCM | DXG-SPR-4FR4BCM |
| Middle chassis cover | DXG-SPR-FR4MCC | DXG-SPR-FR4MCC | DXG-SPR-FR4MCC |
| Outer housing | DXG-SPR-FR4OH | DXG-SPR-FR4OH | DXG-SPR-FR4OH |
| UL conduit plate | DXG-SPR-FR4CPUL | DXG-SPR-FR4CPUL | DXG-SPR-FR4CPUL |
| IEC conduit plate | DXG-SPR-FR4CPIEC | DXG-SPR-FR4CPIEC | DXG-SPR-FR4CPIEC |

Note

^① Factory recommended spare parts.

Frame 5

| Description | 230 V Catalog Number | 480 V Catalog Number | 575 V Catalog Number |
|---|-------------------------|-------------------------|-------------------------|
| Standard keypad | DXG-KEY-LCD | DXG-KEY-LCD | DXG-KEY-LCD |
| Main control board | DXG-SPR-CTRLBOARD | DXG-SPR-CTRLBOARD | DXG-SPR-CTRLBOARD |
| Control module kit with keypad ^① | DXG-SPR-CTRLKIT | DXG-SPR-CTRLKIT | DXG-SPR-CTRLKIT |
| Control board cover | DXG-SPR-BCOVER | DXG-SPR-BCOVER | DXG-SPR-BCOVER |
| Standard cover | DXG-SPR-FR5CVR | DXG-SPR-FR5CVR | DXG-SPR-FR5CVR |
| Main fan kit ^① | DXG-SPR-FR5FANKIT | DXG-SPR-FR5FANKIT | DXG-SPR-FR5FANKIT |
| Main fan | DXG-SPR-FR5FAN | DXG-SPR-FR5FAN | DXG-SPR-FR5FAN |
| Control fan | DXG-SPR-FR5CF | DXG-SPR-FR5CF | DXG-SPR-FR5CF |
| Bus capacitor | DXG-SPR-FR5BC | DXG-SPR-FR5BC | DXG-SPR-FR5BC |
| Main power board | DXG-SPR-2FR5MPB | DXG-SPR-4FR5MPB | DXG-SPR-4FR5MPB |
| EMI-1 board | DXG-SPR-2FR5E1B | DXG-SPR-4FR5E1B | DXG-SPR-4FR5E1B |
| EMI-2 board | DXG-SPR-2FR5E2B | DXG-SPR-4FR5E2B | DXG-SPR-4FR5E2B |
| EMI-3 board | DXG-SPR-FR5E3B | DXG-SPR-FR5E3B | DXG-SPR-FR5E3B |
| IGBT module | DXG-SPR-2FR5IGBT | DXG-SPR-4FR5IGBT | DXG-SPR-5FR5IGBT |
| Rectifier module | DXG-SPR-FR5RM | DXG-SPR-FR5RM | DXG-SPR-5FR5RM |
| Brake chopper module | DXG-SPR-2FR5BCM | DXG-SPR-4FR5BCM | DXG-SPR-4FR5BCM |
| Middle chassis cover | DXG-SPR-FR5MCC | DXG-SPR-FR5MCC | DXG-SPR-FR5MCC |
| Outer housing | DXG-SPR-FR5OH | DXG-SPR-FR5OH | DXG-SPR-FR5OH |
| UL conduit plate | DXG-SPR-FR5CPUL | DXG-SPR-FR5CPUL | DXG-SPR-FR5CPUL |
| IEC conduit plate | DXG-SPR-FR5IECCP | DXG-SPR-FR5IECCP | DXG-SPR-FR5IECCP |
| DC terminal kit | DXG-SPR-FR5DCKIT | DXG-SPR-FR5DCKIT | DXG-SPR-FR5DCKIT |

Frame 6

| Description | 230 V Catalog Number | 480 V Catalog Number | 600 V Catalog Number |
|--------------------------------|-------------------------|-------------------------|-------------------------|
| Standard keypad | DXG-KEY-LCD | DXG-KEY-LCD | DXG-KEY-LCD |
| Main control board | DXG-SPR-CTRLBOARD | DXG-SPR-CTRLBOARD | DXG-SPR-CTRLBOARD |
| Control module kit with keypad | DXG-SPR-CTRLKIT | DXG-SPR-CTRLKIT | DXG-SPR-CTRLKIT |
| Control board cover | DXG-SPR-BCOVER | DXG-SPR-BCOVER | DXG-SPR-BCOVER |
| Standard cover | DXG-SPR-FR6CVR | DXG-SPR-FR6CVR | DXG-SPR-FR6CVR |
| Type 12 grommet kit | DXG-SPR-FR6GRN12 | DXG-SPR-FR6GRN12 | DXG-SPR-FR6GRN12 |
| Main fan kit | DXG-SPR-FR6FANKIT | DXG-SPR-FR6FANKIT | DXG-SPR-FR6FANKIT |
| Main fan | DXG-SPR-FR6FAN | DXG-SPR-FR6FAN | DXG-SPR-FR6FAN |
| Control fan | DXG-SPR-FR6CF | DXG-SPR-FR6CF | DXG-SPR-FR6CF |
| Bus capacitor | DXG-SPR-FR6BC | DXG-SPR-FR6BC | DXG-SPR-5FR6BC |
| Main power board | DXG-SPR-2FR6MPB | DXG-SPR-4FR6MPB | DXG-SPR-5FR6MPB |
| EMI board | DXG-SPR-FR6EB | DXG-SPR-FR6EB | DXG-SPR-FR6EB |
| IGBT module | DXG-SPR-2FR6IGBT | DXG-SPR-4FR6IGBT | DXG-SPR-5FR6IGBT |
| Rectifier module | DXG-SPR-FR6RM | DXG-SPR-FR6RM | DXG-SPR-5FR6RM |
| Middle chassis cover | DXG-SPR-FR6MCC | DXG-SPR-FR6MCC | DXG-SPR-FR6MCC |
| Outer housing | DXG-SPR-FR6OH | DXG-SPR-FR6OH | DXG-SPR-FR6OH |
| UL conduit plate | DXG-SPR-FR6CPUL | DXG-SPR-FR6CPUL | DXG-SPR-FR6CPUL |
| IEC conduit plate | DXG-SPR-FR6CPIEC | DXG-SPR-FR6CPIEC | DXG-SPR-FR6CPIEC |
| Softstart board | DXG-SPR-2FR6SB | DXG-SPR-4FR6SB | DXG-SPR-5FR6SB |
| Rectifier snubber board | DXG-SPR-2FR6RSB | DXG-SPR-4FR6RSB | DXG-SPR-5FR6RSB |
| Terminal block kit (1-pole) | DXG-SPR-FR6TB1P | DXG-SPR-FR6TB1P | DXG-SPR-FR6TB1P |
| Terminal block kit (3-pole) | DXG-SPR-FR6TB3P | DXG-SPR-FR6TB3P | DXG-SPR-FR6TB3P |

Note

^① Factory recommended spare parts.

2.6

Adjustable Frequency Drives

PowerXL DG1 Series Drives

2

Frame 7

| Description | 230 V Catalog Number | 480 V Catalog Number | 575 V Catalog Number |
|---|---------------------------------|---------------------------------|---------------------------------|
| Standard keypad | — | DXG-KEY-LCD | DXG-KEY-LCD |
| Control module kit with keypad ^① | — | DXG-SPR-HPCTRLKIT | DXG-SPR-HPCTRLKIT |
| Control board cover | — | DXG-SPR-BCOVER | DXG-SPR-BCOVER |
| Standard cover | — | DXG-SPR-FR1CVR | DXG-SPR-FR1CVR |

Frame 8

| Description | 230 V Catalog Number | 480 V Catalog Number | 575 V Catalog Number |
|---|---------------------------------|---------------------------------|---------------------------------|
| Standard keypad | — | DXG-KEY-LCD | DXG-KEY-LCD |
| Control module kit with keypad ^① | — | DXG-SPR-HPCTRLKIT | DXG-SPR-HPCTRLKIT |
| Control board cover | — | DXG-SPR-BCOVER | DXG-SPR-BCOVER |
| Standard cover | — | DXG-SPR-FR1CVR | DXG-SPR-FR1CVR |

Note

^① Factory recommended spare parts.

Technical Data and Specifications

PowerXL Series—DG1 Technical Data and Specifications

| Attribute | Description | Specification | |
|---|--------------------------------|--|--|
| Input ratings | Input voltage U_{in} | 208 V to 240 V, 380 V to 500 V, 525 V to 600 V, -15 to 10% | |
| | Input frequency | 50 Hz to 60 Hz (variation up to 45 Hz to 66 Hz) | |
| | Connection to power | Once per minute or less | |
| | Starting delay | 3 s (FR1 to FR2), 4 s (FR3), 5 s (FR4), 6 s (FR5 and FR6) | |
| | Short-circuit withstand rating | 100 kAIC (fuses and circuit breakers); 5 kAIC (without fuses or breakers) | |
| Output ratings | Output voltage | 0 to U_{in} | |
| | Continuous output current | I_L : ambient temperature maximum 40 °C, up to 60 °C with derating, overload 1.1 x I_L (1 min./10 min.) I_H : ambient temperature maximum 50 °C, up to 60 °C with derating, overload 1.5 x I_H (1 min./10 min.) | |
| | Overload current | 150% of drive rating for constant torque, 110% for variable torque | |
| | Initial output current | 200% (2 s / 20 s) | |
| | Output frequency | 0–400 Hz (standard) | |
| | Frequency resolution | 0.01 Hz | |
| Control characteristics | Control methods | Frequency control Speed control Open-loop speed control Open-loop torque control | |
| | Switching frequency | 230 V / 480 V range: FR1–3: 1 kHz to 12 kHz FR4–6: 1 kHz to 10 kHz 230 V / 480 V defaults: FR1–3: 4 kHz FR4–5: 3.6 kHz FR6: 2 kHz 575 V range: FR1–6: 1 kHz to 6 kHz 575 V defaults: FR1–4: 3 kHz FR5–6: 2 kHz Automatic switching frequency derating in case of overload. | |
| | Frequency reference | Analog input: resolution 0.1% (10-bit), accuracy +1% Analog output: resolution 0.1% (10-bit), accuracy +1% Panel reference: resolution 0.01 Hz | |
| | Field weakening point | 20 Hz to 400 Hz | |
| | Acceleration time | 0.1 s to 3000 s | |
| | Deceleration time | 0.1 s to 3000 s | |
| | Braking torque | DC brake: 30% x Motor Rated Torque (T_n) (without brake chopper) Dynamic braking (with optional brake chopper using an external brake resistor): 100% continuous maximum rating | |
| | Ambient conditions | Ambient operating temperature | -10 °C (no frost) to +50 °C, up to +60 °C with derating (CT) -10 °C (no frost) to +40 °C, up to +60 °C with derating (VT) |
| | | Storage temperature | -40 °C to +70 °C |
| | | Relative humidity | 0–95% RH, noncondensing, non-corrosive |
| Air quality: • Chemical vapors • Mechanical particles | | Tested according to IEC 60068-2-60 Test Key: Flowing mixed gas corrosion test, Method 1 (H ₂ S [hydrogen sulfide] and SO ₂ [sulfur dioxide]) Designed according to: IEC 60721-3-3, unit in operation, class 3C2 IEC 60721-3-3, unit in operation, class 3S2 | |
| Altitude | | 100% load capacity (no derating) up to 3280 ft (1000 m); 1% derating for each 328 ft (100 m) above 3280 ft (1000 m); max. 9842 ft (3000 m) (2000 m for corner grounded earth main systems) For 575 V product, maximum altitude is 6561 ft (2000 m) regardless of main system | |

2.6

Adjustable Frequency Drives

PowerXL DG1 Series Drives

PowerXL Series—DG1 Technical Data and Specifications, continued

2

| Attribute | Description | Specification |
|-------------------------------|-------------------------|---|
| Ambient conditions, continued | Vibration: | 5–150 Hz |
| | • EN 61800-5-1 | Displacement amplitude: 1 mm (peak) at 5 Hz to 15.8 Hz (FR1–FR6) |
| | • EN 60668-2-6 | Maximum acceleration amplitude: 1g at 15.8 Hz to 150 Hz (FR1–FR6) |
| | Shock: | Storage and shipping: maximum 15 g, 11 ms (in package) |
| | • ISTA 1 A | |
| | • EN 60068-2-27 | |
| | Overvoltage | Overvoltage Category III |
| | Pollution degree | Pollution Degree 2 |
| | Enclosure class | IP21/Type 1 standard in entire kW/hp range IP54/Type 12 option Note: Keypad or keypad hole plug required to be mounted in drive for IP54/Type 12 rating |
| | Immunity | Fulfills EN 61800-3 (2004), first and second environment |
| MTBF | | FR1: 165,457 hours |
| | | FR2: 134,833 hours |
| | | FR3: 102,515 hours |
| | | FR4: 121,567 hours |
| | | FR5: 108,189 hours |
| | | FR6: 100,000 hours |
| Noise | | FR1: 51.2 dB |
| | | FR2: 58.6 dB |
| | | FR3: 61.0 dB |
| | | FR4: 68.0 dB |
| | | FR5: 69.1 dB |
| | | FR6: 73.2 dB |
| Standards | Safety | UL 508C, CSA C22.2 No. 274-13 and EN 61800-5-1 |
| | EMC | +EMC2: EN 61800-3 (2004), Category C2 The drive can be modified for IT networks and corner grounding TN system |
| | Electrostatic discharge | Second environment, IEC 61000-4-2, 4 kV CD or 8 kV AD, Criterion B |
| | Fast transient burst | Second environment, IEC 61000-4-4, 2 kV/5 kHz, Criterion B |
| | Dielectrical strength | Primary to secondary: 3600 Vac/5100 Vdc Primary to earth: 2000 Vac/2828 Vdc |
| | Approvals | EAC, RCM (C-Tick), RoHS, CE, UL and cUL (see nameplate for more detailed approvals) |
| | Fieldbus connections | Onboard: EtherNet/IP, Modbus® TCP, Modbus RTU, BACnet |

PowerXL Series—DG1 Technical Data and Specifications, continued

| Attribute | Description | Specification |
|----------------------|---|--|
| Safety/protections | Oversvoltage protection | Yes |
| | Oversvoltage trip limit | 230 V drives: 456 V 480 V drives: 911 V 575 V drives: 1100 V |
| | Undersvoltage protection | Yes |
| | Undersvoltage trip limit | 230 V drives: 211 V 480 V drives: 370 V 575 V drives: 550 V |
| | Earth fault protection | Yes Default: 15% motor FLA Minimum: 0% motor FLA Maximum: 30% motor FLA |
| | Input phase supervision | Yes |
| | Motor phase supervision | Yes |
| | Overcurrent protection | Yes |
| | Unit overtemperature protection | Yes |
| | Motor overload protection | Yes |
| | Motor stall protection | Yes |
| | Motor underload protection | Yes |
| | DC bus oversvoltage control | Yes |
| | Short-circuit protection of 24 V reference voltages | Yes |
| | Surge protection | Yes (differential mode 2 kV; common mode 4 kV 230 V drives: 275 Vac, 10,000 A 480 V drives: 320 Vac, 8000 A 575 V drives: 385 Vac, 10,000 A |
| Common coated boards | Yes (prevents corrosion) | |

2.6

Adjustable Frequency Drives

PowerXL DG1 Series Drives

PowerXL Series—DG1 Technical Data and Specifications—Efficiency

2

230 V

| Frame Size | Load Torque | Efficiency | | Input THDi |
|------------|-------------|------------|--------|------------|
| | | VT | CT | |
| FR1 | 25% | 92.10% | 90.90% | 42.8% |
| | 50% | 95.20% | 95.20% | 35.2% |
| | 100% | 96.70% | 96.20% | 29.9% |
| FR2 | 25% | 90.80% | 94.20% | 70.0% |
| | 50% | 96.64% | 97.09% | 46.6% |
| | 100% | 97.30% | 97.30% | 33.3% |
| FR3 | 25% | 97.23% | 97.06% | 53.1% |
| | 50% | 97.37% | 97.17% | 43.6% |
| | 100% | 97.00% | 97.20% | 30.8% |
| FR4 | 25% | 94.60% | 94.30% | 39.4% |
| | 50% | 97.20% | 97.10% | 32.4% |
| | 100% | 97.60% | 97.60% | 25.6% |
| FR5 | 25% | 94.5 | 94.30% | 30.50% |
| | 50% | 97.80% | 97.60% | 30.8% |
| | 100% | 97.70% | 97.80% | 25.0% |

575 V












| Frame Size | Load Torque | Efficiency | | Input THDi |
|------------|-------------|------------|--------|------------|
| | | VT | CT | |
| FR1 | 25% | 97.48% | 97.25% | 62.6% |
| | 50% | 97.79% | 97.66% | 45.6% |
| | 100% | 98.10% | 97.60% | 36.8% |
| FR2 | 25% | 98.06% | 97.98% | 60.6% |
| | 50% | 98.19% | 98.11% | 47.2% |
| | 100% | 98.20% | 98.10% | 36.7% |
| FR3 | 25% | 97.98% | 97.77% | 78.9% |
| | 50% | 98.32% | 98.18% | 55.5% |
| | 100% | 98.10% | 98.10% | 36.3% |
| FR4 | 25% | 98.27% | 97.96% | 66.1% |
| | 50% | 98.57% | 98.44% | 41.6% |
| | 100% | 98.30% | 98.30% | 31.2% |
| FR5 | 25% | 98.60% | 98.50% | 52.80% |
| | 50% | 98.81% | 98.78% | 35.9% |
| | 100% | 98.60% | 98.70% | 28.4% |

480 V

| Frame Size | Load Torque | Efficiency | | Input THDi |
|------------|-------------|------------|--------|------------|
| | | VT | CT | |
| FR1 | 25% | 93.30% | 90.70% | 54.0% |
| | 50% | 97.10% | 96.98% | 46.8% |
| | 100% | 97.61% | 97.67% | 35.3% |
| FR2 | 25% | 95.90% | 94.20% | 59.8% |
| | 50% | 97.81% | 98.34% | 42.7% |
| | 100% | 98.11% | 98.20% | 33.8% |
| FR3 | 25% | 96.40% | 95.20% | 69.2% |
| | 50% | 97.87% | 97.99% | 45.2% |
| | 100% | 97.79% | 98.15% | 32.6% |
| FR4 | 25% | 98.00% | 97.80% | 56.5% |
| | 50% | 97.97% | 97.89% | 39.8% |
| | 100% | 97.96% | 98.17% | 31.5% |
| FR5 | 25% | 97.8 | 97.60% | 50.3% |
| | 50% | 98.39% | 98.10% | 37.0% |
| | 100% | 98.14% | 98.19% | 29.5% |

Wiring Diagram

PowerXL Series—DG1 Control Wiring Diagram

| External Wiring | Pin | Signal Name | Signal | Default Setting | Description |
|---|-----|-------------|-------------------------|--------------------|---|
|  | 1 | +10 V | Ref. Output Voltage | — | 10 Vdc Supply Source |
| | 2 | AI1+ | Analog Input 1 | 0–10 V | Voltage Speed Reference (Programmable to 4 mA to 20 mA) |
| | 3 | AI1– | Analog Input 1 Ground | — | Analog Input 1 Common (Ground) |
|  | 4 | AI2+ | Analog Input 2 | 4 mA to 20 mA | Current Speed Reference (Programmable to 0–10 V) |
| | 5 | AI2– | Analog Input 2 Ground | — | Analog Input 2 Common (Ground) |
| | 6 | GND | I/O Signal Ground | — | I/O Ground for Reference and Control |
|  | 7 | DIN5 | Digital Input 5 | Preset Speed B0 | Sets frequency output to Preset Speed 1 |
|  | 8 | DIN6 | Digital Input 6 | Preset Speed B1 | Sets frequency output to Preset Speed 2 |
|  | 9 | DIN7 | Digital Input 7 | — | — |
|  | 10 | DIN8 | Digital Input 8 | Force Remote (TI+) | Input takes VFD from Local to Remote |
| | 11 | CMB | DI5 to DI8 Common | Grounded | Allows source input |
| | 12 | GND | I/O Signal Ground | — | I/O Ground for Reference and Control |
| | 13 | 24 V | +24 Vdc Output | — | Control voltage output (100 mA max.) |
| | 14 | DO1 | Digital Output 1 | Ready | Shows the drive is ready to run |
| | 15 | 24 Vo | +24 Vdc Output | — | Control voltage output (100 mA max.) |
|  | 16 | GND | I/O Signal Ground | — | I/O Ground for Reference and Control |
| | 17 | AO1+ | Analog Output 1 | Output Frequency | Shows Output frequency to motor 0–60 Hz (4 mA to 20 mA) |
| | 18 | AO2+ | Analog Output 2 | Motor Current | Shows Motor current of motor 0–FLA (4 mA to 20 mA) |
| | 19 | 24 Vi | +24 Vdc Input | — | External control voltage input |
|  | 20 | DIN1 | Digital Input 1 | Run Forward | Input starts drive in forward direction (start enable) |
|  | 21 | DIN2 | Digital Input 2 | Run Reverse | Input starts drive in reverse direction (start enable) |
|  | 22 | DIN3 | Digital Input 3 | External Fault | Input causes drive to fault |
|  | 23 | DIN4 | Digital Input 4 | Fault Reset | Input resets active faults |
| | 24 | CMA | DI1 to DI4 Common | Grounded | Allows source input |
| | 25 | A | RS-485 Signal A | — | Fieldbus Communication (Modbus, BACnet) |
| | 26 | B | RS-485 Signal B | — | Fieldbus Communication (Modbus, BACnet) |
| | 27 | R3NO | Relay 3 Normally Open | At Speed | Relay output 3 shows VFD is at Ref. Frequency |
| | 28 | R1NC | Relay 1 Normally Closed | Run | Relay output 1 shows VFD is in a run state |
| | 29 | R1CM | Relay 1 Common | | |
| | 30 | R1NO | Relay 1 Normally Open | | |
| | 31 | R3CM | Relay 3 Common | At Speed | Relay output 3 shows VFD is at Ref. Frequency |
| | 32 | R2NC | Relay 2 Normally Closed | Fault | Relay output 2 shows VFD is in a fault state |
| | 33 | R2CM | Relay 2 Common | | |
| | 34 | R2NO | Relay 2 Normally Open | | |

Notes

The above wiring demonstrates a SINK configuration. It is important that CMA and CMB are wired to ground (as shown by dashed line).

If a SOURCE configuration is desired, wire 24 V to CMA and CMB and close the inputs to ground.

When using the +10 V for AI1, it is important to wire AI1– to ground (as shown by dashed line).

If using +10 V for AI1 or AI2, terminals 3, 5 and 6 need to be jumpered together.

2.6


Adjustable Frequency Drives

PowerXL DG1 Series Drives

Control Board Layout


2

PowerXL Series—DG1 Control Board Layout

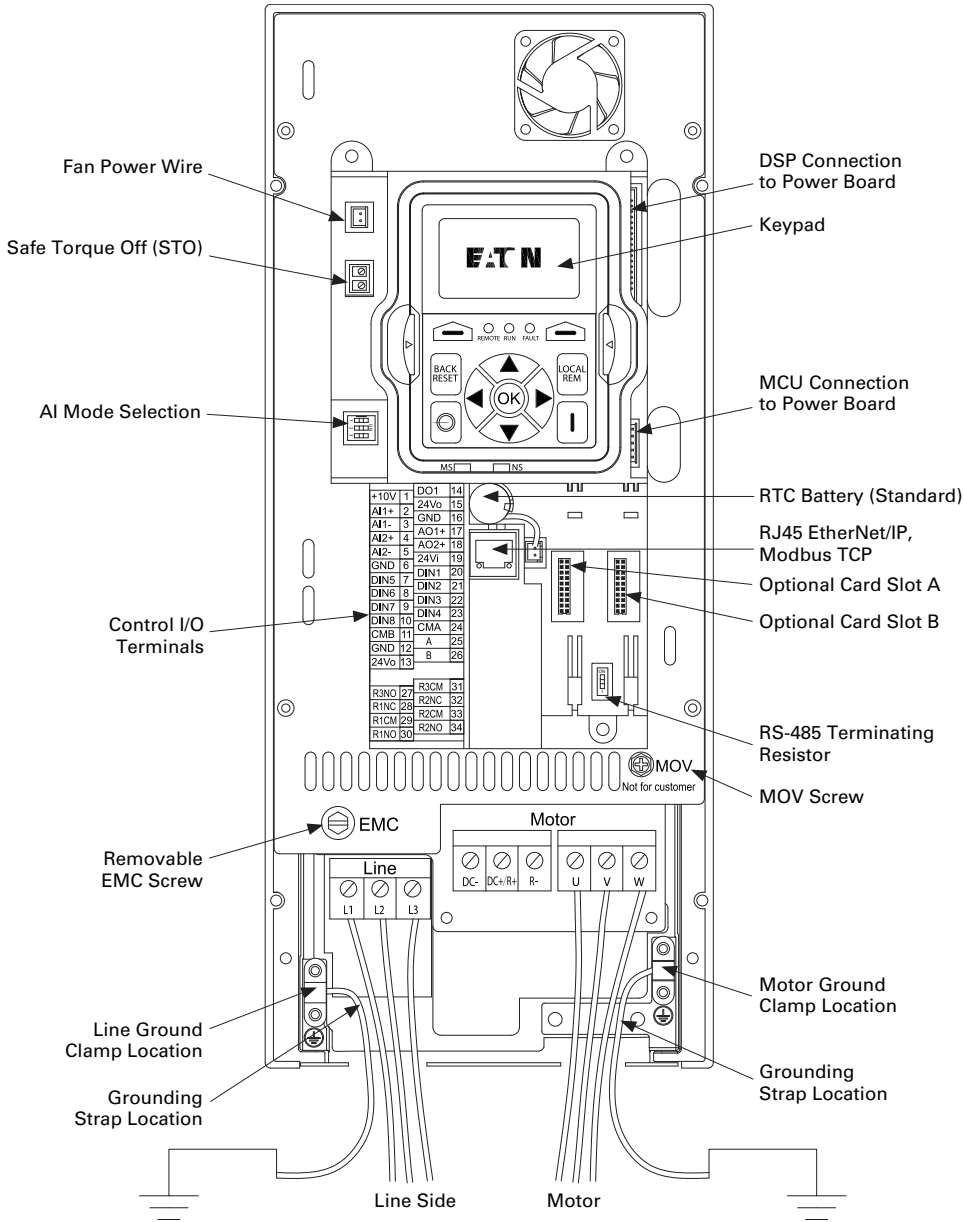

Dimensions

Approximate Dimensions in Inches (mm)

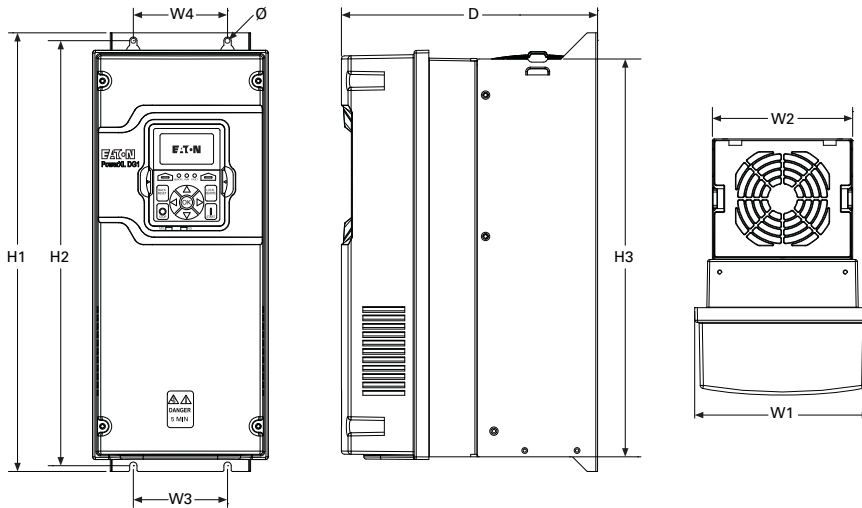PowerXL Series—DG1 Dimensions

| Frame Size | Voltage | hp (CT/I _H) | kW | Amperes (CT/I _H) | Approximate Dimensions in Inches (mm) | | | | | | | | | Weight Lb (kg) |
|------------------------|---------|-------------------------|----------|------------------------------|---------------------------------------|----------|----------|------------|----------|----------|---------|---------|--------|----------------|
| | | | | | D | H1 | H2 | H3 | W1 | W2 | W3 | W4 | Ø | |
| FR0 | 230 Vac | 0.75–1.5 | 0.55–1.1 | 3.7–6.6 | 6.83 | 10.58 | 10.16 | 9.54 | 5.00 | 4.97 | 4.26 | 4.26 | 0.28 | 4.41 |
| | 480 Vac | 1–3 | 0.75–2.2 | 2.2–5.6 | (173.5) | (268.7) | (258) | (242.3) | (127) | (126.3) | (108.3) | (108.3) | (7.0) | (2.0) |
| FR1 | 230 Vac | 0.75–3 | 0.55–2.2 | 3.5–11 | 7.91 | 12.87 | 12.28 | 11.50 | 6.02 | 4.80 | 3.94 | 3.94 | 0.28 | 14.33 |
| | 480 Vac | 1–5 | 0.75–3.7 | 2.3–7.6 | (200.9) | (326.9) | (311.9) | (292.1) | (153.0) | (121.9) | (100.1) | (100.1) | (7.0) | (6.5) |
| | 575 Vac | 2–5 | 1.5–3.7 | 3.3–7.5 | | | | | | | | | | |
| FR2 | 230 Vac | 5–7.5 | 3–5.5 | 12.5–25 | 9.63 | 16.50 | 15.98 | 14.96 | 6.61 | 5.28 | 3.54 | 3.54 | 0.28 | 23.37 |
| | 480 Vac | 7.5–15 | 5.5–11 | 12–23 | (244.7) | (419.1) | (405.9) | (380.0) | (167.8) | (134.1) | (90.0) | (90.0) | (7.0) | (10.6) |
| | 575 Vac | 7.5–15 | 5.5–11 | 10–18 | | | | | | | | | | |
| FR3 | 230 Vac | 10–15 | 7.5–11 | 31–48 | 10.44 | 21.97 | 21.46 | 20.41 | 8.06 | 7.24 | 4.92 | 4.92 | 0.35 | 49.82 |
| | 480 Vac | 20–30 | 15–22 | 31–46 | (265.1) | (558.0) | (545.0) | (518.5) | (204.6) | (183.9) | (125.0) | (125.0) | (9.0) | (22.6) |
| | 575 Vac | 20–30 | 15–22 | 22–34 | | | | | | | | | | |
| FR4 | 230 Vac | 20–30 | 15–22 | 61–88 | 11.57 | 24.80 | 24.31 | 23.27 | 9.36 | 9.13 | 8.07 | 8.07 | 0.35 | 77.60 |
| | 480 Vac | 40–60 | 30–45 | 61–87 | (294.0) | (629.9) | (617.5) | (591.1) | (237.7) | (231.9) | (205.0) | (205.0) | (9.0) | (35.2) |
| | 575 Vac | 40–60 | 30–45 | 41–62 | | | | | | | | | | |
| FR5 | 230 Vac | 40–60 | 30–45 | 114–170 | 13.41 | 34.98 | 29.65 | 27.83 | 11.34 | 11.10 | 8.66 | 8.66 | 0.35 | 154.32 |
| | 480 Vac | 75–125 | 55–90 | 105–170 | (340.7) | (888.5) | (753.1) | (706.9) | (288.0) | (281.9) | (220.0) | (220.0) | (9.0) | (70.0) |
| | 575 Vac | 75–125 | 55–90 | 80–125 | | | | | | | | | | |
| FR6 | 230 Vac | 75–100 | 55–75 | 211–248 | 14.61 | 34.04 | 33.27 | 40.75 | 19.13 | 18.90 | 15.75 | 15.75 | 0.35 | 281.3 |
| | 480 Vac | 150–200 | 110–150 | 205–261 | (371.0) | (864.5) | (845.0) | (1035.0) | (486.0) | (480.0) | (400.0) | (400.0) | (9.0) | (127.6) |
| | 575 Vac | 150–200 | 110–160 | 144–208 | | | | | | | | | | |
| FR7 | 480 Vac | 250–450 | 160–250 | 311–520 | 20.51 | 38.58 | 34.25 | 34.49 | 19.92 | 19.92 | 17.99 | 18.74 | 0.98 | 452 |
| | 575 Vac | 250–400 | 187–298 | 261–416 | (507.0) | (980.0) | (870.0) | (876.0) | (506.0) | (506.0) | (457.0) | (476.0) | (25.0) | (205.0) |
| | 690 Vac | 335–536 | 250–400 | 261–416 | | | | | | | | | | |
| FR7 with brake chopper | 480 Vac | 250–450 | 160–250 | 311–520 | 20.67 | 60.55 | 56.81 | 59.13 | 19.92 | 19.92 | 15.91 | 18.74 | 0.98 | 904 |
| | 575 Vac | 250–400 | 187–298 | 261–416 | (525.0) | (1538.0) | (1442.0) | (1501.9.0) | (506.0) | (506.0) | (404.0) | (476.0) | (25.0) | (410.0) |
| | 690 Vac | 335–536 | 250–400 | 261–416 | | | | | | | | | | |
| FR8 | 480 Vac | 500–800 | 315–500 | 590–920 | 20.51 | 38.58 | 34.25 | 34.49 | 39.84 | 39.84 | 17.99 | 18.74 | 0.98 | 904 |
| | 575 Vac | 450–650 | 336–485 | 460–650 | (507.0) | (980.0) | (870.0) | (876.0) | (1012.0) | (1012.0) | (457.0) | (476.0) | (25.0) | (410.0) |
| | 690 Vac | 603–845 | 450–630 | 460–650 | | | | | | | | | | |
| FR8 with brake chopper | 480 Vac | 500–800 | 315–500 | 590–920 | 20.67 | 60.55 | 56.81 | 59.13 | 39.84 | 39.84 | 15.91 | 18.74 | 0.98 | 1808 |
| | 575 Vac | 450–650 | 336–485 | 460–650 | (525.0) | (1538.0) | (1442.0) | (1501.9.0) | (1012.0) | (1012.0) | (404.0) | (476.0) | (25.0) | (820.0) |
| | 690 Vac | 603–845 | 450–630 | 460–650 | | | | | | | | | | |

Note: The FR8 drive includes 2 FR7 power units coupled together.

DG1 General Purpose Enclosed Drive**Contents**

| Description | Page |
|---|-----------------|
| PowerXL DG1 Series Drives | V6-T2-48 |
| PowerXL DG1 Series Enclosed Drives | |
| Catalog Number Selection | V6-T2-75 |
| Production Selection | V6-T2-77 |
| Enclosure Selection | V6-T2-81 |
| Accessories | V6-T2-82 |
| Options | V6-T2-83 |
| Technical Data and Specifications | V6-T2-84 |
| Wiring Diagram | V6-T2-86 |
| Dimensions | V6-T2-87 |

PowerXL DG1 Series Enclosed Drives**Product Description**

The DG1 Enclosed Drive family incorporates the latest Eaton drive technology into pre-engineered enclosed solutions covering the industry's most common applications. Using the benefits of the PowerXL DG1, the enclosed family provides enhanced user safety with the Safe Torque feature as well as industry-leading energy efficiency from the patented Active Energy Control algorithm. Eaton further raises the bar by providing customers with industry best lead times with the Rapid Response System. This system allows customers to select from 9 million standard configurations that have been pre-engineered with each configuration having a set lead time. The Rapid Response System delivers an improved quotation process and a faster delivery.

Features and Benefits

- Dual rated for both constant torque (CT) / high overload (I_H) and variable torque (VT) / low overload applications
- Optional Brake Chopper for external braking applications
- Available circuit breaker, motor circuit protector, fused disconnect, isolation fusing and surge protection device options to provide input power protection
- Optional 3% input and output reactors provide a reduction in voltage and current harmonics on both line and load side
- Bypass options include a standard three-contactor design and a reduced voltage soft starter design
- Output contactor option provides a means for positive disconnection of the drive output from the motor terminals
- MotoRX and dV/dt filter options are used to reduce transients voltages at the motor terminals
- Customizable cover control options
- Padlockable disconnect

- The PowerXL DG1 comes standard with the following communication protocols:

- EtherNet/IP
- Modbus/TCP
- Modbus RTU
- BACnet MS/TP

Standards and Certifications

- UL 508C

**Communication Options**

- PROFIBUS-DP
- LonWorks
- CANopen
- DeviceNet

Enclosure Ratings

- NEMA Type 1
- NEMA Type 12
- NEMA Type 3R

Mounting

- Wall mount
- Floor mount: 12-inch legs
- Floor mount: 22-inch legs


Product Range

- 208 V: 0.75–100 hp
- 230 V: 0.75–125 hp
- 480 V: 1–250 hp
- 230 V single-phase: 1–30 hp
- 480 V single-phase: 1.5–60 hp

Catalog Number Selection

Catalog Number Selection is for reference only. Not all option combinations may be available.

DG1 Enclosed—Base Catalog Number

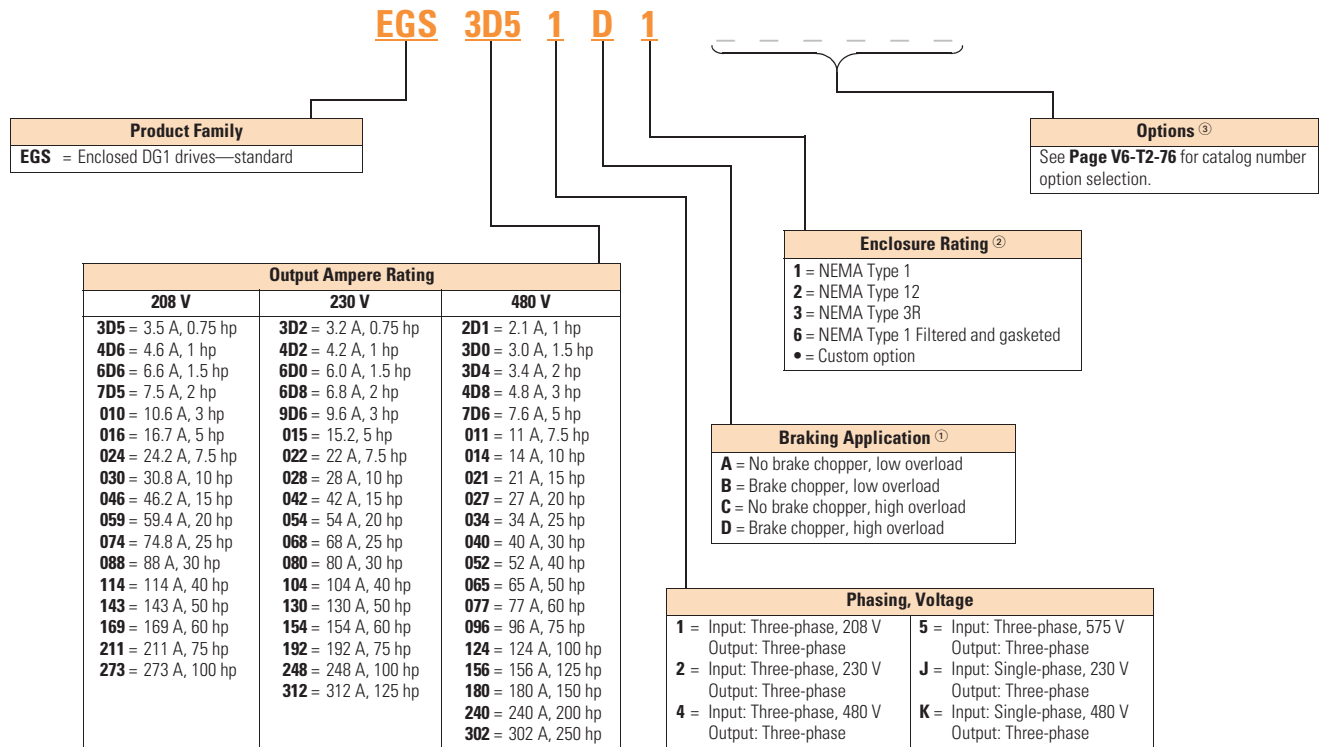

Notes

- ⁽¹⁾ Brake chopper is a factory-installed option only. Braking resistors sold separately. See DG1 drives starting on Page V6-T2-59 for selection.
- ⁽²⁾ Additional enclosure options including NEMA 4, 4X, 7 and 9 are available. Please contact the factory for configuration and pricing.
- ⁽³⁾ Part number configuration continued on the following page.

2.6

Adjustable Frequency Drives

PowerXL DG1 Series Drives

Catalog Number Selection is for reference only. Not all option combinations may be available.

DG1 Enclosed—Catalog Number Options

2

EGS 3D5 1 D 1

2 0 0 B 1 0 0 0 0

Base Catalog Number Example
See **Page V6-T2-75** for base catalog number selection.

Power Disconnect Options

- 0 = None
- 1 = MCP disconnect ①
- 2 = Circuit breaker
- 3 = Circuit breaker/isolation fusing
- 4 = Circuit breaker/isolation fusing/3% input reactor
- 5 = Circuit breaker/isolation fusing/SPD
- 6 = Circuit breaker/isolation fusing/SPD/3% input reactor
- 7 = Circuit breaker/3% input reactor
- 8 = Circuit breaker/SPD
- 9 = Circuit breaker/SPD/3% input reactor
- A = Fused disconnect
- B = Fused disconnect/SPD
- C = Fused disconnect/SPD/3% input reactor
- D = Fused disconnect/3% input reactor
- E = Isolation fuses
- F = Isolation fuses/3% input reactor
- G = Isolation fuses/SPD
- H = Isolation fuses/SPD/3% input reactor
- = Custom option ②

Bypass Options ③

- 0 = None
- 1 = Manual HOA bypass
- 2 = Manual HOA bypass/isolation fusing
- 3 = Manual HOA bypass/isolation fusing/3% input reactor
- 4 = Manual HOA bypass/isolation fusing/SPD
- 5 = Manual HOA bypass/isolation fusing/SPD/3% input reactor
- 6 = Manual HOA bypass/3% input reactor
- 7 = Manual HOA bypass/SPD
- 8 = Manual HOA bypass/SPD/3% input reactor
- H = Manual HOA RVSS bypass
- J = Manual HOA RVSS bypass/isolation fusing
- K = Manual HOA RVSS bypass/isolation fusing/3% input reactor
- L = Manual HOA RVSS bypass/isolation fusing/SPD
- M = Manual HOA RVSS bypass/isolation fusing/SPD/3% input reactor
- N = Manual HOA RVSS bypass/3% input reactor
- P = Manual HOA RVSS bypass/SPD
- R = Manual HOA RVSS bypass/SPD/3% input reactor
- = Custom option ②

Output Power Options ④

- 0 = None
- A = Output contactor
- B = 3% Output reactor
- D = dV/dt filter
- E = 3% Output Reactor/output contactor
- G = dV/dt/output contactor
- = Custom option ②

Control Options ⑤

- 0 = None
- 1 = Speed pot
- 2 = Start-stop pushbutton
- 3 = Start-stop pushbutton with speed pot
- A = HOA switch
- B = Start-stop pushbutton with speed pot & HOA switch
- C = Start-stop pushbutton with HOA switch
- D = HOA switch with speed pot
- = Custom option ②

Option Boards 2
Same options and codes as Option Boards 1

Option Boards 1

- 0 = No option
- 1 = 3 x DI, 3 x DO, 1 Thermistor, 24 Vdc/EXT
- 2 = 1 x AI, 2 x AO (isolated to control board)
- 3 = 3 x relay dry contact (2NO + 1NO/NC)
- 4 = 3 x PT100 RTD thermistor input
- 5 = 6 DI 240 Vac input
- = Custom option ②

Communication Options

- 0 = No option
- 1 = PROFIBUS-DP
- 3 = CANopen (slave)
- 4 = DeviceNet
- 5 = PROFIBUS-DP (D9 connector)
- D = SmartWire-DT
- = Custom option ②

Enclosure Options

- 0 = None
- 1 = Floor stand—12 inches
- 2 = Floor stand—22 inches
- A = Space heater
- B = Space heater & 12-inch floor stands
- C = Space heater & 22-inch floor stands
- = Custom option ②

Light Options ⑤

- 0 = None
- 1 = Non-bypass light kit—Power On, Run, Fault
- 2 = Bypass light kit—On, VFD Run, Fault, Bypass Run
- = Custom option ②

Notes

- ① HMCP disconnect option required and only available when bypass is selected.
- ② More options are available as Engineered to Order through the Bid Manager tool.
- ③ All bypass options include third contactor for drive isolation when in bypass mode.
- ④ Output contactor not available with bypass. Bypass comes standard with output contactor.
- ⑤ Pilot devices are 22 mm standard. 30 mm options are available as engineered to order through the Bid Manager tool.

Production Selection

DG1 Enclosed Drive



208 V Drives—Constant Torque (CT)/High Overload (IH) Enclosed Drives

| hp | Current (A) | Drive Frame Size | NEMA Type 1 | NEMA Type 12 | NEMA Type 3R |
|-------------------|------------------|------------------|----------------------------------|----------------------------------|----------------------------------|
| | | | Base Catalog Number ^① | Base Catalog Number ^① | Base Catalog Number ^① |
| 0.75 | 3.5 | 1 | EGS3D51D1 | EGS3D51D2 | EGS3D51D3 |
| 1 | 4.6 | 1 | EGS4D61D1 | EGS4D61D2 | EGS4D61D3 |
| 1.5 | 6.6 | 1 | EGS6D61D1 | EGS6D61D2 | EGS6D61D3 |
| 2 | 7.5 | 1 | EGS7D51D1 | EGS7D51D2 | EGS7D51D3 |
| 3 | 10.6 | 1 | EGS0101D1 | EGS0101D2 | EGS0101D3 |
| 5 | 16.7 | 2 | EGS0161D1 | EGS0161D2 | EGS0161D3 |
| 7.5 | 24.2 | 2 | EGS0241D1 | EGS0241D2 | EGS0241D3 |
| 10 | 30.8 | 3 | EGS0301D1 | EGS0301D2 | EGS0301D3 |
| 15 | 46.2 | 3 | EGS0461D1 | EGS0461D2 | EGS0461D3 |
| 20 | 59.4 | 4 | EGS0591C1 | EGS0591C2 | EGS0591C3 |
| 25 | 74.8 | 4 | EGS0741C1 | EGS0741C2 | EGS0741C3 |
| 30 | 88 | 4 | EGS0881C1 | EGS0881C2 | EGS0881C3 |
| 40 | 114 | 5 | EGS1141C1 | EGS1141C2 | EGS1141C3 |
| 50 | 143 | 5 | EGS1431C1 | EGS1431C2 | EGS1431C3 |
| 60 | 169 | 5 | EGS1691C1 | EGS1691C2 | EGS1691C3 |
| 75 ^② | 211 | 6 | EGS2111C1 ^② | EGS2111C2 ^② | EGS2111C3 ^② |
| 100 ^{②③} | 261 ^③ | 6 | EGS2611C1 ^② | EGS2611C2 ^② | EGS2611C3 ^② |

DG1 Enclosed Drive



208 V Drives—Variable Torque (VT)/Low Overload (IL) Enclosed Drives

| hp | Current (A) | Drive Frame Size | NEMA Type 1 | NEMA Type 12 | NEMA Type 3R |
|------------------|-------------|------------------|----------------------------------|----------------------------------|----------------------------------|
| | | | Base Catalog Number ^① | Base Catalog Number ^① | Base Catalog Number ^① |
| 1 | 4.6 | 1 | EGS4D61B1 | EGS4D61B2 | EGS4D61B3 |
| 1.5 | 6.6 | 1 | EGS6D61B1 | EGS6D61B2 | EGS6D61B3 |
| 2 | 7.5 | 1 | EGS7D51B1 | EGS7D51B2 | EGS7D51B3 |
| 3 | 10.6 | 1 | EGS0101B1 | EGS0101B2 | EGS0101B3 |
| 5 | 16.7 | 2 | EGS0161B1 | EGS0161B2 | EGS0161B3 |
| 7.5 | 24.2 | 2 | EGS0241B1 | EGS0241B2 | EGS0241B3 |
| 10 | 30.8 | 2 | EGS0301B1 | EGS0301B2 | EGS0301B3 |
| 15 | 46.2 | 3 | EGS0461B1 | EGS0461B2 | EGS0461B3 |
| 20 | 59.4 | 3 | EGS0591B1 | EGS0591B2 | EGS0591B3 |
| 25 | 74.8 | 4 | EGS0741A1 | EGS0741A2 | EGS0741A3 |
| 30 | 88 | 4 | EGS0881A1 | EGS0881A2 | EGS0881A3 |
| 40 | 114 | 4 | EGS1141A1 | EGS1141A2 | EGS1141A3 |
| 50 | 143 | 5 | EGS1431A1 | EGS1431A2 | EGS1431A3 |
| 60 | 169 | 5 | EGS1691A1 | EGS1691A2 | EGS1691A3 |
| 75 | 211 | 5 | EGS2111A1 | EGS2111A2 | EGS2111A3 |
| 100 ^② | 273 | 6 | EGS2731A1 ^② | EGS2731A2 ^② | EGS2731A3 ^② |

Notes

^① Table is for base catalog number reference only. For complete catalog number selection, see **Page V6-T2-76**.

^② Available in 2017.

^③ These units are current rated. They do not meet NEC ampere rating at this horsepower.

2.6

Adjustable Frequency Drives

PowerXL DG1 Series Drives

2

DG1 Enclosed Drive



230 V Drives—Constant Torque (CT)/High Overload (H) Enclosed Drives

| hp | Current (A) | Drive Frame Size | NEMA Type | | |
|-------|-------------|------------------|-------------------------------|--------------------------------|--------------------------------|
| | | | 1 Base Catalog Number ① | 12 Base Catalog Number ① | 3R Base Catalog Number ① |
| 0.75 | 3.2 | 1 | EGS3D22D1 | EGS3D22D2 | EGS3D22D3 |
| 1 | 4.2 | 1 | EGS4D22D1 | EGS4D22D2 | EGS4D22D3 |
| 1.5 | 6 | 1 | EGS6D02D1 | EGS6D02D2 | EGS6D02D3 |
| 2 | 6.8 | 1 | EGS6D82D1 | EGS6D82D2 | EGS6D82D3 |
| 3 | 9.6 | 1 | EGS9D62D1 | EGS9D62D2 | EGS9D62D3 |
| 5 | 15.2 | 2 | EGS0152D1 | EGS0152D2 | EGS0152D3 |
| 7.5 | 22 | 2 | EGS0222D1 | EGS0222D2 | EGS0222D3 |
| 10 | 28 | 3 | EGS0282D1 | EGS0282D2 | EGS0282D3 |
| 15 | 42 | 3 | EGS0422D1 | EGS0422D2 | EGS0422D3 |
| 20 | 54 | 4 | EGS0542C1 | EGS0542C2 | EGS0542C3 |
| 25 | 68 | 4 | EGS0682C1 | EGS0682C2 | EGS0682C3 |
| 30 | 80 | 4 | EGS0802C1 | EGS0802C2 | EGS0802C3 |
| 40 | 104 | 5 | EGS1042C1 | EGS1042C2 | EGS1042C3 |
| 50 | 130 | 5 | EGS1302C1 | EGS1302C2 | EGS1302C3 |
| 60 | 154 | 5 | EGS1542C1 | EGS1542C2 | EGS1542C3 |
| 75 ② | 192 | 6 | EGS1922C1 ② | EGS1922C2 ② | EGS1922C3 ② |
| 100 ② | 248 | 6 | EGS2482C1 ② | EGS2482C2 ② | EGS2482C3 ② |

DG1 Enclosed Drive



230 V Drives—Variable Torque (VT)/Low Overload (L) Enclosed Drives

| hp | Current (A) | Drive Frame Size | NEMA Type | | |
|-------|-------------|------------------|-------------------------------|--------------------------------|--------------------------------|
| | | | 1 Base Catalog Number ① | 12 Base Catalog Number ① | 3R Base Catalog Number ① |
| 1 | 4.2 | 1 | EGS4D22B1 | EGS4D22B2 | EGS4D22B3 |
| 1.5 | 6 | 1 | EGS6D02B1 | EGS6D02B2 | EGS6D02B3 |
| 2 | 6.8 | 1 | EGS6D82B1 | EGS6D82B2 | EGS6D82B3 |
| 3 | 9.6 | 1 | EGS9D62B1 | EGS9D62B2 | EGS9D62B3 |
| 5 | 15.2 | 2 | EGS0152B1 | EGS0152B2 | EGS0152B3 |
| 7.5 | 22 | 2 | EGS0222B1 | EGS0222B2 | EGS0222B3 |
| 10 | 28 | 2 | EGS0282B1 | EGS0282B2 | EGS0282B3 |
| 15 | 42 | 3 | EGS0422B1 | EGS0422B2 | EGS0422B3 |
| 20 | 54 | 3 | EGS0542B1 | EGS0542B2 | EGS0542B3 |
| 25 | 68 | 4 | EGS0682A1 | EGS0682A2 | EGS0682A3 |
| 30 | 80 | 4 | EGS0802A1 | EGS0802A2 | EGS0802A3 |
| 40 | 104 | 4 | EGS1042A1 | EGS1042A2 | EGS1042A3 |
| 50 | 130 | 5 | EGS1302A1 | EGS1302A2 | EGS1302A3 |
| 60 | 154 | 5 | EGS1542A1 | EGS1542A2 | EGS1542A3 |
| 75 | 192 | 5 | EGS1922A1 | EGS1922A2 | EGS1922A3 |
| 100 ② | 248 | 6 | EGS2482A1 ② | EGS2482A2 ② | EGS2482A3 ② |
| 125 ② | 312 | 6 | EGS3122A1 ② | EGS3122A2 ② | EGS3122A3 ② |

Notes

① Table is for base catalog number reference only. For complete catalog number selection, see [Page V6-T2-76](#).

② Available in 2017.

DG1 Enclosed Drive



480 V Drives—Constant Torque (CT)/High Overload (IH) Enclosed Drives

| hp | Current (A) | Drive Frame Size | NEMA Type 1 Base Catalog Number ① | NEMA Type 12 Base Catalog Number ① | NEMA Type 3R Base Catalog Number ① |
|-------|-------------|------------------|---|--|--|
| 1 | 2.1 | 1 | EGS2D14D1 | EGS2D14D2 | EGS2D14D3 |
| 1.5 | 3 | 1 | EGS3D04D1 | EGS3D04D2 | EGS3D04D3 |
| 2 | 3.4 | 1 | EGS3D44D1 | EGS3D44D2 | EGS3D44D3 |
| 3 | 4.8 | 1 | EGS4D84D1 | EGS4D84D2 | EGS4D84D3 |
| 5 | 7.6 | 1 | EGS7D64D1 | EGS7D64D2 | EGS7D64D3 |
| 7.5 | 11 | 2 | EGS0114D1 | EGS0114D2 | EGS0114D3 |
| 10 | 14 | 2 | EGS0144D1 | EGS0144D2 | EGS0144D3 |
| 15 | 21 | 2 | EGS0214D1 | EGS0214D2 | EGS0214D3 |
| 20 | 27 | 3 | EGS0274D1 | EGS0274D2 | EGS0274D3 |
| 25 | 34 | 3 | EGS0344D1 | EGS0344D2 | EGS0344D3 |
| 30 | 40 | 3 | EGS0404D1 | EGS0404D2 | EGS0404D3 |
| 40 | 52 | 4 | EGS0524C1 | EGS0524C2 | EGS0524C3 |
| 50 | 65 | 4 | EGS0654C1 | EGS0654C2 | EGS0654C3 |
| 60 | 77 | 4 | EGS0774C1 | EGS0774C2 | EGS0774C3 |
| 75 | 96 | 5 | EGS0964C1 | EGS0964C2 | EGS0964C3 |
| 100 | 124 | 5 | EGS1244C1 | EGS1244C2 | EGS1244C3 |
| 125 | 156 | 5 | EGS1564C1 | EGS1564C2 | EGS1564C3 |
| 150 ② | 180 | 6 | EGS1804C1 ② | EGS1804C2 ② | EGS1804C3 ② |
| 200 ② | 240 | 6 | EGS2404C1 ② | EGS2404C2 ② | EGS2404C3 ② |

DG1 Enclosed Drive



480 V Drives—Variable Torque (VT)/Low Overload (IL) Enclosed Drives

| hp | Current (A) | Drive Frame Size | NEMA Type 1 Base Catalog Number ① | NEMA Type 12 Base Catalog Number ① | NEMA Type 3R Base Catalog Number ① |
|-------|-------------|------------------|---|--|--|
| 1.5 | 3 | 1 | EGS3D04B1 | EGS3D04B2 | EGS3D04B3 |
| 2 | 3.4 | 1 | EGS3D44B1 | EGS3D44B2 | EGS3D44B3 |
| 3 | 4.8 | 1 | EGS4D84B1 | EGS4D84B2 | EGS4D84B3 |
| 5 | 7.6 | 1 | EGS7D64B1 | EGS7D64B2 | EGS7D64B3 |
| 7.5 | 11 | 1 | EGS0114B1 | EGS0114B2 | EGS0114B3 |
| 10 | 14 | 2 | EGS0144B1 | EGS0144B2 | EGS0144B3 |
| 15 | 21 | 2 | EGS0214B1 | EGS0214B2 | EGS0214B3 |
| 20 | 27 | 2 | EGS0274B1 | EGS0274B2 | EGS0274B3 |
| 25 | 34 | 3 | EGS0344B1 | EGS0344B2 | EGS0344B3 |
| 30 | 40 | 3 | EGS0404B1 | EGS0404B2 | EGS0404B3 |
| 40 | 52 | 3 | EGS0524B1 | EGS0524B2 | EGS0524B3 |
| 50 | 65 | 4 | EGS0654A1 | EGS0654A2 | EGS0654A3 |
| 60 | 77 | 4 | EGS0774A1 | EGS0774A2 | EGS0774A3 |
| 75 | 96 | 4 | EGS0964A1 | EGS0964A2 | EGS0964A3 |
| 100 | 124 | 5 | EGS1244A1 | EGS1244A2 | EGS1244A3 |
| 125 | 156 | 5 | EGS1564A1 | EGS1564A2 | EGS1564A3 |
| 150 | 180 | 5 | EGS1804A1 | EGS1804A2 | EGS1804A3 |
| 200 ② | 240 | 6 | EGS2404A1 ② | EGS2404A2 ② | EGS2404A3 ② |
| 250 ② | 302 | 6 | EGS3024A1 ② | EGS3024A2 ② | EGS3024A3 ② |

Notes

① Table is for base catalog number reference only. For complete catalog number selection, see **Page V6-T2-76**.

② Available in 2017.

DG1 Enclosed Drive



230 V Single-Phase Drives—Variable Torque (VT)/Low Overload (L) Enclosed Drives

| hp | Current (A) | Drive Frame Size | NEMA Type 1 Base Catalog Number ^① | NEMA Type 12 Base Catalog Number ^① | NEMA Type 3R Base Catalog Number ^① |
|--|-------------|------------------|--|---|---|
| Low Overload (VT) Enclosed Drives | | | | | |
| 0.75 | 3.2 | 1 | EGS3D2JB1 | EGS3D2JB2 | EGS3D2JB3 |
| 1 | 4.2 | 1 | EGS4D2JB1 | EGS4D2JB2 | EGS4D2JB3 |
| 1.5 | 6 | 2 | EGS6D0JB1 | EGS6D0JB2 | EGS6D0JB3 |
| 2 | 6.8 | 2 | EGS6D8JB1 | EGS6D8JB2 | EGS6D8JB3 |
| 3 | 9.6 | 2 | EGS9D6JB1 | EGS9D6JB2 | EGS9D6JB3 |
| 5 | 15.2 | 2 | EGS015JB1 | EGS015JB2 | EGS015JB3 |
| 7.5 | 22 | 3 | EGS022JB1 | EGS022JB2 | EGS022JB3 |
| 10 | 28 | 3 | EGS028JB1 | EGS028JB2 | EGS028JB3 |
| 15 | 42 | 4 | EGS042JB1 | EGS042JB2 | EGS042JB3 |
| 20 | 54 | 4 | EGS054JB1 | EGS054JB2 | EGS054JB3 |
| 25 | 68 | 5 | EGS068JA1 | EGS068JA2 | EGS068JA3 |
| 30 | 80 | 5 | EGS080JA1 | EGS080JA2 | EGS080JA3 |
| 40 | 104 | 5 | EGS104JA1 | EGS104JA2 | EGS104JA3 |

DG1 Enclosed Drive



480 V Single-Phase Drives—Variable Torque (VT)/Low Overload (L) Enclosed Drives

| hp | Current (A) | Drive Frame Size | NEMA Type 1 Base Catalog Number ^① | NEMA Type 12 Base Catalog Number ^① | NEMA Type 3R Base Catalog Number ^① |
|--|-------------|------------------|--|---|---|
| Low Overload (VT) Enclosed Drives | | | | | |
| 1 | 2.1 | 1 | EGS2D1KB1 | EGS2D1KB2 | EGS2D1KB3 |
| 1.5 | 3 | 1 | EGS3D0KB1 | EGS3D0KB2 | EGS3D0KB3 |
| 2 | 3.4 | 1 | EGS3D4KB1 | EGS3D4KB2 | EGS3D4KB3 |
| 3 | 4.8 | 1 | EGS4D8KB1 | EGS4D8KB2 | EGS4D8KB3 |
| 5 | 7.6 | 2 | EGS7D6KB1 | EGS7D6KB2 | EGS7D6KB3 |
| 7.5 | 11 | 2 | EGS011KB1 | EGS011KB2 | EGS011KB3 |
| 10 | 14 | 2 | EGS014KB1 | EGS014KB2 | EGS014KB3 |
| 15 | 21 | 3 | EGS021KB1 | EGS021KB2 | EGS021KB3 |
| 20 | 27 | 4 | EGS027KB1 | EGS027KB2 | EGS027KB3 |
| 25 | 34 | 4 | EGS034KB1 | EGS034KB2 | EGS034KB3 |
| 30 | 40 | 4 | EGS040KB1 | EGS040KB2 | EGS040KB3 |
| 40 | 52 | 5 | EGS052KB1 | EGS052KB2 | EGS052KB3 |
| 50 | 65 | 5 | EGS065KA1 | EGS065KA2 | EGS065KA3 |
| 60 | 77 | 5 | EGS077KA1 | EGS077KA2 | EGS077KA3 |

Note

^① Table is for base catalog number reference only. For complete catalog number selection, see **Page V6-T2-76**.

Enclosure Selection

EGS

Enclosure selection charts are based on physical space limitations only and only to be used as a reference. For actual enclosure sizing, refer to Bid Manager.

Note: Standard enclosure sizing includes dedicated space for a circuit breaker or fusible disconnect, CPT, SPD, heater/thermostat, control relay and terminal blocks.

Standard Enclosure X-Space

| Enclosure Size | Frame 1 | Frame 2 | Frame 3 | Frame 4 | Frame 5 |
|----------------|---------|---------|---------|---------|---------|
| AX | 2 | 2 | 2 | — | — |
| BX | 4 | 4 | 4 | 4 | — |
| CX | 7 | 7 | 7 | 7 | 7 |
| DX | 18 | 18 | 18 | 18 | 18 |

Standard Power Options X-Space

| Power Options | Frame 1 | Frame 2 | Frame 3 | Frame 4 | Frame 5 |
|-------------------|---------|---------|---------|---------|---------|
| Isolation fuses | 1 | 1 | 1 | 1 | 1 |
| 3% Input reactor | 2 | 2 | 3 | 5 | 6 |
| 3% Output reactor | 1 | 1 | 3 | 5 | 6 |
| dV/dt filter | 3 | 3 | 3 | 5 | 6 |
| Output contactor | 1 | 1 | 1 | 1 | 1 |

Note: Bypass enclosure sizing includes dedicated space for a MCP, CPT, input contactor, output bypass contactors, overload relay, SPD, heater/thermostat, control relay and terminal blocks.

Bypass Enclosure X-Space

| Enclosure Size | Frame 1 | Frame 2 | Frame 3 | Frame 4 | Frame 5 |
|----------------|---------|---------|---------|---------|---------|
| AX | 0 | 0 | 0 | — | — |
| BX | 2 | 2 | 2 | 0 | — |
| CX | 5 | 5 | 5 | 3 | 2 |
| DX | 16 | 16 | 16 | 14 | 13 |

Bypass Power Options X-Space

| Power Options | Frame 1 | Frame 2 | Frame 3 | Frame 4 | Frame 5 |
|-------------------|---------|---------|---------|---------|---------|
| Isolation fuses | 1 | 1 | 1 | 1 | 1 |
| 3% Input reactor | 2 | 2 | 3 | 5 | 6 |
| RVSS bypass | 2 | 2 | 2 | 3 | 4 |
| 3% output reactor | 1 | 1 | 3 | 5 | 6 |
| dV/dt filter | 3 | 3 | 3 | 5 | 6 |

Note: Single-phase enclosure sizing includes dedicated space for a capacitor kit, circuit breaker or fusible disconnect, CPT, SPD, heater/thermostat, control relay and terminal blocks.

Single-Phase Enclosure X-Space

| Enclosure Size | Frame 1 | Frame 2 | Frame 3 | Frame 4 | Frame 5 |
|----------------|---------|---------|---------|---------|---------|
| AX | 0 | 0 | — | — | — |
| BX | 2 | 2 | 1 | 1 | — |
| CX | 5 | 5 | 4 | 4 | 4 |
| DX | 16 | 16 | 15 | 15 | 15 |

Single-Phase Power Options X-Space

| Power Options | Frame 1 | Frame 2 | Frame 3 | Frame 4 | Frame 5 |
|-------------------|---------|---------|---------|---------|---------|
| Isolation fuses | 1 | 1 | 1 | 1 | 1 |
| 3% Input reactor | 2 | 2 | 3 | 5 | 6 |
| 3% Output reactor | 1 | 1 | 3 | 5 | 6 |
| dV/dt filter | 3 | 3 | 3 | 5 | 6 |
| Output contactor | 1 | 1 | 1 | 1 | 1 |

Accessories

The PowerXL Series—DG1 drives can accommodate a wide selection of expander and adapter option boards to customize the drive for your application needs. The drive's control unit is designed to accept a total of two additional option boards.

The PowerXL Series—DG1 drives come with a factory-installed standard board configuration including the following:

- Standard I/O:
 - 8DI, 1DO
 - 2AI, 2AO
 - 2FC, 1FA relays
- Standard communications:
 - EtherNet/IP, Modbus TCP
 - RS-485: Modbus RTU, BACnet MS/TP

PowerXL Series—DG1 I/O Card Kits

| Description | Catalog Number |
|--|-------------------------|
| 3 x DI, 3 x DO, 1 x thermistor, 24 Vdc/EXT option card | DXG-EXT-3DI3DO1T |
| 1 x AI, 2 x AO (isolated to control board) option card | DXG-EXT-1AI2AO |
| 3 x relay dry contact (2NO + 1NO/NC) option card | DXG-EXT-3R0 |
| 3 x PT100 RTD thermistor input option card | DXG-EXT-THER1 |
| 6 x DI 240 Vac input option card | DXG-EXT-6DI |

PowerXL Series—DG1 Communication Card Kits

| Description | Catalog Number |
|---|---------------------------------|
| PROFIBUS-DP communication card | DXG-NET-PROFB |
| CANopen communication card | DXG-NET-CANOPEN |
| DeviceNet communication card | DXG-NET-DEVICENET |
| PROFIBUS DB9 to 5-pin adapter card | DXG-NET-PROAD |
| SmartWire communication card and module | DXG-NET-SWD ^① |

Note

^① Available in January 2017.

Options

Input Power Options

| Option | Description |
|------------------|---|
| HMCP Disconnect | The HMCP motor protection circuit breaker uses an electronic trip unit to provide typical motor overload relay functionality and short-circuit protection against potential phase-to-phase or phase-to-ground faults. |
| Circuit Breaker | Utilizes a circuit breaker to provide a means of short-circuit protection for the power cables between it and the drive, and protection from high-level ground faults on the power cable. Allows a convenient means of disconnecting the drive from the line, and the operating mechanism can be padlocked in the OFF position. This is factory mounted in the enclosure. |
| Isolation Fusing | Provides high-level fault protection of the drive input power circuit from the load side of the fuses to the input side of the power transistors. This option consists of three 200 kA fuses that are factory mounted in the enclosure. |
| 3% Input Reactor | The input reactor is a three-phase series inductance on the line side of an AFD. It is used to provide a reduction in voltage and current harmonics. It also provides increased input protection for AFD and its semiconductors from line transients. |
| SPD | Provides a UL 1449 surge protection device (SPD) rated for 40 kA/ph that is connected to the line side terminals. |
| Fused Disconnect | Utilizes fusing to provide a means of short-circuit protection for the power cables between it and the drive, and protection from high-level ground faults on the power cable. Allows a convenient means of disconnecting the drive from the line, and the operating mechanism can be padlocked in the OFF position. This is factory mounted in the enclosure. |

Bypass Options

| Option | Description |
|------------------------|---|
| Manual HOA Bypass | Provides a three-position selector switch that allows the user to select either a HAND or AUTO mode of operation. HAND mode is defaulted keypad operation, and AUTO mode is defaulted to control from an external terminal source. These modes of operation can be configured via programming to allow for alternate combinations of start and speed sources. Start and speed sources include keypad, I/O and fieldbus. |
| Manual HOA RVSS Bypass | This option adds a reduced voltage soft starter to bypass assembly for soft starting in bypass mode. |

Output Power Options

| Option | Description |
|-------------------|--|
| Output Contactor | Provides a means for positive disconnection of the drive output from the motor terminals. The contactor coil is controlled by the drive's run or permissive logic. NC and NO auxiliary contacts rated at 10 A, 600 Vac are provided for customer use. This option includes a low VA 115 Vac fused control power transformer and is factory mounted in the enclosure. |
| 3% Output Reactor | The output reactor is a three-phase series inductance on the load side of a VFD. It is used to reduce transient voltage (dv/dt) and peak voltages at the motor terminals. A 3% output filter is recommended for motor cable lengths up to 300 ft (10 m). |
| dV/dt Filter | Used to reduce the transient voltage (dV/dt) at the motor terminals. Recommended for motor cable lengths over 300 ft (10 m) and up to 1000 ft (304.8 m). This option is mounted in the enclosure. |

Control Options

| Option | Description |
|-----------------------|--|
| Speed Pot | Provides the ability to adjust the frequency reference using a door-mounted potentiometer. This option uses the 10 Vdc reference to generate a 0–10 V signal at the analog voltage input signal terminal. When the HOA bypass option is added, the speed is controlled when the HOA switch is in the HAND position. Without the HOA bypass option, a two-position switch (labeled local/remote) is provided on the keypad to select speed reference from the speed potentiometer or a remote speed signal. |
| HOA Switch | Provides a three-position selector switch that allows the user to select either a HAND or AUTO mode of operation. HAND mode is defaulted to keypad operation, and AUTO mode is defaulted to control from an external terminal source. These modes of operation can be configured via drive programming to allow for alternate combinations of start and speed sources. Start and speed sources include Keypad, I/O and fieldbus. |
| Start-Stop Pushbutton | Provides door-mounted START and STOP pushbuttons for either bypass or non-bypass configurations. |

Light Options

| Option | Description |
|---|--|
| Non-Bypass Light Kit—Power On, Run, Fault | Provides a white POWER ON light that indicates power to the enclosed cabinet, a green RUN light that indicates the drive is running and a red FAULT light that indicates a drive fault has occurred. |
| Bypass Light Kit—On, VFD Run, Fault, Bypass Run | Provides a white POWER ON light that indicates power to the enclosed cabinet, a green RUN light that indicates the drive is running, a red FAULT light that indicates a drive fault has occurred and an amber light that indicates when the motor is running in Bypass mode. |

Enclosure Options

| Option | Description |
|-------------------|---|
| Floor Stand 12 in | Converts a normally wall-mounted enclosure to a floor-standing enclosure with a height of 12 in (304.8 mm). |
| Floor Stand 22 in | Converts a normally wall-mounted enclosure to a floor-standing enclosure with a height of 22 in (558.8 mm). |

2.6

Adjustable Frequency Drives

PowerXL DG1 Series Drives

Technical Data and Specifications

PowerXL Series—DG1 Technical Data and Specifications

2

| Attribute | Description | Specification | |
|---|--------------------------------|--|--|
| Input ratings | Input voltage U_{in} | 208 V, 230 V, 480 V, 575 V, –15 to 10% | |
| | Input frequency | 50 Hz to 60 Hz (variation up to 45 Hz to 66 Hz) | |
| | Connection to power | Once per minute or less | |
| | Starting delay | 3 s (FR1 to FR2), 4 s (FR3), 5 s (FR4), 6 s (FR5 and FR6) | |
| | Short-circuit withstand rating | 100 kAIC (fuses and circuit breakers) | |
| Output ratings | Output voltage | 0 to U_{in} | |
| | Output current | I_L : ambient temperature maximum 40 °C, up to 60 °C with derating, overload 1.1 x I_L (1 min./10 min.) I_H : ambient temperature maximum 50 °C, up to 60 °C with derating, overload 1.5 x I_H (1 min./10 min.) | |
| | Initial output current | 200% (2 s / 20 s) | |
| | Output frequency | 0–400 Hz (standard) | |
| | Frequency resolution | 0.01 Hz | |
| Control characteristics | Control methods | Frequency control Speed control Open-loop speed control Open-loop torque control | |
| | Switching frequency | 230 V / 480 V range: FR1–3: 1 kHz to 12 kHz FR4–6: 1 kHz to 10 kHz 230 V / 480 V defaults: FR1–3: 4 kHz FR4–5: 3.6 kHz FR6: 2 kHz 575 V range: FR1–6: 1 kHz to 6 kHz 575 V defaults: FR1–4: 3 kHz FR5–6: 2 kHz Automatic switching frequency derating in case of overload. | |
| | Frequency reference | Analog input: resolution 0.1% (10-bit), accuracy +1% Analog output: resolution 0.1% (10-bit), accuracy +1% Panel reference: resolution 0.01 Hz | |
| | Field weakening point | 20 Hz to 400 Hz | |
| | Acceleration time | 0.1 s to 3000 s | |
| | Deceleration time | 0.1 s to 3000 s | |
| | Braking torque | DC brake: 30% x Motor Rated Torque (T_n) (without brake chopper) Dynamic braking (with optional brake chopper using an external brake resistor): 100% continuous maximum rating | |
| | Ambient conditions | Ambient operating temperature | –10 °C (no frost) to +40 °C |
| | | Storage temperature | –40 °C to +70 °C |
| | | Relative humidity | 0–95% RH, noncondensing, non-corrosive |
| Air quality: • Chemical vapors • Mechanical particles | | Tested according to IEC 60068-2-60 Test Key: Flowing mixed gas corrosion test, Method 1 (H2S [hydrogen sulfide] and SO2 [sulfur dioxide]) Designed according to: IEC 60721-3-3, unit in operation, class 3C2 IEC 60721-3-3, unit in operation, class 3S2 | |
| Altitude | | 100% load capacity (no derating) up to 3280 ft (1000 m); 1% derating for each 328 ft (100 m) above 3280 ft (1000 m); max. 9842 ft (3000 m) (2000 m for corner grounded earth main systems) For 575 V product, maximum altitude is 6561 ft (2000 m) regardless of main system | |

PowerXL Series—DG1 Technical Data and Specifications, continued

| Attribute | Description | Specification |
|-------------------------------|---|--|
| Ambient conditions, continued | Overvoltage | Overvoltage Category III |
| | Pollution degree | Pollution Degree 2 |
| | Enclosure class | NEMA Type 1, 12, 3R |
| | Immunity | Fulfills EN 61800-3 (2004), first and second environment |
| Standards | Safety | UL 508C, EN 61800-5-1 |
| | Approvals | UL and cUL |
| Fieldbus connections | | Onboard: EtherNet/IP, Modbus [®] TCP, Modbus RTU, BACnet |
| Safety/protections | Overvoltage protection | Yes |
| | Overvoltage trip limit | 230 V drives: 456 V 480 V drives: 911 V 575 V drives: 1100 V |
| | Undervoltage protection | Yes |
| | Undervoltage trip limit | 230 V drives: 211 V 480 V drives: 370 V 575 V drives: 550 V |
| | Earth fault protection | Yes Default: 15% motor FLA Minimum: 0% motor FLA Maximum: 30% motor FLA |
| | Input phase supervision | Yes |
| | Motor phase supervision | Yes |
| | Overcurrent protection | Yes |
| | Unit overtemperature protection | Yes |
| | Motor overload protection | Yes |
| | Motor stall protection | Yes |
| | Motor underload protection | Yes |
| | DC bus overvoltage control | Yes |
| | Short-circuit protection of 24 V reference voltages | Yes |
| | Surge protection | Yes (differential mode 2 kV; common mode 4 kV 230 V drives: 275 Vac, 10,000 A 480 V drives: 320 Vac, 8000 A 575 V drives: 385 Vac, 10,000 A |
| Common coated boards | Yes (prevents corrosion) | |
| Efficiency | Drive efficiency ratings [Ⓢ] | 480 V: FR1 = 97.7% FR2 = 97.9% FR3 = 97.7% FR4 = 98.0% FR5 = 98.2% |
| | | 230 V: FR1 = 96.7% FR2 = 97.4% FR3 = 97.2% FR4 = 97.4% FR5 = 97.7% |

Note

[Ⓢ] Based on DG1 efficiency ratings in an enclosure with no options.

2.6

Adjustable Frequency Drives

PowerXL DG1 Series Drives

Wiring Diagram



2

PowerXL Series—DG1 Control Wiring Diagram

| Pin | Signal Name | Signal | Default Setting | Description |
|-----|-------------|-------------------------|----------------------|---|
| 1 | +10 V | Ref. Output Voltage | — | 10 Vdc Supply Source |
| 2 | AI1+ | Analog Input 1 | 0–10 V | Voltage Speed Reference (Programmable to 4 mA to 20 mA) |
| 3 | AI1– | Analog Input 1 Ground | — | Analog Input 1 Common (Ground) |
| 4 | AI2+ | Analog Input 2 | 4 mA to 20 mA | Current Speed Reference (Programmable to 0–10 V) |
| 5 | AI2– | Analog Input 2 Ground | — | Analog Input 2 Common (Ground) |
| 6 | GND | I/O Signal Ground | — | I/O Ground for Reference and Control |
| 7 | DIN5 | Digital Input 5 | Preset Speed B0 | Sets frequency output to Preset Speed 1 |
| 8 | DIN6 | Digital Input 6 | Preset Speed B1 | Sets frequency output to Preset Speed 2 |
| 9 | DIN7 | Digital Input 7 | Emergency Stop (TI–) | Input forces VFD output to shut off |
| 10 | DIN8 | Digital Input 8 | Force Remote (TI+) | Input takes VFD from Local to Remote |
| 11 | CMB | DI5 to DI8 Common | Grounded | Allows source input |
| 12 | GND | I/O Signal Ground | — | I/O Ground for Reference and Control |
| 13 | 24 V | +24 Vdc Output | — | Control voltage output (100 mA max.) |
| 14 | DO1 | Digital Output 1 | Ready | Shows the drive is ready to run |
| 15 | 24 Vo | +24 Vdc Output | — | Control voltage output (100 mA max.) |
| 16 | GND | I/O Signal Ground | — | I/O Ground for Reference and Control |
| 17 | A01+ | Analog Output 1 | Output Frequency | Shows Output frequency to motor 0–60 Hz (4 mA to 20 mA) |
| 18 | A02+ | Analog Output 2 | Motor Current | Shows Motor current of motor 0–FLA (4 mA to 20 mA) |
| 19 | 24 Vi | +24 Vdc Input | — | External control voltage input |
| 20 | DIN1 | Digital Input 1 | Run Forward | Input starts drive in forward direction (start enable) |
| 21 | DIN2 | Digital Input 2 | Run Reverse | Input starts drive in reverse direction (start enable) |
| 22 | DIN3 | Digital Input 3 | External Fault | Input causes drive to fault |
| 23 | DIN4 | Digital Input 4 | Fault Reset | Input resets active faults |
| 24 | CMA | DI1 to DI4 Common | Grounded | Allows source input |
| 25 | A | RS-485 Signal A | — | Fieldbus Communication (Modbus, BACnet) |
| 26 | B | RS-485 Signal B | — | Fieldbus Communication (Modbus, BACnet) |
| 27 | R3NO | Relay 3 Normally Open | At Speed | Relay output 3 shows VFD is at Ref. Frequency |
| 28 | R1NC | Relay 1 Normally Closed | Run | Relay output 1 shows VFD is in a run state |
| 29 | R1CM | Relay 1 Common | | |
| 30 | R1NO | Relay 1 Normally Open | | |
| 31 | R3CM | Relay 3 Common | At Speed | Relay output 3 shows VFD is at Ref. Frequency |
| 32 | R2NC | Relay 2 Normally Closed | Fault | Relay output 2 shows VFD is in a fault state |
| 33 | R2CM | Relay 2 Common | | |
| 34 | R2NO | Relay 2 Normally Open | | |

Dimensions

Approximate Dimensions in Inches (mm)

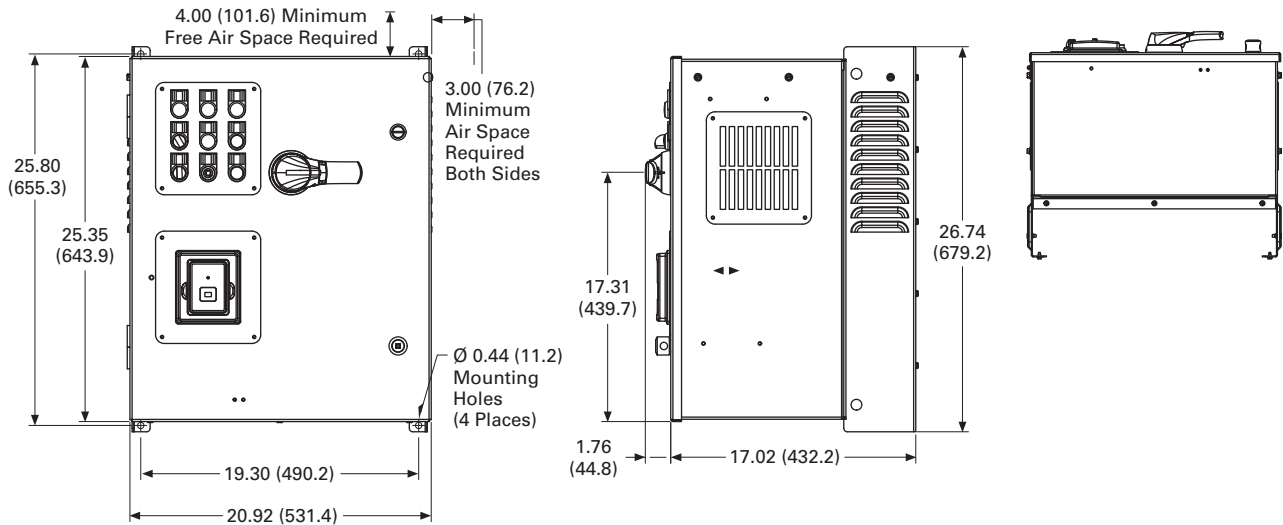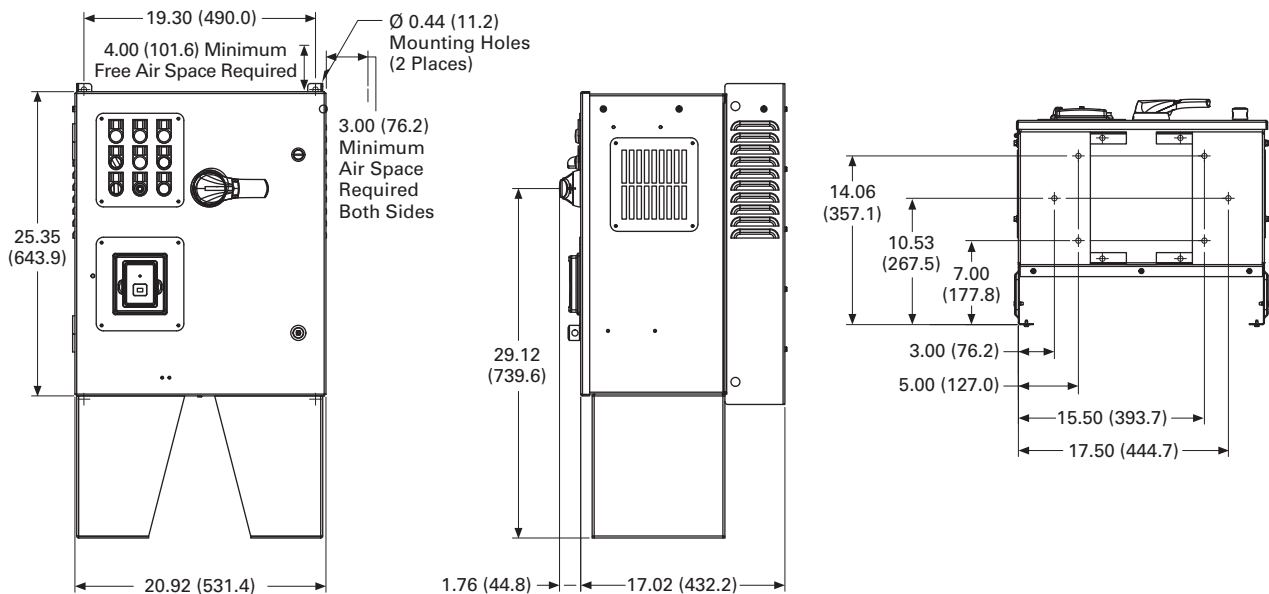AX Box Type 1**AX Box Type 1—12 Inch Floor Stands**

2.6


Adjustable Frequency Drives

PowerXL DG1 Series Drives


Approximate Dimensions in Inches (mm)

2

AX Box Type 1—22 Inch Floor Stands

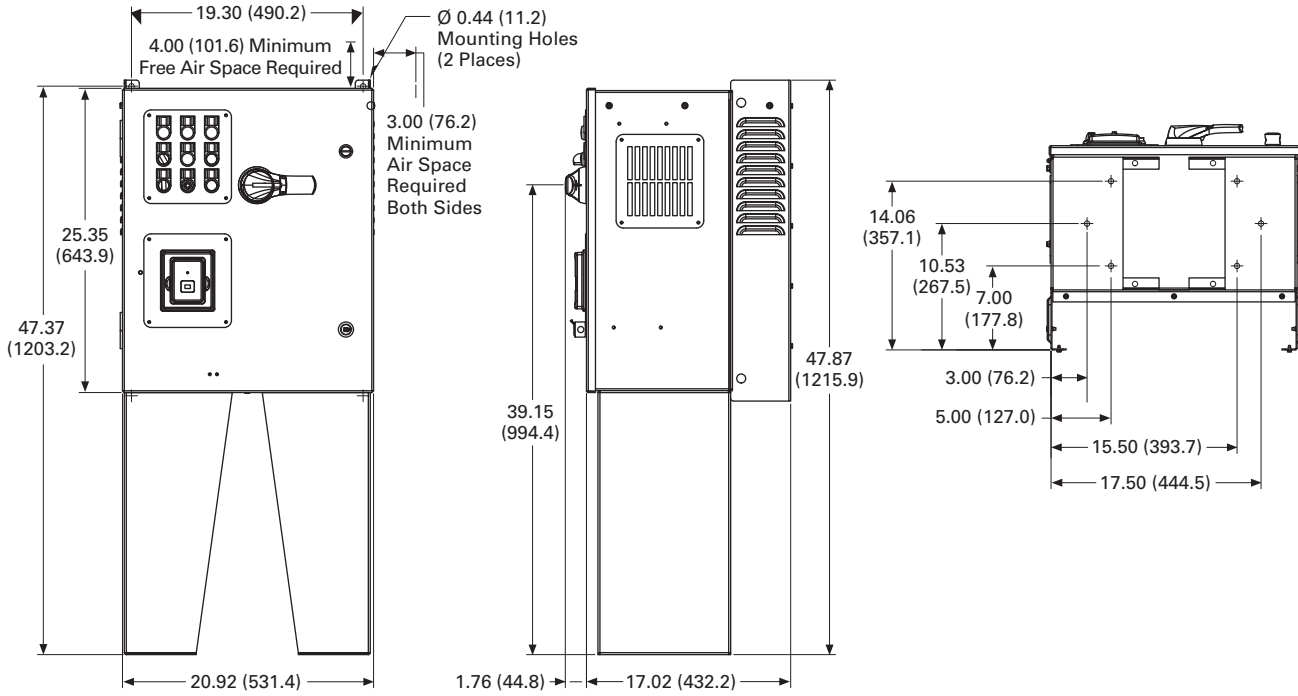


AX Box Type 12

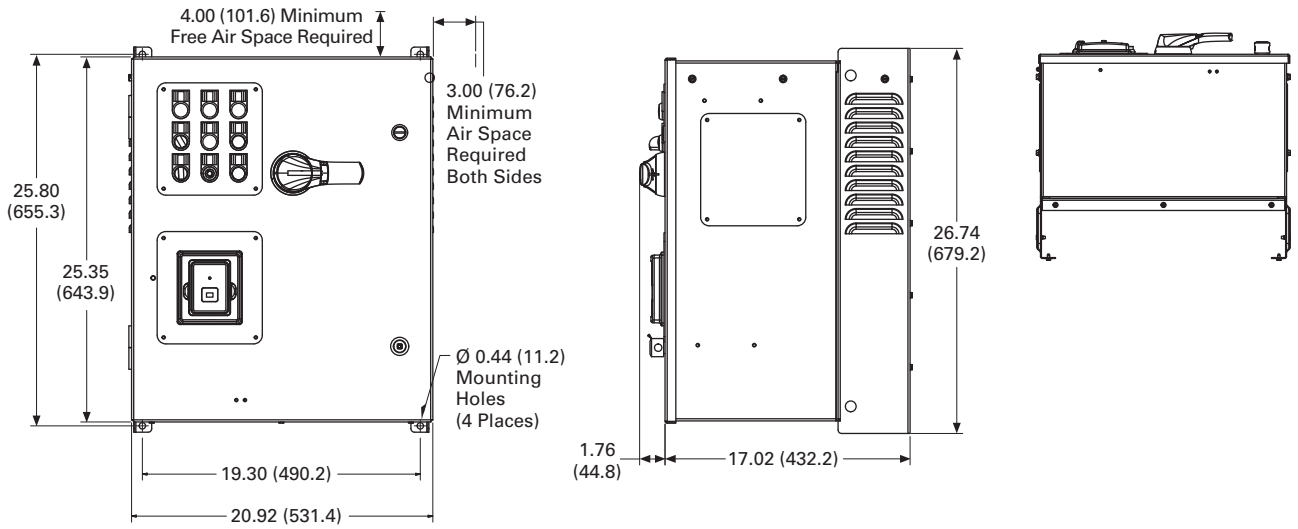


Approximate Dimensions in Inches (mm)

AX Box Type 12—12 Inch Floor Stands

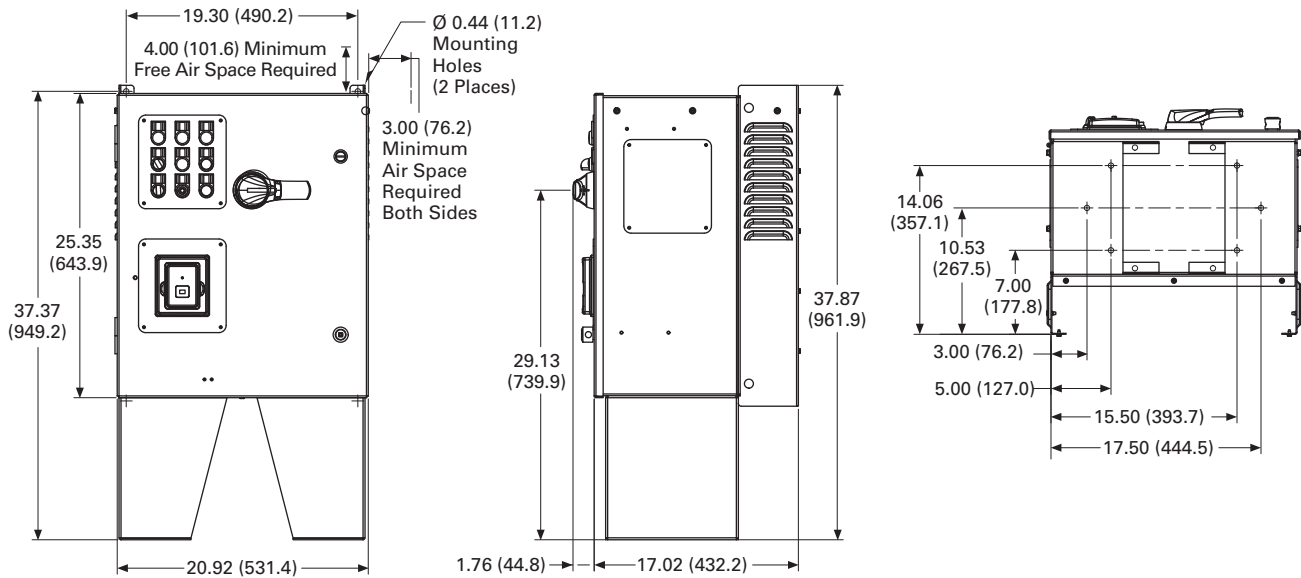

AX Box Type 12—22 Inch Floor Stands

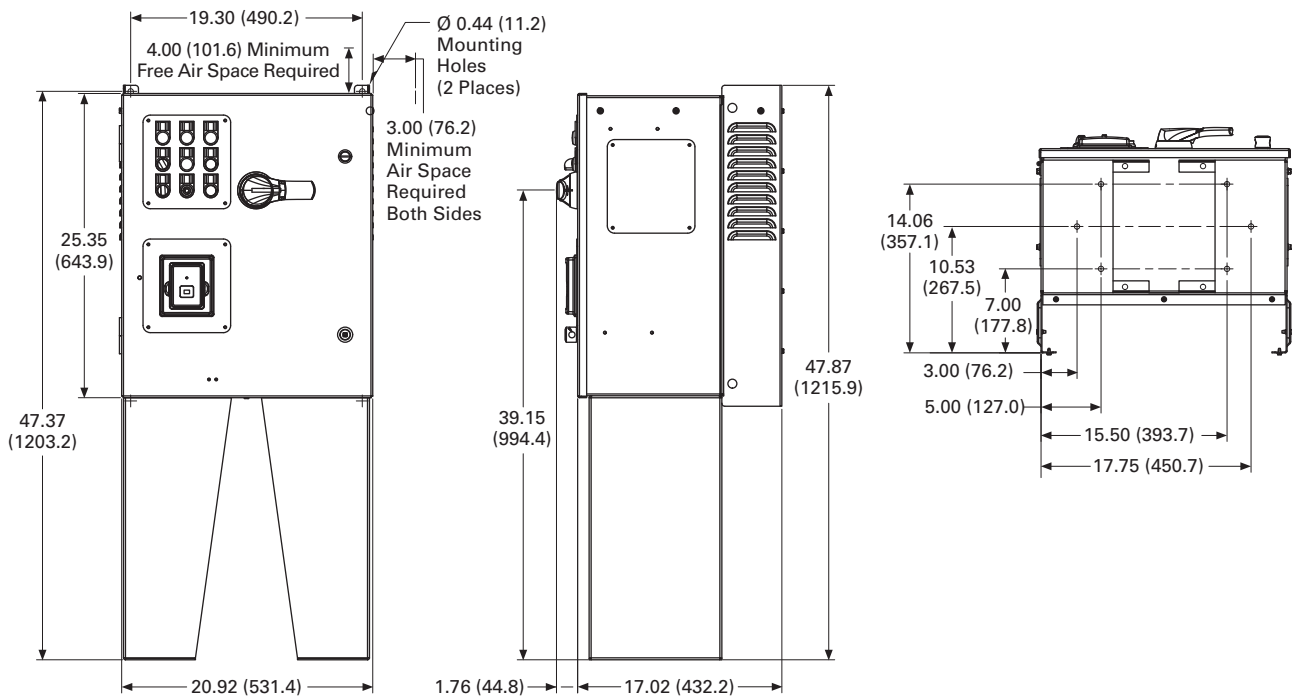

2.6


Adjustable Frequency Drives

PowerXL DG1 Series Drives


Approximate Dimensions in Inches (mm)

2

AX Box Type 3R

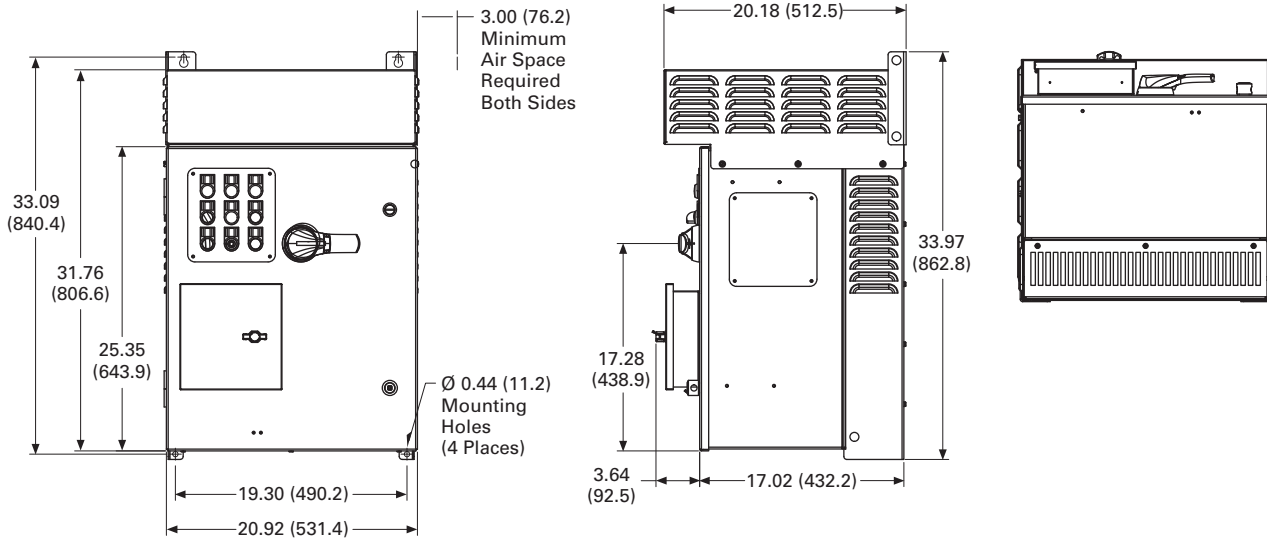


AX Box Type 3R—12 Inch Floor Stands

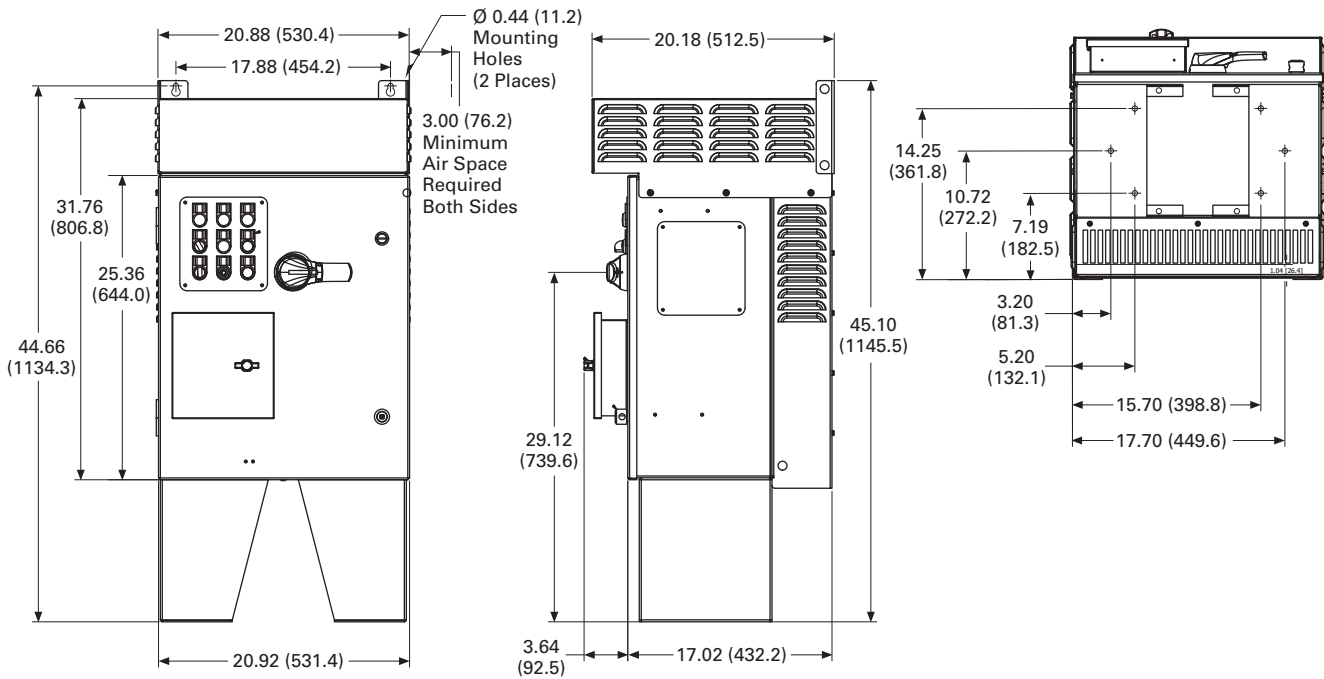


Approximate Dimensions in Inches (mm)

AX Box Type 3R—22 Inch Floor Stands

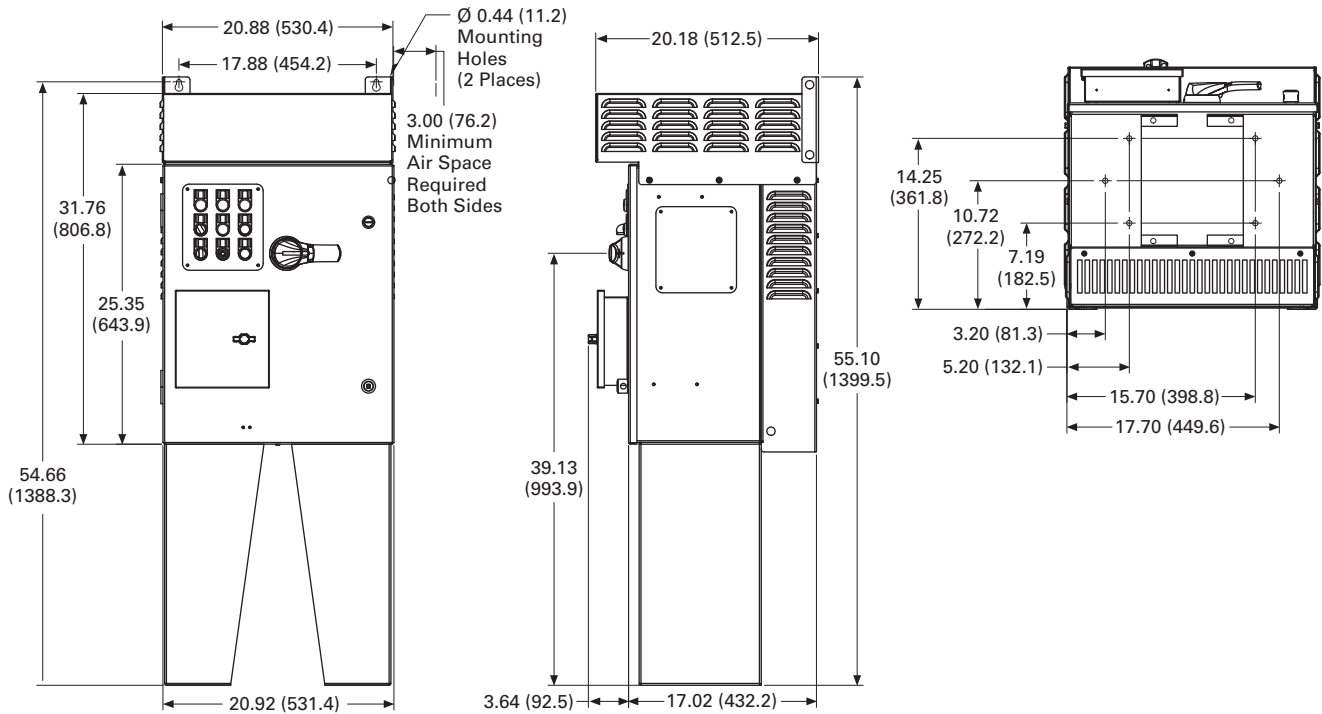

BX Box Type 1

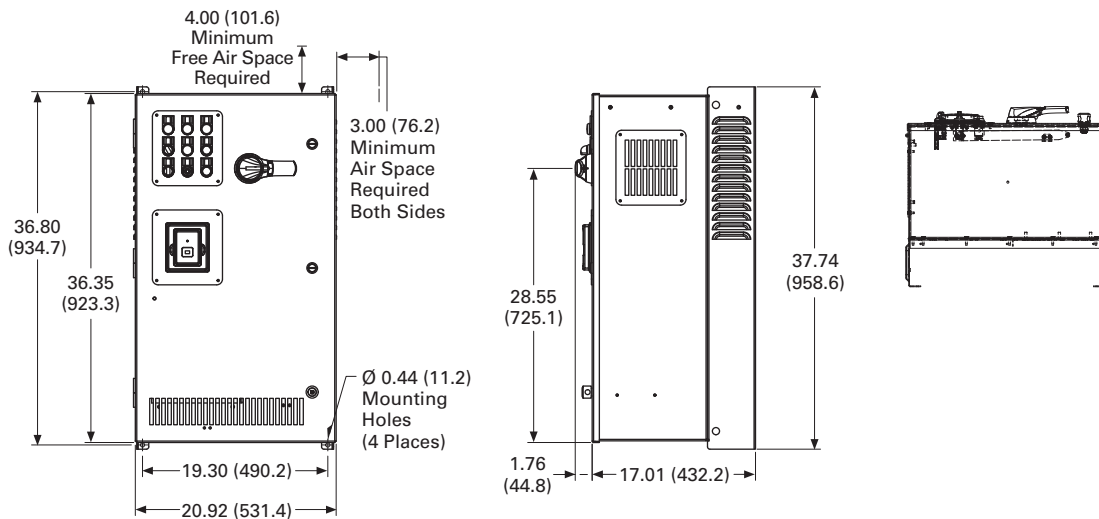

2.6


Adjustable Frequency Drives

PowerXL DG1 Series Drives


Approximate Dimensions in Inches (mm)

2

BX Box Type 1—12 Inch Floor Stands

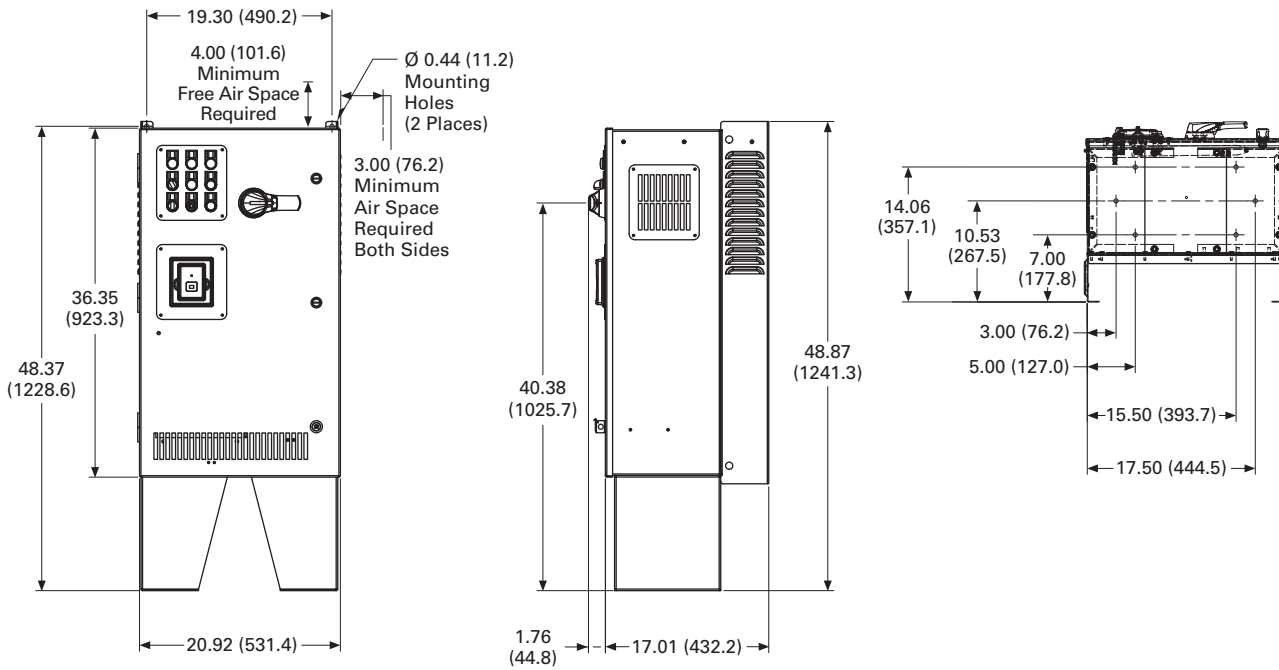


BX Box Type 1—22 Inch Floor Stands

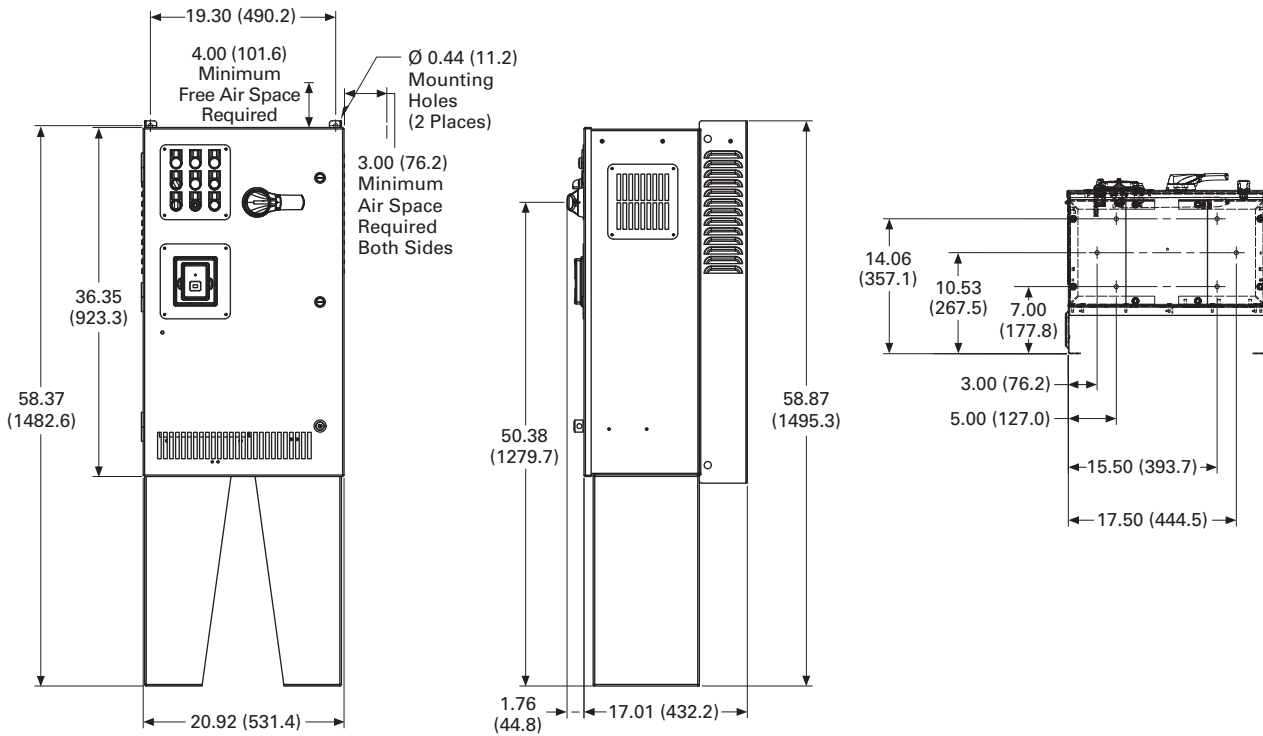


Approximate Dimensions in Inches (mm)

BX Box Type 12

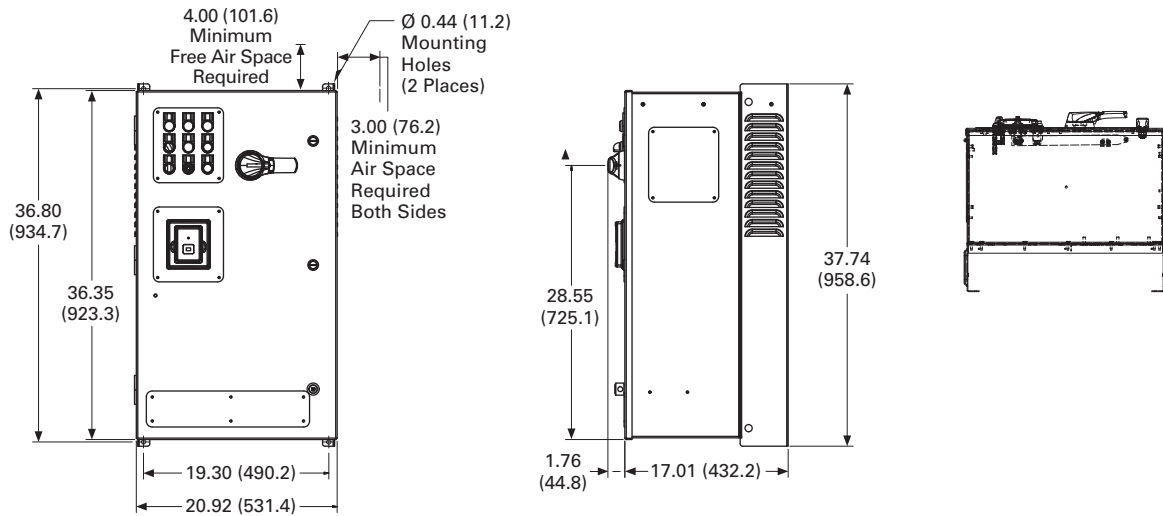

BX Box Type 12—12 Inch Floor Stands

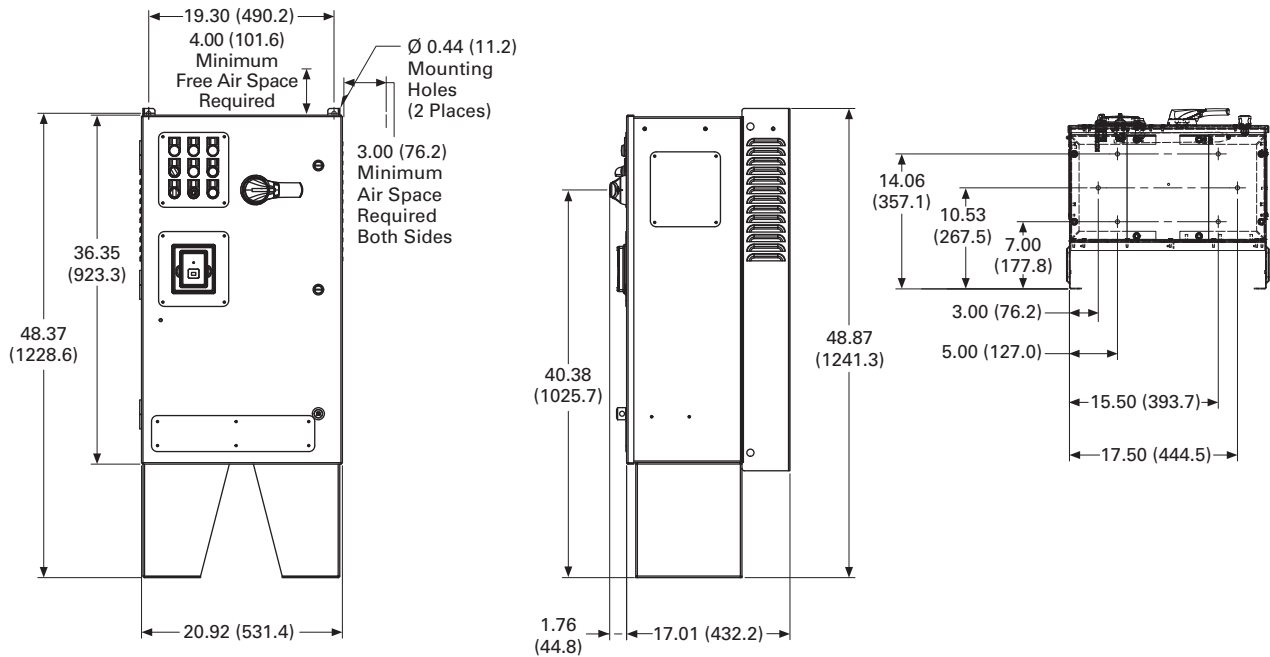

2.6


Adjustable Frequency Drives

PowerXL DG1 Series Drives


Approximate Dimensions in Inches (mm)

BX Box Type 12–22 Inch Floor Stands

2

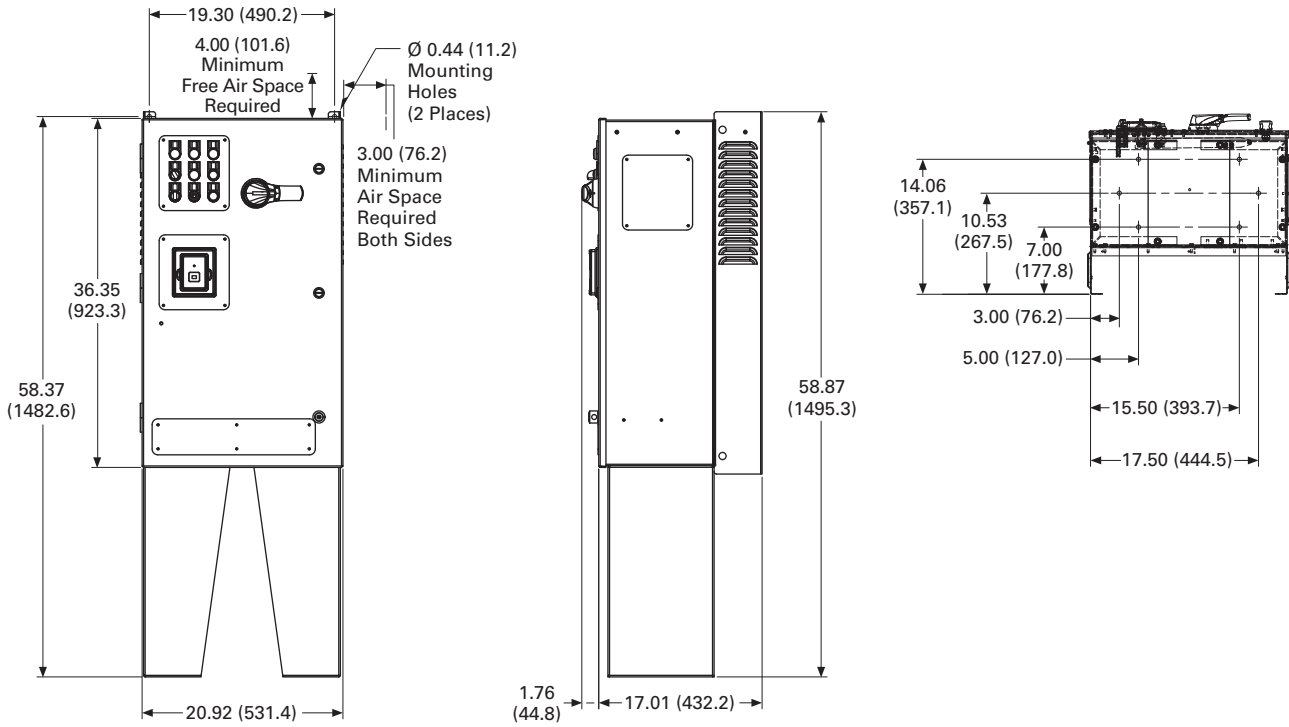


BX Box Type 3R

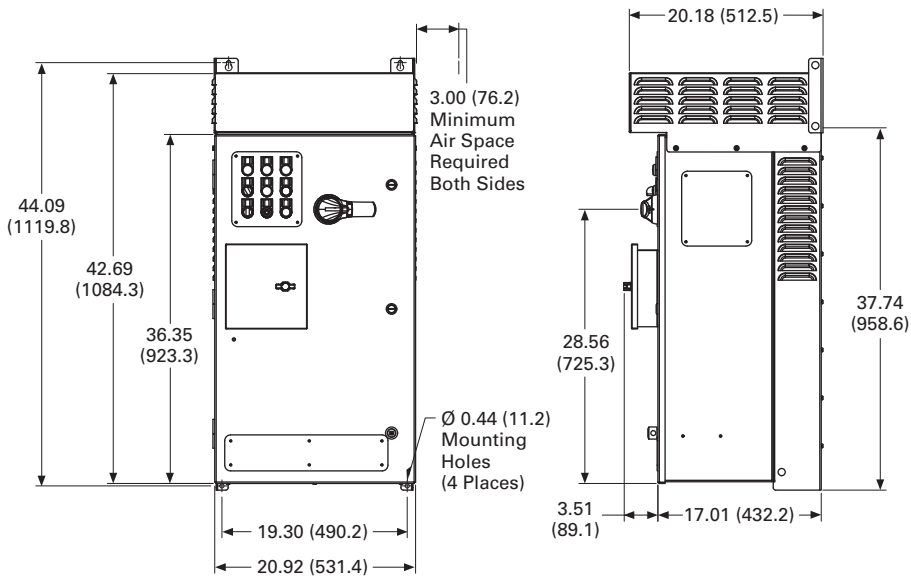


Approximate Dimensions in Inches (mm)

BX Box Type 3R—12 Inch Floor Stands

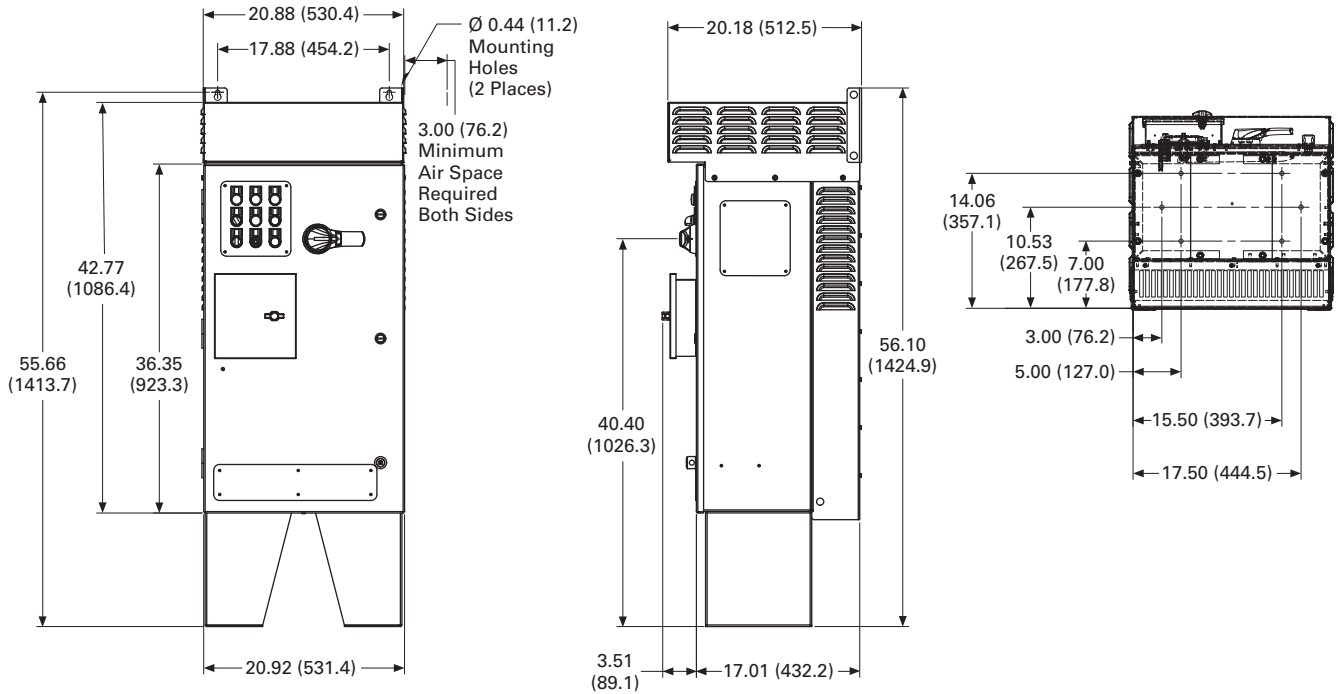

BX Box Type 3R—22 Inch Floor Stands

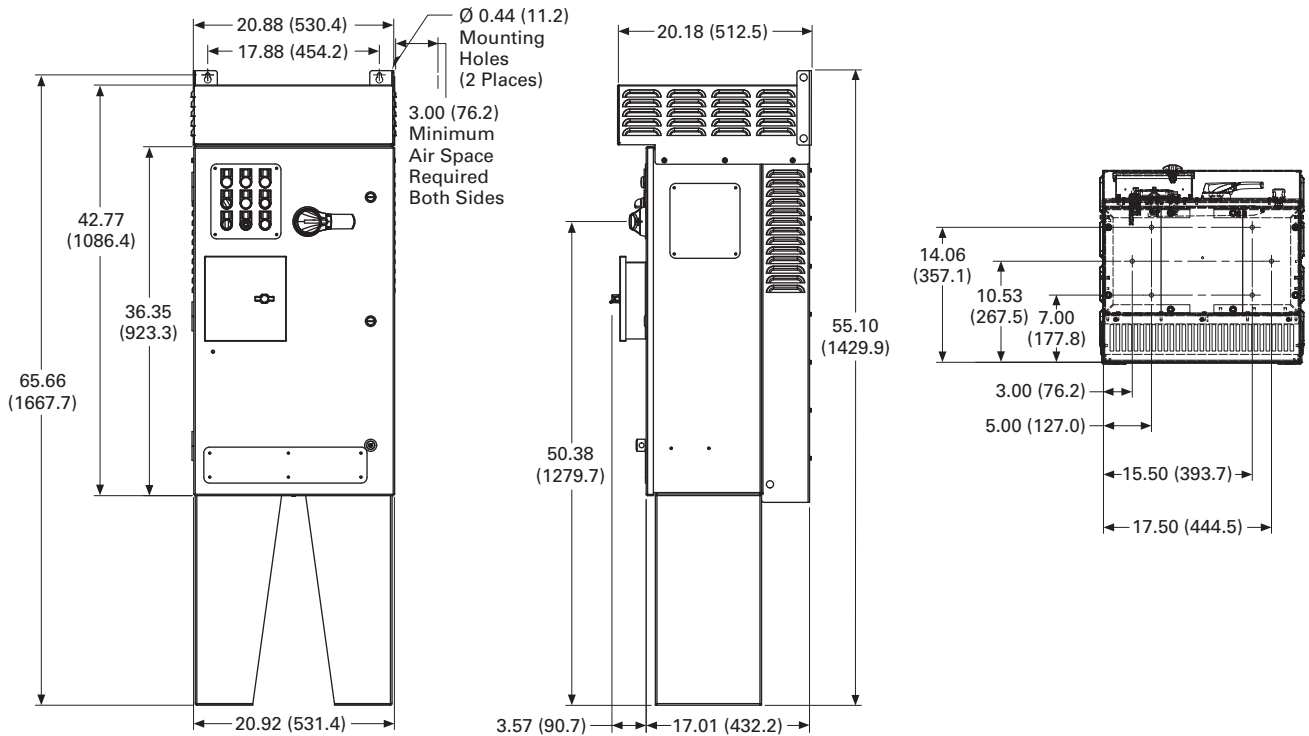

2.6


Adjustable Frequency Drives

PowerXL DG1 Series Drives


Approximate Dimensions in Inches (mm)

CX Box Type 1

2

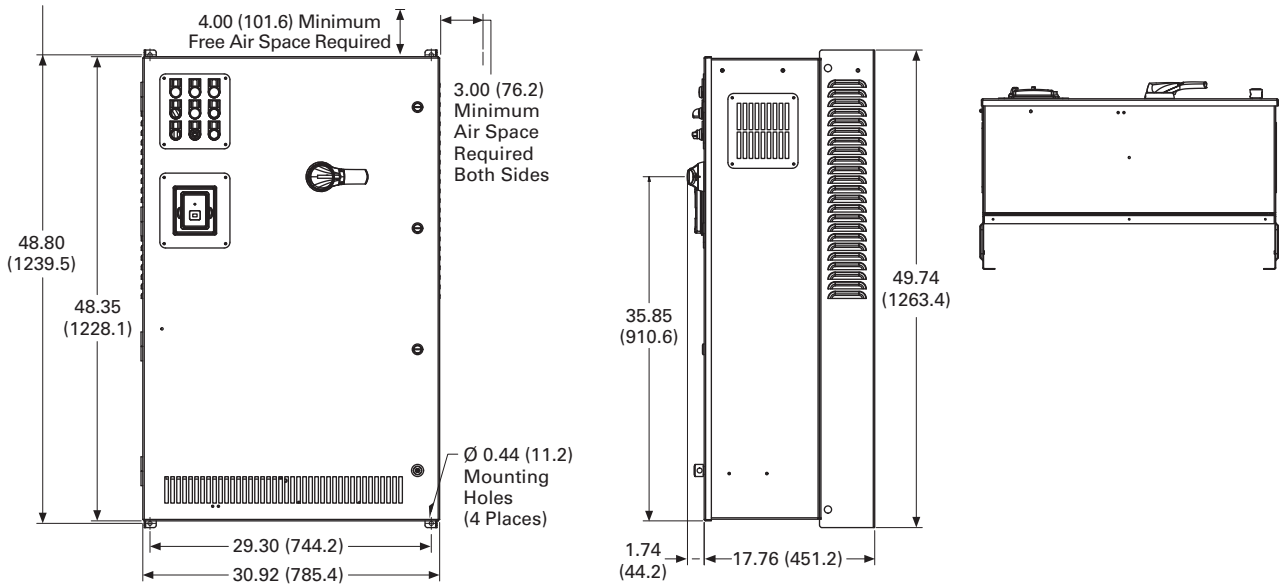


CX Box Type 1—12 Inch Floor Stands

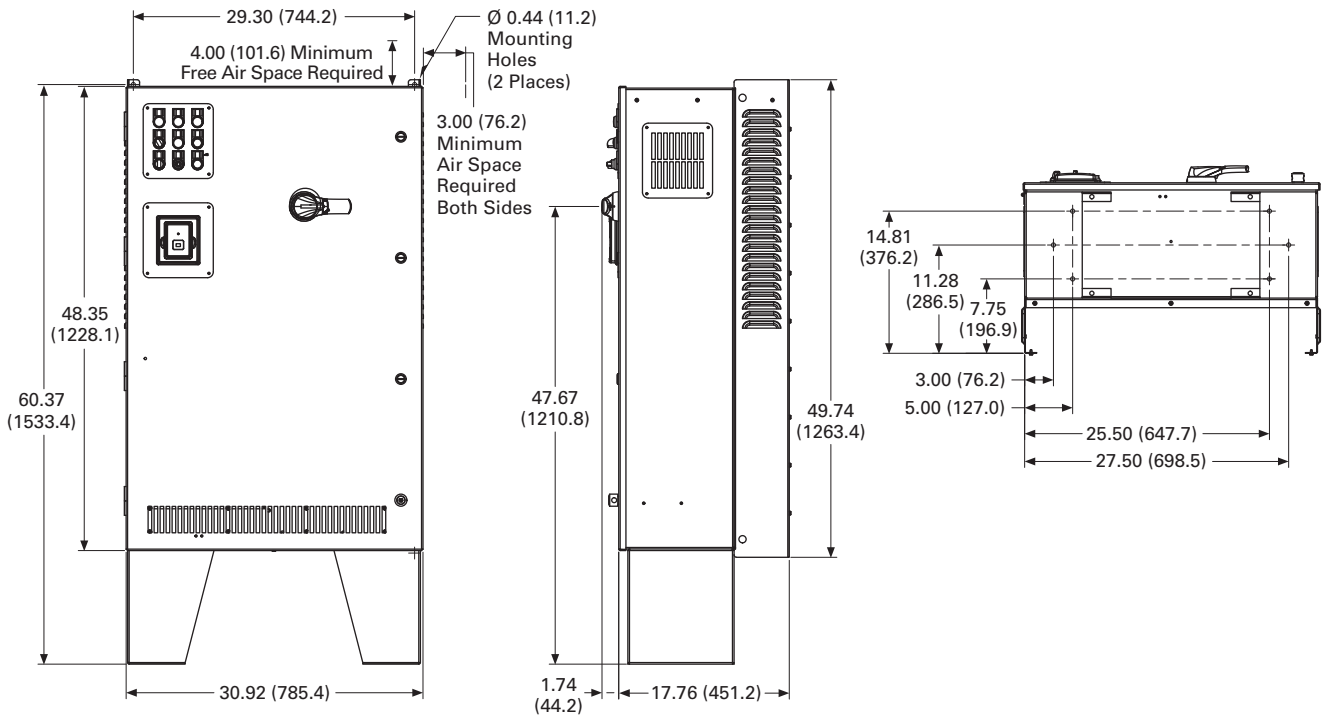


Approximate Dimensions in Inches (mm)

CX Box Type 1—22 Inch Floor Stands

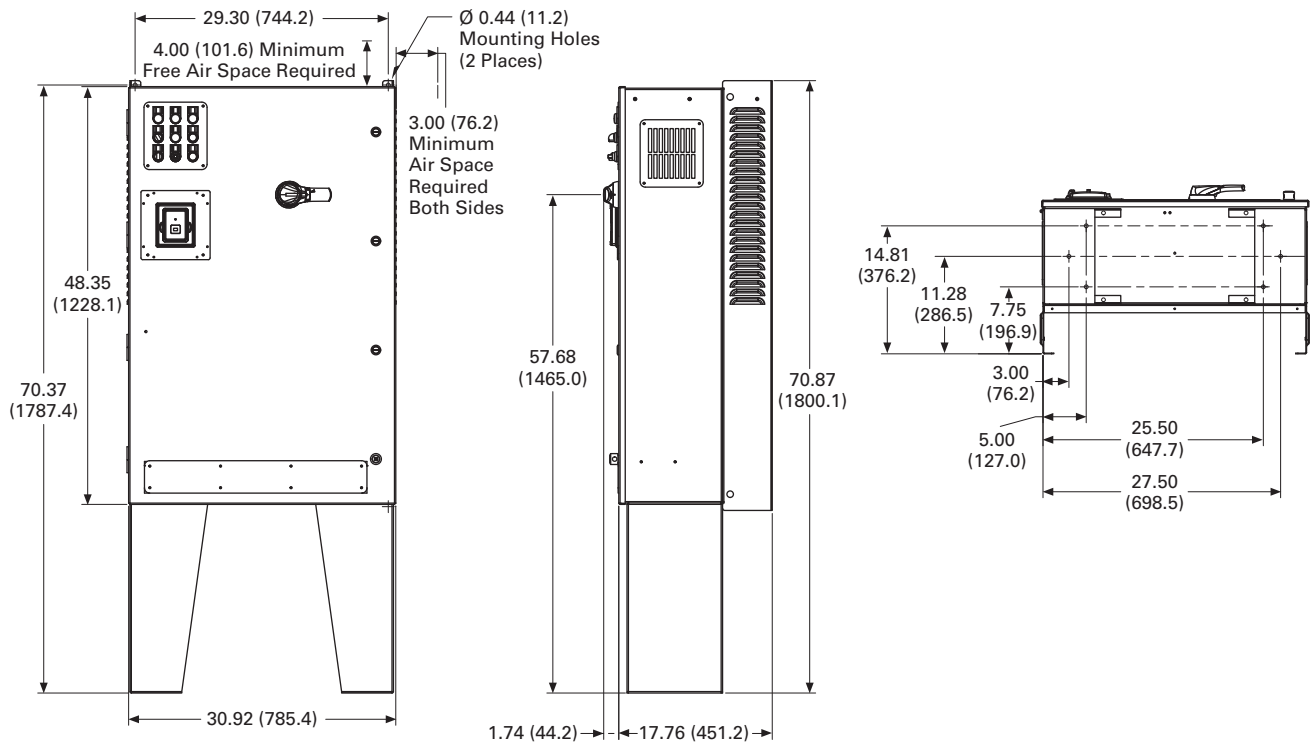

CX Box Type 12

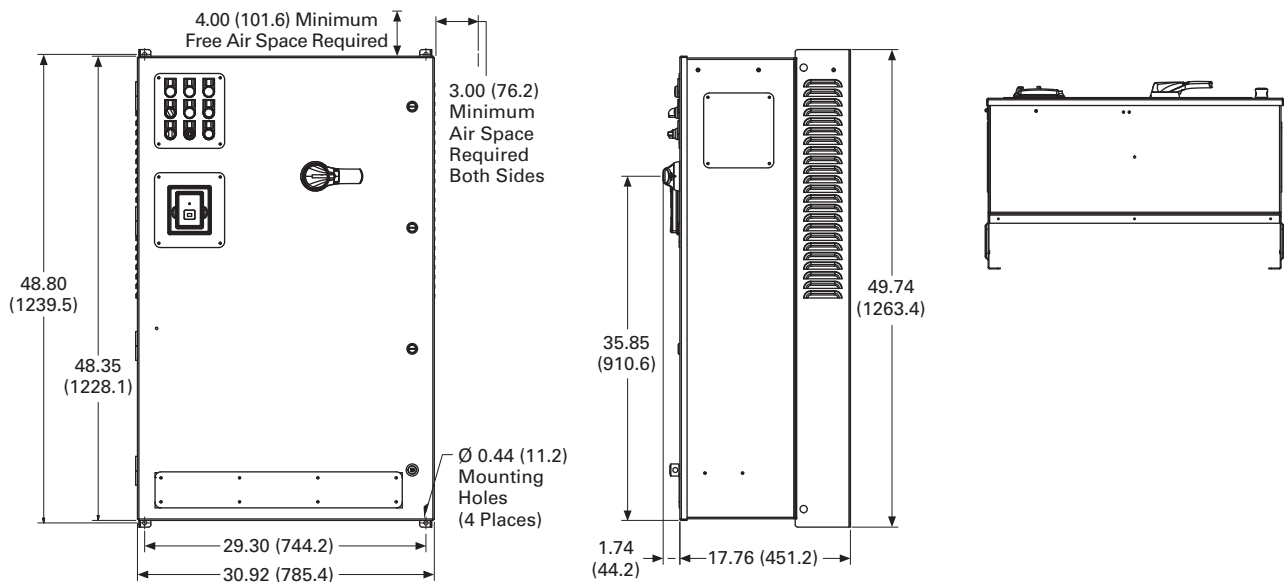

2.6


Adjustable Frequency Drives

PowerXL DG1 Series Drives


Approximate Dimensions in Inches (mm)

2



CX Box Type 12—12 Inch Floor Stands

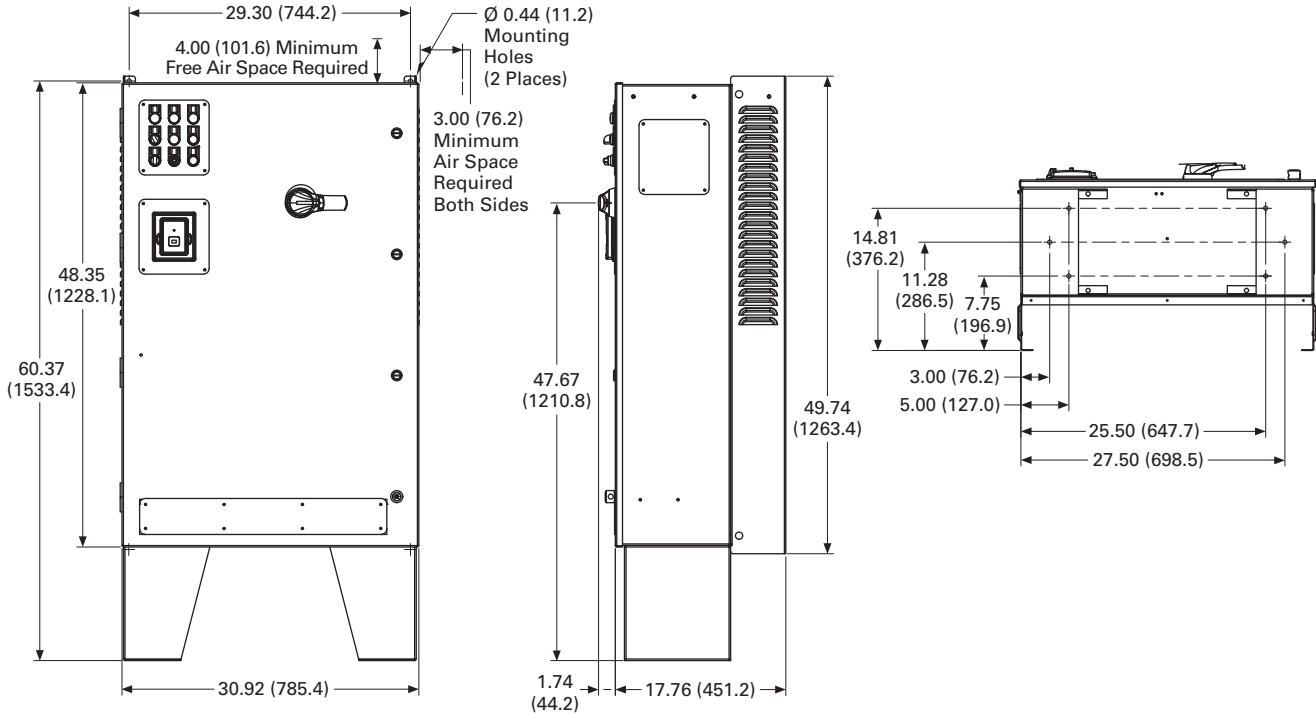

CX Box Type 12—22 Inch Floor Stands

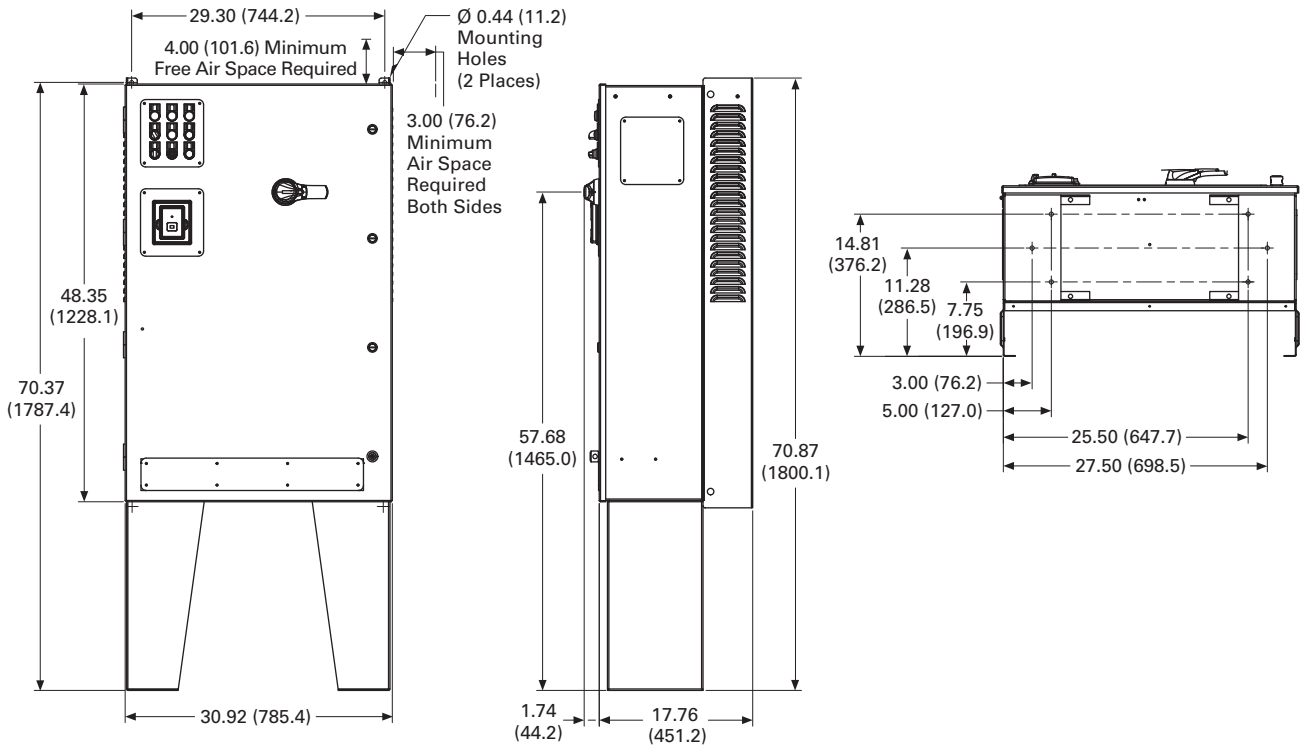

Approximate Dimensions in Inches (mm)

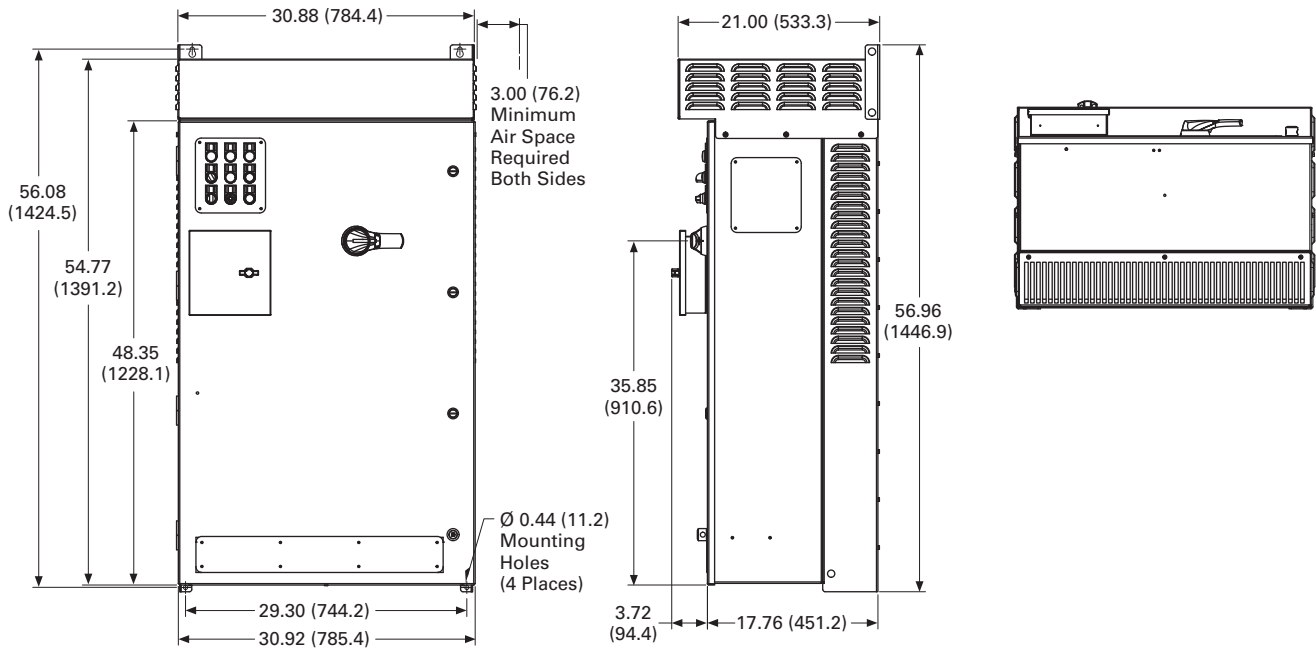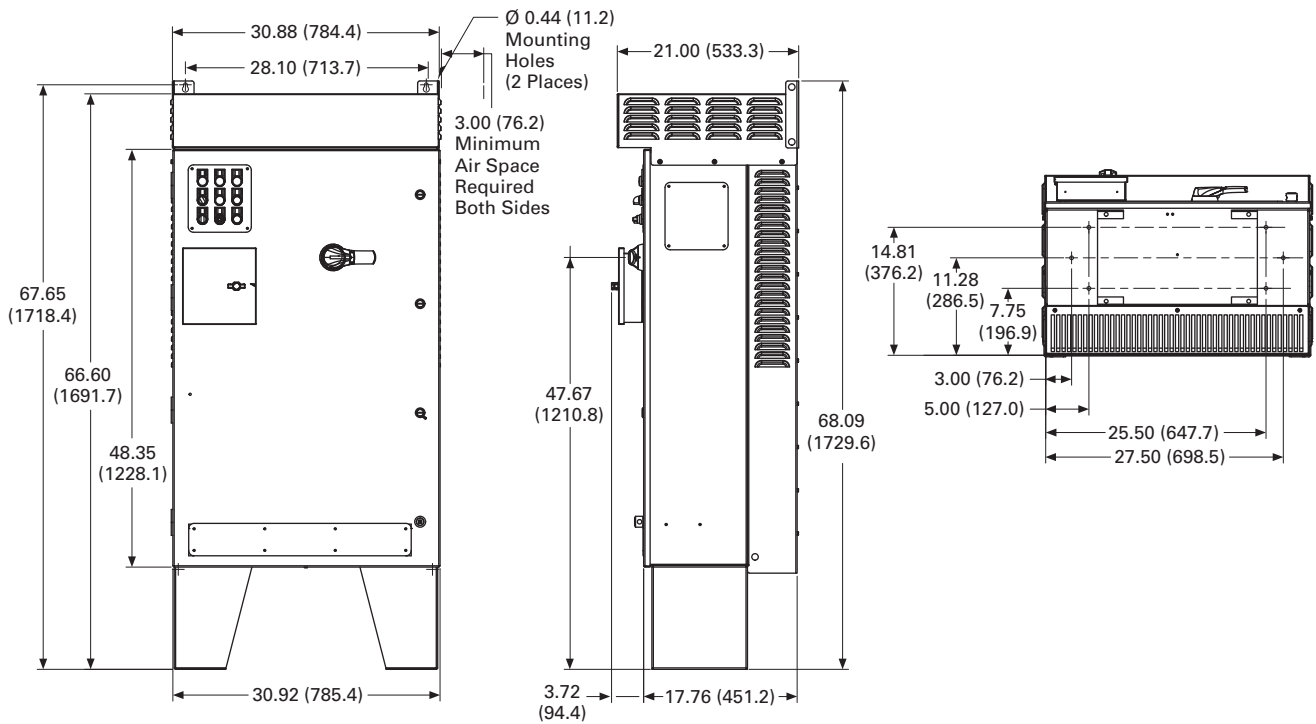CX Box Type 3R**CX Box Type 3R—12 Inch Floor Stands**

2.6


Adjustable Frequency Drives

PowerXL DG1 Series Drives


Approximate Dimensions in Inches (mm)

2

CX Box Type 3R—22 Inch Floor Stands

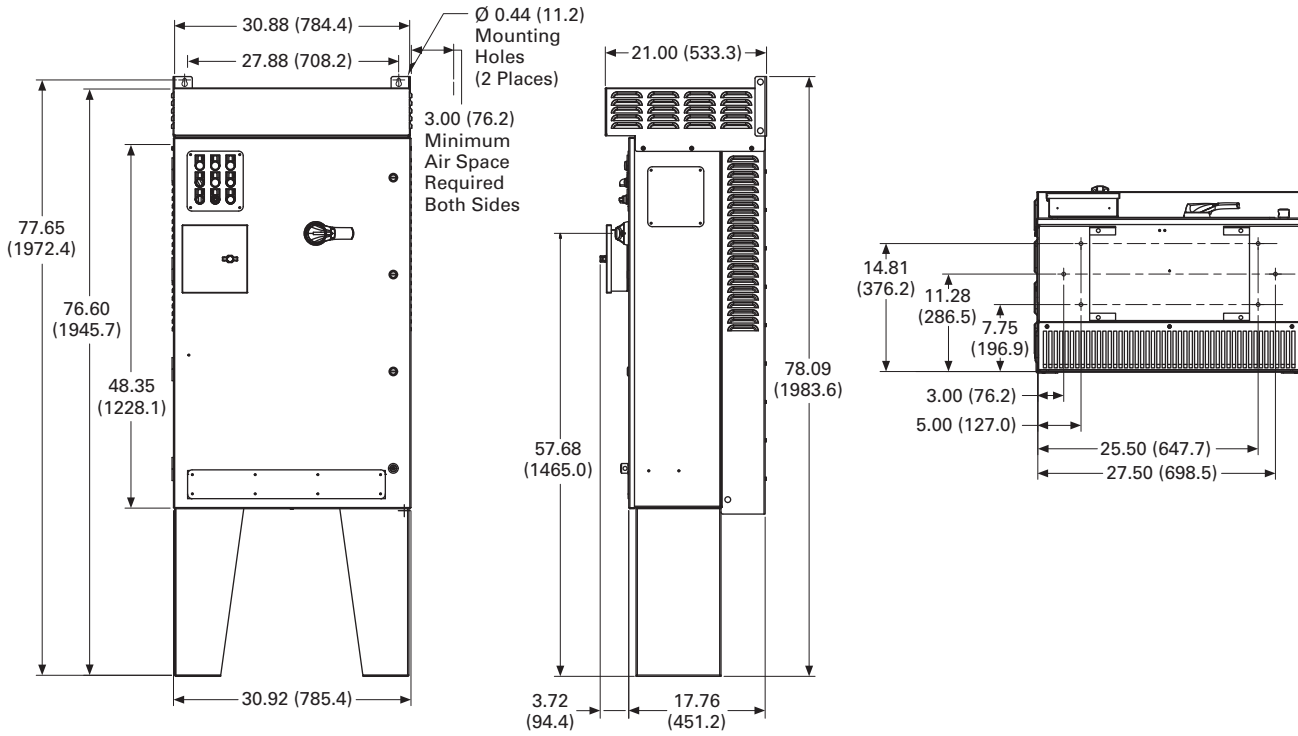


DX Box Type 1

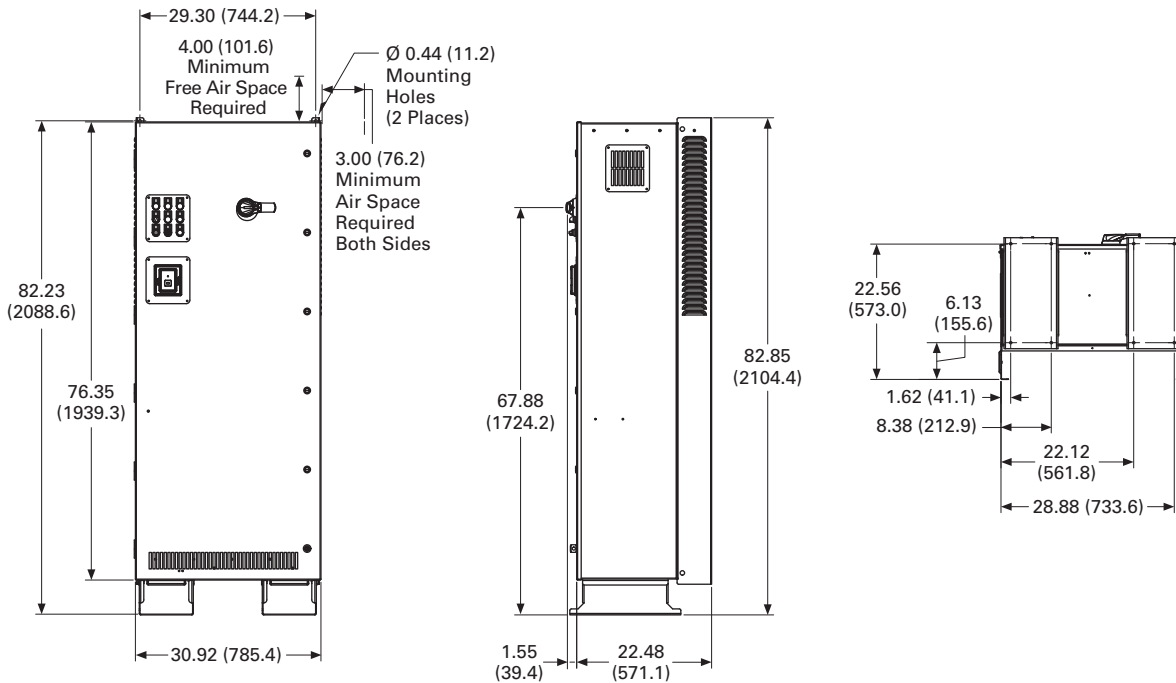


Approximate Dimensions in Inches (mm)

DX Box Type 12

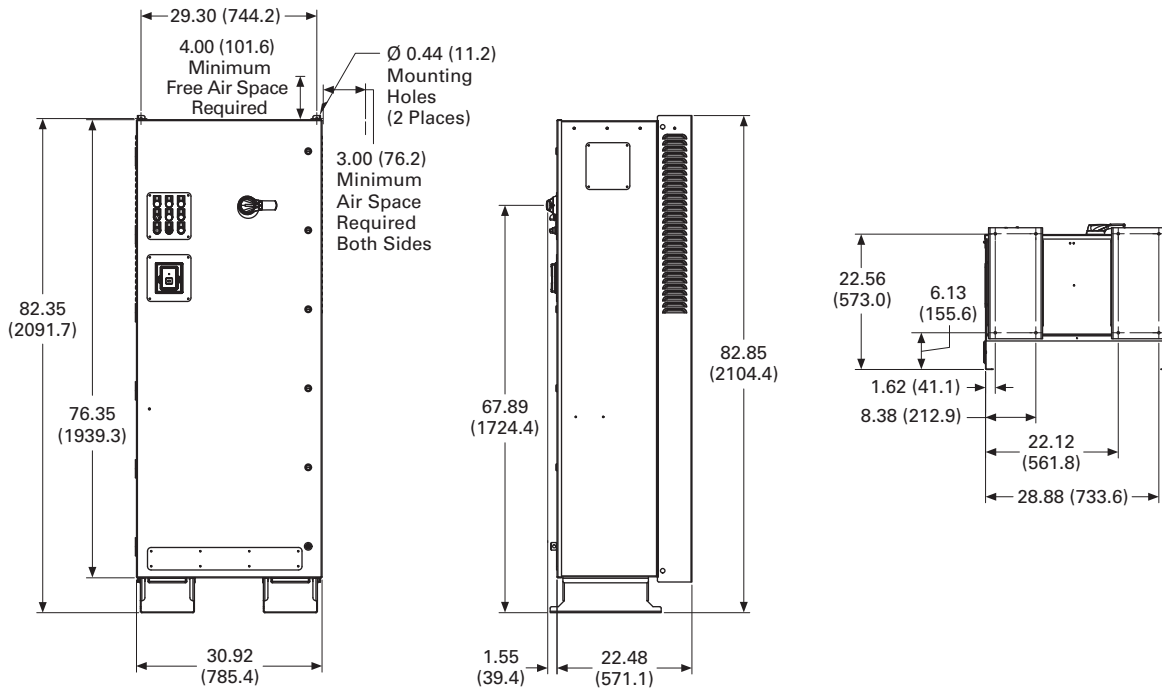

DX Box Type 3R

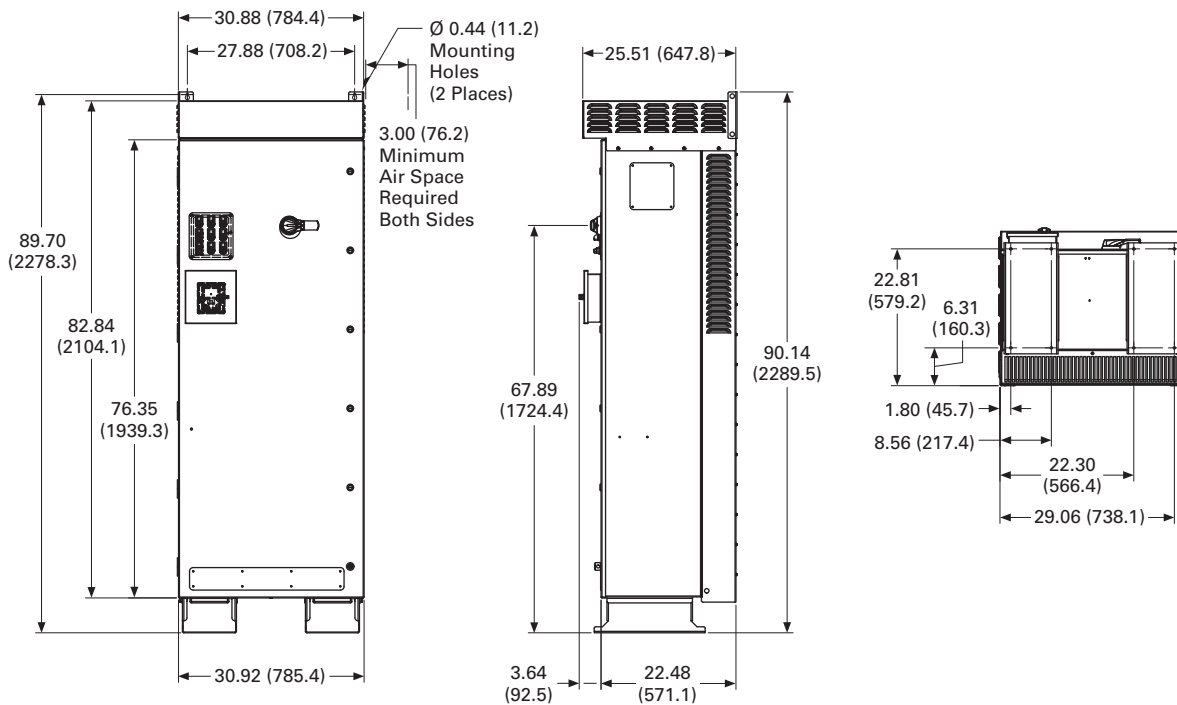



SVX Drives

Product Description

SVX Series Adjustable Frequency Drives from Eaton's Electrical Sector are the next generation of drives specifically engineered for today's commercial and industrial applications. The power unit makes use of the most sophisticated semiconductor technology and a highly modular construction that can be flexibly adapted to the customer's needs.

The input and output configuration (I/O) is designed with modularity in mind. The I/O is comprised of option cards, each with its own input and output configuration. The control module is designed to accept a total of five of these cards. The cards contain not only normal analog and digital inputs but also fieldbus cards.

These drives continue the tradition of robust performance, and raise the bar on features and functionality, ensuring the best solution at the right price.

Features

- Robust design—proven 500,000 hours MTBF
- Integrated 3% line reactors standard on drives from FR4 through FR9
- EMI/RFI Filters H standard up to 200 hp I_H 480 V, 100 hp I_H 230 V
- Simplified operating menu allows for typical programming changes, while programming mode provides control of everything
- Quick Start Wizard built into the programming of the drive ensures a smooth start-up
- Keypad can display up to three monitored parameters simultaneously
- LOCAL/REMOTE operation from keypad
- Copy/paste function allows transfer of parameter settings from one drive to the next
- Standard NEMA Type 12/IP54 keypad on all drives
- The SVX can be flexibly adapted to a variety of needs using our pre-installed "Seven in One" precision application programs consisting of:
 - Basic
 - Standard
 - Local/remote
 - Multi step speed control
 - PID control
 - Multi-purpose control
 - Pump and fan control with auto change
- Additional I/O and communication cards provide plug and play functionality
- I/O connections with simple quick connection terminals
- Hand-held auxiliary 24 V power supply allows programming/monitoring of control module without applying full power to the drive
- Control logic can be powered from an external auxiliary control panel, internal drive functions and fieldbus if necessary
- Brake chopper standard from: 1–30 hp/380–500 V 3/4–15 hp/208–230 V
- NEMA Type 1/IP21 and NEMA Type 12/IP54 enclosures available, Frame Sizes FR4–FR9
- Open chassis FR10 and greater
- Standard option board configuration includes an A9 I/O board and an A2 relay output board installed in slots A and B

Contents

Description

Page

| | |
|-----------------------------------|-----------|
| SVX Drives | |
| Standards and Certifications | V6-T2-103 |
| Catalog Number Selection | V6-T2-103 |
| Product Selection | V6-T2-104 |
| Accessories | V6-T2-108 |
| Options | V6-T2-109 |
| Replacement Parts | V6-T2-116 |
| Technical Data and Specifications | V6-T2-123 |
| Dimensions | V6-T2-124 |
| SVX Enclosed Drives | V6-T2-140 |

Standards and Certifications

Product

- IEC 61800-2

EMC (At Default Settings)

- Immunity: Fulfills all EMC immunity requirements; Emissions: EN 61800-3, LEVEL H


Safety

- UL 508C
- CE



Catalog Number Selection

SVX Adjustable Frequency Drives

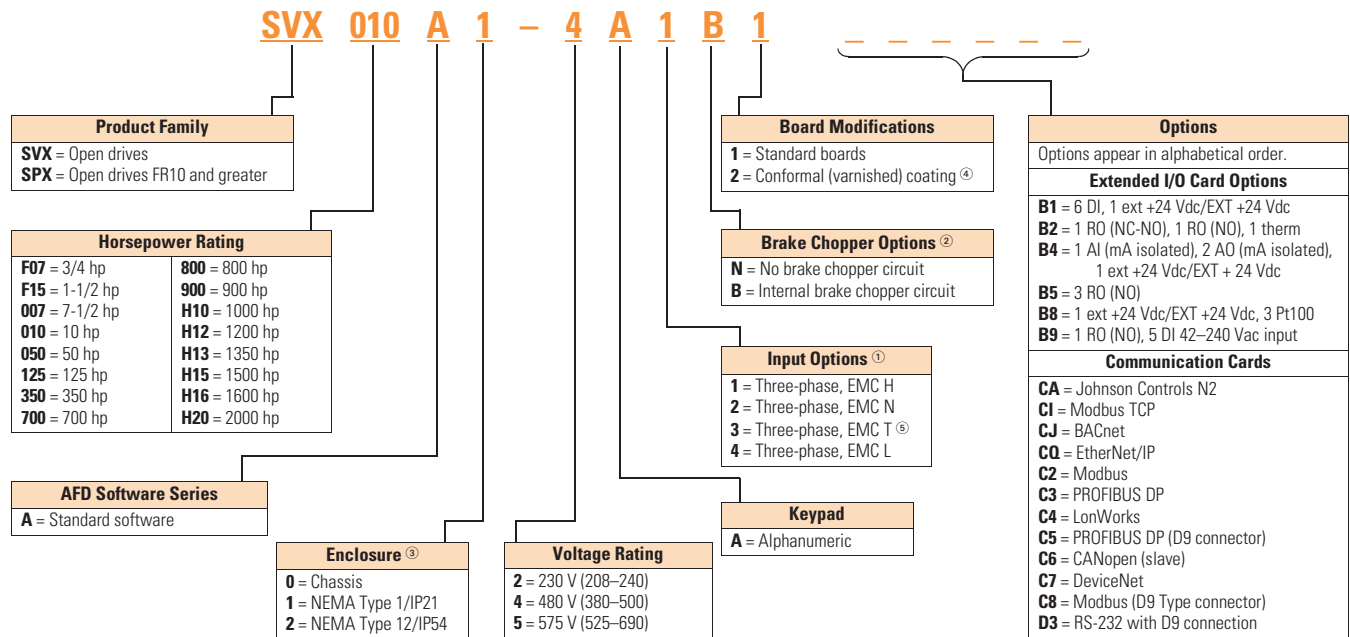

Notes

- ^① All 230 V drives and 480 V drives up to 200 hp (IH) are only available with input option **1** (EMC Level H). 480 V drives 250 hp (IH) or larger are available with input option **2** (EMC Level N). 480 V drives are available with input option **4** (EMC Level L). 575 V drives 200 hp (IH) or larger are only available with input option **2**. 575 V drives up to 150 hp (IH) are only available with input option **4** (EMC Level L).
- ^② 480 V drives up to 30 hp (IH) are only available with brake chopper option **B**. 480 V drives 40 hp (IH) or larger come standard with brake chopper option **N**. 230 V drives up to 15 hp (IH) are only available with brake chopper option **B**. 230 V drives 20 hp or larger come standard with brake chopper option **N**. All 575 V drives come standard without brake chopper option (N). **N** = No brake chopper.
- ^③ 480 V drives 250 hp (IH) and larger are available with enclosure style **0** (chassis); 690 V drives 200 hp (IH) and larger are available with enclosure style **0** (chassis).
- ^④ Factory promise delivery. Consult sales office for availability.
- ^⑤ For high-resistance ground systems, any SVX/SPX drive can be used if the HRG system has ground supervision. If no ground supervision feature is available, use EMC class N or T.

Product Selection

230 V SVX Drives

2

SVX Open Drives



208–240 V, NEMA Type 1/IP21 Drives

| Frame Size | hp (I _H) | Current (I _H) | hp (I _L) | Current (I _L) | Catalog Number |
|------------|----------------------|---------------------------|----------------------|---------------------------|----------------|
| FR4 | 3/4 | 3.7 | 1 | 4.8 | SVXF07A1-2A1B1 |
| | 1 | 4.8 | 1-1/2 | 6.6 | SVX001A1-2A1B1 |
| | 1-1/2 | 6.6 | 2 | 7.8 | SVXF15A1-2A1B1 |
| | 2 | 7.8 | 3 | 11 | SVX002A1-2A1B1 |
| | 3 | 11 | — | 12.5 | SVX003A1-2A1B1 |
| FR5 | — | 12.5 | 5 | 17.5 | SVX004A1-2A1B1 |
| | 5 | 17.5 | 7-1/2 | 25 | SVX005A1-2A1B1 |
| | 7-1/2 | 25 | 10 | 31 | SVX007A1-2A1B1 |
| FR6 | 10 | 31 | 15 | 48 | SVX010A1-2A1B1 |
| | 15 | 48 | 20 | 61 | SVX015A1-2A1B1 |
| FR7 | 20 | 61 | 25 | 75 | SVX020A1-2A1N1 |
| | 25 | 75 | 30 | 88 | SVX025A1-2A1N1 |
| | 30 | 88 | 40 | 114 | SVX030A1-2A1N1 |
| FR8 | 40 | 114 | 50 | 140 | SVX040A1-2A1N1 |
| | 50 | 140 | 60 | 170 | SVX050A1-2A1N1 |
| | 60 | 170 | 75 | 205 | SVX060A1-2A1N1 |
| FR9 | 75 | 205 | 100 | 261 | SVX075A1-2A1N1 |
| | 100 | 261 | 125 | 300 | SVX100A1-2A1N1 |

208–240 V, NEMA Type 12/IP54 Drives

| Frame Size | hp (I _H) | Current (I _H) | hp (I _L) | Current (I _L) | Catalog Number |
|------------|----------------------|---------------------------|----------------------|---------------------------|----------------|
| FR4 | 3/4 | 3.7 | 1 | 4.8 | SVXF07A2-2A1B1 |
| | 1 | 4.8 | 1-1/2 | 6.6 | SVX001A2-2A1B1 |
| | 1-1/2 | 6.6 | 2 | 7.8 | SVXF15A2-2A1B1 |
| | 2 | 7.8 | 3 | 11 | SVX002A2-2A1B1 |
| | 3 | 11 | — | 12.5 | SVX003A2-2A1B1 |
| FR5 | — | 12.5 | 5 | 17.5 | SVX004A2-2A1B1 |
| | 5 | 17.5 | 7-1/2 | 25 | SVX005A2-2A1B1 |
| | 7-1/2 | 25 | 10 | 31 | SVX007A2-2A1B1 |
| FR6 | 10 | 31 | 15 | 48 | SVX010A2-2A1B1 |
| | 15 | 48 | 20 | 61 | SVX015A2-2A1B1 |
| FR7 | 20 | 61 | 25 | 75 | SVX020A2-2A1N1 |
| | 25 | 75 | 30 | 88 | SVX025A2-2A1N1 |
| | 30 | 88 | 40 | 114 | SVX030A2-2A1N1 |
| FR8 | 40 | 114 | 50 | 140 | SVX040A2-2A1N1 |
| | 50 | 140 | 60 | 170 | SVX050A2-2A1N1 |
| | 60 | 170 | 75 | 205 | SVX060A2-2A1N1 |
| FR9 | 75 | 205 | 100 | 261 | SVX075A2-2A1N1 |
| | 100 | 261 | 125 | 300 | SVX100A2-2A1N1 |

480 V SVX Drives

SVX Open Drives



380–500 V, NEMA Type 1/IP21 Drives

| Frame Size | hp (I _H) | Current (I _H) | hp (I _L) | Current (I _L) | Catalog Number |
|------------|----------------------|---------------------------|----------------------|---------------------------|----------------|
| FR4 | 1 | 2.2 | 1-1/2 | 3.3 | SVX001A1-4A1B1 |
| | 1-1/2 | 3.3 | 2 | 4.3 | SVXF15A1-4A1B1 |
| | 2 | 4.3 | 3 | 5.6 | SVX002A1-4A1B1 |
| | 3 | 5.6 | 5 | 7.6 | SVX003A1-4A1B1 |
| | 5 | 7.6 | — | 9 | SVX005A1-4A1B1 |
| | — | 9 | 7-1/2 | 12 | SVX006A1-4A1B1 |
| FR5 | 7-1/2 | 12 | 10 | 16 | SVX007A1-4A1B1 |
| | 10 | 16 | 15 | 23 | SVX010A1-4A1B1 |
| | 15 | 23 | 20 | 31 | SVX015A1-4A1B1 |
| FR6 | 20 | 31 | 25 | 38 | SVX020A1-4A1B1 |
| | 25 | 38 | 30 | 46 | SVX025A1-4A1B1 |
| | 30 | 46 | 40 | 61 | SVX030A1-4A1B1 |
| FR7 | 40 | 61 | 50 | 72 | SVX040A1-4A1N1 |
| | 50 | 72 | 60 | 87 | SVX050A1-4A1N1 |
| | 60 | 87 | 75 | 105 | SVX060A1-4A1N1 |
| FR8 | 75 | 105 | 100 | 140 | SVX075A1-4A1N1 |
| | 100 | 140 | 125 | 170 | SVX100A1-4A1N1 |
| | 125 | 170 | 150 | 205 | SVX125A1-4A1N1 |
| FR9 | 150 | 205 | 200 | 261 | SVX150A1-4A1N1 |
| | 200 | 245 | 250 | 300 | SVX200A1-4A1N1 |

380–500 V, NEMA Type 12/IP54 Drives

| Frame Size | hp (I _H) | Current (I _H) | hp (I _L) | Current (I _L) | Catalog Number |
|------------|----------------------|---------------------------|----------------------|---------------------------|----------------|
| FR4 | 1 | 2.2 | 1-1/2 | 3.3 | SVX001A2-4A1B1 |
| | 1-1/2 | 3.3 | 2 | 4.3 | SVXF15A2-4A1B1 |
| | 2 | 4.3 | 3 | 5.6 | SVX002A2-4A1B1 |
| | 3 | 5.6 | 5 | 7.6 | SVX003A2-4A1B1 |
| | 5 | 7.6 | — | 9 | SVX005A2-4A1B1 |
| | — | 9 | 7-1/2 | 12 | SVX006A2-4A1B1 |
| FR5 | 7-1/2 | 12 | 10 | 16 | SVX007A2-4A1B1 |
| | 10 | 16 | 15 | 23 | SVX010A2-4A1B1 |
| | 15 | 23 | 20 | 31 | SVX015A2-4A1B1 |
| FR6 | 20 | 31 | 25 | 38 | SVX020A2-4A1B1 |
| | 25 | 38 | 30 | 46 | SVX025A2-4A1B1 |
| | 30 | 46 | 40 | 61 | SVX030A2-4A1B1 |
| FR7 | 40 | 61 | 50 | 72 | SVX040A2-4A1N1 |
| | 50 | 72 | 60 | 87 | SVX050A2-4A1N1 |
| | 60 | 87 | 75 | 105 | SVX060A2-4A1N1 |
| FR8 | 75 | 105 | 100 | 140 | SVX075A2-4A1N1 |
| | 100 | 140 | 125 | 170 | SVX100A2-4A1N1 |
| | 125 | 170 | 150 | 205 | SVX125A2-4A1N1 |
| FR9 | 150 | 205 | 200 | 261 | SVX150A2-4A1N1 |
| | 200 | 245 | 250 | 300 | SVX200A2-4A1N1 |

SVX Open Drives

2



380–500 V, Open Chassis Drives

| Frame Size | hp (I _H) | Current (I _H) | hp (I _L) | Current (I _L) | Catalog Number |
|------------|----------------------|---------------------------|----------------------|---------------------------|----------------|
| FR10 ① | 250 | 330 | 300 | 385 | SPX250A0-4A2N1 |
| | 300 | 385 | 350 | 460 | SPX300A0-4A2N1 |
| | 350 | 460 | 400 | 520 | SPX350A0-4A2N1 |
| FR11 | 400 | 520 | 500 | 590 | SPX400A0-4A2N1 |
| | 500 | 590 | — | 650 | SPX500A0-4A2N1 |
| | — | 650 | 600 | 730 | SPX550A0-4A2N1 |
| FR12 | 600 | 730 | — | 820 | SPX600A0-4A2N1 |
| | — | 820 | 700 | 920 | SPX650A0-4A2N1 |
| | 700 | 920 | 800 | 1030 | SPX700A0-4A2N1 |
| FR13 | 800 | 1030 | 900 | 1150 | SPX800A0-4A2N1 |
| | 900 | 1150 | 1000 | 1300 | SPX900A0-4A2N1 |
| | 1000 | 1300 | 1200 | 1450 | SPXH10A0-4A2N1 |
| FR14 | 1200 | 1600 | 1500 | 1770 | SPXH12A0-4A2N1 |
| | 1600 | 1940 | 1800 | 2150 | SPXH16A0-4A2N1 |
| | 1900 | 2300 | 2200 | 2700 | SPXH19A0-4A2N1 |

575 V SVX Drives

525–690 V, NEMA Type 1/IP21 Drives

| Frame Size | hp (I _H) | Current (I _H) | hp (I _L) | Current (I _L) | Catalog Number |
|------------|----------------------|---------------------------|----------------------|---------------------------|----------------|
| FR6 | 2 | 3.3 | 3 | 4.5 | SVX002A1-5A4N1 |
| | 3 | 4.5 | — | 5.5 | SVX003A1-5A4N1 |
| | — | 5.5 | 5 | 7.5 | SVX004A1-5A4N1 |
| | 5 | 7.5 | 7-1/2 | 10 | SVX005A1-5A4N1 |
| | 7-1/2 | 10 | 10 | 13.5 | SVX007A1-5A4N1 |
| | 10 | 13.5 | 15 | 18 | SVX010A1-5A4N1 |
| | 15 | 18 | 20 | 22 | SVX015A1-5A4N1 |
| | 20 | 22 | 25 | 27 | SVX020A1-5A4N1 |
| FR7 | 25 | 27 | 30 | 34 | SVX025A1-5A4N1 |
| | 30 | 34 | 40 | 41 | SVX030A1-5A4N1 |
| FR8 | 40 | 41 | 50 | 52 | SVX040A1-5A4N1 |
| | 50 | 52 | 60 | 62 | SVX050A1-5A4N1 |
| FR9 | 60 | 62 | 75 | 80 | SVX060A1-5A4N1 |
| | 75 | 80 | 100 | 100 | SVX075A1-5A4N1 |
| | 100 | 100 | 125 | 125 | SVX100A1-5A4N1 |
| | 125 | 125 | 150 | 144 | SVX125A1-5A4N1 |
| FR10 | 150 | 144 | — | 170 | SVX150A1-5A4N1 |
| | — | 170 | 200 | 208 | SVX175A1-5A4N1 |

Note

① FR10–FR14 includes 3% line reactor, but it is not integral to chassis.

SVX Open Drives



525–690 V, NEMA Type 12/IP54 Drives

| Frame Size | hp (I _H) | Current (I _H) | hp (I _L) | Current (I _L) | Catalog Number |
|------------|----------------------|---------------------------|----------------------|---------------------------|----------------|
| FR6 | 2 | 3.3 | 3 | 4.5 | SVX002A2-5A4N1 |
| | 3 | 4.5 | — | 5.5 | SVX003A2-5A4N1 |
| | — | 5.5 | 5 | 7.5 | SVX004A2-5A4N1 |
| | 5 | 7.5 | 7-1/2 | 10 | SVX005A2-5A4N1 |
| | 7-1/2 | 10 | 10 | 13.5 | SVX007A2-5A4N1 |
| | 10 | 13.5 | 15 | 18 | SVX010A2-5A4N1 |
| | 15 | 18 | 20 | 22 | SVX015A2-5A4N1 |
| | 20 | 22 | 25 | 27 | SVX020A2-5A4N1 |
| | 25 | 27 | 30 | 34 | SVX025A2-5A4N1 |
| FR7 | 30 | 34 | 40 | 41 | SVX030A2-5A4N1 |
| | 40 | 41 | 50 | 52 | SVX040A2-5A4N1 |
| FR8 | 50 | 52 | 60 | 62 | SVX050A2-5A4N1 |
| | 60 | 62 | 75 | 80 | SVX060A2-5A4N1 |
| | 75 | 80 | 100 | 100 | SVX075A2-5A4N1 |
| FR9 | 100 | 100 | 125 | 125 | SVX100A2-5A4N1 |
| | 125 | 125 | 150 | 144 | SVX125A2-5A4N1 |
| | 150 | 144 | — | 170 | SVX150A2-5A4N1 |
| | — | 170 | 200 | 208 | SVX175A2-5A4N1 |

525–690 V, Open Chassis Drives

| Frame Size | hp (I _H) | Current (I _H) | hp (I _L) | Current (I _L) | Catalog Number |
|------------|----------------------|---------------------------|----------------------|---------------------------|----------------|
| FR10 | 200 | 208 | 250 | 261 | SPX200A0-5A2N1 |
| | 250 | 261 | 300 | 325 | SPX250A0-5A2N1 |
| | 300 | 325 | 400 | 385 | SPX300A0-5A2N1 |
| FR11 | 400 | 385 | 450 | 460 | SPX400A0-5A2N1 |
| | 450 | 460 | 500 | 502 | SPX450A0-5A2N1 |
| | 500 | 502 | — | 590 | SPX500A0-5A2N1 |
| FR12 | — | 590 | 600 | 650 | SPX550A0-5A2N1 |
| | 600 | 650 | 700 | 750 | SPX600A0-5A2N1 |
| | 700 | 750 | 800 | 820 | SPX700A0-5A2N1 |
| FR13 | 800 | 820 | 900 | 920 | SPX800A0-5A2N1 |
| | 900 | 920 | 1000 | 1030 | SPX900A0-5A2N1 |
| | 1000 | 1030 | 1250 | 1180 | SPXH10A0-5A2N1 |
| FR14 | 1350 | 1300 | 1500 | 1500 | SPXH13A0-5A2N1 |
| | 1500 | 1500 | 2000 | 1900 | SPXH15A0-5A2N1 |
| | 2000 | 1900 | 2300 | 2250 | SPXH20A0-5A2N1 |

Accessories**2****Demo Drive and Power Supply****Demo Drive and Power Supply**

| Description | Catalog Number |
|------------------|----------------|
| 9000X demo drive | 9000XDEMO |

9000X Series—SVX/SPX Conversion and Flange Kits

The Type 12/IP54 option kit is used to convert a Type 1/IP21 to a Type 12/IP54 drive. The kit includes:

NEMA Type 12 / IP54 Conversion Kits

| Frame Size | Catalog Number |
|--------------------------|----------------|
| Frame 4 Type 12/IP54 kit | OPTN12FR4 |
| Frame 5 Type 12/IP54 kit | OPTN12FR5 |
| Frame 6 Type 12/IP54 kit | OPTN12FR6 |

Flange Kits

The flange kit is used when the power section heat sink is mounted through the back panel of an enclosure. The kit includes hardware and supporting steel plates.

NEMA Type 12 / IP54 Conversion Kits**Kit**

| Frame Size | Catalog Number |
|---------------------------------|----------------|
| Frame 4 flange kit Type 12/IP54 | OPTTHR4 |
| Frame 5 flange kit Type 12/IP54 | OPTTHR5 |
| Frame 6 flange kit Type 12/IP54 | OPTTHR6 |
| Frame 7 flange kit Type 12/IP54 | OPTTHR7 |
| Frame 8 flange kit Type 12/IP54 | OPTTHR8 |
| Frame 9 flange kit Type 12/IP54 | OPTTHR9 |


Options

SVX Series Option Board Kits

The SVX Series drives can accommodate a wide selection of expander and adapter option boards to customize the drive for your application needs. The drive's control unit is designed to accept a total of five option boards.

The SVX Series factory installed standard board configuration includes an A9 I/O board and an A2 relay output board, which are installed in slots A and B.

Option Boards



Option Board Kits

| Option Kit Description ^① | Allowed Slot Locations ^② | Field Installed Catalog Number | Factory Installed Option Designator | SVX Ready Programs | | | | | | |
|--|-------------------------------------|--------------------------------|-------------------------------------|--------------------|--------------|----------|-----|-----|----------|-----|
| | | | | Basic | Local/Remote | Standard | MSS | PID | Multi-P. | PFC |
| Standard I/O Cards | | | | | | | | | | |
| 6 DI, 1 DO, 2 AI, 1 AO, 1 +10 Vdc ref, 2 ext +24 Vdc/EXT +24 Vdc | A | OPTA9 | — | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| 2 RO (NC-NO) | B | OPTA2 | — | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Extended I/O Cards | | | | | | | | | | |
| 2 RO, therm | B | OPTA3 | A3 | — | ■ | ■ | ■ | ■ | ■ | ■ |
| Encoder low volt +5 V/15 V/24 V—SPX only | C | OPTA4 | A4 | — | ■ | ■ | ■ | ■ | ■ | ■ |
| Encoder high volt +15 V/24 V—SPX only | C | OPTA5 | A5 | — | ■ | ■ | ■ | ■ | ■ | ■ |
| Double encoder—SPX only | C | OPTA7 | A7 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| 6 DI, 1 DO, 2 AI, 1 AO | A | OPTA8 | A8 | — | ■ | ■ | ■ | ■ | ■ | ■ |
| 3 DI (encoder 10–24 V), out +15 V/+24 V, 2 DO (pulse+direction)—SPX only | C | OPTAE | AE | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| 6 DI, 1 ext +24 Vdc/EXT +24 Vdc | B, C, D , E | OPTB1 | B1 | — | — | — | — | — | ■ | ■ |
| 1 RO (NC-NO), 1 RO (NO), 1 therm | B, C, D , E | OPTB2 | B2 | — | — | — | — | — | ■ | ■ |
| 1 AI (mA isolated), 2 AO (mA isolated), 1 ext +24 Vdc/EXT +24 Vdc | B, C, D , E | OPTB4 | B4 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| 3 RO (NO) | B, C, D , E | OPTB5 | B5 | — | — | — | — | — | ■ | ■ |
| 1 ext +24 Vdc/EXT +24 Vdc, 3 Pt100 | B, C, D , E | OPTB8 | B8 | — | — | — | — | — | — | — |
| 1 RO (NO), 5 DI 42–240 Vac input | B, C, D , E | OPTB9 | B9 | — | — | — | — | — | ■ | ■ |
| Communication Cards | | | | | | | | | | |
| Modbus RTU | D, E | OPTC2 | C2 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Modbus RTU (D9 connector) | D, E | OPTC8 | C8 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| PROFIBUS DP | D, E | OPTC3 | C3 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| PROFIBUS DP (D9 connector) | D, E | OPTC5 | C5 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Johnson Controls N2 | D, E | OPTC2 | CA | — | — | — | — | — | — | — |
| BACnet MSTP | D, E | OPTCJ | CJ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| LonWorks | D, E | OPTC4 | C4 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| CANopen (slave) | D, E | OPTC6 | C6 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| DeviceNet | D, E | OPTC7 | C7 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Modbus TCP | D, E | OPTCI | CI | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| EtherNet/IP | D, E | OPTCQ | CQ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| PROFINET, Modbus TCP, EtherNet/IP (dual-port) ^④ | D, E | OPTC9 | E9 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| EtherCAT (dual-port) ^④ | D, E | OPTCQ | EC | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| SPX adapter | D, E | OPTD1 | D1 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| SPX adapter | D, E | OPTD2 | D2 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| RS-232 adapter | D, E | OPTD3 | D3 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |

Notes

^① AI = Analog Input; AO = Analog Output, DI = Digital Input, DO = Digital Output, RO = Relay Output

^② Option card must be installed in one of the slots listed for that card. Slot indicated in bold is the preferred location.

^③ OPTC2 is a multi-protocol option card.

^④ Available October 2016.

2.7

Adjustable Frequency Drives

SVX Drives

2

Modbus RTU Network Communications

The Modbus Network Card OPTC2 is used for connecting the SVX Drive as a slave on a Modbus network. The interface is connected by a 9-pin DSUB connector (female) and the baud rate ranges from 300 to 19,200 baud. Other communication parameters include an address range from 1 to 247; a parity of None, Odd or Even; and the stop bit is 1.

PROFIBUS Network Communications

The PROFIBUS Network Card OPTC3 is used for connecting the SVX Drive as a slave on a PROFIBUS-DP network. The interface is connected by a 9-pin DSUB connector (female). The baud rates range from 9.6 Kbaud to 12 Mbaud, and the addresses range from 1 to 127.

LonWorks Network Communications

The LonWorks Network Card OPTC4 is used for connecting the SVX Drive on a LonWorks network. This interface uses Standard Network Variable Types (SNVT) as data types.

The channel connection is achieved using a FTT-10 A Free Topology transceiver via a single twisted transfer cable. The communication speed with LonWorks is 78 kBits/s.

CANopen (Slave) Communications

The CANopen (Slave) Network Card OPTC6 is used for connecting the SVX Drive to a host system. According to ISO11898 standard cables to be chosen for CANbus should have a nominal impedance of 120 ohms, and specific line delay of nominal 5 nS/m. 120 ohms line termination resistors required for installation.

DeviceNet Network Communications

The DeviceNet Network Card OPTC7 is used for connecting the SVX Drive on a DeviceNet Network. It includes a 5.08 mm pluggable connector. Transfer method is via CAN using a two-wire twisted shielded cable with two-wire bus power cable and drain. The baud rates used for communication include 125 Kbaud, 250 Kbaud and 500 Kbaud.

Johnson Controls Metasys N2 Network Communications

The OPTC2 fieldbus board provides communication between the SVX Drive and a Johnson Controls Metasys™ N2 network. With this connection, the drive can be controlled, monitored and programmed from the Metasys system. The N2 fieldbus is available as a factory installed option and as a field installable kit.

Modbus/TCP Network Communications

The Modbus/TCP Network Card OPTC1 is used for connecting the SVX Drive to Ethernet networks utilizing Modbus protocol. It includes an RJ-45 pluggable connector. This interface provides a selection of standard and custom register values to communicate drive parameters. The board supports 10 Mbps and 100 Mbps communication speeds. The IP address of the board is configurable over Ethernet using a supplied software tool.

BACnet Network Communications

The BACnet Network Card OPTCJ is used for connecting the SVX Drive to BACnet networks. It includes a 5.08 mm pluggable connector. Data transfer is Master-Slave/Token Passing (MS/TP) RS-485. This interface uses a collection of 30 Binary Value Objects (BVOs) and 35 Analog Value Objects (AVOs) to communicate drive parameters. The card supports 9.6, 19.2 and 38.4 Kbaud communication speeds and supports network addresses 1–127.

EtherNet/IP Network Communications

The EtherNet/IP Network Card OPTCK is used for connecting the SVX Drive to Ethernet/Industrial Protocol networks. It includes an RJ-45 pluggable connector. The interface uses CIP objects to communicate drive parameters (CIP is “Common Industrial Protocol”, the same protocol used by DeviceNet). The board supports 10 Mbps and 100 Mbps communication speeds. The IP address of the board is configurable by Static, BOOTP and DHCP methods.

Control Panel Options

Factory Options

| Description | Factory Installed Option Code | Field Installed NEMA Type 1/IP21 Catalog Number |
|--|----------------------------------|---|
| Local/Remote Keypad SVX Control Panel —This option is standard on all drives and consists of an RS-232 connection, backlit alphanumeric LCD display with nine indicators for the RUN status and two indicators for the control source. The nine pushbuttons on the panel are used for panel programming and monitoring of all SVX parameters. The panel is detachable and isolated from the input line potential. Include LOC/REM key to choose control location. | A | KEYPAD-LOC/REM |
| Keypad Remote Mounting Kit —This option is used to remote mount the SVX keypad. The footprint is compatible to the SV remote mount kit. Includes 10 ft cable, keypad holder and mounting hardware. | — | OPTRMT-KIT-9000X |

Miscellaneous Options

| Description | Catalog Number |
|---|---------------------------|
| 9000XDrive —A PC-based tool for controlling and monitoring of the SVX. Features include: loading parameters that can be saved to a file or printed, setting references, starting and stopping the motor, monitoring signals in graphical or text form, and real-time display. To avoid damage to the drive or computer, SVDrivecable must be used. | 9000XDRIVE |
| SVDrivecable —6 ft (1.8 m) RS-232 cable (22 gauge) with a 7-pin connector on each end. Should be used in conjunction with the 9000XDrive option to avoid damage to the SVX or computer. The same cable can be used for downloading specialized applications to the drive. | SVDRIVECABLE |
| External Dynamic Braking Resistors —Used with the dynamic braking chopper circuit to absorb motor regenerative energy for stopping the load and to dissipate the energy flowing back into the drive. Resistors are separated into standard duty and heavy-duty. Standard duty is defined as 20% duty or less with 100% braking torque, while heavy-duty is defined as 50% duty or less with 150% braking torque. | See Page V6-T2-111 |

Open Drive Options**Brake Chopper Options**


The brake chopper circuit option is used for applications that require dynamic braking. Dynamic braking resistors are not included with drive purchase. Consult the factory for additional dynamic braking resistor selections that are supplied separately. A list of common resistors are listed below and are complete indoor assemblies, include a pre-wired terminal block and a thermal switch, and are not UL Listed.

Duty Cycle

The duty cycle rating is based on a 60-second period. For example, the 20% duty cycle resistor can carry 100% current for 12 seconds out of every 60 seconds, while the 50% duty cycle resistor can carry 150% current for 30 seconds out of every 60 seconds.

Torque

If the braking torque required is less than 15%, dynamic braking is not required because the regenerated energy will be dissipated in the drive and motor losses.

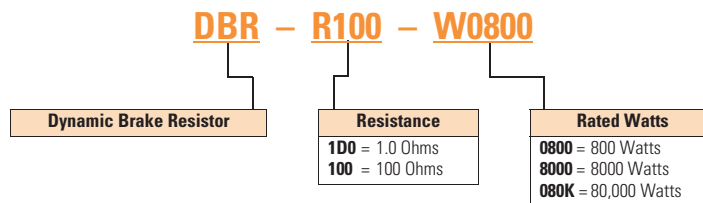Dynamic Brake Resistor—Catalog Number Selection**230 V Brake Resistors**

| Drive hp (CT/lH) | Minimum Ohms | 20% Duty Cycle, 100% Torque | | 50% Duty Cycle, 150% Torque | |
|---------------------|-----------------|-----------------------------|---------------------|-----------------------------|---------------------|
| | | Catalog Number | Dimensions (Inches) | Catalog Number | Dimensions (Inches) |
| 0.75 | 30.0 | DBR-R100-W0400 | 12W x 5D x 5H | DBR-R100-W0800 | 12W x 7D x 5H |
| 1 | 30.0 | DBR-R100-W0400 | 12W x 5D x 5H | DBR-R100-W0800 | 12W x 7D x 5H |
| 1.5 | 30.0 | DBR-R100-W0400 | 12W x 5D x 5H | DBR-R036-W1200 | 12W x 10D x 5H |
| 2 | 30.0 | DBR-R100-W0400 | 12W x 5D x 5H | DBR-R036-W1200 | 12W x 10D x 5H |
| 3 | 30.0 | DBR-R036-W0800 | 12W x 7D x 5H | DBR-R036-W2000 | 12W x 16D x 5H |
| 4 | 30.0 | DBR-R036-W0800 | 12W x 7D x 5H | DBR-R030-W2400 | 19W x 10D x 5H |
| 5 | 30.0 | DBR-R036-W0800 | 12W x 7D x 5H | DBR-R030-W2800 | 19W x 13D x 5H |
| 7.5 | 20.0 | DBR-R020-W1200 | 12W x 10D x 5H | DBR-R020-W4800 | 26.5W x 13D x 5H |
| 10 | 10.0 | DBR-R015-W1600 | 12W x 13D x 5H | DBR-R112-W6000 | 26.5W x 13D x 5H |
| 15 | 10.0 | DBR-R012-W2400 | 19W x 10D x 5H | DBR-R010-W9000 | 28W x 10D x 10H |
| 20 | 3.3 | DBR-R9D3-W3200 | 19W x 10D x 5H | DBR-R3D4-W012K | 28W x 10D x 10H |
| 25 | 3.3 | DBR-R5D5-W4000 | 26.5W x 10D x 5H | DBR-R5D1-W015K | 28W x 16D x 10H |
| 30 | 3.3 | DBR-R4D8-W4800 | 26.5W x 10D x 5H | DBR-R4D1-W020K | 28W x 16D x 10H |
| 40 | 1.4 | DBR-R004-W6000 | 26.5W x 13D x 5H | DBR-R3D4-W025K | 30W x 18D x 16H |
| 50 | 1.4 | DBR-R3D1-W7500 | 26.5W x 16D x 5H | DBR-R2D1-W030K | 30W x 18D x 24H |
| 60 | 1.4 | DBR-R2D8-W9000 | 26.5W x 16D x 5H | DBR-R002-W036K | 30W x 18D x 24H |
| 75 | 1.4 | DBR-R2D6-W012K | 28W x 10D x 10H | DBR-R1D5-W045K | 30W x 18D x 32H |
| 100 | 1.4 | DBR-R002-W015K | 28W x 16D x 10H | DBR-R1D4-W060K | 30W x 18D x 40H |

480 V Brake Resistors

| Drive hp (CT/l _H) | Minimum Ohms | 20% Duty Cycle, 100% Torque | | 50% Duty Cycle, 150% Torque | |
|----------------------------------|-----------------|-----------------------------|---------------------|-----------------------------|---------------------|
| | | Catalog Number | Dimensions (Inches) | Catalog Number | Dimensions (Inches) |
| 1 | 63.0 | DBR-R100-W0400 | 12W x 5D x 5H | DBR-R100-W0800 | 12W x 7D x 5H |
| 1.5 | 63.0 | DBR-R100-W0400 | 12W x 5D x 5H | DBR-R100-W1200 | 12W x 10D x 5H |
| 2 | 63.0 | DBR-R100-W0400 | 12W x 5D x 5H | DBR-R100-W1200 | 12W x 10D x 5H |
| 3 | 63.0 | DBR-R100-W0800 | 12W x 7D x 5H | DBR-R100-W2000 | 12W x 16D x 5H |
| 5 | 63.0 | DBR-R100-W0800 | 12W x 7D x 5H | DBR-R100-W2800 | 19W x 13D x 5H |
| 6 | 63.0 | DBR-R100-W1200 | 12W x 10D x 5H | DBR-R070-W4000 | 19W x 16D x 5H |
| 7.5 | 63.0 | DBR-R100-W1200 | 12W x 10D x 5H | DBR-R063-W4800 | 26.5W x 13D x 5H |
| 10 | 63.0 | DBR-R063-W1600 | 12W x 13D x 5H | DBR-R063-W6000 | 26.5W x 16D x 5H |
| 15 | 42.0 | DBR-R042-W2400 | 19W x 10D x 5H | DBR-R042-W9000 | 28W x 10D x 10H |
| 20 | 21.0 | DBR-R030-W3200 | 19W x 13D x 5H | DBR-R023-W012K | 28W x 13D x 10H |
| 25 | 21.0 | DBR-R030-W4000 | 19W x 16D x 5H | DBR-R021-W015K | 28W x 13D x 10H |
| 30 | 14.0 | DBR-R020-W4800 | 26.5W x 13D x 5H | DBR-R014-W020K | 30W x 18D x 24H |
| 40 | 6.5 | DBR-R112-W6000 | 26.5W x 13D x 5H | DBR-R007-W025K | 30W x 18D x 16H |
| 50 | 6.5 | DBR-R013-W7500 | 26.5W x 16D x 5H | DBR-R8D5-W030K | 30W x 18D x 24H |
| 60 | 6.5 | DBR-R010-W9000 | 28W x 10D x 10H | DBR-R7D3-W036K | 30W x 18D x 24H |
| 75 | 3.3 | DBR-R009-W012K | 28W x 13D x 10H | DBR-R3D3-W045K | 30W x 18D x 32H |
| 100 | 3.3 | DBR-R5D1-W015K | 28W x 16D x 10H | DBR-R004-W060K | 30W x 18D x 40H |
| 125 | 3.3 | DBR-R4D1-W020K | 28W x 16D x 10H | DBR-R004-W070K | 30W x 18D x 48H |
| 150 | 3.3 | DBR-R3D4-W025K | 30W x 18D x 16H | DBR-R3D5-W085K | 30W x 18D x 56H |
| 200 | 3.3 | DBR-R3D3-W030K | 30W x 18D x 24H | DBR-R3D3-W110K | 30W x 18D x 72H |
| 250 | 1.4 | DBR-R2D5-W036K | 30W x 18D x 24H | Ⓢ | — |
| 300 | 1.4 | DBR-R1D5-W045K | 30W x 18D x 32H | Ⓢ | — |
| 350 | 1.4 | DBR-R1D4-W060K | 30W x 18D x 40H | Ⓢ | — |
| 400 | 0.9 | DBR-R1D4-W060K | 30W x 18D x 40H | Ⓢ | — |
| 500 | 0.9 | DBR-R0D9-W080K | 30W x 18D x 48H | Ⓢ | — |
| 550 | 0.9 | DBR-R001-W085K | 30W x 18D x 56H | Ⓢ | — |

Note

Ⓢ Consult factory.

575 V Brake Resistors

| Drive hp (CT/1H) | Minimum Ohms | 20% Duty Cycle, 100% Torque | | 50% Duty Cycle, 150% Torque | |
|---------------------|-----------------|-----------------------------|---------------------|-----------------------------|---------------------|
| | | Catalog Number | Dimensions (Inches) | Catalog Number | Dimensions (Inches) |
| 2 | 100.0 | DBR-R100-W0400 | 12W x 5D x 5H | DBR-R100-W1200 | 12W x 10D x 5H |
| 3 | 100.0 | DBR-R100-W0800 | 12W x 7D x 5H | DBR-R100-W2000 | 12W x 16D x 5H |
| 4 | 100.0 | DBR-R100-W0800 | 12W x 7D x 5H | DBR-R100-W2400 | 19W x 10D x 5H |
| 5 | 100.0 | DBR-R100-W0800 | 12W x 7D x 5H | DBR-R100-W2800 | 19W x 13D x 5H |
| 7.5 | 100.0 | DBR-R100-W1200 | 12W x 10D x 5H | DBR-R100-W4800 | 26.5W x 13D x 5H |
| 10 | 30.0 | DBR-R063-W1600 | 12W x 13D x 5H | DBR-R063-W6000 | 26.5W x 16D x 5H |
| 15 | 30.0 | DBR-R042-W2400 | 19W x 10D x 5H | DBR-R042-W9000 | 28W x 10D x 10H |
| 20 | 30.0 | DBR-R030-W3200 | 19W x 13D x 5H | DBR-R030-W012K | 28W x 13D x 10H |
| 25 | 30.0 | DBR-R030-W4000 | 19W x 16D x 5H | DBR-R030-W015K | 28W x 16D x 10H |
| 30 | 18.0 | DBR-R020-W4800 | 26.5W x 13D x 5H | DBR-R020-W020K | 30W x 18D x 16H |
| 40 | 18.0 | DBR-R030-W6000 | 26.5W x 16D x 5H | DBR-R184-W025K | 30W x 18D x 16H |
| 50 | 9.0 | DBR-R013-W7500 | 26.5W x 16D x 5H | DBR-R012-W030K | 30W x 18D x 24H |
| 60 | 9.0 | DBR-R010-W9000 | 28W x 10D x 10H | DBR-R010-W036K | 30W x 18D x 24H |
| 75 | 9.0 | DBR-R009-W012K | 28W x 13D x 10H | DBR-R009-W045K | 30W x 18D x 24H |
| 100 | 7.0 | DBR-R013-W015K | 28W x 16D x 10H | DBR-R8D4-W060K | 30W x 18D x 40H |
| 125 | 7.0 | DBR-R8D2-W020K | 30W x 18D x 10H | DBR-R007-W070K | 30W x 18D x 40H |
| 150 | 7.0 | DBR-R007-W025K | 30W x 18D x 16H | DBR-R006-W085K | 30W x 18D x 56H |
| 175 | 7.0 | DBR-R007-W030K | 30W x 18D x 24H | DBR-R007-W100K | 30W x 18D x 72H |
| 200 | 2.5 | DBR-R3D3-W030K | 30W x 18D x 24H | DBR-R2D6-W110K | 30W x 18D x 64H |
| 250 | 2.5 | DBR-R2D5-W036K | 30W x 18D x 24H | DBR-R003-W140K | 30W x 18D x 72H |
| 300 | 2.5 | DBR-R3D3-W045K | 30W x 18D x 32H | ① | — |
| 400 | 1.7 | DBR-R002-W060K | 30W x 18D x 48H | ① | — |
| 450 | 1.7 | DBR-R1D8-W070K | 30W x 18D x 48H | ① | — |
| 500 | 1.7 | DBR-R002-W080K | 30W x 18D x 56H | ① | — |

Note

① Consult factory.

2.7

Adjustable Frequency Drives

SVX Drives

2

Line and Load Reactors

A line and load reactor is a three-phase inductance filter that can be placed on the line and load side of the AFD to help improve the harmonic performance of the system. Consult the factory for additional filtering options and further technical details.


DR1 Line Reactor

A line reactor helps to provide a moderate reduction in current harmonics similar to a DC choke. It also provides increased input protection for AFD and its semiconductors from line transients helping to extend the life of the AFD.

DR2 Output Reactor

An output filter is used to reduce the transient voltage (dV/dt) at the motor terminals. The output filter is recommended for cable lengths exceeding 100 ft (30 m) with a drive of 3 hp and above and for cable lengths of 33 ft (10 m) with a drive of 2 hp and below.

Line and Load Reactors—Catalog Number Selection

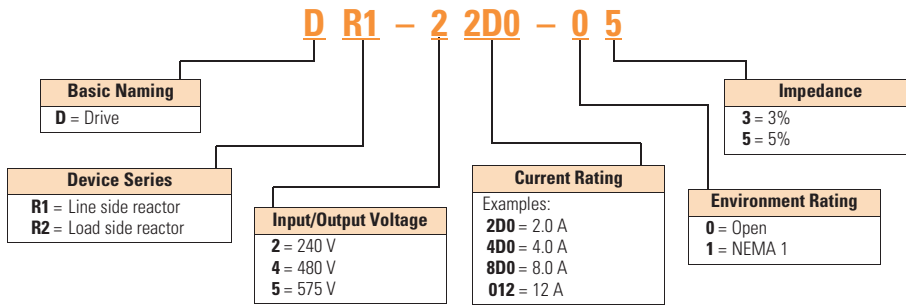

Line and Load Reactors—230 V

| hp (CT) | Open Line Reactor | | Load Reactor | | NEMA 1 Line Reactor | | Load Reactor | |
|---------|-------------------|-------------|--------------|-------------|---------------------|-------------|--------------|-------------|
| | 3% | 5% | 3% | 5% | 3% | 5% | 3% | 5% |
| 0.75 | DR1-23D2-03 | DR1-23D2-05 | DR2-24D0-03 | DR2-24D0-05 | DR1-23D2-13 | DR1-23D2-15 | DR2-24D0-13 | DR2-24D0-15 |
| 1 | DR1-24D2-03 | DR1-24D2-05 | DR2-24D0-03 | DR2-28D0-05 | DR1-24D2-13 | DR1-24D2-15 | DR2-24D0-13 | DR2-28D0-15 |
| 1.5 | DR1-26D0-03 | DR1-26D0-05 | DR2-28D0-03 | DR2-28D0-05 | DR1-26D0-13 | DR1-26D0-15 | DR2-28D0-13 | DR2-28D0-15 |
| 2 | DR1-26D8-03 | DR1-26D8-05 | DR2-28D0-03 | DR2-28D0-05 | DR1-26D8-13 | DR1-26D8-15 | DR2-28D0-13 | DR2-28D0-15 |
| 3 | DR1-29D6-03 | DR1-29D6-05 | DR2-2012-03 | DR2-2012-05 | DR1-29D6-13 | DR1-29D6-15 | DR2-2012-13 | DR2-2012-15 |
| 5 | DR1-2015-03 | DR1-2015-05 | DR2-2018-03 | DR2-2018-05 | DR1-2015-13 | DR1-2015-15 | DR2-2018-13 | DR2-2018-15 |
| 7.5 | DR1-2022-03 | DR1-2022-05 | DR2-2025-03 | DR2-2025-05 | DR1-2022-13 | DR1-2022-15 | DR2-2025-13 | DR2-2025-15 |
| 10 | DR1-2028-03 | DR1-2028-05 | DR2-2035-03 | DR2-2035-05 | DR1-2028-13 | DR1-2028-15 | DR2-2035-13 | DR2-2035-15 |
| 15 | DR1-2042-03 | DR1-2042-05 | DR2-2045-03 | DR2-2045-05 | DR1-2042-13 | DR1-2042-15 | DR2-2045-13 | DR2-2045-15 |
| 20 | DR1-2054-03 | DR1-2054-05 | DR2-2055-03 | DR2-2055-05 | DR1-2054-13 | DR1-2054-15 | DR2-2055-13 | DR2-2055-15 |
| 25 | DR1-2068-03 | DR1-2068-05 | DR2-2080-03 | DR2-2080-05 | DR1-2068-13 | DR1-2068-15 | DR2-2080-13 | DR2-2080-15 |
| 30 | DR1-2080-03 | DR1-2080-05 | DR2-2080-03 | DR2-2100-05 | DR1-2080-13 | DR1-2080-15 | DR2-2080-13 | DR2-2100-15 |
| 40 | DR1-2104-03 | DR1-2104-05 | DR2-2100-03 | DR2-2100-05 | DR1-2104-13 | DR1-2104-15 | DR2-2100-13 | DR2-2100-15 |
| 50 | DR1-2130-03 | DR1-2130-05 | DR2-2130-03 | DR2-2130-05 | DR1-2130-13 | DR1-2130-15 | DR2-2130-13 | DR2-2130-15 |
| 60 | DR1-2154-03 | DR1-2154-05 | DR2-2160-03 | DR2-2200-15 | DR1-2154-13 | DR1-2154-15 | DR2-2160-13 | DR2-2200-15 |
| 75 | DR1-2192-03 | DR1-2192-05 | DR2-2200-13 | DR2-2200-15 | DR1-2192-13 | DR1-2192-15 | DR2-2200-13 | DR2-2200-15 |
| 100 | DR1-2248-03 | DR1-2248-05 | DR2-2225-13 | DR2-2225-15 | DR1-2248-13 | DR1-2248-15 | DR2-2225-13 | DR2-2225-15 |

Line and Load Reactors—480 V

| hp (CT) | Open Line Reactor | | Load Reactor | | NEMA 1 Line Reactor | | Load Reactor | |
|---------|-------------------|-------------|--------------|-------------|---------------------|-------------|--------------|-------------|
| | 3% | 5% | 3% | 5% | 3% | 5% | 3% | 5% |
| 1 | DR1-42D1-03 | DR1-42D1-05 | DR2-42D0-05 | DR2-42D0-05 | DR1-42D1-13 | DR1-42D1-15 | DR2-42D0-13 | DR2-42D0-15 |
| 1.5 | DR1-43D0-03 | DR1-43D0-05 | DR2-44D0-05 | DR2-44D0-05 | DR1-43D0-13 | DR1-43D0-15 | DR2-44D0-13 | DR2-44D0-15 |
| 2 | DR1-43D4-03 | DR1-43D4-05 | DR2-44D0-03 | DR2-44D0-05 | DR1-43D4-13 | DR1-43D4-15 | DR2-44D0-13 | DR2-44D0-15 |
| 3 | DR1-44D8-03 | DR1-44D8-05 | DR2-48D0-03 | DR2-48D0-05 | DR1-44D8-13 | DR1-44D8-15 | DR2-48D0-13 | DR2-48D0-15 |
| 5 | DR1-47D6-03 | DR1-47D6-05 | DR2-48D0-03 | DR2-48D0-05 | DR1-47D6-13 | DR1-47D6-15 | DR2-48D0-13 | DR2-48D0-15 |
| 7.5 | DR1-4011-03 | DR1-4011-05 | DR2-4012-03 | DR2-4012-05 | DR1-4011-13 | DR1-4011-15 | DR2-4012-13 | DR2-4012-15 |
| 10 | DR1-4014-03 | DR1-4014-05 | DR2-4018-03 | DR2-4018-05 | DR1-4014-13 | DR1-4014-15 | DR2-4018-13 | DR2-4018-15 |
| 15 | DR1-4021-03 | DR1-4021-05 | DR2-4025-03 | DR2-4025-05 | DR1-4021-13 | DR1-4021-15 | DR2-4025-13 | DR2-4025-15 |
| 20 | DR1-4027-03 | DR1-4027-05 | DR2-4025-03 | DR2-4025-05 | DR1-4027-13 | DR1-4027-15 | DR2-4025-13 | DR2-4025-15 |
| 25 | DR1-4034-03 | DR1-4034-05 | DR2-4035-03 | DR2-4035-05 | DR1-4034-13 | DR1-4034-15 | DR2-4035-13 | DR2-4035-15 |
| 30 | DR1-4040-03 | DR1-4040-05 | DR2-4045-03 | DR2-4045-05 | DR1-4040-13 | DR1-4040-15 | DR2-4045-13 | DR2-4045-15 |
| 40 | DR1-4052-03 | DR1-4052-05 | DR2-4055-03 | DR2-4055-05 | DR1-4052-13 | DR1-4052-15 | DR2-4055-13 | DR2-4055-15 |
| 50 | DR1-4065-03 | DR1-4065-05 | DR2-4080-03 | DR2-4080-05 | DR1-4065-13 | DR1-4065-15 | DR2-4080-13 | DR2-4080-15 |
| 60 | DR1-4077-03 | DR1-4077-05 | DR2-4100-03 | DR2-4080-05 | DR1-4077-13 | DR1-4077-15 | DR2-4100-13 | DR2-4080-15 |
| 75 | DR1-4096-03 | DR1-4096-05 | DR2-4100-03 | DR2-4100-05 | DR1-4096-13 | DR1-4096-15 | DR2-4100-13 | DR2-4100-15 |
| 100 | DR1-4124-03 | DR1-4124-05 | DR2-4130-03 | DR2-4130-05 | DR1-4124-13 | DR1-4124-15 | DR2-4130-13 | DR2-4130-15 |
| 125 | DR1-4156-03 | DR1-4156-05 | DR2-4160-03 | DR2-4160-05 | DR1-4156-13 | DR1-4156-15 | DR2-4160-13 | DR2-4160-15 |
| 150 | DR1-4180-03 | DR1-4180-05 | DR2-4200-13 | DR2-4200-15 | DR1-4180-13 | DR1-4180-15 | DR2-4200-13 | DR2-4200-15 |
| 200 | DR1-4240-03 | DR1-4240-05 | DR2-4250-13 | DR2-4250-15 | DR1-4240-13 | DR1-4240-15 | DR2-4250-13 | DR2-4250-15 |
| 250 | DR1-4302-03 | DR1-4302-05 | DR2-4320-13 | DR2-4320-15 | DR1-4302-13 | DR1-4302-15 | DR2-4320-13 | DR2-4320-15 |
| 300 | DR1-4361-03 | DR1-4361-05 | DR2-4400-13 | DR2-4400-15 | DR1-4361-13 | DR1-4361-15 | DR2-4400-13 | DR2-4400-15 |
| 350 | DR1-4414-03 | DR1-4414-05 | DR2-4400-13 | DR2-4400-15 | DR1-4414-13 | DR1-4414-15 | DR2-4400-13 | DR2-4400-15 |
| 400 | DR1-4477-03 | DR1-4477-05 | DR2-4500-03 | DR2-4500-05 | DR1-4477-13 | DR1-4477-15 | DR2-4500-13 | DR2-4500-15 |
| 500 | DR1-4590-03 | DR1-4590-05 | DR2-4600-03 | DR2-4600-05 | DR1-4590-13 | DR1-4590-15 | DR2-4600-13 | DR2-4600-15 |
| 600 | DR1-4708-03 | DR1-4708-05 | DR2-4750-03 | DR2-4750-05 | DR1-4708-13 | DR1-4708-15 | DR2-4750-13 | DR2-4750-15 |

Line and Load Reactors—575 V

| hp (CT) | Open Line Reactor | | Load Reactor | | NEMA 1 Line Reactor | | Load Reactor | |
|---------|-------------------|-------------|--------------|-------------|---------------------|-------------|--------------|-------------|
| | 3% | 5% | 3% | 5% | 3% | 5% | 3% | 5% |
| 2 | DR1-52D7-03 | DR1-52D7-05 | DR2-54D0-03 | DR2-54D0-05 | DR1-52D7-13 | DR1-52D7-15 | DR2-54D0-13 | DR2-54D0-15 |
| 3 | DR1-53D9-03 | DR1-53D9-05 | DR2-54D0-03 | DR2-54D0-05 | DR1-53D9-13 | DR1-53D9-15 | DR2-54D0-13 | DR2-54D0-15 |
| 5 | DR1-56D1-03 | DR1-56D1-05 | DR2-58D0-03 | DR2-58D0-05 | DR1-56D1-13 | DR1-56D1-15 | DR2-58D0-13 | DR2-58D0-15 |
| 7.5 | DR1-59D0-03 | DR1-59D0-05 | DR2-58D0-03 | DR2-58D0-05 | DR1-59D0-13 | DR1-59D0-15 | DR2-58D0-13 | DR2-58D0-15 |
| 10 | DR1-5011-03 | DR1-5011-05 | DR2-5012-03 | DR2-5012-05 | DR1-5011-13 | DR1-5011-15 | DR2-5012-13 | DR2-5012-15 |
| 15 | DR1-5017-03 | DR1-5017-05 | DR2-5018-03 | DR2-5018-05 | DR1-5017-13 | DR1-5017-15 | DR2-5018-13 | DR2-5018-15 |
| 20 | DR1-5022-03 | DR1-5022-05 | DR2-5025-03 | DR2-5025-05 | DR1-5022-13 | DR1-5022-15 | DR2-5025-13 | DR2-5025-15 |
| 25 | DR1-5027-03 | DR1-5027-05 | DR2-5025-03 | DR2-5025-05 | DR1-5027-13 | DR1-5027-15 | DR2-5025-13 | DR2-5025-15 |
| 30 | DR1-5032-03 | DR1-5032-05 | DR2-5035-03 | DR2-5035-05 | DR1-5032-13 | DR1-5032-15 | DR2-5035-13 | DR2-5035-15 |
| 40 | DR1-5041-03 | DR1-5041-05 | DR2-5045-03 | DR2-5045-05 | DR1-5041-13 | DR1-5041-15 | DR2-5045-13 | DR2-5045-15 |
| 50 | DR1-5052-03 | DR1-5052-05 | DR2-5055-03 | DR2-5055-05 | DR1-5052-13 | DR1-5052-15 | DR2-5055-13 | DR2-5055-15 |
| 60 | DR1-5062-03 | DR1-5062-05 | DR2-5080-03 | DR2-5080-05 | DR1-5062-13 | DR1-5062-15 | DR2-5080-13 | DR2-5080-15 |
| 75 | DR1-5077-03 | DR1-5077-05 | DR2-5080-03 | DR2-5080-05 | DR1-5077-13 | DR1-5077-15 | DR2-5080-13 | DR2-5080-15 |
| 100 | DR1-5100-03 | DR1-5100-05 | DR2-5100-03 | DR2-5100-05 | DR1-5100-13 | DR1-5100-15 | DR2-5100-13 | DR2-5100-15 |
| 125 | DR1-5125-03 | DR1-5125-05 | DR2-5130-03 | DR2-5130-05 | DR1-5125-13 | DR1-5125-15 | DR2-5130-13 | DR2-5130-15 |
| 150 | DR1-5144-03 | DR1-5144-05 | DR2-5160-03 | DR2-5160-05 | DR1-5144-13 | DR1-5144-15 | DR2-5160-13 | DR2-5160-15 |
| 200 | DR1-5192-03 | DR1-5192-05 | DR2-5200-13 | DR2-5200-15 | DR1-5192-13 | DR1-5192-15 | DR2-5200-13 | DR2-5200-15 |
| 250 | DR1-5242-03 | DR1-5242-05 | DR2-5250-13 | DR2-5250-15 | DR1-5242-13 | DR1-5242-15 | DR2-5250-13 | DR2-5250-15 |
| 300 | DR1-5289-03 | DR1-5289-05 | DR2-5320-13 | DR2-5320-15 | DR1-5289-13 | DR1-5289-15 | DR2-5320-13 | DR2-5320-15 |
| 400 | DR1-5382-03 | DR1-5382-05 | DR2-5400-13 | DR2-5400-15 | DR1-5382-13 | DR1-5382-15 | DR2-5400-13 | DR2-5400-15 |
| 450 | DR1-5412-03 | DR1-5412-05 | DR2-5400-13 | DR2-5400-15 | DR1-5412-13 | DR1-5412-15 | DR2-5400-13 | DR2-5400-15 |
| 500 | DR1-5472-03 | DR1-5472-05 | DR2-5500-03 | DR2-5500-05 | DR1-5472-13 | DR1-5472-15 | DR2-5500-13 | DR2-5500-15 |
| 600 | DR1-5576-03 | DR1-5576-05 | DR2-5600-03 | DR2-5600-05 | DR1-5576-13 | DR1-5576-15 | DR2-5600-13 | DR2-5600-15 |

Replacement Parts

FR4 Spare Parts

2

| Category | Description | Quantity/ Drive | 230 V Catalog Number | 480 V Catalog Number | 575 V Catalog Number |
|-----------------------------|--|--------------------|-------------------------|-------------------------|-------------------------|
| Control fan | NEMA Type 12 control fan ^① | 1 | PP01086 | PP01086 | — |
| Control module ^② | SVX control module | 1 | CSBS0000000000 | CSBS0000000000 | — |
| | Standard slot A I/O card | 1 | OPTA9 | OPTA9 | — |
| | Standard slot B I/O card | 1 | OPTA2 | OPTA2 | — |
| Keypad ^② | SVX/SPX keypad | 1 | KEYPAD-LOC/REM | KEYPAD-LOC/REM | — |
| Main fan ^② | DC fan (main) | 1 | PP01060 | PP01060 | — |
| Other | Mounting kit, fixing kit | 1 | FR00040 | FR00040 | — |
| | Mounting kit, fixing kit, N12 ^① | 1 | FR00079 | FR00079 | — |
| | Control cover, plastic, N1 | 1 | FR00006 | FR00006 | — |

FR5 Spare Parts

| Category | Description | Quantity/ Drive | 230 V Catalog Number | 480 V Catalog Number | 575 V Catalog Number |
|-----------------------------|--|--------------------|-------------------------|-------------------------|-------------------------|
| Control fan | NEMA Type 12 control fan ^① | 1 | PP01088 | PP01088 | — |
| Control module ^② | SVX control module | 1 | CSBS0000000000 | CSBS0000000000 | — |
| | Standard slot A I/O card | 1 | OPTA9 | OPTA9 | — |
| | Standard slot B I/O card | 1 | OPTA2 | OPTA2 | — |
| Keypad ^② | SVX/SPX keypad | 1 | KEYPAD-LOC/REM | KEYPAD-LOC/REM | — |
| Main fan ^② | DC fan (main) | 1 | PP01061 | PP01061 | — |
| Other | Mounting kit, fixing kit | 1 | FR00050 | FR00050 | — |
| | Mounting kit, fixing kit, N12 ^① | 1 | FR00081 | FR00081 | — |

FR6 Spare Parts

| Category | Description | Quantity/ Drive | 230 V Catalog Number | 480 V Catalog Number | 575 V Catalog Number |
|-----------------------------|--|--------------------|-------------------------|-------------------------|-------------------------|
| Control fan | NEMA Type 12 control fan ^① | 1 | PP01049 | PP01049 | — |
| Control module ^② | SVX control module | 1 | CSBS0000000000 | CSBS0000000000 | CSBS0000000000 |
| | Standard slot A I/O card | 1 | OPTA9 | OPTA9 | OPTA9 |
| | Standard slot B I/O card | 1 | OPTA2 | OPTA2 | OPTA2 |
| Keypad ^② | SVX/SPX keypad | 1 | KEYPAD-LOC/REM | KEYPAD-LOC/REM | KEYPAD-LOC/REM |
| Main fan ^② | DC fan (main) | 1 | PP01062 | PP01062 | — |
| Other | Mounting kit, fixing kit | 1 | FR00060 | FR00060 | FR00060 |
| | Mounting kit, fixing kit, N12 ^① | 1 | FR00082 | FR00082 | FR00082 |
| | Control cover, plastic, N1 | 1 | FR06011 | FR06011 | FR06011 |

FR7 Spare Parts

| Category | Description | Quantity/ Drive | 230 V Catalog Number | 480 V Catalog Number | 575 V Catalog Number |
|-----------------------------|--|--------------------|-------------------------|-------------------------|-------------------------|
| Control fan | NEMA Type 12 control fan ^① | 1 | PP01049 | PP01049 | PP01049 |
| Control module ^② | SVX control module | 1 | CSBS0000000000 | CSBS0000000000 | CSBS0000000000 |
| | Standard slot A I/O card | 1 | OPTA9 | OPTA9 | OPTA9 |
| | Standard slot B I/O card | 1 | OPTA2 | OPTA2 | OPTA2 |
| Keypad ^② | SVX/SPX keypad | 1 | KEYPAD-LOC/REM | KEYPAD-LOC/REM | KEYPAD-LOC/REM |
| Main fan ^② | DC fan (main) | 1 | PP01063 | PP01063 | PP01063 |
| Other | Mounting kit, fixing kit | 1 | FR07071 | FR07071 | FR07071 |
| | Mounting kit, fixing kit, N12 ^① | 1 | FR07072 | FR07072 | FR07072 |
| | Control cover, plastic, N1 | 1 | FR07011 | FR07011 | FR07011 |

Notes

^① Only for NEMA Type 12/IP54 Type drives.

^② Factory recommended spare parts.

FR8 Spare Parts

| Category | Description | Quantity/ Drive | 230 V Catalog Number | 480 V Catalog Number | 575 V Catalog Number |
|-----------------------------|---------------------------------------|--------------------|-------------------------|-------------------------|-------------------------|
| Control fan | NEMA Type 12 control fan ^① | 1 | CP01180 | CP01180 | CP01180 |
| Control module ^② | SVX control module | 1 | CSBS0000000000 | CSBS0000000000 | CSBS0000000000 |
| | Standard slot A I/O card | 1 | OPTA9 | OPTA9 | OPTA9 |
| | Standard slot B I/O card | 1 | OPTA2 | OPTA2 | OPTA2 |
| Keypad ^② | SVX/SPX keypad | 1 | KEYPAD-LOC/REM | KEYPAD-LOC/REM | KEYPAD-LOC/REM |
| Main AC fan | Fan AC | 1 | PP01123 | PP01123 | PP01123 |
| | Fan fuse | 2 | PP20202 | PP20202 | PP20202 |
| | Starting cap | 1 | S00734 | S00734 | S00734 |
| | Fan driver board AC | 1 | VB00599 | VB00799 | VB00799 |
| | Isolation transformer (fan) | 1 | S0000113 | S0000113 | S0000113 |
| Main DC fan ^② | DC fan | 1 | PP00071 | PP00071 | PP00071 |
| | DC power supply | 1 | S01016 | S01016 | S01016 |
| Other | Front cover, N12 ^① | 1 | FR08079 | FR08079 | FR08079 |
| | Conduit plate, N12 | 1 | FR08082 | FR08082 | FR08082 |

FR9 Spare Parts

| Category | Description | Quantity/ Drive | 230 V Catalog Number | 480 V Catalog Number | 575 V Catalog Number |
|-----------------------------|----------------------------|--------------------|-------------------------|-------------------------|-------------------------|
| Control fan | 50 mm fan | 1 | PP09041 | PP09041 | PP09041 |
| | 80 mm fan | 1 | PP01068 | PP01068 | PP01068 |
| Control module ^① | SVX control module | 1 | CSBS0000000000 | CSBS0000000000 | CSBS0000000000 |
| | Standard slot A I/O card | 1 | OPTA9 | OPTA9 | OPTA9 |
| | Standard slot B I/O card | 1 | OPTA2 | OPTA2 | OPTA2 |
| Inverter | Power module ^② | 1 | FR09-0261-2-ANV | FR09-0261-4-ANV | FR09-0125-5-ANV |
| | | 1 | FR09-0300-2-ANV | FR09-0300-4-ANV | FR09-0144-5-ANV |
| | | 1 | — | — | FR09-0170-5-ANV |
| | Driver board | 1 | S00583 | S00583 | S00583 |
| | Shunt board ^② | 6 | — | VB00535 | VB00537 |
| | | 6 | — | VB00536 | VB00542 |
| 6 | | — | — | VB00543 | |
| DC section | Balancing resistor | 3 | PP00052 | PP00052 | PP00052 |
| | Bus capacitor | 8 | S00335 | S00335 | PP01041 |
| | DC busbars DC- | 1 | FR09043 | FR09043 | FR09043 |
| | DC busbars DC+ | 1 | FR09044 | FR09044 | FR09044 |
| | DC busbars connection | 1 | FR09045 | FR09045 | FR09045 |
| | DC busbars +/- insulator | 1 | FR09046 | FR09046 | FR09046 |
| | DC busbars -/con insulator | 1 | FR09047 | FR09047 | FR09047 |
| Converter | Rectifier module | 1 | FR09826 | FR09822 | FR09823 |
| | Diode | 3 | CP01268 | CP01268 | CP01268 |
| | Rectifier board | 1 | — | VB00459 | VB00460 |
| Keypad ^① | SVX/SPX keypad | 1 | KEYPAD-LOC/REM | KEYPAD-LOC/REM | KEYPAD-LOC/REM |
| Main DC fan ^① | DC fan | 1 | PP00072 | PP00072 | PP00072 |
| | DC power supply | 1 | S01017 | S01017 | S01017 |
| Other | Front cover power | 1 | FR09012 | FR09012 | FR09012 |
| | Front cover connection | 1 | FR09013 | FR09013 | FR09013 |
| | Front power conduit | 1 | FR09014 | FR09014 | FR09014 |

Notes

^① Factory recommended spare parts.

^② Select one part number based on the amperage rating of the drive. Please contact EatonCare at 877-ETN-CARE for assistance.

FR10 Spare Parts

2

| Category | Description | Quantity/ Drive | 230 V Catalog Number | 480 V Catalog Number | 575 V Catalog Number |
|------------------|--------------------------|--------------------|-------------------------|-------------------------|-------------------------|
| Control | Fiber board | 1 | — | S00451 | S00451 |
| | ASIC board | 1 | — | S00457 | S00457 |
| Control fan | ASIC fan | 1 | — | PP01096 | PP01096 |
| Control module ① | SVX control module | 1 | — | CPBS0000000000 | CPBS0000000000 |
| | Standard slot A I/O card | 1 | — | OPTA9 | OPTA9 |
| | Standard slot B I/O card | 1 | — | OPTA2 | OPTA2 |
| Inverter | Power module ② | 1 | — | FR10-0385-4-ANV | FR10-0261-5-ANV |
| | | 1 | — | FR10-0460-4-ANV | FR10-0325-5-ANV |
| | | 1 | — | FR10-0520-4-ANV | FR10-0385-5-ANV |
| | | 1 | — | — | FR10-0416-5-ANV |
| | Driver board | 1 | — | S00450 | S00450 |
| | Driver adapter board | 1 | — | VB00330 | VB00330 |
| | Shunt board ② | 6 | — | VB00497 | VB00510 |
| | | 6 | — | VB00498 | VB00511 |
| | | 6 | — | VB00537 | VB00545 |
| Covers | Top cover | 1 | — | FR10340 | FR10340 |
| | Side cover | 2 | — | FR10341 | FR10341 |
| DC section | Balancing resistor | 2 | — | PP13027 | PP13028 |
| | DC busbars kit (right) | 1 | — | S0000005 | S0000005 |
| | Bus capacitor | 12 | — | S00335 | S00336 |
| Converter | Rectifier module | 1 | — | FR10823 | FR10823 |
| | Charging resistor | 1 | — | PP00066 | PP00066 |
| | Diode | 3 | — | PP01177 | PP01177 |
| | Rectifier board | 1 | — | S00591 | S00592 |
| Keypad ① | SVX/SPX keypad | 1 | — | KEYPAD-LOC/REM | KEYPAD-LOC/REM |
| Main DC fan ① | DC fan | 2 | — | PP00072 | PP00072 |
| | DC power supply | 2 | — | S01017 | S01017 |

Notes

① Factory recommended spare parts.

② Select one part number based on the amperage rating of the drive. Please contact EatonCare at 877-ETN-CARE for assistance.

FR11 Spare Parts

| Category | Description | Quantity/ Drive | 230 V Catalog Number | 480 V Catalog Number | 575 V Catalog Number |
|-----------------------------|---------------------------|--------------------|-------------------------|-------------------------|-------------------------|
| Control | Fiber board | 1 | — | S00451 | S00451 |
| | ASIC board | 1 | — | S00457 | S00457 |
| Control fan | ASIC fan | 1 | — | PP01096 | PP01096 |
| Control module ^① | SVX control module | 1 | — | CPBS0000000000 | CPBS0000000000 |
| | Standard slot A I/O card | 1 | — | OPTA9 | OPTA9 |
| | Standard slot B I/O card | 1 | — | OPTA2 | OPTA2 |
| Inverter | Power module ^② | 1 | — | FR11-0590-4-ANV | FR11-0460-5-ANV |
| | | 1 | — | FR11-0650-4-ANV | FR11-0502-5-ANV |
| | | 1 | — | FR11-0730-4-ANV | FR11-0590-5-ANV |
| | Driver board | 1 | — | S00452 | S00452 |
| | Driver adapter board | 1 | — | VB00330 | VB00330 |
| | Shunt board ^② | 9 | — | VB00513 | VB00512 |
| | | 9 | — | VB00514 | VB00546 |
| | | 9 | — | VB00538 | VB00547 |
| | Covers | Top cover | 1 | — | FR11345 |
| DC section | Balancing resistor | 3 | — | PP13027 | PP13027 |
| | DC busbars kit (right) | 3 | — | S0000005 | S0000005 |
| | Bus capacitor | 18 | — | S00335 | S00335 |
| Converter | Rectifier module | 1 | — | FR10823 | FR10823 |
| | Diode | 3 | — | PP01177 | PP01177 |
| | Rectifier board | 1 | — | S00591 | S00591 |
| Keypad ^① | SVX/SPX keypad | 1 | — | KEYPAD-LOC/REM | KEYPAD-LOC/REM |
| Main DC fan ^① | DC fan | 2 | — | PP00072 | PP00072 |
| | DC power supply | 2 | — | S01017 | S01017 |

Notes

^① Factory recommended spare parts.

^② Select one part number based on the amperage rating of the drive. Please contact EatonCare at 877-ETN-CARE for assistance.

FR12 Spare Parts

2

| Category | Description | Quantity/ Drive | 230 V Catalog Number | 480 V Catalog Number | 575 V Catalog Number |
|-----------------------------|---------------------------|--------------------|-------------------------|-------------------------|-------------------------|
| Control | Fiber board | 2 | — | S00451 | S00451 |
| | ASIC board | 2 | — | S00457 | S00457 |
| | Star coupler | 1 | — | S00593 | S00593 |
| Control fan | ASIC fan | 2 | — | PP01096 | PP01096 |
| Control module ^① | SVX control module | 1 | — | CPBS0000000000 | CPBS0000000000 |
| | Standard slot A I/O card | 1 | — | OPTA9 | OPTA9 |
| | Standard slot B I/O card | 1 | — | OPTA2 | OPTA2 |
| Inverter | Power module ^② | 1 | — | FR12-0820-4-ANV | FR12-0650-5-ANV |
| | | 1 | — | FR12-0920-4-ANV | FR12-0750-5-ANV |
| | | 1 | — | FR12-1030-4-ANV | FR12-0820-5-ANV |
| | Driver board | 2 | — | S00450 | S00450 |
| | Driver adapter board | 2 | — | VB00330 | VB00330 |
| | Shunt board | 12 | — | VB00498 | VB00511 |
| | Covers | Top cover | 2 | — | FR10340 |
| Side cover | | 4 | — | FR10341 | FR10341 |
| DC section | Balancing resistor | 4 | — | PP13027 | PP13027 |
| | DC busbars kit (right) | 2 | — | S0000005 | S0000005 |
| | Bus capacitor | 24 | — | S00335 | S00336 |
| Converter | Rectifier module | 2 | — | FR10823 | FR10823 |
| | Diode | 3 | — | PP01177 | PP01177 |
| | Rectifier board | 2 | — | S00591 | S00591 |
| Keypad ^① | SVX/SPX keypad | 1 | — | KEYPAD-LOC/REM | KEYPAD-LOC/REM |
| Main DC fan ^① | DC fan | 4 | — | PP00072 | PP00072 |
| | DC power supply | 4 | — | S01017 | S01017 |

Notes

^① Factory recommended spare parts.

^② Select one part number based on the amperage rating of the drive. Please contact EatonCare at 877-ETN-CARE for assistance.

FR13 Spare Parts

| Category | Description | Quantity/ Drive | 230 V Catalog Number | 480 V Catalog Number | 575 V Catalog Number |
|------------------|--------------------------|--------------------|-------------------------|-------------------------|-------------------------|
| Control | ASIC board | 1 | — | S00457 | S00457 |
| | ASIC assembly | 1 | — | 60S01030 | 60S01030 |
| Control fan | ASIC fan | 1 | — | PP01096 | PP01096 |
| Control module ① | SVX control module | 1 | — | CPBS0000000000 | CPBS0000000000 |
| | Standard slot A I/O card | 1 | — | OPTA9 | OPTA9 |
| | Standard slot B I/O card | 1 | — | OPTA2 | OPTA2 |
| Inverter | Power module ② | 3 | — | FI13-1150-4-ANV | FR13-1030-5-ANV |
| | | 3 | — | FI13-1300-4-ANV | FR13-1180-5-ANV |
| | | 3 | — | FI13-1450-4-ANV | FR13-920-5-ANV |
| | Driver board | 3 | — | S00454 | S00454 |
| | Driver adapter board | 2 | — | VB00330 | VB00330 |
| | Shunt board ② | 18 | — | VB00505 | VB00516 |
| | | 18 | — | VB00514 | VB00517 |
| 18 | | — | VB00541 | VB00547 | |
| Covers | Top cover | 3 | — | FI10001 | FI10001 |
| | Side cover | 3 | — | FI10003 | FI10003 |
| DC section | Balancing resistor | 6 | — | PP13034 | PP13034 |
| | Bus capacitor | 36 | — | S00335 | S00336 |
| | DC busbars kit | 3 | — | FI13329 | FI13329 |
| Converter | Rectifier module | 2 | — | FR10823 | FR10823 |
| | Diode | 3 | — | PP01177 | PP01177 |
| | Rectifier board | 2 | — | S00591 | S00591 |
| Keypad ① | SVX/SPX keypad | 1 | — | KEYPAD-LOC/REM | KEYPAD-LOC/REM |
| Main DC fan ① | DC fan | 4 | — | PP00072 | PP00072 |
| | DC power supply | 4 | — | S01017 | S01017 |

Notes

① Factory recommended spare parts.

② Select one part number based on the amperage rating of the drive. Please contact EatonCare at 877-ETN-CARE for assistance.

FR14 Spare Parts

2

| Category | Description | Quantity/ Drive | 230 V Catalog Number | 480 V Catalog Number | 575 V Catalog Number |
|------------------|--------------------------|--------------------|-------------------------|-------------------------|-------------------------|
| Control | ASIC board | 2 | — | S00457 | S00457 |
| | Star coupler | 1 | — | S00593 | S00593 |
| | ASIC assembly | 2 | — | 60S01030 | 60S01030 |
| | Star coupler kit | 1 | — | FR10860 | FR10860 |
| Control fan | ASIC fan | 2 | — | PP01096 | PP01096 |
| Control module ① | SVX control module | 1 | — | CPBS0000000000 | CPBS0000000000 |
| | Standard slot A I/O card | 1 | — | OPTA9 | OPTA9 |
| | Standard slot B I/O card | 1 | — | OPTA2 | OPTA2 |
| Inverter | Power module ② | 1 | — | FR14-1770-4-ANV | FR14-1500-5-ANV |
| | | 1 | — | FR14-2150-4-ANV | FR14-1900-5-ANV |
| | | 1 | — | FR14-2700-4-ANV | FR14-2250-5-ANV |
| | Driver board | 6 | — | S00454 | S00454 |
| | Driver adapter board | 2 | — | VB00330 | VB00330 |
| | Shunt board ② | 36 | — | VB00541 | VB00516 |
| | | 36 | — | — | VB00517 |
| Covers | Top cover | 6 | — | FI10001 | FI10001 |
| | Side cover | 6 | — | FI10003 | FI10003 |
| DC section | Balancing resistor | 6 | — | PP13034 | PP13034 |
| | Bus capacitor | 72 | — | S00335 | S00336 |
| | DC busbars kit | 6 | — | FI13329 | FI13329 |
| Converter | Rectifier module | 2 | — | FR10823 | FR10823 |
| | Diode | 3 | — | PP01177 | PP01177 |
| | Rectifier board | 2 | — | S00591 | S00591 |
| Keypad ① | SVX/SPX keypad | 1 | — | KEYPAD-LOC/REM | KEYPAD-LOC/REM |
| Main DC fan ① | DC fan | 6 | — | PP00072 | PP00072 |
| | DC power supply | 6 | — | S01017 | S01017 |

Notes

① Factory recommended spare parts.

② Select one part number based on the amperage rating of the drive. Please contact EatonCare at 877-ETN-CARE for assistance.

Technical Data and Specifications

SVX Drives

| Description | Specification |
|----------------------------------|---|
| Input Ratings | |
| Input voltage (V_{in}) | +10%/–15% |
| Input frequency (f_{in}) | 50/60 Hz (variation up to 45–66 Hz) |
| Connection to power | Once per minute or less (typical operation) |
| High withstand rating | 100 kAIC |
| Output Ratings | |
| Output voltage | 0 to V_{in} |
| Continuous output current | I_H rated 100% at 122 °F (50 °C), FR9 and below I_L rated 100% at 104 °F (40 °C), FR9 and below I_H/I_L 100% at 104 °F (40 °C), FR10 and above |
| Overload current (I_H/I_L) | 150% I_H , 110% I_L for 1 min. |
| Output frequency | 0 to 320 Hz |
| Frequency resolution | 0.01 Hz |
| Initial output current (I_H) | 250% for 2 seconds |
| Efficiency | >96% |
| Control Characteristics | |
| Control method | Frequency control (V/f) Open loop: Sensorless vector control Closed loop: SPX drives only |
| Switching frequency | Adjustable with parameter 2.6.9 |
| Frame 4–6 | 1–16 kHz; default 10 kHz |
| Frame 7–12 | 1–10 kHz; default 3.6 kHz |
| Frequency reference | Analog input: Resolution 0.1% (10-bit), accuracy $\pm 1\%$ V/Hz Panel reference: Resolution 0.01 Hz |
| Field weakening point | 30–320 Hz |
| Acceleration time | 0–3000 sec. |
| Deceleration time | 0–3000 sec. |
| Braking torque | DC brake: 30% $\times T_n$ (without brake option) |
| Ambient Conditions | |
| Ambient operating temperature | 14 °F (–10 °C), no frost to 122 °F (50 °C) I_H (FR4–FR9) 14 °F (–10 °C), no frost to 104 °F (40 °C) I_H (FR10 and up) 14 °F (–10 °C), no frost to 104 °F (40 °C) I_L (all frames) |
| Storage temperature | –40° to 158 °F (–40° to 70 °C) |
| Relative humidity | 0 to 95% RH, noncondensing, non-corrosive, no dripping water |
| Air quality | Chemical vapors: IEC 721-3-3, unit in operation, class 3C2; Mechanical particles: IEC 721-3-3, unit in operation, class 3S2 |
| Altitude | 100% load capacity (no derating) up to 3280 ft (1000 m); 1% derating for each 328 ft (100 m) above 3280 ft (1000 m); max. 9842 ft (3000 m) |
| Vibration | EN 50178, EN 60068-2-6; 5 to 50 Hz, displacement amplitude 1 mm (peak) at 3 to 15.8 Hz, max. acceleration amplitude 1G at 15.8 to 150 Hz |
| Shock | EN 50178, EN 60068-2-27 UPS Drop test (for applicable UPS weights) Storage and shipping: max. 15 g, 11 ms (in package) |
| Enclosure class | NEMA 1/IP21 or NEMA 12/IP54, open chassis/IP20 |

| Description | Specification |
|----------------------------|---|
| Control Connections | |
| Analog input voltage | 0 to 10 V, $R = 200$ kohms (–10 to 10 V joystick control) resolution 0.1%; accuracy $\pm 1\%$ |
| Analog input current | 0(4) to 20 mA; $R_i = 250$ ohms differential |
| Digital inputs (6) | Positive or negative logic; 18 to 30 Vdc |
| Auxiliary voltage | +24 V $\pm 15\%$, max. 250 mA |
| Output reference voltage | +10 V +3%, max. load 10 mA |
| Analog output | 0(4) to 20 mA; R_i max. 500 ohms; resolution 10 bit; accuracy $\pm 2\%$ |
| Digital outputs | Open collector output, 50 mA/48V |
| Relay outputs | Two programmable Form C relay outputs switching capacity: 24 Vdc/8 A, 250 Vac/8 A, 125 Vdc/0.4 A |
| Protections | |
| Overcurrent protection | Trip limit 4.0 $\times I_H$ instantaneously |
| Overvoltage protection | Yes |
| Undervoltage protection | Yes |
| Earth fault protection | In case of earth fault in motor or motor cable, only the frequency converter is protected |
| Input phase supervision | Trips if any of the input phases are missing |
| Motor phase supervision | Trips if any of the output phases are missing |
| Overtemperature protection | Yes |
| Motor overload protection | Yes |
| Motor stall protection | Yes |
| Motor underload protection | Yes |
| Short-circuit protection | Yes (+24 V and +10 V reference voltages) |

Standard I/O Specifications

| Description | Specification |
|--|---|
| Six–digital input programmable | 24 V: "0" ≤ 10 V, "1" ≥ 18 V, $R_i > 5$ kohms |
| Two–analog input configurable w/jumpers | Voltage: 0– ± 10 V, $R_i > 200$ kohms Current: 0 (4)–20 mA, $R_i = 250$ ohms |
| Two–digital output programmable | Form C relays 250 Vac 30 Vdc 2 amp resistive |
| One–analog output programmable configurable w/jumper | 0–20 mA, R_i max. 500 ohms 10 bits $\pm 2\%$ |
| One digital output programmable | Open collector 48 Vdc 50 mA |

2.7

Adjustable Frequency Drives

SVX Drives


Dimensions

Approximate Dimensions in Inches (mm)

2

9000X Open Drives


NEMA Type 1/IP21 and NEMA Type 12/IP54, FR4, FR5 and FR6

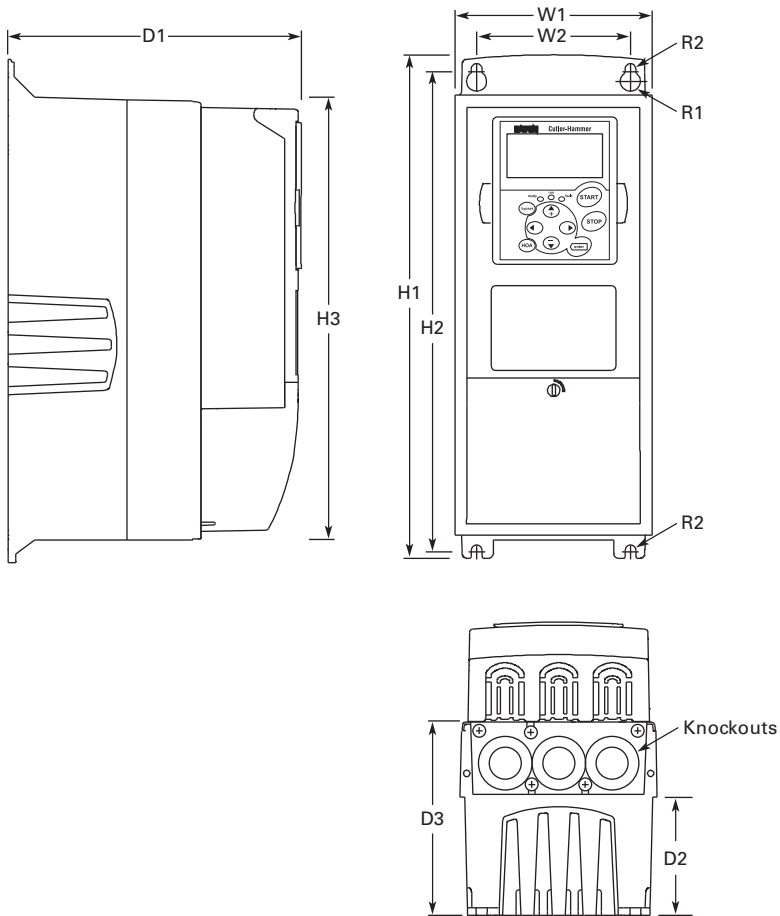

| Voltage | hp (I _H) | H1 | H2 | H3 | D1 | D2 | D3 | W1 | W2 | R1 Dia. | R2 Dia. | Weight Lbs (kg) | Knockouts at Inches (mm) N1 (O.D.) |
|------------|----------------------|-------|-------|-------|-------|-------|-------|-------|-------|------------|---------|--------------------|---------------------------------------|
| FR4 | | | | | | | | | | | | | |
| 230 V | 3/4–3 | 12.9 | 12.3 | 11.5 | 7.5 | 3.0 | 4.9 | 5.0 | 3.9 | 0.5 (13) | 0.3 (7) | 11.0 (5) | 3 @ 1.1 (28) |
| 480 V | 1–5 | (327) | (313) | (292) | (190) | (77) | (126) | (128) | (100) | | | | |
| FR5 | | | | | | | | | | | | | |
| 230 V | 5–7-1/2 | 16.5 | 16.0 | 15.3 | 8.4 | 3.9 | 5.8 | 5.6 | 3.9 | 0.5 (13) | 0.3 (7) | 17.9 (8) | 2 @ 1.5 (37) |
| 480 V | 7-1/2–15 | (419) | (406) | (389) | (214) | (100) | (148) | (143) | (100) | | | | 1 @ 1.1 (28) |
| FR6 | | | | | | | | | | | | | |
| 230 V | 10–15 | 22.0 | 21.3 | 20.4 | 9.3 | 4.2 | 6.5 | 7.6 | 5.8 | 0.6 (15.5) | 0.4 (9) | 40.8 (19) | 3 @ 1.5 (37) |
| 480 V | 20–30 | (558) | (541) | (519) | (237) | (105) | (165) | (195) | (148) | | | | |
| 575 V | 2–25 | | | | | | | | | | | | |

Approximate Dimensions in Inches (mm)

NEMA Type 1/IP21 and NEMA Type 12/IP54 with Flange Kit, FR4, FR5 and FR6

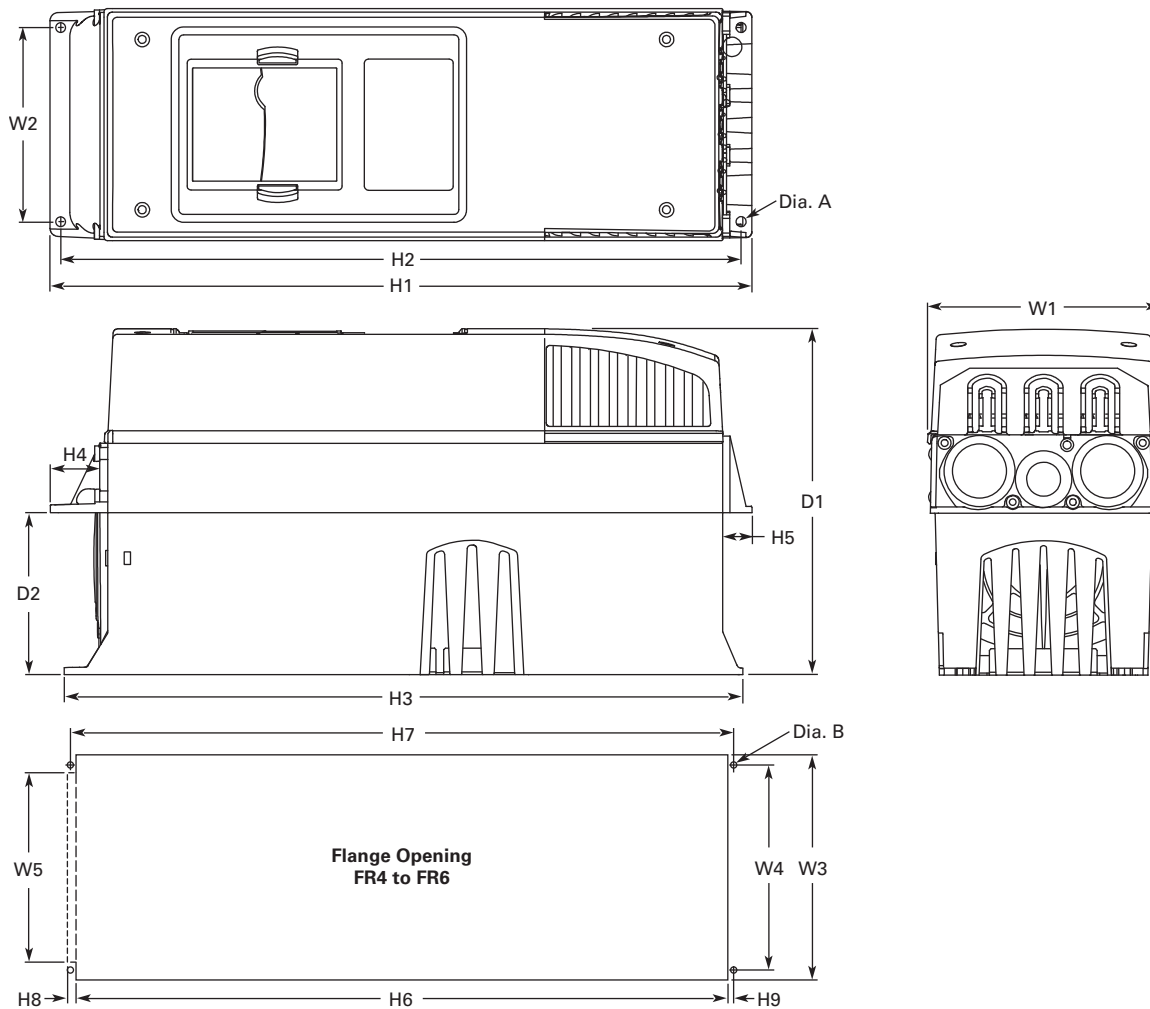

FR4, FR5 and FR6 with Flange Kit

| W1 | W2 | H1 | H2 | H3 | H4 | H5 | D1 | D2 | Dia. A |
|------------|-----------|------------|------------|------------|----------|----------|-----------|-----------|---------|
| FR4 | | | | | | | | | |
| 5.0 (128) | 4.5 (113) | 13.3 (337) | 12.8 (325) | 12.9 (327) | 1.2 (30) | 0.9 (22) | 7.5 (190) | 3.0 (77) | 0.3 (7) |
| FR5 | | | | | | | | | |
| 5.6 (143) | 4.7 (120) | 17.0 (434) | 16.5 (420) | 16.5 (419) | 1.4 (36) | 0.7 (18) | 8.4 (214) | 3.9 (100) | 0.3 (7) |
| FR6 | | | | | | | | | |
| 7.7 (195) | 6.7 (170) | 22.0 (560) | 21.6 (549) | 22.0 (558) | 1.2 (30) | 0.8 (20) | 9.3 (237) | 4.2 (106) | 0.3 (7) |

Flange Opening, FR4 to FR6

| W3 | W4 | W5 | H6 | H7 | H8 | H9 | Dia. B |
|------------|-----------|-----------|------------|------------|---------|---------|---------|
| FR4 | | | | | | | |
| 4.8 (123) | 4.5 (113) | — | 12.4 (315) | 12.8 (325) | — | 0.2 (5) | 0.3 (7) |
| FR5 | | | | | | | |
| 5.3 (135) | 4.7 (120) | — | 16.2 (410) | 16.5 (420) | — | 0.2 (5) | 0.3 (7) |
| FR6 | | | | | | | |
| 7.3 (185) | 6.7 (170) | 6.2 (157) | 21.2 (539) | 21.6 (549) | 0.3 (7) | 0.2 (5) | 0.3 (7) |

2.7



Adjustable Frequency Drives

SVX Drives

Approximate Dimensions in Inches (mm)

NEMA Type 1/IP21 and NEMA Type 12/IP54, FR7


2

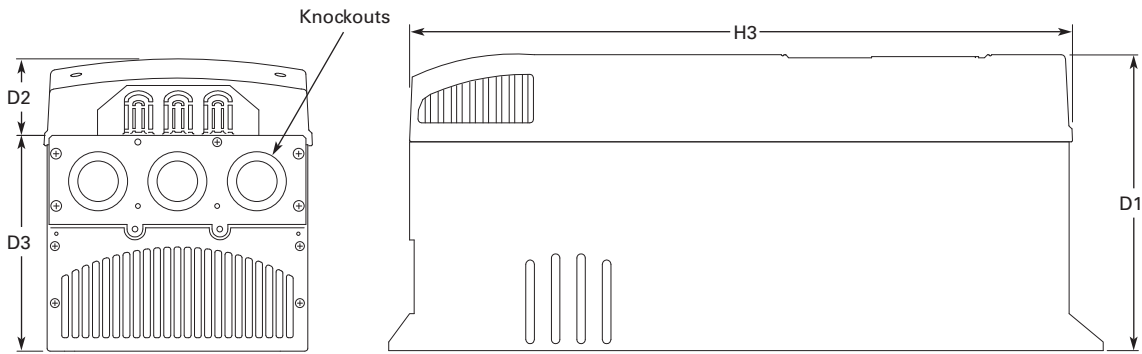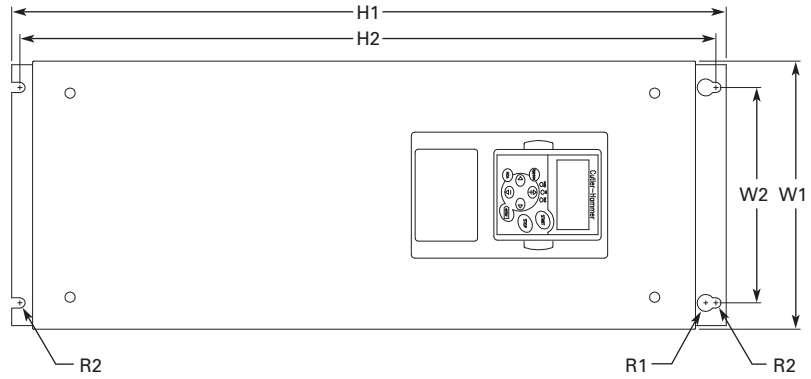

| Voltage | hp (I _H) | H1 | H2 | H3 | D1 | D2 | D3 | W1 | W2 | R1 Dia. | R2 Dia. | Weight Lbs (kg) | Knockouts at Inches (mm) N1 (O.D.) |
|---------|----------------------|------------|------------|------------|------------|----------|-----------|-----------|-----------|----------|---------|--------------------|---------------------------------------|
| 230 V | 20–30 | 24.8 (630) | 24.2 (614) | 23.2 (590) | 10.1 (257) | 3.0 (77) | 7.3 (184) | 9.3 (237) | 7.5 (190) | 0.7 (18) | 0.4 (9) | 77.2 (35) | 3 at 1.5 (37) |
| 480 V | 40–60 | | | | | | | | | | | | |
| 575 V | 30–40 | | | | | | | | | | | | |

Approximate Dimensions in Inches (mm)

NEMA Type 1/IP21 and NEMA Type 12/IP54, FR8

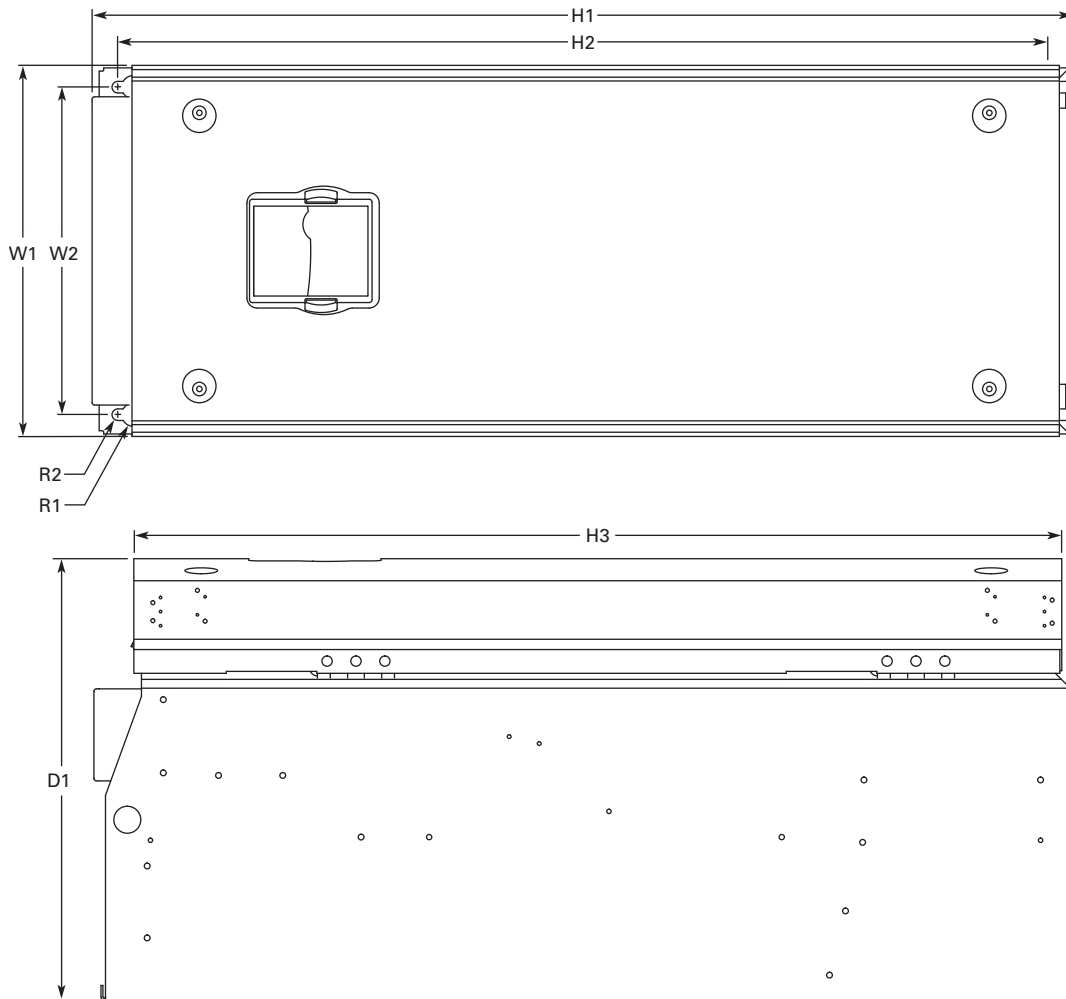

| Voltage | hp (I _H) | D1 | H1 | H2 | H3 | W1 | W2 | R1 Dia. | R2 Dia. | Weight Lbs (kg) |
|---------|----------------------|------------|------------|------------|------------|------------|----------|----------|---------|--------------------|
| 230 V | 40–60 | 13.5 (344) | 30.1 (764) | 28.8 (732) | 28.4 (721) | 11.5 (291) | 10 (255) | 0.7 (18) | 0.4 (9) | 127 (58) |
| 480 V | 75–125 | | | | | | | | | |
| 575 V | 50–75 | | | | | | | | | |

2.7


Adjustable Frequency Drives

SVX Drives

Approximate Dimensions in Inches (mm)

NEMA Type 1/IP21 and NEMA Type 12/IP54, with Flange Kit, FR7 and FR8

2

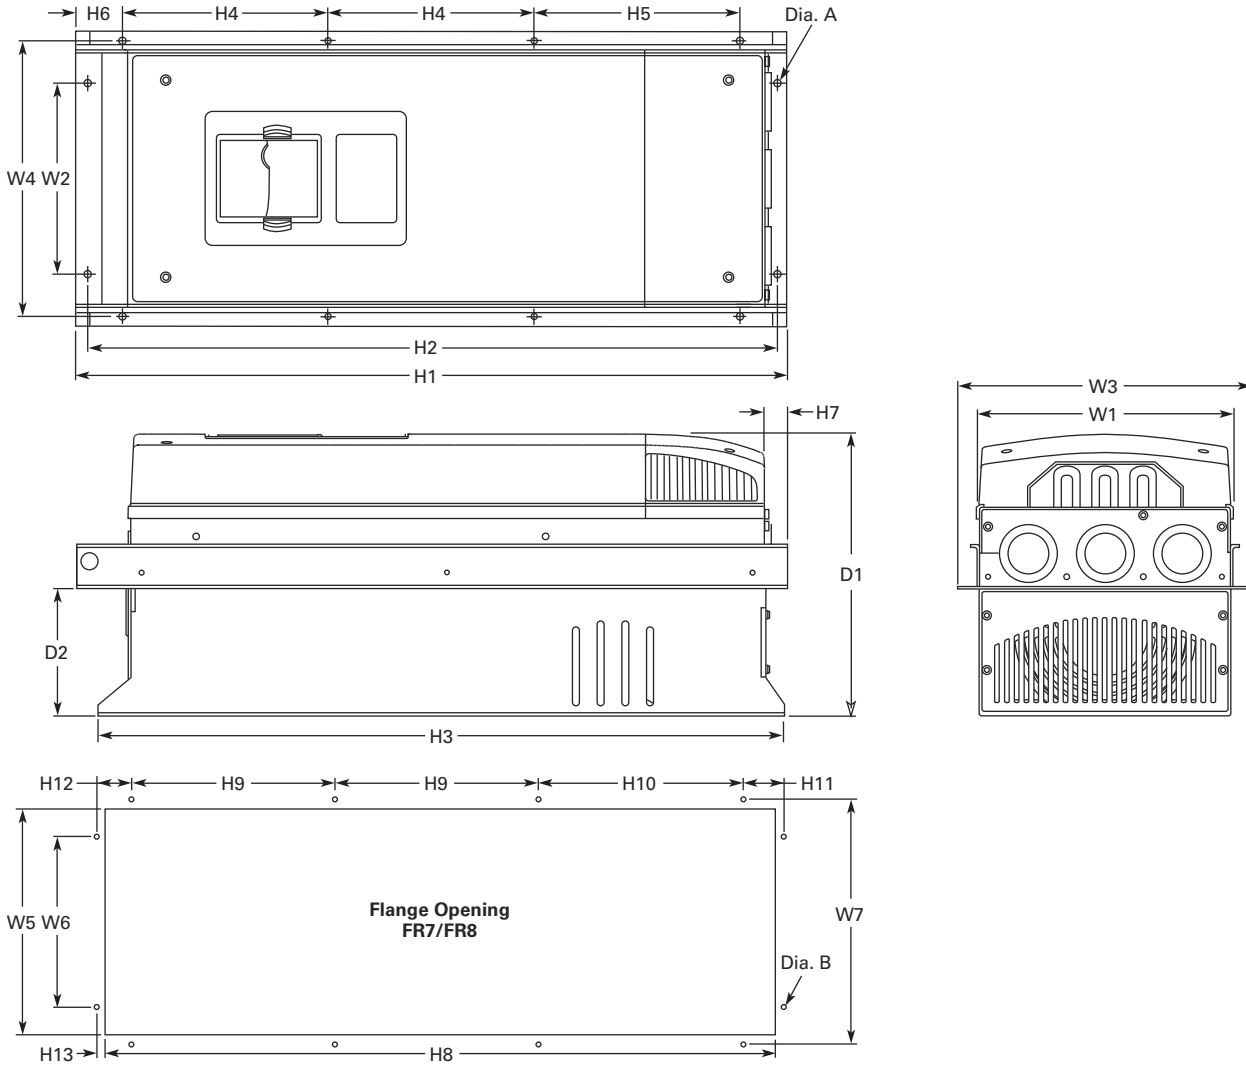


| W1 | W2 | W3 | W4 | H1 | H2 | H3 | H4 | H5 | H6 | H7 | D1 | D2 | Dia. A |
|------------|-----------|------------|------------|------------|------------|------------|------------|------------|----------|----------|------------|-----------|---------|
| FR7 | | | | | | | | | | | | | |
| 9.3 (237) | 6.8 (175) | 10.6 (270) | 10.0 (253) | 24.9 (652) | 24.8 (632) | 24.8 (630) | 7.4 (189) | 7.4 (189) | 0.9 (23) | 0.8 (20) | 10.1 (257) | 4.6 (117) | 0.3 (6) |
| FR8 | | | | | | | | | | | | | |
| 11.2 (285) | — | 14.0 (355) | 13.0 (330) | 32.8 (832) | — | 29.3 (745) | 10.2 (258) | 10.4 (265) | 1.7 (43) | 2.2 (57) | 13.5 (344) | 4.3 (110) | 0.4 (9) |

Flange Opening, FR7 and FR8

| W5 | W6 | W7 | H8 | H9 | H10 | H11 | H12 | H13 | Dia. B |
|------------|-----------|------------|------------|------------|------------|----------|----------|----------|---------|
| FR7 | | | | | | | | | |
| 9.2 (233) | 6.9 (175) | 10.0 (253) | 24.4 (619) | 7.4 (189) | 7.4 (189) | 1.4 (35) | 1.3 (32) | 1.0 (25) | 0.3 (6) |
| FR8 | | | | | | | | | |
| 11.9 (301) | — | 13.0 (330) | 31.9 (810) | 10.2 (258) | 10.4 (265) | — | — | 1.3 (33) | 0.4 (9) |

Approximate Dimensions in Inches (mm)

NEMA Type 1/IP21 and NEMA Type 12/IP54 FR9

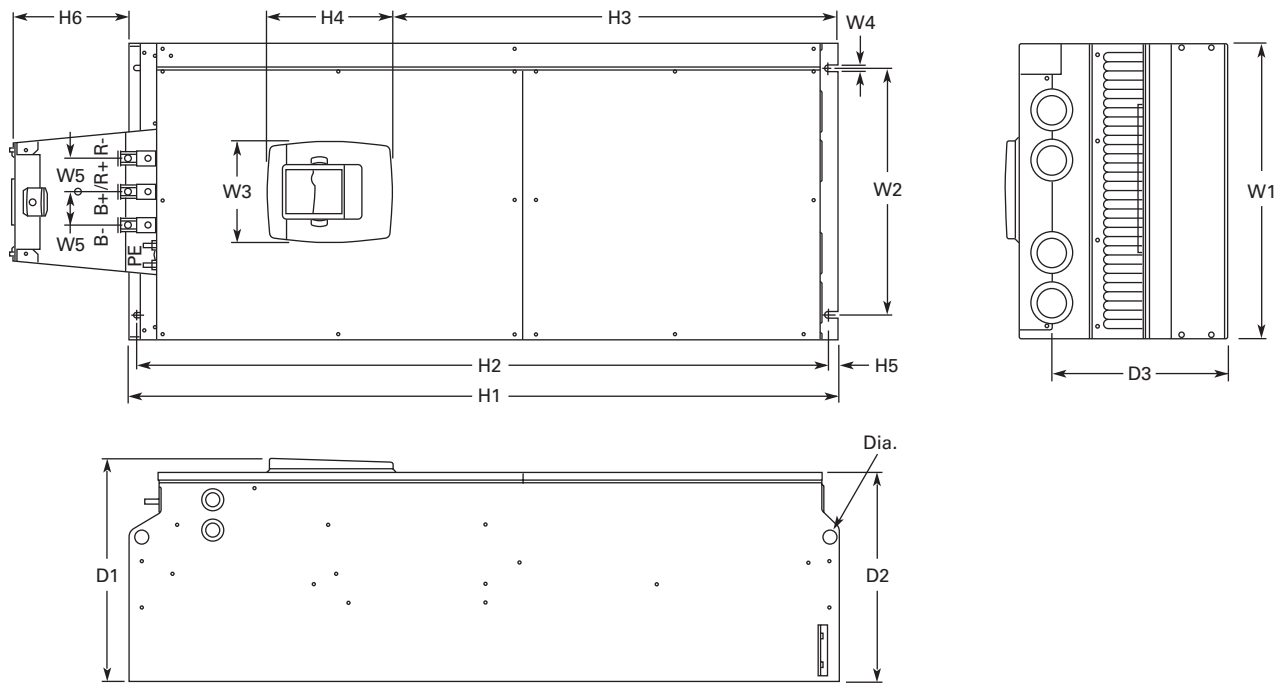

| Voltage | hp (I _H) | W1 | W2 | W3 | W4 | H1 | H2 | H3 | H4 ^① | D1 | D2 | D3 | Dia. | Weight Lbs (kg) |
|---------|----------------------|-------|-------|-----|------|--------|--------|------|-----------------|---------|-------|-------|------|--------------------|
| 230 V | 75–100 | 18.9 | 15.7 | 0.4 | 2.1 | 45.3 | 44.1 | 0.6 | 7.4 | 14.2 | 13.4 | 11.2 | 0.8 | 321.9 (146) |
| 480 V | 150–200 | (480) | (400) | (9) | (54) | (1150) | (1120) | (16) | (188) | (361.5) | (340) | (285) | (21) | |
| 575 V | 100–175 | | | | | | | | | | | | | |

Note

① Brake resistor terminal box (H6) included when brake chopper ordered.

2.7




Adjustable Frequency Drives

SVX Drives

Approximate Dimensions in Inches (mm)

NEMA Type 1/IP21 and NEMA Type 12/IP54, FR9 with Flange Kit





2

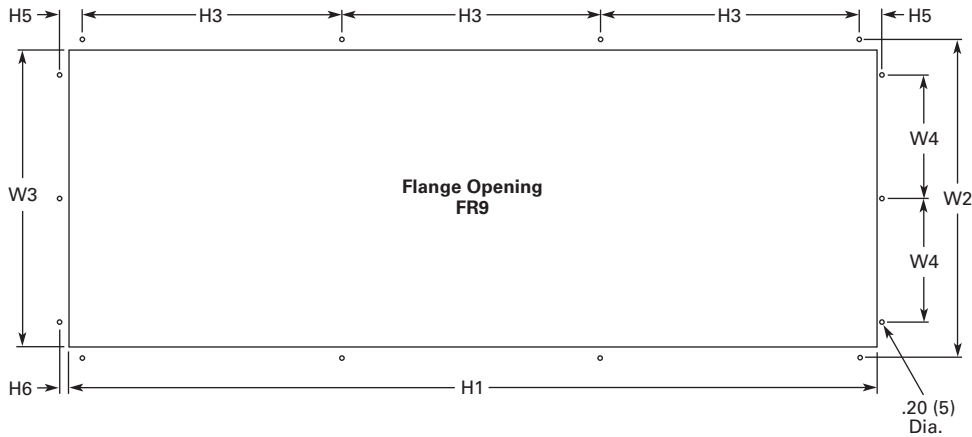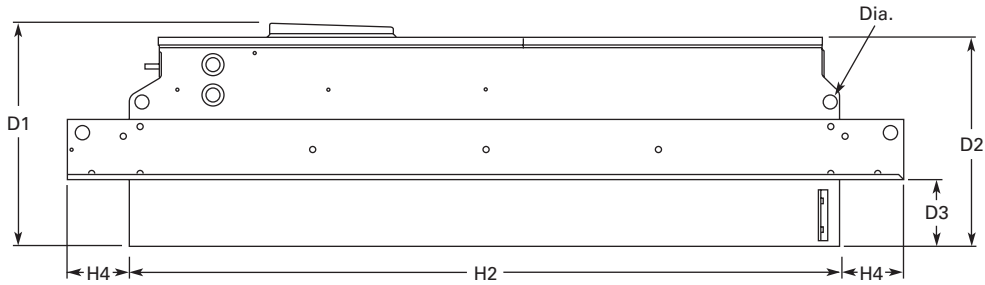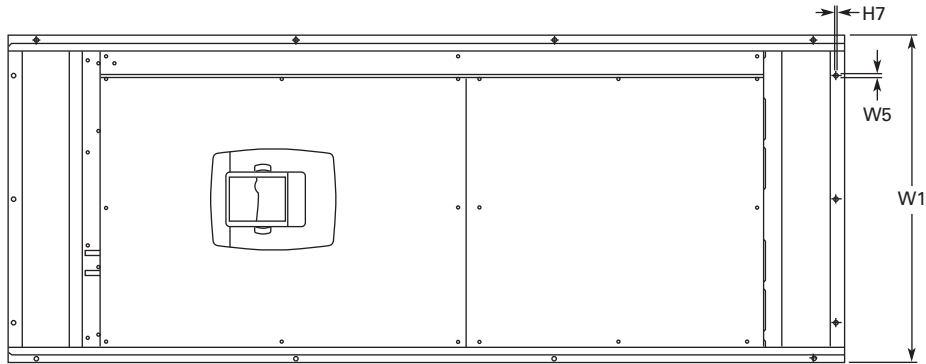

| W1 | W2 | W3 | W4 | W5 | H1 | H2 | H3 | H4 | H5 | H6 | H7 | D1 | D2 | D3 | Dia. |
|------------|------------|------------|-----------|-----------|-------------|-------------|------------|-----------|----------|---------|---------|------------|------------|-----------|----------|
| 20.9 (530) | 20.0 (510) | 19.1 (485) | 7.9 (200) | 0.2 (5.5) | 51.7 (1312) | 45.3 (1150) | 16.5 (420) | 3.9 (100) | 1.4 (35) | 0.4 (9) | 0.1 (2) | 24.9 (362) | 13.4 (340) | 4.3 (109) | 0.8 (21) |

Approximate Dimensions in Inches (mm)

NEMA Type 1/IP21 and NEMA Type 12/IP54, FR10 Freestanding

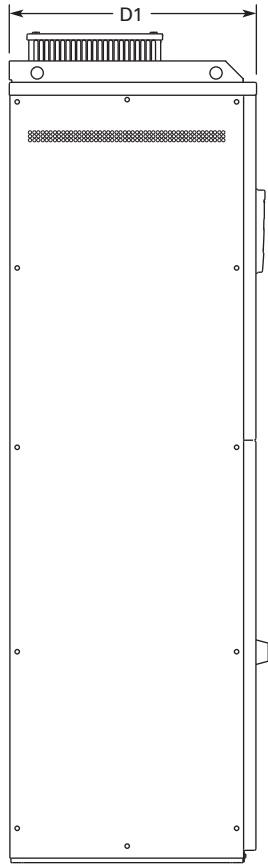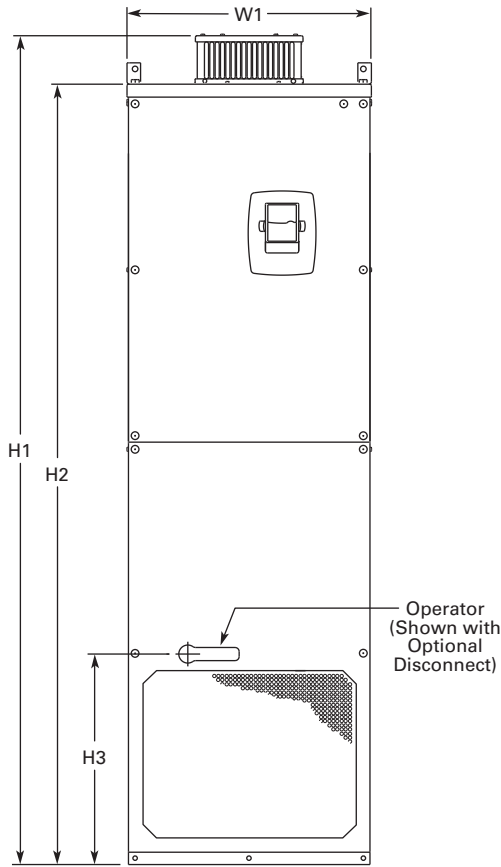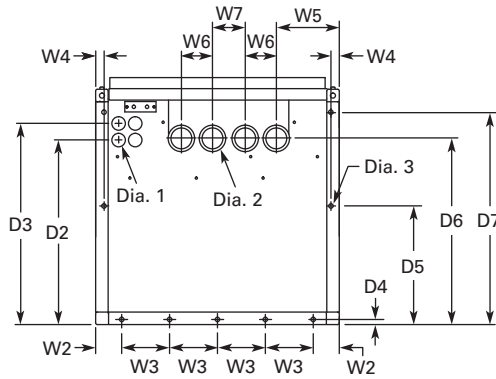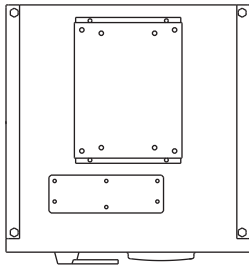

| W1 | W2 | W3 | W4 | W5 | W6 | W7 | H1 | H2 | H3 | D1 | D2 | D3 | D4 | D5 | D6 | D7 | Dia. 1 | Dia. 2 | Dia. 3 | Weight Lbs (kg) |
|----------------|----------------|---------------|--------------|---------------|--------------|---------------|-----------------|-----------------|------------------|----------------|----------------|----------------|--------------|----------------|----------------|----------------|--------------|--------------|--------------|--------------------|
| 23.43 (595) | 2.46 (62.5) | 4.53 (115) | 0.79 (20) | 5.95 (151) | 2.95 (75) | 30.11 (79) | 79.45 (2018) | 74.80 (1900) | 20.18 (512.5) | 23.70 (602) | 17.44 (443) | 19.02 (483) | 0.47 (12) | 11.22 (285) | 17.60 (447) | 20.08 (510) | 0.83 (21) | 1.89 (48) | 0.43 (11) | 857 (389) |

2.7


Adjustable Frequency Drives

SVX Drives

Approximate Dimensions in Inches (mm)

FR10 Open Chassis ①

2

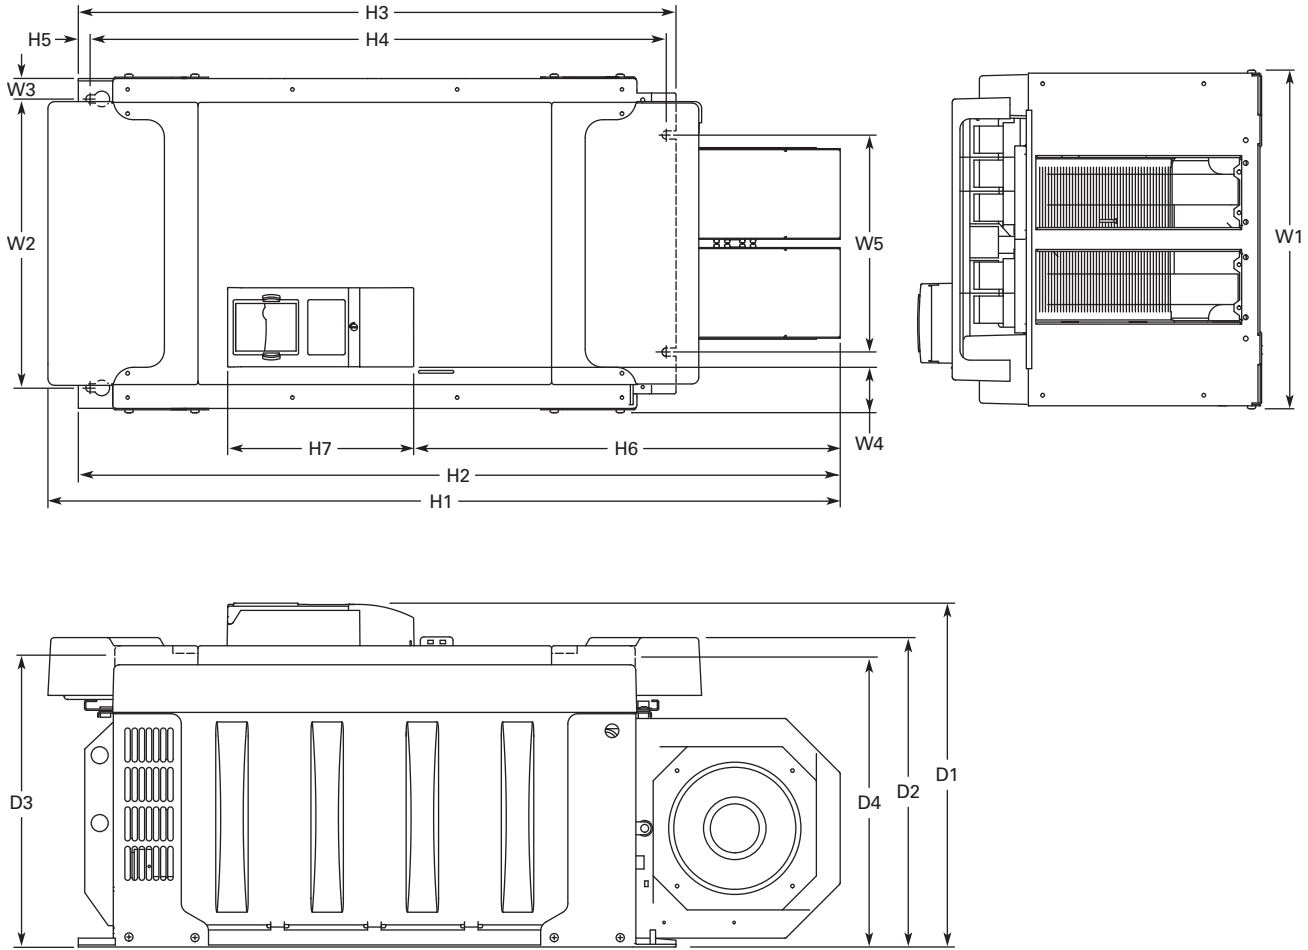





| Voltage | hp (I _H) | W1 | W2 | W3 | W4 | W5 | H1 | H2 | H3 | H4 | H5 | H6 | H7 | D1 | D2 | D3 | D4 | Weight Lbs (kg) |
|---------|----------------------|---------------|---------------|-------------|-------------|---------------|----------------|----------------|---------------|---------------|-------------|---------------|---------------|---------------|---------------|---------------|---------------|--------------------|
| 480 V | 250–350 | 19.7 (500) | 16.7 (425) | 1.2 (30) | 2.6 (67) | 12.8 (325) | 45.9 (1165) | 44.1 (1121) | 34.6 (879) | 33.5 (850) | 0.7 (17) | 24.7 (627) | 10.8 (275) | 19.9 (506) | 17.9 (455) | 16.7 (423) | 16.6 (421) | 518 (235) |
| 575 V | 200–300 | | | | | | | | | | | | | | | | | |

Note

① 9000X FR12 is built of two FR10 modules. Please refer to SPX installation manual for mounting instructions.

Approximate Dimensions in Inches (mm)

NEMA Type 1/IP21, FR11 Freestanding Drive

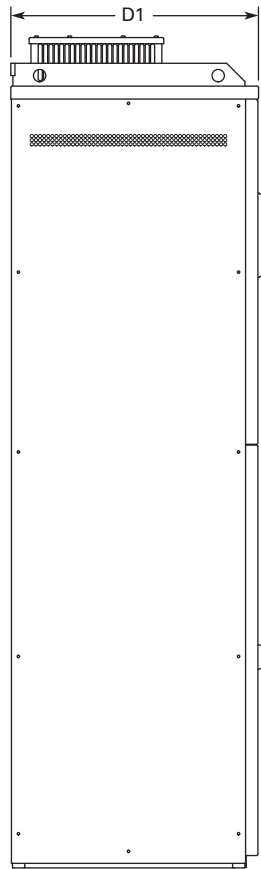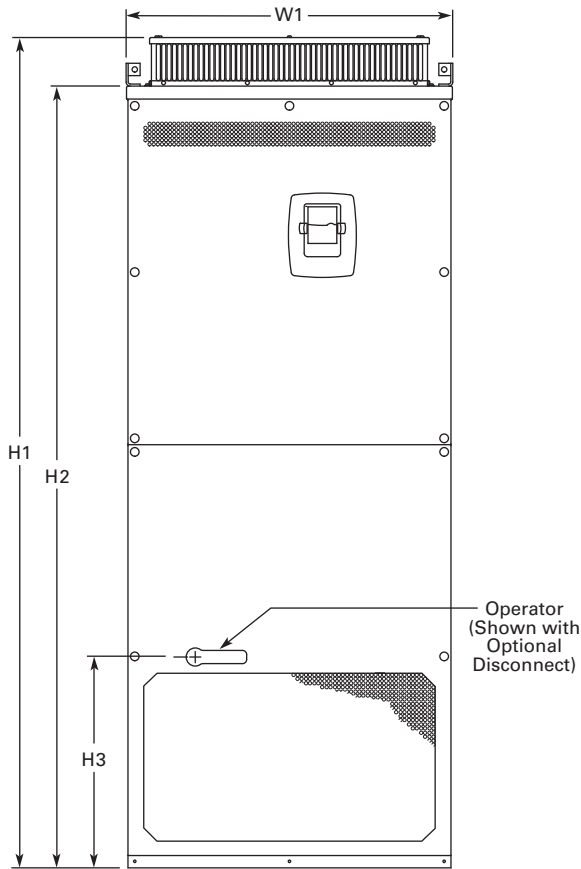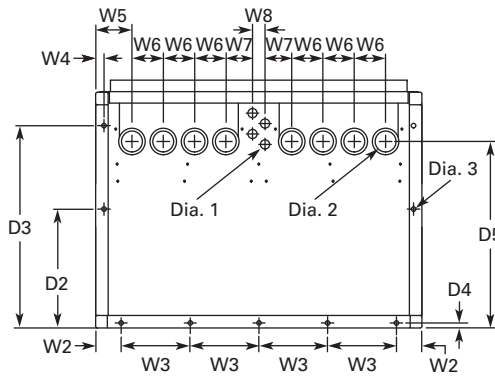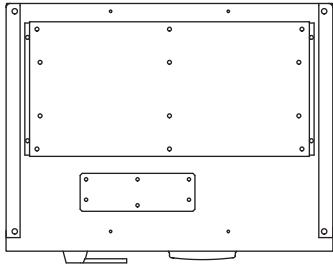

| Voltage | hp (I _H) | W1 | W2 | W3 | W4 | W5 | W6 | W7 | W8 | H1 | H2 | H3 | D1 | D2 | D3 | D4 | D5 | Dia. 1 | Dia. 2 | Dia. 3 | Weight Lbs (kg) |
|---------|----------------------|----------------|--------------|---------------|--------------|--------------|--------------|--------------|--------------|-----------------|-----------------|------------------|----------------|----------------|----------------|--------------|----------------|--------------|--------------|-------------------------|--------------------|
| 480 | 400-550 | 31.26 (794) | 2.40 (61) | 6.50 (165) | 0.79 (20) | 3.43 (87) | 2.95 (75) | 2.52 (64) | 1.18 (30) | 79.45 (2018) | 74.80 (1900) | 20.18 (512.5) | 23.70 (602) | 11.22 (285) | 19.09 (485) | 0.47 (12) | 17.60 (447) | 0.83 (21) | 1.89 (48) | 0.35 x 0.43 (9 x 11) | 526 (239) |

2.7


Adjustable Frequency Drives

SVX Drives

Approximate Dimensions in Inches (mm)

FR11 Open Chassis


2

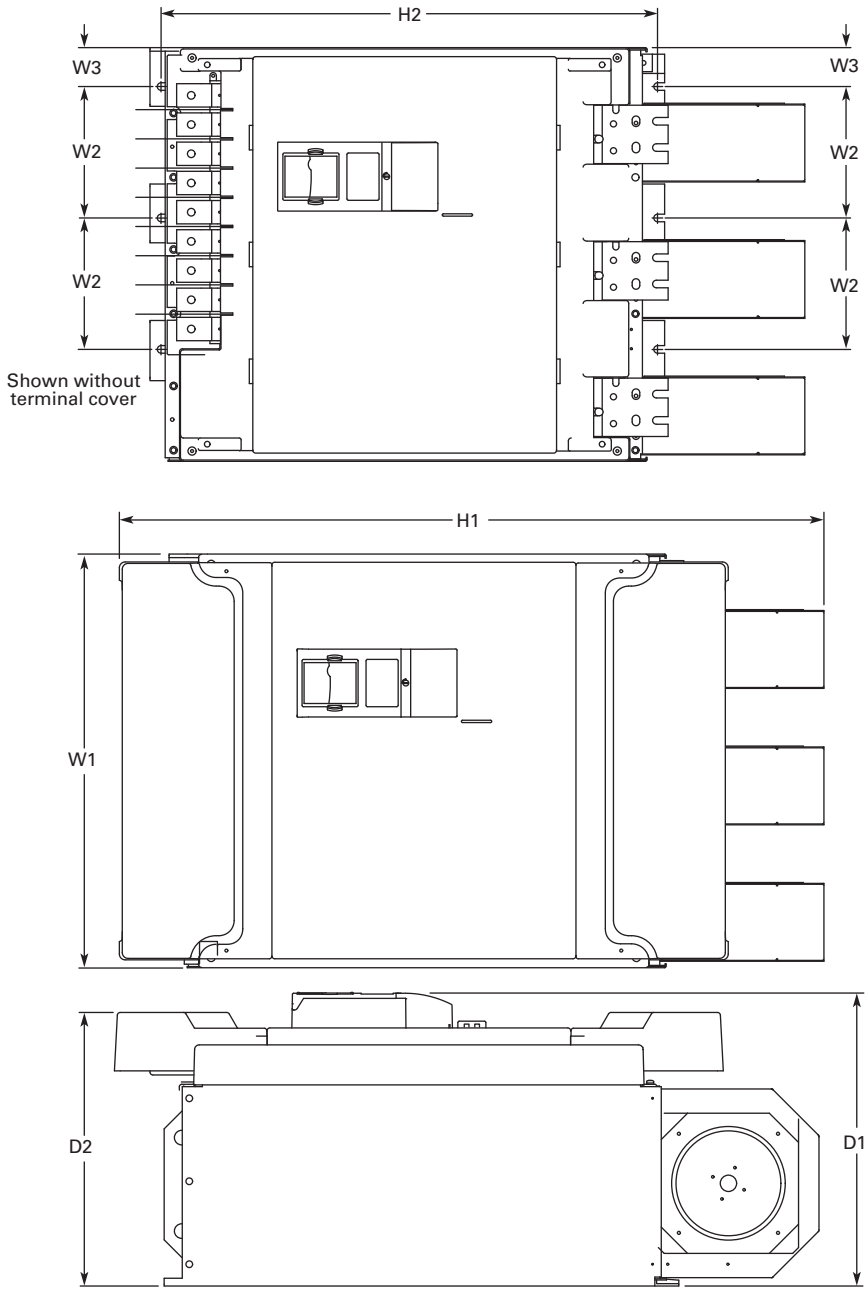

| Voltage | hp (I _H) | W1 | W2 | W3 | H1 | H2 | D1 | D2 | Weight Lbs (kg) |
|---------|----------------------|------------|------------|----------|-------------|------------|------------|------------|--------------------|
| 480 V | 400–550 | 27.9 (709) | 8.86 (225) | 2.6 (67) | 45.5 (1155) | 33.5 (850) | 19.8 (503) | 18.4 (468) | 833 (378) |
| 575 V | 400–500 | | | | | | | | |

Approximate Dimensions in Inches (mm)

FR13, Open Chassis Inverter

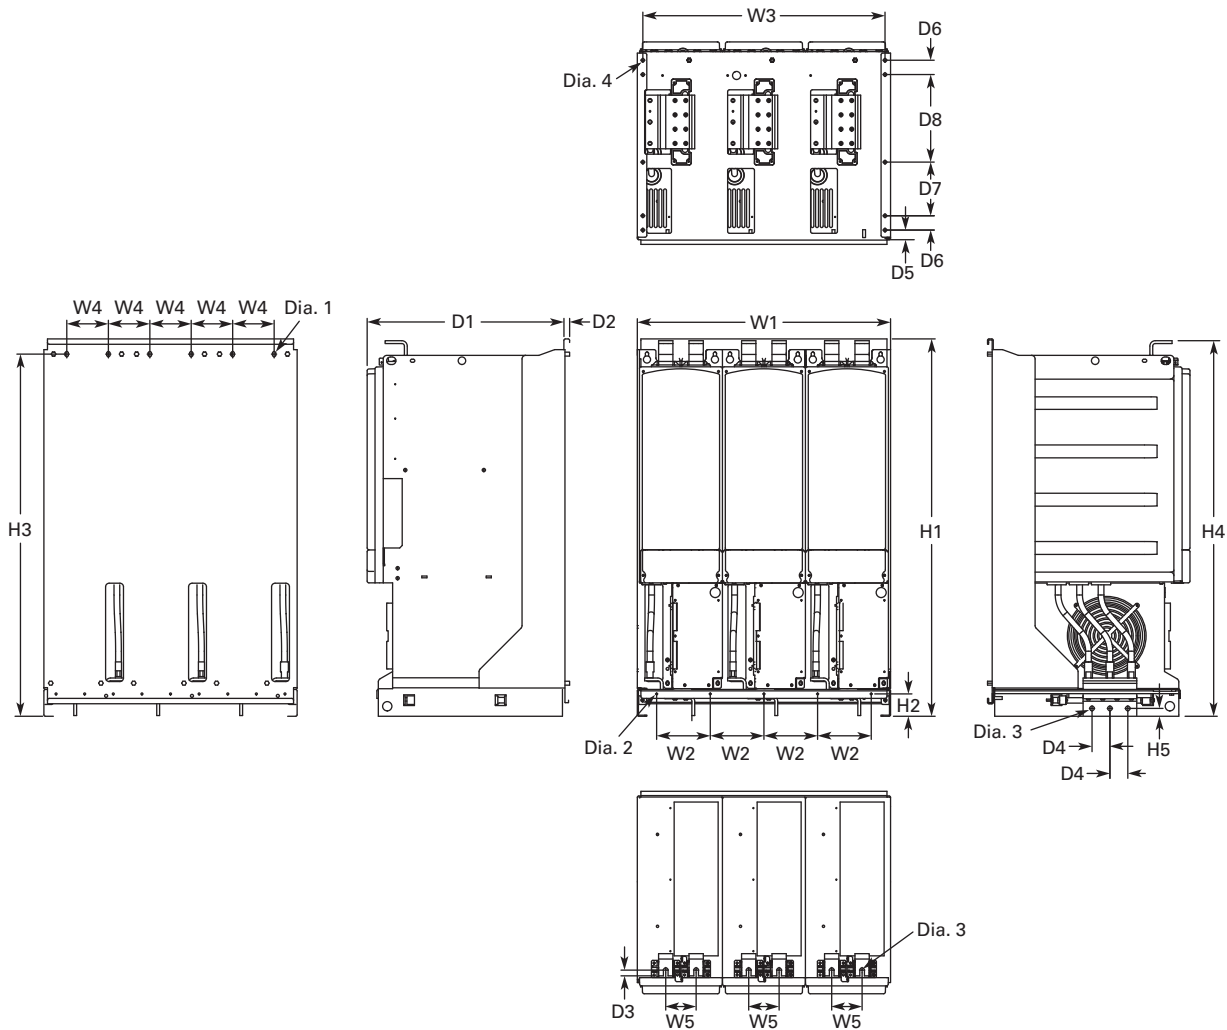

| W1 | W2 | W3 | W4 | W5 | H1 | H2 | H3 | H4 | H5 | D1 | D2 | D3 | D4 | D5 | D6 | D7 | D8 | Dia. 1 | Dia. 2 | Dia. 3 | Dia. 4 | Weight Lbs (kg) |
|-------|-------|-------|-------|------|--------|--------|----------|--------|------|-------|------|------|------|------|------|-------|---------|-----------|--------|--------|--------|-----------------|
| 27.87 | 5.91 | 26.65 | 4.57 | 3.35 | 41.54 | 2.46 | 39.86 | 41.34 | 0.79 | 21.77 | 0.51 | 0.63 | 1.97 | 1.06 | 1.57 | 5.91 | 9.64 | 0.35x0.59 | 0.18 | 0.51 | 0.37 | 683 |
| (708) | (150) | (677) | (116) | (85) | (1055) | (62.5) | (1012.5) | (1050) | (20) | (553) | (13) | (16) | (50) | (27) | (40) | (150) | (244.8) | (9x15) | (4.6) | (13) | (9.5) | (310) |

Notes

9000X FR14 is built of two FR13 modules. Please refer to SPX installation manual for mounting instructions.

FR13 is built from an inverter module and a converter module. Please refer to SPX installation manual for mounting instructions.

2.7


Adjustable Frequency Drives

SVX Drives

Approximate Dimensions in Inches (mm)

FR13, Open Chassis Converter

2

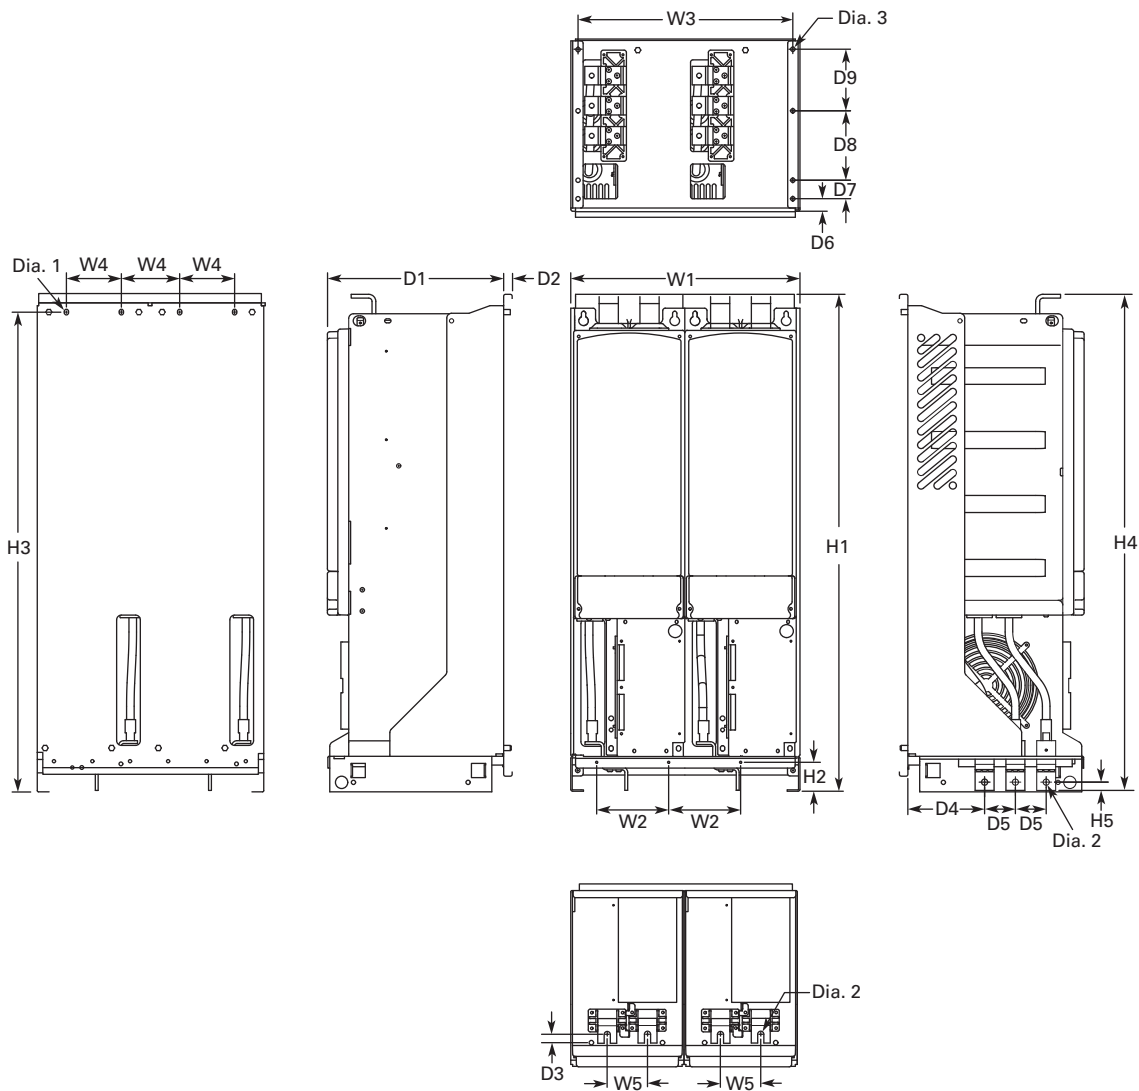

| W1 | W2 | W3 | W4 | W5 | H1 | H2 | H3 | H4 | H5 | D1 | D2 | D3 | D4 | D5 | D6 | D7 | D8 | D9 | Dia. 1 | Dia. 2 | Dia. 3 | Weight Lbs (kg) |
|----------------|---------------|----------------|---------------|--------------|-----------------|----------------|-------------------|-----------------|----------------|----------------|--------------|----------------|---------------|--------------|--------------|--------------|---------------|---------------|---------------------|--------------|---------------|--------------------|
| 18.74 (476) | 5.91 (150) | 17.52 (445) | 4.57 (116) | 3.35 (85) | 41.54 (1055) | 2.46 (62.5) | 39.86 (1012.5) | 41.34 (1050) | 0.69 (17.5) | 14.69 (373) | 0.51 (13) | 0.73 (18.5) | 6.42 (163) | 2.56 (65) | 1.06 (27) | 1.57 (40) | 5.91 (150) | 5.24 (133) | 0.35x0.59 (9x15) | 0.51 (13) | 0.37 (9.5) | 295 (134) |


Number of Input Units

| 480 V Catalog Number | hp | Input Modules |
|-------------------------|-----|------------------|
| SPX800A0-4A2N1 | 800 | 2 |

| 690 V Catalog Number | hp | Input Modules |
|-------------------------|------|------------------|
| SPX800A0-5A2N1 | 800 | 2 |
| SPX900A0-5A2N1 | 900 | 2 |
| SPXH10A0-5A2N1 | 1000 | 2 |

Approximate Dimensions in Inches (mm)

FR13, Open Chassis Converter—900/1000 hp 480 V

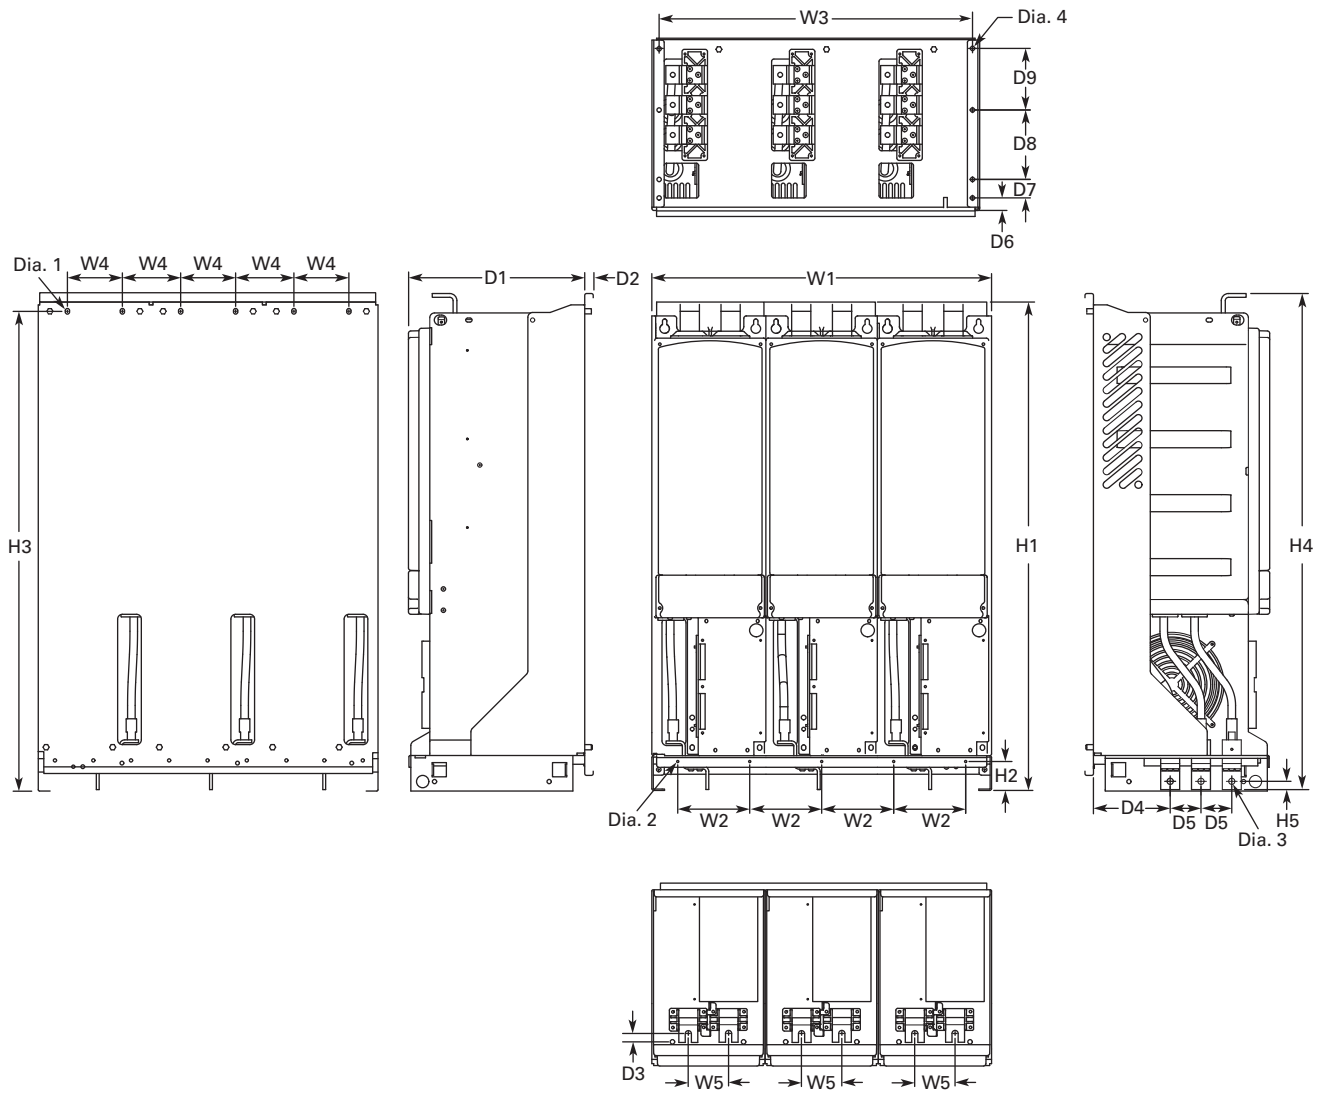

| W1 | W2 | W3 | W4 | W5 | H1 | H2 | H3 | H4 | H5 | D1 | D2 | D3 | D4 | D5 | D6 | D7 | D8 | D9 | Dia. 1 | Dia. 2 | Dia. 3 | Dia. 4 | Weight Lbs (kg) |
|-------|-------|-------|-------|------|--------|--------|----------|--------|--------|-------|------|--------|-------|------|------|------|-------|-------|-----------|--------|--------|--------|-----------------|
| 27.87 | 5.91 | 26.65 | 4.57 | 3.35 | 41.54 | 2.46 | 39.86 | 41.34 | 0.69 | 14.69 | 0.51 | 0.73 | 6.42 | 2.56 | 1.06 | 1.57 | 5.91 | 5.24 | 0.35x0.59 | 0.18 | 0.51 | 0.37 | 443 |
| (708) | (150) | (677) | (116) | (85) | (1055) | (62.5) | (1012.5) | (1050) | (17.5) | (373) | (13) | (18.5) | (163) | (65) | (27) | (40) | (150) | (133) | (9x15) | (4.6) | (13) | (9.5) | (201) |

Number of Input Units

| 480 V Catalog Number | hp | Input Modules |
|----------------------|------|---------------|
| SPX900A0-4A2N1 | 900 | 3 |
| SPXH10A0-4A2N1 | 1000 | 3 |

2.7

Adjustable Frequency Drives

SVX Drives

Approximate Dimensions in Inches (mm)


2

AC Choke Dimensions

Choke Types

| Catalog Number | Frame Size | Choke Type ① | Catalog Number | Frame Size | Choke Type ① |
|--------------------------------|------------|--------------|--------------------------------|------------|--------------|
| Voltage Range 380–500 V | | | Voltage Range 525–690 V | | |
| SPX 250 4 | FR10 | CHK0400 | SPX 200 5 | FR10 | CHK0261 |
| SPX 300 4 | | CHK0520 | SPX 250 5 | | CHK0400 |
| SPX 350 4 | | CHK0520 | SPX 300 5 | | CHK0400 |
| SPX 400 4 | FR11 | 2 x CHK0400 | SPX 400 5 | FR11 | CHK0520 |
| SPX 500 4 | | 2 x CHK0400 | SPX 450 5 | | CHK0520 |
| SPX 550 4 | | 2 x CHK0400 | SPX 500 5 | | 2 x CHK0400 |
| SPX 600 4 | FR12 | 2 x CHK0520 | SPX 550 5 | FR12 | 2 x CHK0400 |
| SPX 650 4 | | 2 x CHK0520 | SPX 600 5 | | 2 x CHK0400 |
| SPX 700 4 | | 2 x CHK0520 | SPX 700 5 | | 2 x CHK0400 |
| SPX 800 4 | FR13 | 2 x CHK0400 | SPX 800 5 | FR13 | 2 x CHK0400 |
| SPX 900 4 | | 3 x CHK0520 | SPX 900 5 | | 2 x CHK0400 |
| SPX H10 4 | | 3 x CHK0520 | SPX H10 5 | | 2 x CHK0400 |
| SPX H12 4 | FR14 | 4 x CHK0520 | SPX H13 5 | FR14 | 4 x CHK0400 |
| SPX H16 4 | | 6 x CHK0400 | SPX H15 5 | | 6 x CHK0400 |

CHK0520

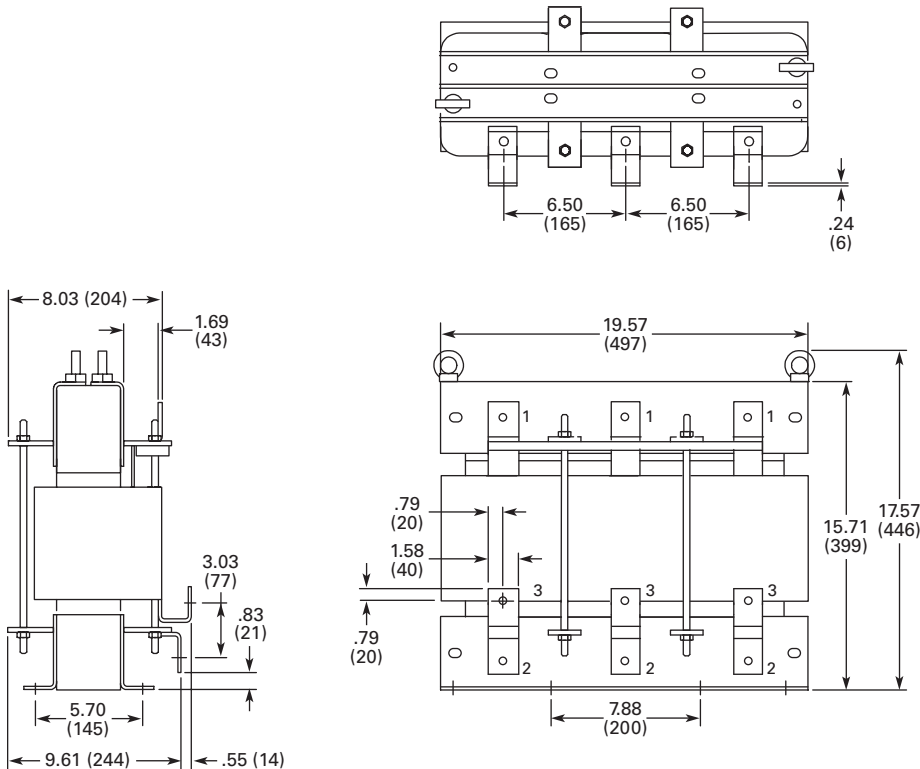


Note


① Chokes are provided with all FR10–FR14 drives.

Approximate Dimensions in Inches (mm)

CHK0400

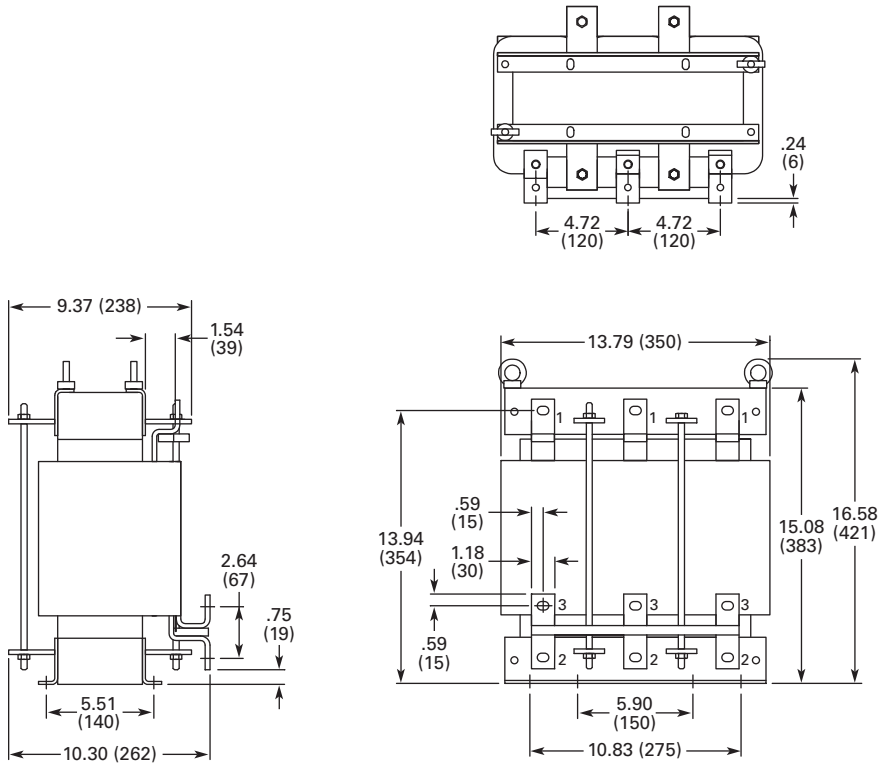


CHK0261

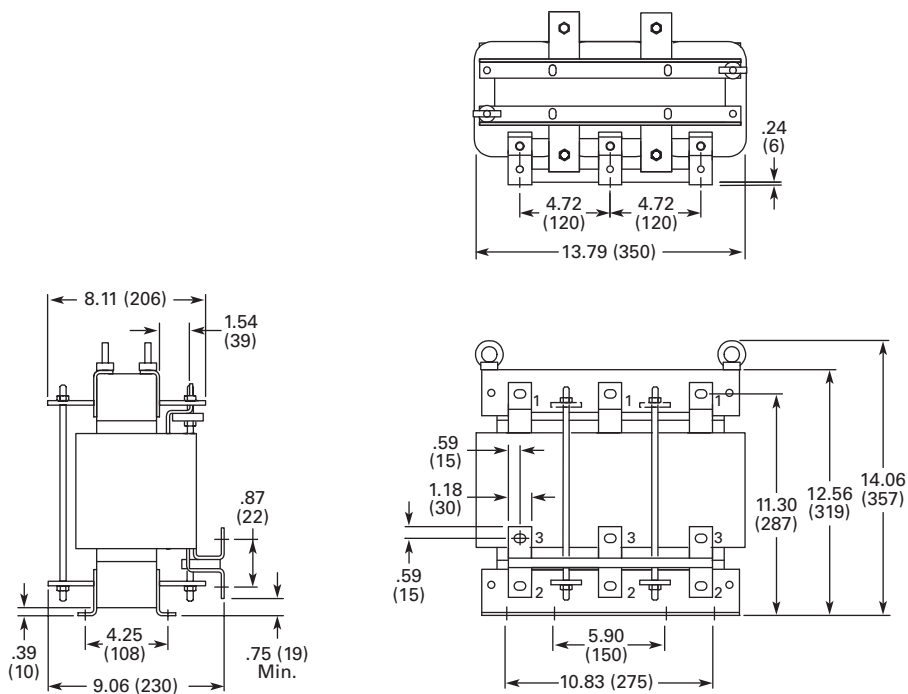

SVX Enclosed Drives

2

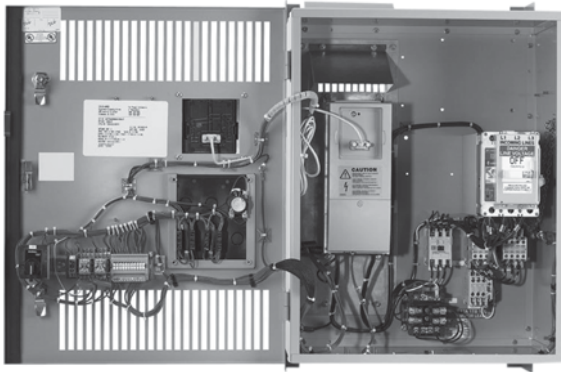

SVX Enclosed Drives

Product Description

Eaton's line of enclosed SVX drives combine the proven performance from Eaton's SVX drives with the enhanced capabilities of enclosed control. With a comprehensive list of pre-engineered options, Eaton's SVX enclosed drives eliminate the lead time normally associated with customer specific options. For those applications with more unique or complex requirements, Eaton offers individually engineered solutions to meet the customer's needs.

Features and Benefits

- Dual rated for both constant torque (CT) / high overload (IH) and variable torque (VT) / low overload applications
- Optional Brake Chopper for external braking applications
- High-performance drive option uses an Eaton SPX (IH) drive that allows for increased functionality and performance
- Available circuit breaker, motor circuit protector, isolation fusing and surge protection device options to provide input power protection
- Optional 3% input and output reactors provide a reduction in voltage and current harmonics on both line and load side
- Bypass options include a standard three-contactor design and a reduced voltage soft starter design
- Output contactor option provides a means for positive disconnection of the drive output from the motor terminals
- MotoRX and dV/dt filter options are used to reduce transients voltages at the motor terminals
- Customizable cover control options
- Padlockable disconnect

Contents

Description

| Description | Page |
|-----------------------------------|-----------|
| SVX Drives | V6-T2-102 |
| SVX Enclosed Drives | |
| Catalog Number Selection | V6-T2-141 |
| Product Selection | V6-T2-143 |
| Enclosure Selection | V6-T2-149 |
| Options | V6-T2-150 |
| Technical Data and Specifications | V6-T2-153 |
| Dimensions | V6-T2-155 |

Standards and Certifications

- UL 508C



Communication Options

- Modbus
- Modbus/TCP
- Johnson Controls N2
- BACnet
- EtherNet/IP
- PROFIBUS-DP
- LonWorks
- CANopen
- DeviceNet

Enclosure Ratings

- NEMA Type 1
- NEMA Type 12
- NEMA Type 3R

Mounting

- Wall mount
- Floor mount: 12-inch legs
- Floor mount: 22-inch legs


Product Range

- 208 V: 0.75–100 hp
- 230 V: 0.75–125 hp
- 480 V: 1–800 hp
- 575 V: 2–800 hp
- 230 V single-phase: 1–30 hp
- 480 V single-phase: 1.5–60 hp

Catalog Number Selection

Catalog Number Selection is for reference only. Not all option combinations may be available.

SVX Enclosed—Base Catalog Number

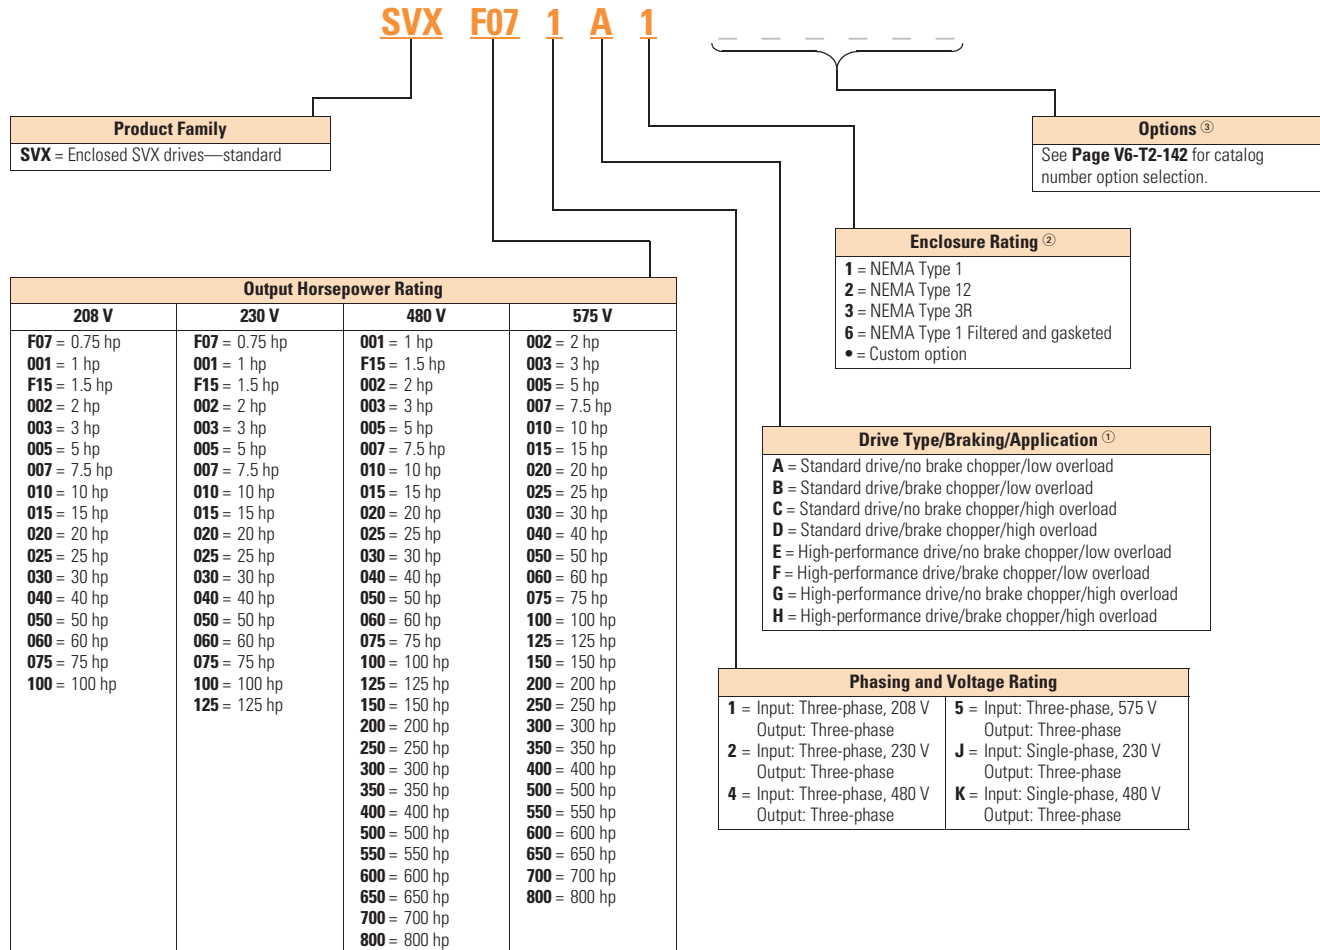


Notes

- ① Brake chopper is a factory-installed option only. Braking resistors sold separately. See SVX catalog section for selection.
② Additional enclosure options including NEMA 4 and 4X are available. Please contact the factory for configuration and pricing.
③ Part number configuration continued on the following page.

Catalog Number Selection is for reference only. Not all option combinations may be available.

SVX Enclosed—Catalog Number Options

2

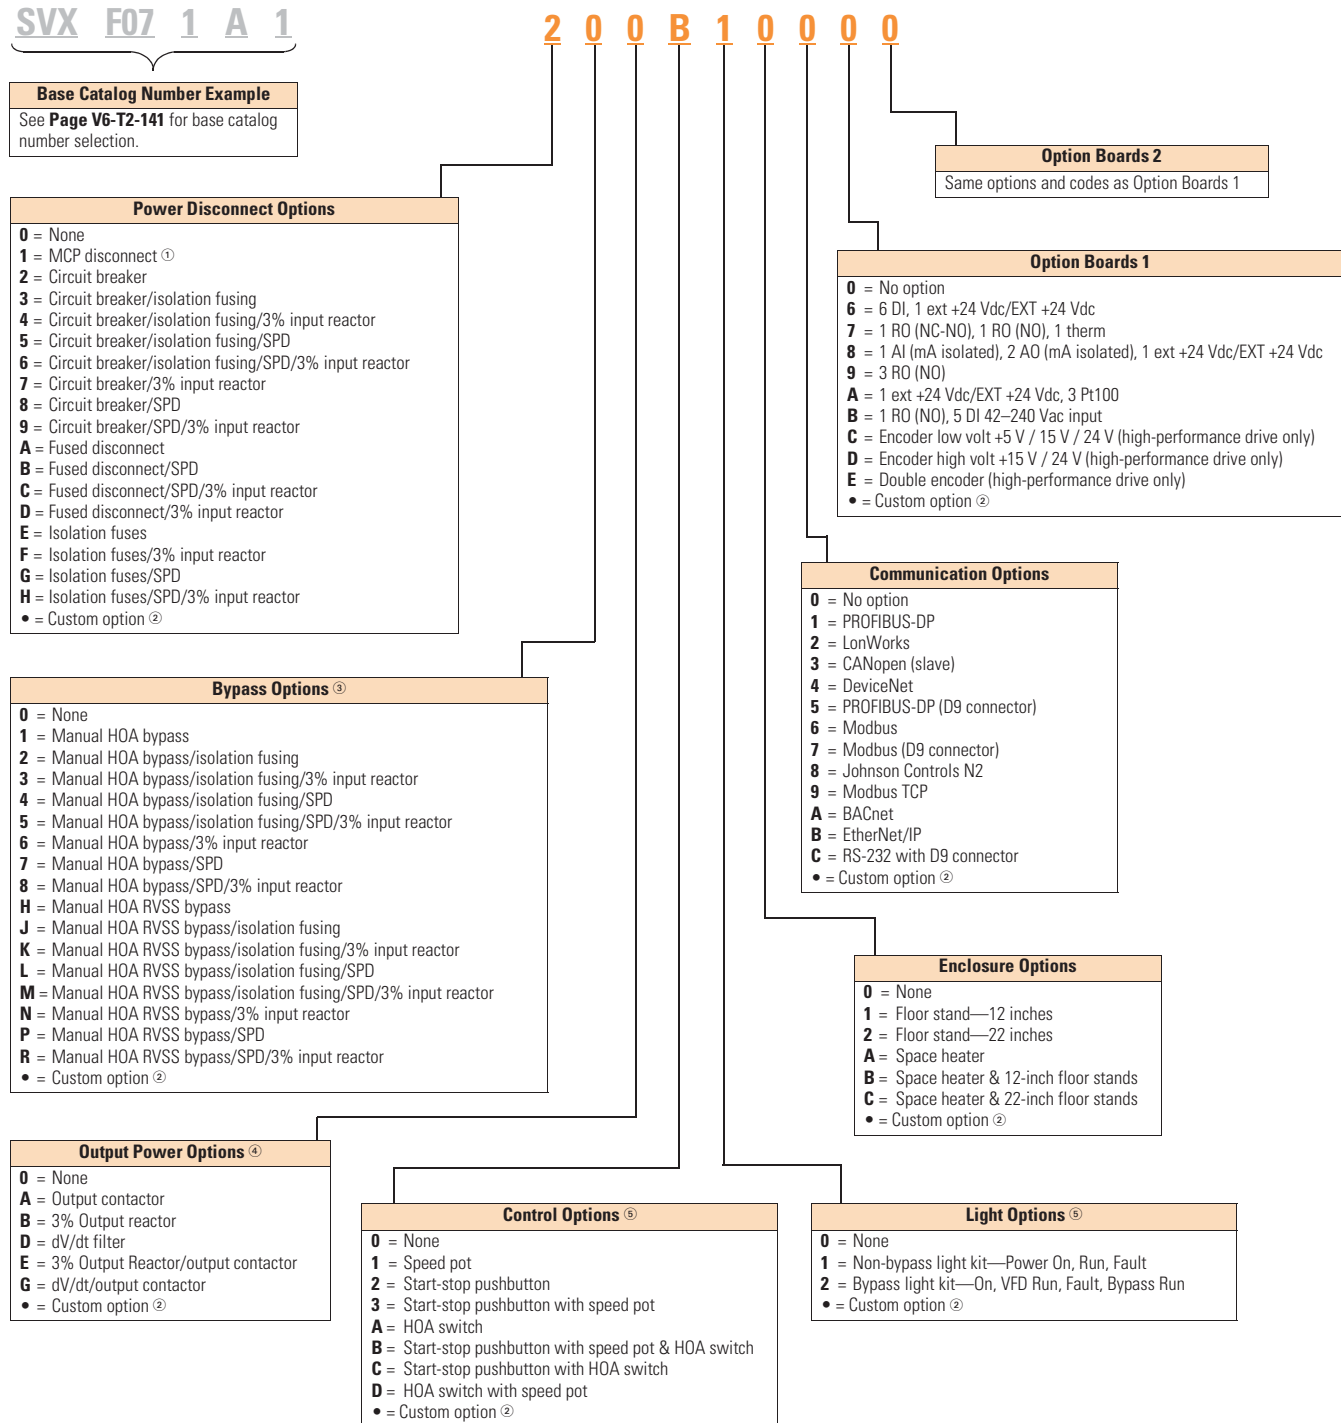

Notes

- ^① HMCP disconnect option required and only available when bypass is selected.
- ^② More options are available as Engineered to Order through the Bid Manager tool.
- ^③ All bypass options include third contactor for drive isolation when in bypass mode.
- ^④ Output contactor not available with bypass. Bypass comes standard with output contactor.
- ^⑤ Pilot devices are 22 mm standard. 30 mm options are available as engineered to order through the Bid Manager tool.

Product Selection

208 V Drives

SVX Enclosed Drives



208 V Drives—Constant Torque (CT)/High Overload (H) Enclosed Drives

| hp | Current (A) | Drive Frame Size | NEMA Type 1 Base Catalog Number ① | NEMA Type 12 Base Catalog Number ① | NEMA Type 3R Base Catalog Number ① |
|------|-------------|------------------|---|--|--|
| 0.75 | 3.5 | 4 | SVXF071D1 | SVXF071D2 | SVXF071D3 |
| 1 | 4.6 | 4 | SVX0011D1 | SVX0011D2 | SVX0011D3 |
| 1.5 | 6.6 | 4 | SVXF151D1 | SVXF151D2 | SVXF151D3 |
| 2 | 7.5 | 4 | SVX0021D1 | SVX0021D2 | SVX0021D3 |
| 3 | 10.6 | 4 | SVX0031D1 | SVX0031D2 | SVX0031D3 |
| 5 | 16.7 | 5 | SVX0051D1 | SVX0051D2 | SVX0051D3 |
| 7.5 | 24.2 | 5 | SVX0071D1 | SVX0071D2 | SVX0071D3 |
| 10 | 30.8 | 6 | SVX0101D1 | SVX0101D2 | SVX0101D3 |
| 15 | 46.2 | 6 | SVX0151D1 | SVX0151D2 | SVX0151D3 |
| 20 | 59.4 | 7 | SVX0201C1 | SVX0201C2 | SVX0201C3 |
| 25 | 74.8 | 7 | SVX0251C1 | SVX0251C2 | SVX0251C3 |
| 30 | 88 | 7 | SVX0301C1 | SVX0301C2 | SVX0301C3 |
| 40 | 114 | 8 | SVX0401C1 | SVX0401C2 | SVX0401C3 |
| 50 | 143 | 8 | SVX0501C1 | SVX0501C2 | SVX0501C3 |
| 60 | 169 | 8 | SVX0601C1 | SVX0601C2 | SVX0601C3 |
| 75 | 211 | 9 | SVX0751C1 | SVX0751C2 | SVX0751C3 |
| ② | 261 | 9 | SVX1001C1 | SVX1001C2 | SVX1001C3 |

SVX Enclosed Drives



208 V Drives—Variable Torque (VT)/Low Overload (L) Enclosed Drives

| hp | Current (A) | Drive Frame Size | NEMA Type 1 Base Catalog Number ① | NEMA Type 12 Base Catalog Number ① | NEMA Type 3R Base Catalog Number ① |
|-----|-------------|------------------|---|--|--|
| 1 | 4.6 | 4 | SVX0011B1 | SVX0011B2 | SVX0011B3 |
| 1.5 | 6.6 | 4 | SVXF151B1 | SVXF151B2 | SVXF151B3 |
| 2 | 7.5 | 4 | SVX0021B1 | SVX0021B2 | SVX0021B3 |
| 3 | 10.6 | 4 | SVX0031B1 | SVX0031B2 | SVX0031B3 |
| 5 | 16.7 | 5 | SVX0051B1 | SVX0051B2 | SVX0051B3 |
| 7.5 | 24.2 | 5 | SVX0071B1 | SVX0071B2 | SVX0071B3 |
| 10 | 30.8 | 5 | SVX0101B1 | SVX0101B2 | SVX0101B3 |
| 15 | 46.2 | 6 | SVX0151B1 | SVX0151B2 | SVX0151B3 |
| 20 | 59.4 | 6 | SVX0201B1 | SVX0201B2 | SVX0201B3 |
| 25 | 74.8 | 7 | SVX0251A1 | SVX0251A2 | SVX0251A3 |
| 30 | 88 | 7 | SVX0301A1 | SVX0301A2 | SVX0301A3 |
| 40 | 114 | 7 | SVX0401A1 | SVX0401A2 | SVX0401A3 |
| 50 | 143 | 8 | SVX0501A1 | SVX0501A2 | SVX0501A3 |
| 60 | 169 | 8 | SVX0601A1 | SVX0601A2 | SVX0601A3 |
| 75 | 211 | 9 | SVX0751A1 | SVX0751A2 | SVX0751A3 |
| 100 | 273 | 9 | SVX1001A1 | SVX1001A2 | SVX1001A3 |

Notes

① Table is for base catalog number reference only. For complete catalog number selection, see Page V6-T2-141.

② These units are current rated. They do not meet NEC ampere rating at this horsepower.

230 V Drives

2

SVX Enclosed Drives



230 V Drives—Constant Torque (CT)/High Overload (IH) Enclosed Drives

| hp | Current (A) | Drive Frame Size | NEMA Type 1 | NEMA Type 12 | NEMA Type 3R |
|------|-------------|------------------|-----------------------|-----------------------|-----------------------|
| | | | Base Catalog Number ① | Base Catalog Number ① | Base Catalog Number ① |
| 0.75 | 3.2 | 4 | SVXF072D1 | SVXF072D2 | SVXF072D3 |
| 1 | 4.2 | 4 | SVX0012D1 | SVX0012D2 | SVX0012D3 |
| 1.5 | 6 | 4 | SVXF152D1 | SVXF152D2 | SVXF152D3 |
| 2 | 6.8 | 4 | SVX0022D1 | SVX0022D2 | SVX0022D3 |
| 3 | 9.6 | 4 | SVX0032D1 | SVX0032D2 | SVX0032D3 |
| 5 | 15.2 | 5 | SVX0052D1 | SVX0052D2 | SVX0052D3 |
| 7.5 | 22 | 5 | SVX0072D1 | SVX0072D2 | SVX0072D3 |
| 10 | 28 | 6 | SVX0102D1 | SVX0102D2 | SVX0102D3 |
| 15 | 42 | 6 | SVX0152D1 | SVX0152D2 | SVX0152D3 |
| 20 | 54 | 7 | SVX0202C1 | SVX0202C2 | SVX0202C3 |
| 25 | 68 | 7 | SVX0252C1 | SVX0252C2 | SVX0252C3 |
| 30 | 80 | 7 | SVX0302C1 | SVX0302C2 | SVX0302C3 |
| 40 | 104 | 8 | SVX0402C1 | SVX0402C2 | SVX0402C3 |
| 50 | 130 | 8 | SVX0502C1 | SVX0502C2 | SVX0502C3 |
| 60 | 154 | 8 | SVX0602C1 | SVX0602C2 | SVX0602C3 |
| 75 | 192 | 9 | SVX0752C1 | SVX0752C2 | SVX0752C3 |
| 100 | 248 | 9 | SVX1002C1 | SVX1002C2 | SVX1002C3 |

SVX Enclosed Drives



230 V Drives—Variable Torque (VT)/Low Overload (IL) Enclosed Drives


| hp | Current (A) | Drive Frame Size | NEMA Type 1 | NEMA Type 12 | NEMA Type 3R |
|-----|-------------|------------------|-----------------------|-----------------------|-----------------------|
| | | | Base Catalog Number ① | Base Catalog Number ① | Base Catalog Number ① |
| 1 | 4.2 | 4 | SVX0012B1 | SVX0012B2 | SVX0012B3 |
| 1.5 | 6 | 4 | SVXF152B1 | SVXF152B2 | SVXF152B3 |
| 2 | 6.8 | 4 | SVX0022B1 | SVX0022B2 | SVX0022B3 |
| 3 | 9.6 | 4 | SVX0032B1 | SVX0032B2 | SVX0032B3 |
| 5 | 15.2 | 5 | SVX0052B1 | SVX0052B2 | SVX0052B3 |
| 7.5 | 22 | 5 | SVX0072B1 | SVX0072B2 | SVX0072B3 |
| 10 | 28 | 5 | SVX0102B1 | SVX0102B2 | SVX0102B3 |
| 15 | 42 | 6 | SVX0152B1 | SVX0152B2 | SVX0152B3 |
| 20 | 54 | 6 | SVX0202B1 | SVX0202B2 | SVX0202B3 |
| 25 | 68 | 7 | SVX0252A1 | SVX0252A2 | SVX0252A3 |
| 30 | 80 | 7 | SVX0302A1 | SVX0302A2 | SVX0302A3 |
| 40 | 104 | 7 | SVX0402A1 | SVX0402A2 | SVX0402A3 |
| 50 | 130 | 8 | SVX0502A1 | SVX0502A2 | SVX0502A3 |
| 60 | 154 | 8 | SVX0602A1 | SVX0602A2 | SVX0602A3 |
| 75 | 192 | 8 | SVX0752A1 | SVX0752A2 | SVX0752A3 |
| 100 | 248 | 9 | SVX1002A1 | SVX1002A2 | SVX1002A3 |
| ② | 300 | 9 | SVX1252A1 | SVX1252A2 | SVX1252A3 |

Notes

- ① Table is for base catalog number reference only. For complete catalog number selection, see [Page V6-T2-141](#).
- ② These units are current rated. They do not meet NEC ampere rating at this horsepower.

480 V Drives

SVX Enclosed Drives



480 V Drives—Constant Torque (CT)/High Overload (IH) Enclosed Drives

| hp | Current (A) | Drive Frame Size | NEMA Type 1 Base Catalog Number ^① | NEMA Type 12 Base Catalog Number ^① | NEMA Type 3R Base Catalog Number ^① |
|-----|-------------|------------------|--|---|---|
| 1 | 2.1 | 4 | SVX0014D1 | SVX0014D2 | SVX0014D3 |
| 1.5 | 3 | 4 | SVXF154D1 | SVXF154D2 | SVXF154D3 |
| 2 | 3.4 | 4 | SVX0024D1 | SVX0024D2 | SVX0024D3 |
| 3 | 4.8 | 4 | SVX0034D1 | SVX0034D2 | SVX0034D3 |
| 5 | 7.6 | 4 | SVX0054D1 | SVX0054D2 | SVX0054D3 |
| 7.5 | 11 | 5 | SVX0074D1 | SVX0074D2 | SVX0074D3 |
| 10 | 14 | 5 | SVX0104D1 | SVX0104D2 | SVX0104D3 |
| 15 | 21 | 5 | SVX0154D1 | SVX0154D2 | SVX0154D3 |
| 20 | 27 | 6 | SVX0204D1 | SVX0204D2 | SVX0204D3 |
| 25 | 34 | 6 | SVX0254D1 | SVX0254D2 | SVX0254D3 |
| 30 | 40 | 6 | SVX0304D1 | SVX0304D2 | SVX0304D3 |
| 40 | 52 | 7 | SVX0404C1 | SVX0404C2 | SVX0404C3 |
| 50 | 65 | 7 | SVX0504C1 | SVX0504C2 | SVX0504C3 |
| 60 | 77 | 7 | SVX0604C1 | SVX0604C2 | SVX0604C3 |
| 75 | 96 | 8 | SVX0754C1 | SVX0754C2 | SVX0754C3 |
| 100 | 124 | 8 | SVX1004C1 | SVX1004C2 | SVX1004C3 |
| 125 | 156 | 8 | SVX1254C1 | SVX1254C2 | SVX1254C3 |
| 150 | 180 | 9 | SVX1504C1 | SVX1504C2 | SVX1504C3 |
| 200 | 240 | 9 | SVX2004C1 | SVX2004C2 | SVX2004C3 |
| 250 | 302 | 10 | SVX2504G1 | SVX2504G6 ^② | SVX2504G3 |
| 300 | 361 | 10 | SVX3004G1 | SVX3004G6 ^② | SVX3004G3 |
| 350 | 414 | 10 | SVX3504G1 | SVX3504G6 ^② | SVX3504G3 |
| 400 | 477 | 11 | SVX4004G1 | SVX4004G6 ^② | SVX4004G3 |
| 500 | 590 | 11 | SVX5004G1 | SVX5004G6 ^② | SVX5004G3 |
| 550 | 650 | 11 | SVX5504G1 | SVX5504G6 ^② | SVX5504G3 |
| 600 | 730 | 12 | SVX6004G1 | SVX6004G6 ^② | SVX6004G3 |
| 650 | 820 | 12 | SVX6504G1 | SVX6504G6 ^② | SVX6504G3 |
| 700 | 920 | 12 | SVX7004G1 | SVX7004G6 ^② | SVX7004G3 |

Notes

^① Table is for base catalog number reference only. For complete catalog number selection, see **Page V6-T2-141**.

^② Enclosure rating is NEMA Type 1 filtered and gasketed.

480 V Drives, continued

2

SVX Enclosed Drives



480 V Drives—Variable Torque (VT)/Low Overload (L) Enclosed Drives

| hp | Current (A) | Drive Frame Size | NEMA Type 1 Base Catalog Number ^① | NEMA Type 12 Base Catalog Number ^① | NEMA Type 3R Base Catalog Number ^① |
|-----|-------------|------------------|--|---|---|
| 1.5 | 3 | 4 | SVXF154B1 | SVXF154B2 | SVXF154B3 |
| 2 | 3.4 | 4 | SVX0024B1 | SVX0024B2 | SVX0024B3 |
| 3 | 4.8 | 4 | SVX0034B1 | SVX0034B2 | SVX0034B3 |
| 5 | 7.6 | 4 | SVX0054B1 | SVX0054B2 | SVX0054B3 |
| 7.5 | 11 | 4 | SVX0074B1 | SVX0074B2 | SVX0074B3 |
| 10 | 14 | 5 | SVX0104B1 | SVX0104B2 | SVX0104B3 |
| 15 | 21 | 5 | SVX0154B1 | SVX0154B2 | SVX0154B3 |
| 20 | 27 | 5 | SVX0204B1 | SVX0204B2 | SVX0204B3 |
| 25 | 34 | 6 | SVX0254B1 | SVX0254B2 | SVX0254B3 |
| 30 | 40 | 6 | SVX0304B1 | SVX0304B2 | SVX0304B3 |
| 40 | 52 | 6 | SVX0404B1 | SVX0404B2 | SVX0404B3 |
| 50 | 65 | 7 | SVX0504A1 | SVX0504A2 | SVX0504A3 |
| 60 | 77 | 7 | SVX0604A1 | SVX0604A2 | SVX0604A3 |
| 75 | 96 | 7 | SVX0754A1 | SVX0754A2 | SVX0754A3 |
| 100 | 124 | 8 | SVX1004A1 | SVX1004A2 | SVX1004A3 |
| 125 | 156 | 8 | SVX1254A1 | SVX1254A2 | SVX1254A3 |
| 150 | 180 | 8 | SVX1504A1 | SVX1504A2 | SVX1504A3 |
| 200 | 240 | 9 | SVX2004A1 | SVX2004A2 | SVX2004A3 |
| ② | 300 | 9 | SVX2504A1 | SVX2504A2 | SVX2504A3 |
| 300 | 361 | 10 | SVX3004E1 | SVX3004E6 ^③ | SVX3004E3 |
| 350 | 414 | 10 | SVX3504E1 | SVX3504E6 ^③ | SVX3504E3 |
| 400 | 477 | 10 | SVX4004E1 | SVX4004E6 ^③ | SVX4004E3 |
| 500 | 590 | 11 | SVX5004E1 | SVX5004E6 ^③ | SVX5004E3 |
| 550 | 650 | 11 | SVX5504E1 | SVX5504E6 ^③ | SVX5504E3 |
| 600 | 730 | 11 | SVX6004E1 | SVX6004E6 ^③ | SVX6004E3 |
| 650 | 820 | 12 | SVX6504E1 | SVX6504E6 ^③ | SVX6504E3 |
| 700 | 920 | 12 | SVX7004E1 | SVX7004E6 ^③ | SVX7004E3 |
| 800 | 1030 | 12 | SVX8004E1 | SVX8004E6 ^③ | SVX8004E3 |

Notes

^① Table is for base catalog number reference only. For complete catalog number selection, see **Page V6-T2-141**.

^② These units are current rated. They do not meet NEC ampere rating at this horsepower.

^③ Enclosure rating is NEMA Type 1 filtered and gasketed.

575 V Drives

SVX Enclosed Drives



575 V Drives—Variable Torque (VT)/Low Overload (LO) Enclosed Drives

| hp | Current (A) | Drive Frame Size | NEMA Type 1 Base Catalog Number ^① | NEMA Type 12 Base Catalog Number ^① | NEMA Type 3R Base Catalog Number ^① |
|-----|-------------|------------------|--|---|---|
| 3 | 3.9 | 6 | SVX0035B1 | SVX0035B2 | SVX0035B3 |
| 5 | 6.1 | 6 | SVX0055B1 | SVX0055B2 | SVX0055B3 |
| 7.5 | 9 | 6 | SVX0075B1 | SVX0075B2 | SVX0075B3 |
| 10 | 11 | 6 | SVX0105B1 | SVX0105B2 | SVX0105B3 |
| 15 | 17 | 6 | SVX0155B1 | SVX0155B2 | SVX0155B3 |
| 20 | 22 | 6 | SVX0205B1 | SVX0205B2 | SVX0205B3 |
| 25 | 27 | 6 | SVX0255B1 | SVX0255B2 | SVX0255B3 |
| 30 | 32 | 6 | SVX0305B1 | SVX0305B2 | SVX0305B3 |
| 40 | 41 | 7 | SVX0405A1 | SVX0405A2 | SVX0405A3 |
| 50 | 52 | 7 | SVX0505A1 | SVX0505A2 | SVX0505A3 |
| 60 | 62 | 8 | SVX0605A1 | SVX0605A2 | SVX0605A3 |
| 75 | 77 | 8 | SVX0755A1 | SVX0755A2 | SVX0755A3 |
| 100 | 99 | 8 | SVX1005A1 | SVX1005A2 | SVX1005A3 |
| 125 | 125 | 9 | SVX1255A1 | SVX1255A2 | SVX1255A3 |
| 150 | 144 | 9 | SVX1505A1 | SVX1505A2 | SVX1505A3 |
| 200 | 192 | 9 | SVX2005A1 | SVX2005A2 | SVX2005A3 |
| 250 | 242 | 10 | SVX2505E1 | SVX2505E6 ^② | SVX2505E3 |
| 300 | 289 | 10 | SVX3005E1 | SVX3005E6 ^② | SVX3005E3 |
| 400 | 382 | 10 | SVX4005E1 | SVX4005E6 ^② | SVX4005E3 |
| 450 | 412 | 11 | SVX4505E1 | SVX4505E6 ^② | SVX4505E3 |
| 500 | 472 | 11 | SVX5005E1 | SVX5005E6 ^② | SVX5005E3 |
| 550 | 590 | 11 | SVX5505E1 | SVX5505E6 ^② | SVX5505E3 |
| 600 | 650 | 12 | SVX6005E1 | SVX6005E6 ^② | SVX6005E3 |
| 700 | 750 | 12 | SVX7005E1 | SVX7005E6 ^② | SVX7005E3 |
| 800 | 820 | 12 | SVX8005E1 | SVX8005E6 ^② | SVX8005E3 |

Notes

^① Table is for base catalog number reference only. For complete catalog number selection, see **Page V6-T2-141**.

^② Enclosure rating is NEMA Type 1 filtered and gasketed.

230 V, Single-Phase Drives

SVX Enclosed Drives

230 V Single-Phase Drives—Variable Torque (VT)/Low Overload (L) Enclosed Drives



| hp | Current (A) | Drive Frame Size | NEMA Type 1 Base Catalog Number ① | NEMA Type 12 Base Catalog Number ① | NEMA Type 3R Base Catalog Number ① |
|--|-------------|------------------|---|--|--|
| Low Overload (VT) Enclosed Drives | | | | | |
| 3 | 9.6 | 5 | SVX003JB1 | SVX003JB2 | SVX003JB3 |
| 5 | 15.2 | 5 | SVX005JB1 | SVX005JB2 | SVX005JB3 |
| 7.5 | 22 | 6 | SVX007JB1 | SVX007JB2 | SVX007JB3 |
| 10 | 28 | 6 | SVX010JB1 | SVX010JB2 | SVX010JB3 |
| 15 | 42 | 7 | SVX015JB1 | SVX015JB2 | SVX015JB3 |
| 20 | 54 | 7 | SVX020JB1 | SVX020JB2 | SVX020JB3 |
| 25 | 68 | 8 | SVX025JA1 | SVX025JA2 | SVX025JA3 |
| 30 | 80 | 8 | SVX030JA1 | SVX030JA2 | SVX030JA3 |
| 40 | 104 | 8 | SVX040JA1 | SVX040JA2 | SVX040JA3 |

480 V, Single-Phase Drives

SVX Enclosed Drives

480 V Single-Phase Drives—Variable Torque (VT)/Low Overload (L) Enclosed Drives



| hp | Current (A) | Drive Frame Size | NEMA Type 1 Base Catalog Number ① | NEMA Type 12 Base Catalog Number ① | NEMA Type 3R Base Catalog Number ① |
|--|-------------|------------------|---|--|--|
| Low Overload (VT) Enclosed Drives | | | | | |
| 1 | 2.1 | 4 | SVX001KB1 | SVX001KB2 | SVX001KB3 |
| 3 | 4.8 | 4 | SVX003KB1 | SVX003KB2 | SVX003KB3 |
| 5 | 7.6 | 5 | SVX005KB1 | SVX005KB2 | SVX005KB3 |
| 7.5 | 11 | 5 | SVX007KB1 | SVX007KB2 | SVX007KB3 |
| 10 | 14 | 5 | SVX010KB1 | SVX010KB2 | SVX010KB3 |
| 15 | 21 | 6 | SVX015KB1 | SVX015KB2 | SVX015KB3 |
| 20 | 27 | 6 | SVX020KB1 | SVX020KB2 | SVX020KB3 |
| 25 | 34 | 7 | SVX025KB1 | SVX025KB2 | SVX025KB3 |
| 30 | 40 | 7 | SVX030KB1 | SVX030KB2 | SVX030KB3 |
| 40 | 52 | 8 | SVX040KB1 | SVX040KB2 | SVX040KB3 |
| 50 | 65 | 8 | SVX050KA1 | SVX050KA2 | SVX050KA3 |
| 60 | 77 | 8 | SVX060KA1 | SVX060KA2 | SVX060KA3 |

Note

① Table is for base catalog number reference only. For complete catalog number selection, see **Page V6-T2-141**.

Enclosure Selection

SVX Drives

Enclosure selection charts are based on physical space limitations only and only to be used as a reference. For actual enclosure sizing, refer to Bid Manager.

Note: Standard enclosure sizing includes dedicated space for a circuit breaker or fusible disconnect, CPT, SPD, heater/thermostat, control relay and terminal blocks.

Standard Enclosure X-Space

| Enclosure Size | Frame 4 | Frame 5 | Frame 6 | Frame 7 | Frame 8 |
|----------------|---------|---------|---------|---------|---------|
| AX | 2 | 2 | 2 | — | — |
| BX | 4 | 4 | 4 | 4 | — |
| CX | 7 | 7 | 7 | 7 | 7 |
| DX | 18 | 18 | 18 | 18 | 18 |

Standard Power Options X-Space

| Power Options | Frame 4 | Frame 5 | Frame 6 | Frame 7 | Frame 8 |
|-------------------|---------|---------|---------|---------|---------|
| Isolation fuses | 1 | 1 | 1 | 1 | 1 |
| 3% Input reactor | 2 | 2 | 3 | 5 | 6 |
| 3% Output reactor | 1 | 1 | 3 | 5 | 6 |
| dV/dt filter | 3 | 3 | 3 | 5 | 6 |
| Output contactor | 1 | 1 | 1 | 1 | 1 |

Larger Frame Enclosure Sizes

| Frame Size | Type 1 | Type 12 | Type 1 Filtered and Gasketed | Type 3R |
|----------------------------------|--------|---------|------------------------------|---------|
| Frame 9 | Size 5 | Size 5 | — | Size F |
| Frame 10 (without power options) | Size 6 | — | Size 6 | Size F |
| Frame 10 (with power options) | Size 8 | — | Size 8 | Size F |
| Frame 11 (without power options) | Size 8 | — | Size 8 | Size F |
| Frame 11 (with power options) | Size 9 | — | Size 9 | Size F |
| Frame 12 | ① | — | ① | ① |

Note: Bypass enclosure sizing includes dedicated space for a MCP, CPT, input contactor, output bypass contactors, overload relay, SPD, heater/thermostat, control relay and terminal blocks.

Bypass Enclosure X-Space

| Enclosure Size | Frame 4 | Frame 5 | Frame 6 | Frame 7 | Frame 8 |
|----------------|---------|---------|---------|---------|---------|
| AX | 0 | 0 | 0 | — | — |
| BX | 2 | 2 | 2 | 0 | — |
| CX | 5 | 5 | 5 | 3 | 2 |
| DX | 16 | 16 | 16 | 14 | 13 |

Bypass Power Options X-Space

| Power Options | Frame 4 | Frame 5 | Frame 6 | Frame 7 | Frame 8 |
|-------------------|---------|---------|---------|---------|---------|
| Isolation fuses | 1 | 1 | 1 | 1 | 1 |
| 3% Input reactor | 2 | 2 | 3 | 5 | 6 |
| RVSS bypass | 2 | 2 | 2 | 3 | 4 |
| 3% Output reactor | 1 | 1 | 3 | 5 | 6 |
| dV/dt filter | 3 | 3 | 3 | 5 | 6 |

Larger Frame Enclosure Sizes

| Frame Size | Type 1 | Type 12 | Type 1 Filtered and Gasketed | Type 3R |
|------------|--------|---------|------------------------------|---------|
| Frame 9 | Size 5 | Size 5 | — | Size F |
| Frame 10 | Size 8 | — | Size 8 | Size F |
| Frame 11 | Size 9 | — | Size 9 | Size F |
| Frame 12 | ① | — | ① | ① |

Note: Single-phase enclosure sizing includes dedicated space for a capacitor kit, circuit breaker or fusible disconnect, CPT, SPD, heater/thermostat, control relay and terminal blocks.

Single-Phase Enclosure X-Space

| Enclosure Size | Frame 4 | Frame 5 | Frame 6 | Frame 7 | Frame 8 |
|----------------|---------|---------|---------|---------|---------|
| AX | 0 | 0 | — | — | — |
| BX | 2 | 2 | 1 | 1 | — |
| CX | 5 | 5 | 4 | 4 | 4 |
| DX | 16 | 16 | 15 | 15 | 15 |

Single-Phase Power Options X-Space

| Power Options | Frame 4 | Frame 5 | Frame 6 | Frame 7 | Frame 8 |
|-------------------|---------|---------|---------|---------|---------|
| Isolation fuses | 1 | 1 | 1 | 1 | 1 |
| 3% Input reactor | 2 | 2 | 3 | 5 | 6 |
| 3% Output reactor | 1 | 1 | 3 | 5 | 6 |
| dV/dt filter | 3 | 3 | 3 | 5 | 6 |
| Output contactor | 1 | 1 | 1 | 1 | 1 |

Larger Frame Enclosure Sizes

| Frame Size | Type 1 | Type 12 | Type 1A Filtered and Gasketed | Type 3R |
|------------|--------|---------|-------------------------------|---------|
| Frame 9 | Size 5 | Size 5 | — | Size F |
| Frame 10 | Size 8 | — | Size 8 | Size F |
| Frame 11 | Size 9 | — | Size 9 | Size F |
| Frame 12 | ① | — | ① | ① |

Note

① Consult factory.

Options


SVX Series Option Board Kits

2

The SVX Series drives can accommodate a wide selection of expander and adapter option boards to customize the drive for your application needs. The drive's control unit is designed to accept a total of five option boards.

The SVX Series factory installed standard board configuration includes an A9 I/O board and an A2 relay output board, which are installed in slots A and B.

Option Boards



Option Board Kits

| Option Kit Description ^① | Allowed Slot Locations ^② | Field Installed Catalog Number | Factory Installed Option Designator | SVX Ready Programs | | | | | | |
|--|-------------------------------------|--------------------------------|-------------------------------------|--------------------|--------------|----------|-----|-----|----------|-----|
| | | | | Basic | Local/Remote | Standard | MSS | PID | Multi-P. | PFC |
| Standard I/O Cards | | | | | | | | | | |
| 6 DI, 1 DO, 2 AI, 1 AO, 1 +10 Vdc ref, 2 ext +24 Vdc/EXT +24 Vdc | A | OPTA9 | — | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| 2 RO (NC-NO) | B | OPTA2 | — | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Extended I/O Cards | | | | | | | | | | |
| 2 RO, therm | B | OPTA3 | A3 | — | ■ | ■ | ■ | ■ | ■ | ■ |
| Encoder low volt +5 V/15 V/24 V—SPX only | C | OPTA4 | A4 | — | ■ | ■ | ■ | ■ | ■ | ■ |
| Encoder high volt +15 V/24 V—SPX only | C | OPTA5 | A5 | — | ■ | ■ | ■ | ■ | ■ | ■ |
| Double encoder—SPX only | C | OPTA7 | A7 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| 6 DI, 1 DO, 2 AI, 1 AO | A | OPTA8 | A8 | — | ■ | ■ | ■ | ■ | ■ | ■ |
| 3 DI (encoder 10–24 V), out +15 V/+24 V, 2 DO (pulse+direction)—SPX only | C | OPTAE | AE | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| 6 DI, 1 ext +24 Vdc/EXT +24 Vdc | B, C, D , E | OPTB1 | B1 | — | — | — | — | — | ■ | ■ |
| 1 RO (NC-NO), 1 RO (NO), 1 therm | B, C, D , E | OPTB2 | B2 | — | — | — | — | — | ■ | ■ |
| 1 AI (mA isolated), 2 AO (mA isolated), 1 ext +24 Vdc/EXT +24 Vdc | B, C, D , E | OPTB4 | B4 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| 3 RO (NO) | B, C, D , E | OPTB5 | B5 | — | — | — | — | — | ■ | ■ |
| 1 ext +24 Vdc/EXT +24 Vdc, 3 Pt100 | B, C, D , E | OPTB8 | B8 | — | — | — | — | — | — | — |
| 1 RO (NO), 5 DI 42–240 Vac input | B, C, D , E | OPTB9 | B9 | — | — | — | — | — | ■ | ■ |
| Communication Cards | | | | | | | | | | |
| Modbus ^③ | D, E | OPTC2 | C2 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Modbus TCP | D, E | OPTCI | CI | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| BACnet | D, E | OPTCJ | CJ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| EtherNet/IP | D, E | OPTCQ | CQ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Johnson Controls N2 ^③ | D, E | OPTC2 | CA | — | — | — | — | — | — | — |
| PROFIBUS DP | D, E | OPTC3 | C3 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| LonWorks | D, E | OPTC4 | C4 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| PROFIBUS DP (D9 connector) | D, E | OPTC5 | C5 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| CANopen (slave) | D, E | OPTC6 | C6 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| DeviceNet | D, E | OPTC7 | C7 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Modbus (D9 type connector) | D, E | OPTC8 | C8 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Adapter—SPX only | D, E | OPTD1 | D1 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Adapter—SPX only | D, E | OPTD2V | D2 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| RS-232 with D9 connection | D, E | OPTD3 | D3 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |

Notes

- ^① AI = Analog Input; AO = Analog Output, DI = Digital Input, DO = Digital Output, RO = Relay Output
^② Option card must be installed in one of the slots listed for that card. Slot indicated in bold is the preferred location.
^③ OPTC2 is a multi-protocol option card.

Modbus RTU Network Communications

The Modbus Network Card OPTC2 is used for connecting the SVX Drive as a slave on a Modbus network. The interface is connected by a 9-pin DSUB connector (female) and the baud rate ranges from 300 to 19,200 baud. Other communication parameters include an address range from 1 to 247; a parity of None, Odd or Even; and the stop bit is 1.

PROFIBUS Network Communications

The PROFIBUS Network Card OPTC3 is used for connecting the SVX Drive as a slave on a PROFIBUS-DP network. The interface is connected by a 9-pin DSUB connector (female). The baud rates range from 9.6 Kbaud to 12 Mbaud, and the addresses range from 1 to 127.

LonWorks Network Communications

The LonWorks Network Card OPTC4 is used for connecting the SVX Drive on a LonWorks network. This interface uses Standard Network Variable Types (SNVT) as data types. The channel connection is achieved using a FTT-10 A Free Topology transceiver via a single twisted transfer cable. The communication speed with LonWorks is 78 kBits/s.

CANopen (Slave) Communications

The CANopen (Slave) Network Card OPTC6 is used for connecting the SVX Drive to a host system. According to ISO11898 standard cables to be chosen for CANbus should have a nominal impedance of 120 ohms, and specific line delay of nominal 5 nS/m. 120 ohms line termination resistors required for installation.

DeviceNet Network Communications

The DeviceNet Network Card OPTC7 is used for connecting the SVX Drive on a DeviceNet Network. It includes a 5.08 mm pluggable connector. Transfer method is via CAN using a two-wire twisted shielded cable with two-wire bus power cable and drain. The baud rates used for communication include 125 Kbaud, 250 Kbaud and 500 Kbaud.

Johnson Controls Metasys N2 Network Communications

The OPTC2 fieldbus board provides communication between the SVX Drive and a Johnson Controls Metasys™ N2 network. With this connection, the drive can be controlled, monitored and programmed from the Metasys system. The N2 fieldbus is available as a factory installed option and as a field installable kit.

Modbus/TCP Network Communications

The Modbus/TCP Network Card OPTCI is used for connecting the SVX Drive to Ethernet networks utilizing Modbus protocol. It includes an RJ-45 pluggable connector. This interface provides a selection of standard and custom register values to communicate drive parameters. The board supports 10 Mbps and 100 Mbps communication speeds. The IP address of the board is configurable over Ethernet using a supplied software tool.

BACnet Network Communications

The BACnet Network Card OPTCJ is used for connecting the SVX Drive to BACnet networks. It includes a 5.08 mm pluggable connector. Data transfer is Master-Slave/Token Passing (MS/TP) RS-485. This interface uses a collection of 30 Binary Value Objects (BVOs) and 35 Analog Value Objects (AVOs) to communicate drive parameters. The card supports 9.6, 19.2 and 38.4 Kbaud communication speeds and supports network addresses 1–127.

EtherNet/IP Network Communications

The EtherNet/IP Network Card OPTCK is used for connecting the SVX Drive to Ethernet/Industrial Protocol networks. It includes an RJ-45 pluggable connector. The interface uses CIP objects to communicate drive parameters (CIP is “Common Industrial Protocol”, the same protocol used by DeviceNet). The board supports 10 Mbps and 100 Mbps communication speeds. The IP address of the board is configurable by Static, BOOTP and DHCP methods.

Input Power Options

| Option | Description |
|------------------|---|
| HMCP Disconnect | The HMCP motor protection circuit breaker uses an electronic trip unit to provide typical motor overload relay functionality and short-circuit protection against potential phase-to-phase or phase-to-ground faults. |
| Circuit Breaker | Utilizes a circuit breaker to provide a means of short-circuit protection for the power cables between it and the drive, and protection from high-level ground faults on the power cable. Allows a convenient means of disconnecting the drive from the line, and the operating mechanism can be padlocked in the OFF position. This is factory mounted in the enclosure. |
| Isolation Fusing | Provides high-level fault protection of the drive input power circuit from the load side of the fuses to the input side of the power transistors. This option consists of three 200 kA fuses that are factory mounted in the enclosure. |
| 3% Input Reactor | The input reactor is a three-phase series inductance on the line side of an AFD. It is used to provide a reduction in voltage and current harmonics. It also provides increased input protection for AFD and its semiconductors from line transients. |
| SPD | Provides a UL 1449 surge protection device (SPD) rated for 40 kA/ph that is connected to the line side terminals. |
| Fused Disconnect | Utilizes fusing to provide a means of short-circuit protection for the power cables between it and the drive, and protection from high-level ground faults on the power cable. Allows a convenient means of disconnecting the drive from the line, and the operating mechanism can be padlocked in the OFF position. This is factory mounted in the enclosure. |

Bypass Options

| Option | Description |
|------------------------|---|
| Manual HOA Bypass | Provides a three-position selector switch that allows the user to select either a HAND or AUTO mode of operation. HAND mode is defaulted keypad operation, and AUTO mode is defaulted to control from an external terminal source. These modes of operation can be configured via programming to allow for alternate combinations of start and speed sources. Start and speed sources include keypad, I/O and fieldbus. |
| Manual HOA RVSS Bypass | This option adds a reduced voltage soft starter to bypass assembly for soft starting in bypass mode. |

Output Power Options

| Option | Description |
|-------------------|--|
| Output Contactor | Provides a means for positive disconnection of the drive output from the motor terminals. The contactor coil is controlled by the drive's run or permissive logic. NC and NO auxiliary contacts rated at 10 A, 600 Vac are provided for customer use. This option includes a low VA 115 Vac fused control power transformer and is factory mounted in the enclosure. |
| 3% Output Reactor | The output reactor is a three-phase series inductance on the load side of a VFD. It is used to reduce transient voltage (dv/dt) and peak voltages at the motor terminals. A 3% output filter is recommended for motor cable lengths up to 300 ft (10 m). |
| dv/dt Filter | Used to reduce the transient voltage (dv/dt) at the motor terminals. Recommended for motor cable lengths over 300 ft (10 m) and up to 1000 ft (304.8 m). This option is mounted in the enclosure. |

Control Options

| Option | Description |
|-----------------------|--|
| Speed Pot | Provides the ability to adjust the frequency reference using a door-mounted potentiometer. This option uses the 10 Vdc reference to generate a 0–10 V signal at the analog voltage input signal terminal. When the HOA bypass option is added, the speed is controlled when the HOA switch is in the HAND position. Without the HOA bypass option, a two-position switch (labeled local/remote) is provided on the keypad to select speed reference from the speed potentiometer or a remote speed signal. |
| HOA Switch | Provides a three-position selector switch that allows the user to select either a HAND or AUTO mode of operation. HAND mode is defaulted to keypad operation, and AUTO mode is defaulted to control from an external terminal source. These modes of operation can be configured via drive programming to allow for alternate combinations of start and speed sources. Start and speed sources include Keypad, I/O and fieldbus. |
| Start-Stop Pushbutton | Provides door-mounted START and STOP pushbuttons for either bypass or non-bypass configurations. |

Light Options

| Option | Description |
|---|--|
| Non-Bypass Light Kit—Power On, Run, Fault | Provides a white POWER ON light that indicates power to the enclosed cabinet, a green RUN light that indicates the drive is running and a red FAULT light that indicates a drive fault has occurred. |
| Bypass Light Kit—On, VFD Run, Fault, Bypass Run | Provides a white POWER ON light that indicates power to the enclosed cabinet, a green RUN light that indicates the drive is running, a red FAULT light that indicates a drive fault has occurred and an amber light that indicates when the motor is running in Bypass mode. |

Enclosure Options

| Option | Description |
|-------------------|---|
| Floor Stand 12 in | Converts a normally wall-mounted enclosure to a floor-standing enclosure with a height of 12 in (304.8 mm). |
| Floor Stand 22 in | Converts a normally wall-mounted enclosure to a floor-standing enclosure with a height of 22 in (558.8 mm). |

Enclosed Drive Options**Brake Chopper Options**

The brake chopper circuit option is used for applications that require dynamic braking. Dynamic braking resistors are not included with drive purchase. Consult **Page V6-T2-111** for dynamic braking resistors which are supplied separately. Resistors are not UL Listed.

For brake chopper circuit selection and adder—NEMA Type 1/IP21, NEMA Type 12/IP54, consult the factory

Technical Data and Specifications**SVX Enclosed Drives**

| Description | Specification |
|-----------------------------------|--------------------|
| Primary Design Features | |
| 45–66 Hz input frequency | Standard |
| Output: AC volts maximum | Input voltage base |
| Output frequency range | 0–320 Hz |
| Initial output current (I_H) | 250% for 2 seconds |
| Overload (1 minute (I_H/I_L)) | 150%/110% |
| Enclosure space heater | Optional |
| Oversize enclosure | Standard |
| Output contactor | Optional |
| Bypass motor starter | Optional |
| Listings | UL, cUL |
| Protection Features | |
| Incoming line fuses | Optional |
| AC input circuit disconnect | Optional |
| Line reactors (3%) | Standard |
| Phase rotation insensitive | Standard |
| EMI filter | Standard |
| Input phase loss protection | Standard |
| Input overvoltage protection | Standard |
| Line surge protection | Optional |
| Output short-circuit protection | Standard |
| Output ground fault protection | Standard |
| Output phase protection | Standard |
| Overtemperature protection | Standard |
| DC overvoltage protection | Standard |
| Drive overload protection | Standard |
| Motor overload protection | Standard |
| Programmer software | Optional |
| Local/remote keypad | Standard |
| Keypad lockout | Standard |
| Fault alarm output | Standard |
| Built-in diagnostics | Standard |

| Description | Specification |
|--|------------------------|
| Input/Output Interface Features | |
| Setup adjustment provisions | |
| Remote keypad/display | Standard |
| Personal computer | Standard |
| Operator control provisions | |
| Drive mounted keypad/display | Standard |
| Remote keypad/display | Standard |
| Conventional control elements | Standard |
| Serial communications | Optional |
| 115 Vac control circuit | Optional |
| Speed setting inputs | |
| Keypad | Standard |
| 0–10 Vdc potentiometer/voltage signal | Standard |
| 4–20 mA Isolated | Configurable |
| 4–20 mA Differential | Configurable |
| Analog outputs | |
| Speed/frequency | Standard |
| Torque/load/current | Programmable |
| Motor voltage | Programmable |
| Kilowatts | Programmable |
| 0–10 Vdc signals | Configurable w/jumpers |
| 4–20 mA DC signals | Standard |
| Isolated signals | Optional |
| Discrete outputs | |
| Fault alarm | Standard |
| Drive running | Standard |
| Drive at set speed | Programmable |
| Optional parameters | 14 |
| Dry contacts | 1 (2 relays Form C) |
| Open collector outputs | 1 |
| Additional discrete outputs | Optional |
| Communications | |
| RS-232 | Standard |
| RS-422/485 | Optional |
| DeviceNet™ | Optional |
| Modbus RTU | Optional |
| CANopen (slave) | Optional |
| PROFIBUS-DP | Optional |
| Lonworks® | Optional |
| Johnson Controls Metasys™ N2 | Optional |
| EtherNet/IP | Optional |
| Modbus TCP | Optional |
| BACnet | Optional |

SVX Enclosed Drives, continued

| Description | Specification |
|--------------------------------------|-------------------------|
| Performance Features | |
| Sensorless vector control | Standard |
| Volts/hertz control | Standard |
| IR and slip compensation | Standard |
| Electronic reversing | Standard |
| Dynamic braking | Optional ^① |
| DC braking | Standard |
| PID setpoint controller | Programmable |
| Critical speed lockout | Standard |
| Current (torque) limit | Standard |
| Adjustable acceleration/deceleration | Standard |
| Linear or S curve accel/decel | Standard |
| Jog at preset speed | Standard |
| Thread/preset speeds | 7 Standard, 15 Optional |
| Automatic restart | Selectable |
| Coasting motor start | Standard |
| Coast or ramp stop selection | Standard |
| Elapsed time meter | Optional |
| Carrier frequency adjustment | 1–16 kHz |

Standard Conditions for Application and Service

| | |
|------------------------------------|------------------|
| Operating ambient temperature | 0 to 40 °C |
| Storage temperature | –40 to 60 °C |
| Humidity (maximum), non-condensing | 95% |
| Altitude (maximum without derate) | 3300 ft (1000 m) |
| Line voltage variation | +10/–15% |
| Line frequency variation | 45–66 Hz |
| Efficiency | >96% |
| Power factor (displacement) | >0.94 |

Standard I/O Specifications

| Description | Specification |
|--|--|
| Six–digital input programmable | 24 V: "0" ≤10 V, "1" ≥18V, R _i >5 kohms |
| Two–analog input configurable w/jumpers | Voltage: 0–±10 V, R _i >200 kohms Current: 0 (4)–20 mA, R _i = 250 ohms |
| Two–digital output programmable | Form C relays 250 Vac 30 Vdc 2 amp resistive |
| One–analog output programmable configurable w/jumper | 0–20 mA, R _L max. 500 ohms 10 bits ±2% |
| One digital output programmable | Open collector 48 Vdc 50 mA |

I/O Specifications for Control/Communication Options



| Description | Specification |
|---------------------------|---|
| Analog voltage, input | 0–±10 V, R _i ≥200 kohms |
| Analog current, input | 0 (4)–20 mA, R _i = 250 ohms |
| Digital input | 24 V: "0" ≤10 V, "1" ≥18V, R _i >5 kohms |
| Auxiliary voltage | 24 V (±20%), max. 50 mA |
| Reference voltage | 10 V ±3%, max. 10 mA |
| Analog current, output | 0 (4)–20 mA, R _L = 500 kohms resolution 10 bit, accuracy ≤±2% |
| Analog voltage, output | 0 (2)–10 V, R _L ≥1 kohms, resolution 10 bit, accuracy ≤±2% |
| Relay output | |
| Maximum switching voltage | 300 Vdc, 250 Vac |
| Maximum switching load | 8 A/24 Vdc, 0.4 A/300 Vdc, 2 kVA/250 Vac |
| Maximum continuous load | 2 A rms |
| Thermistor input | R _{trip} = 4.7 kohms |
| Encoder input | 24 V: "0" ≤10 V, "1" ≥18V, R _i = 2.2 kohms 5 V: "0" ≤2V, "1" ≥3V, R _i = 330 ohms |

Note

- ^① Some horsepower units include dynamic braking chopper as standard—refer to individual drive sections.

Dimensions

Approximate Dimensions in Inches (mm)

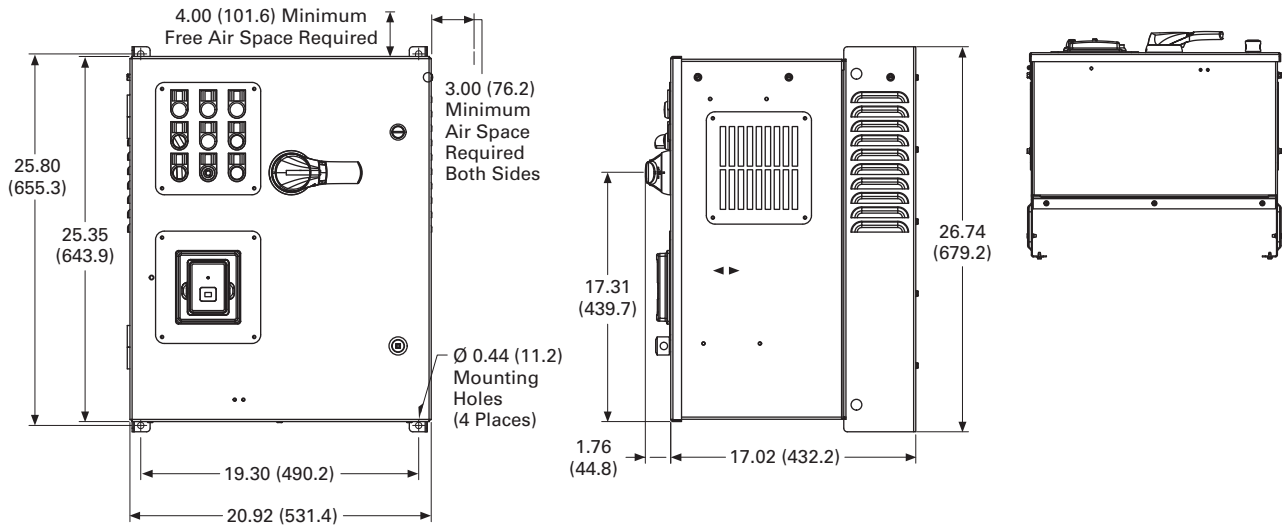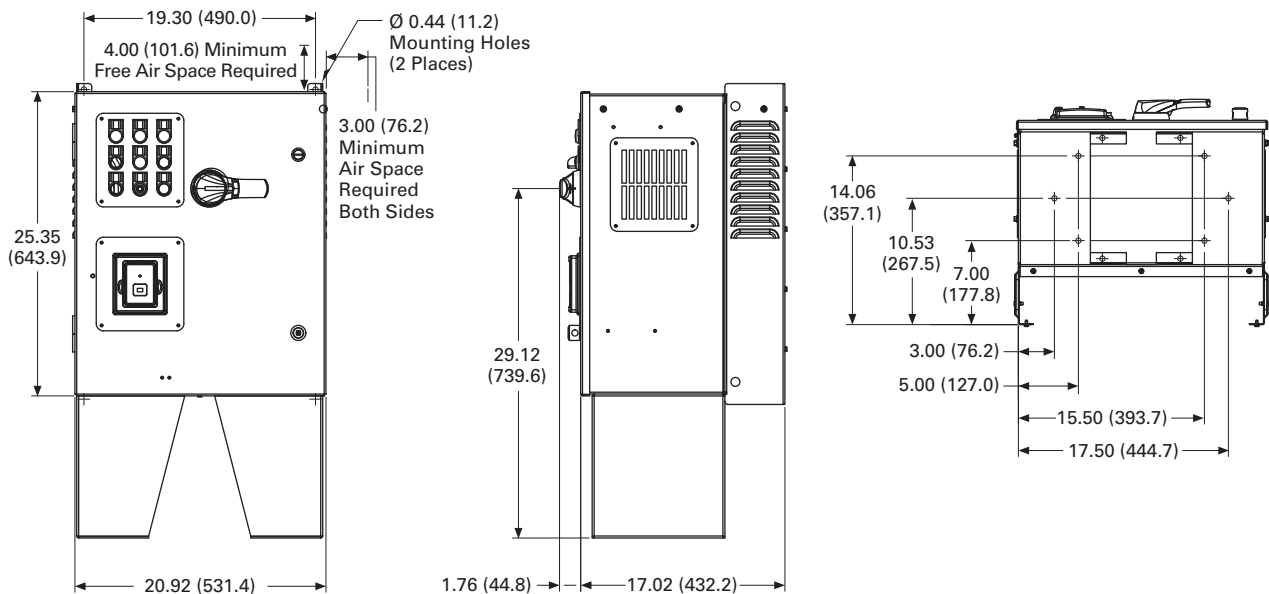AX Box Type 1**AX Box Type 1—12 Inch Floor Stands**

2.7


Adjustable Frequency Drives

SVX Drives


Approximate Dimensions in Inches (mm)

2

AX Box Type 1—22 Inch Floor Stands

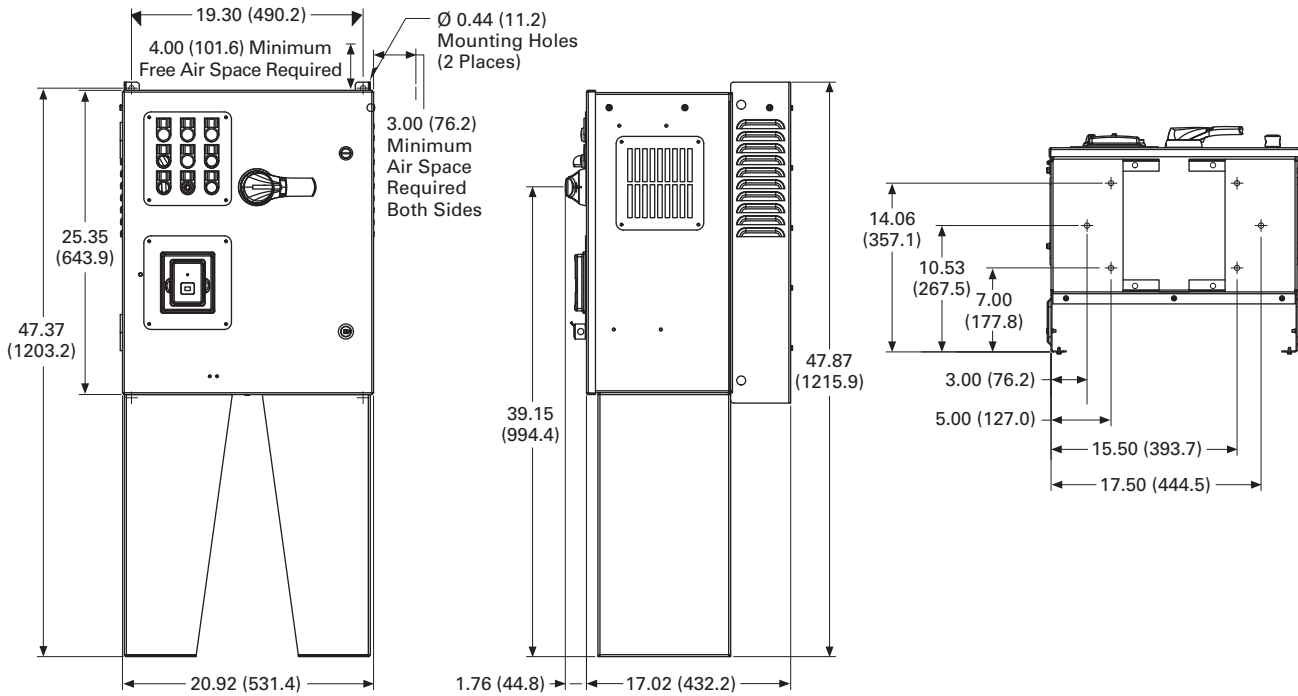


AX Box Type 12

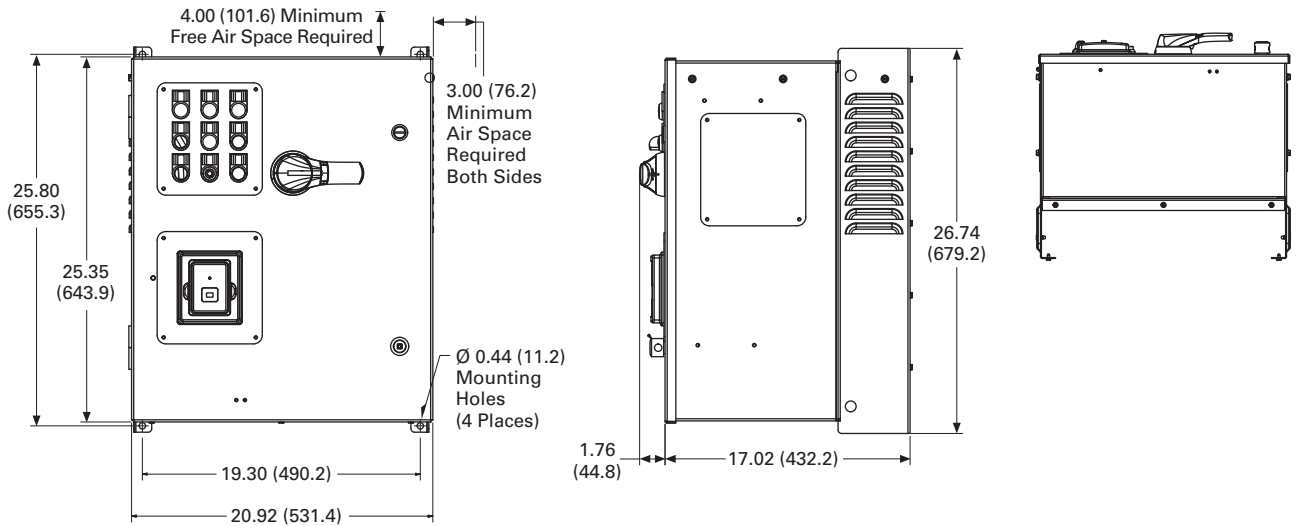


Approximate Dimensions in Inches (mm)

AX Box Type 12—12 Inch Floor Stands

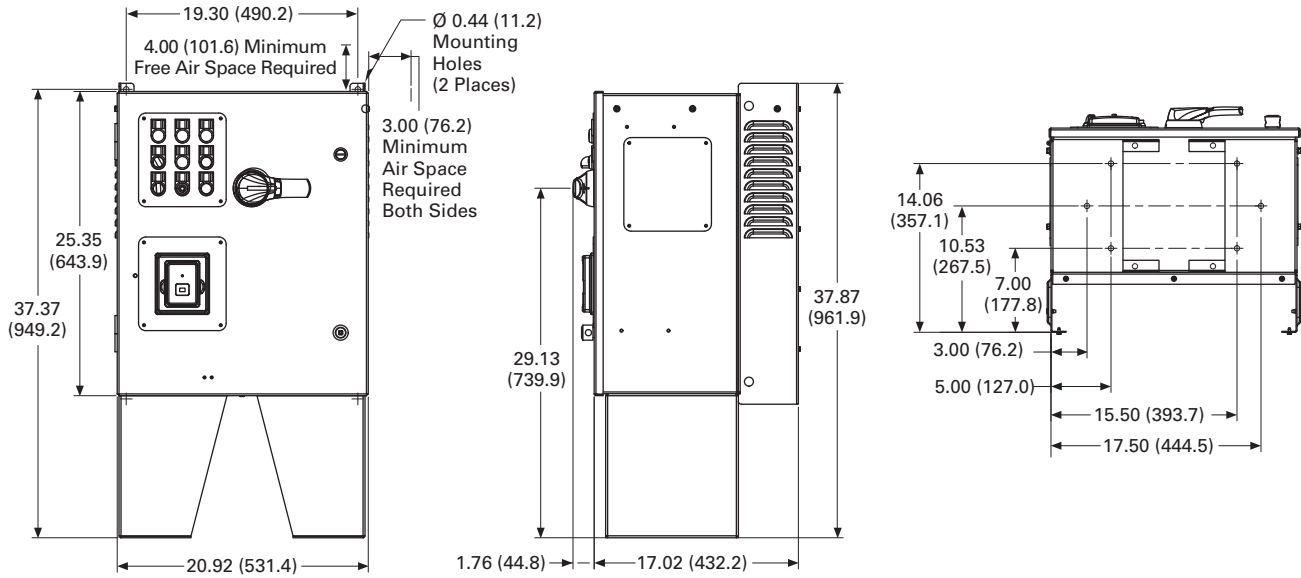

AX Box Type 12—22 Inch Floor Stands

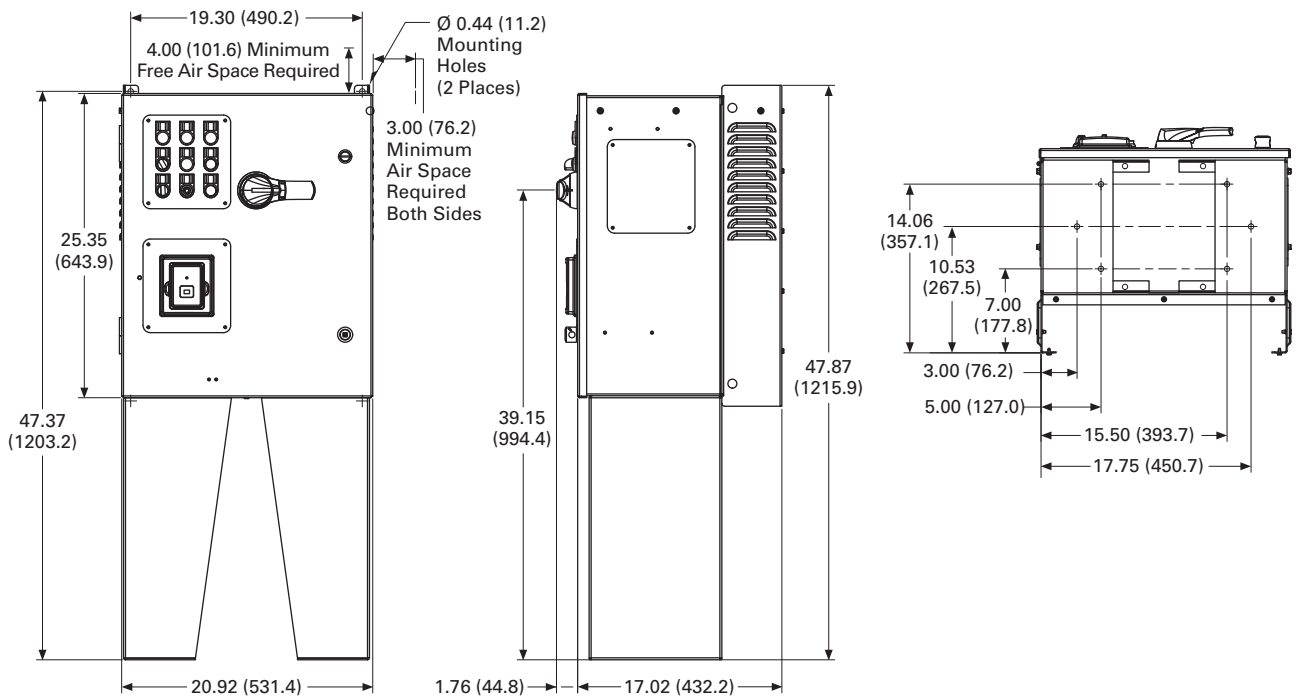

2.7


Adjustable Frequency Drives

SVX Drives


Approximate Dimensions in Inches (mm)

2

AX Box Type 3R

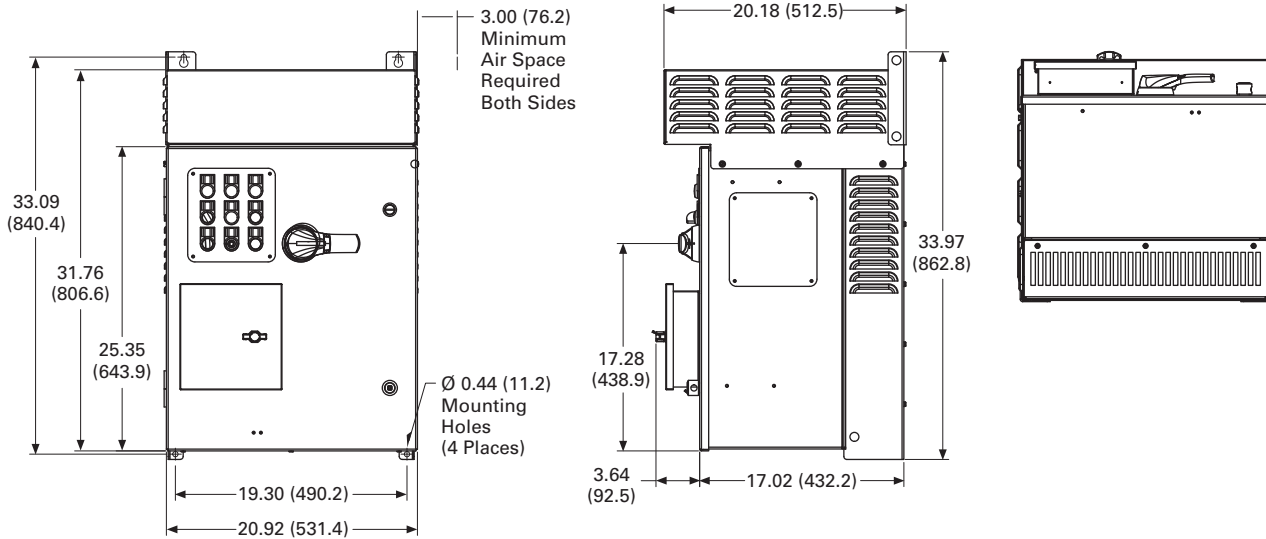


AX Box Type 3R—12 Inch Floor Stands

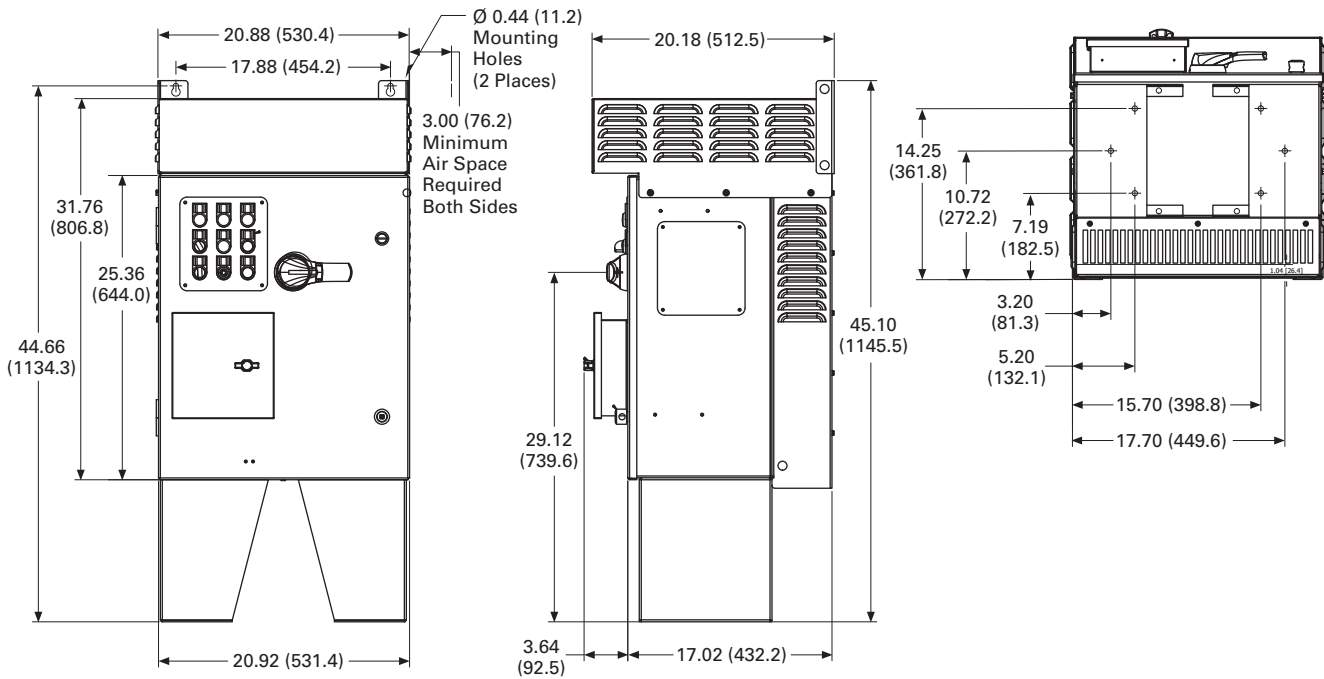


Approximate Dimensions in Inches (mm)

AX Box Type 3R—22 Inch Floor Stands

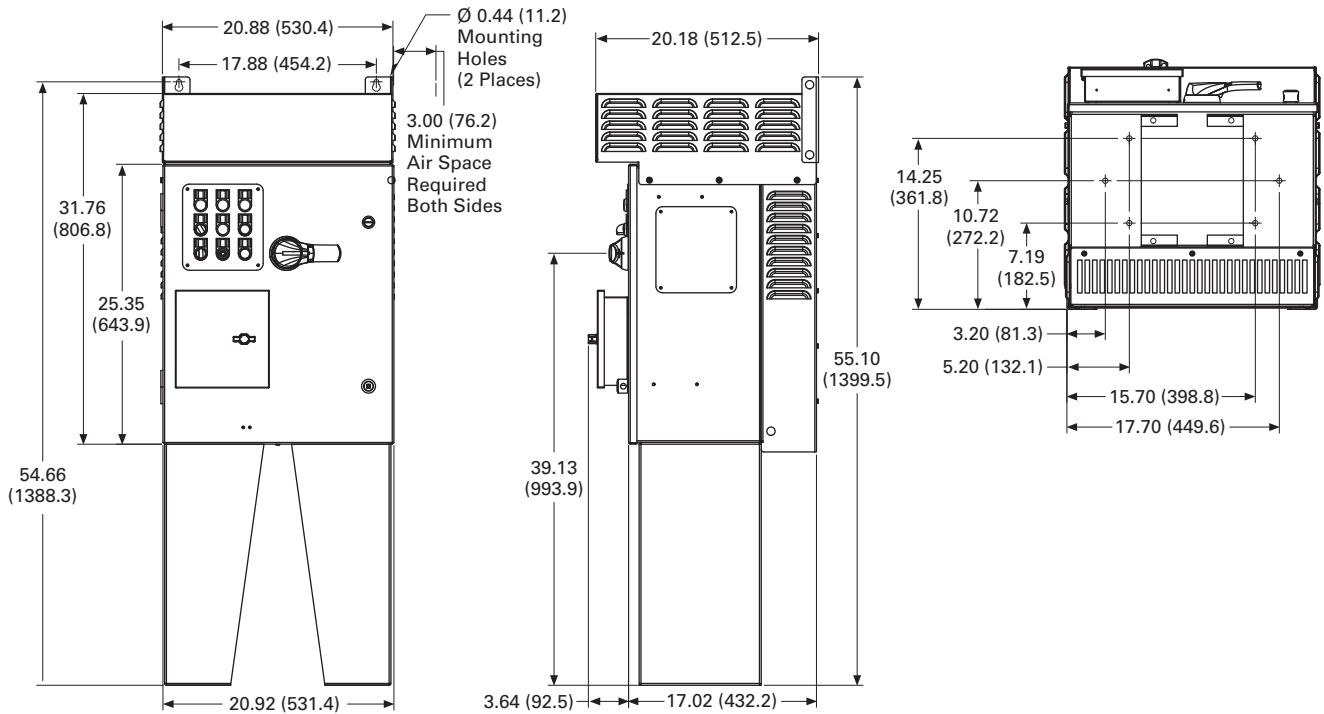

BX Box Type 1

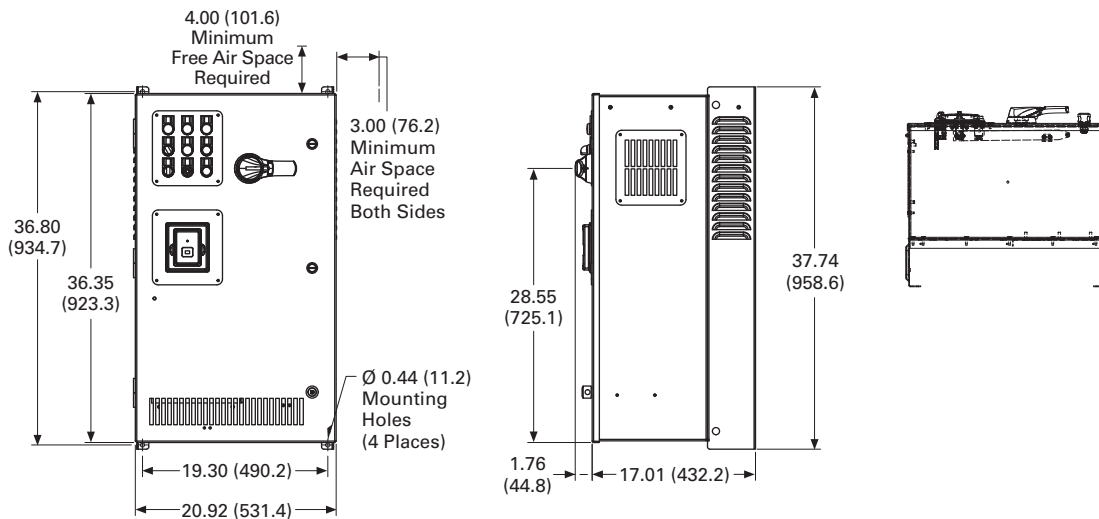

2.7


Adjustable Frequency Drives

SVX Drives


Approximate Dimensions in Inches (mm)

2

BX Box Type 1—12 Inch Floor Stands

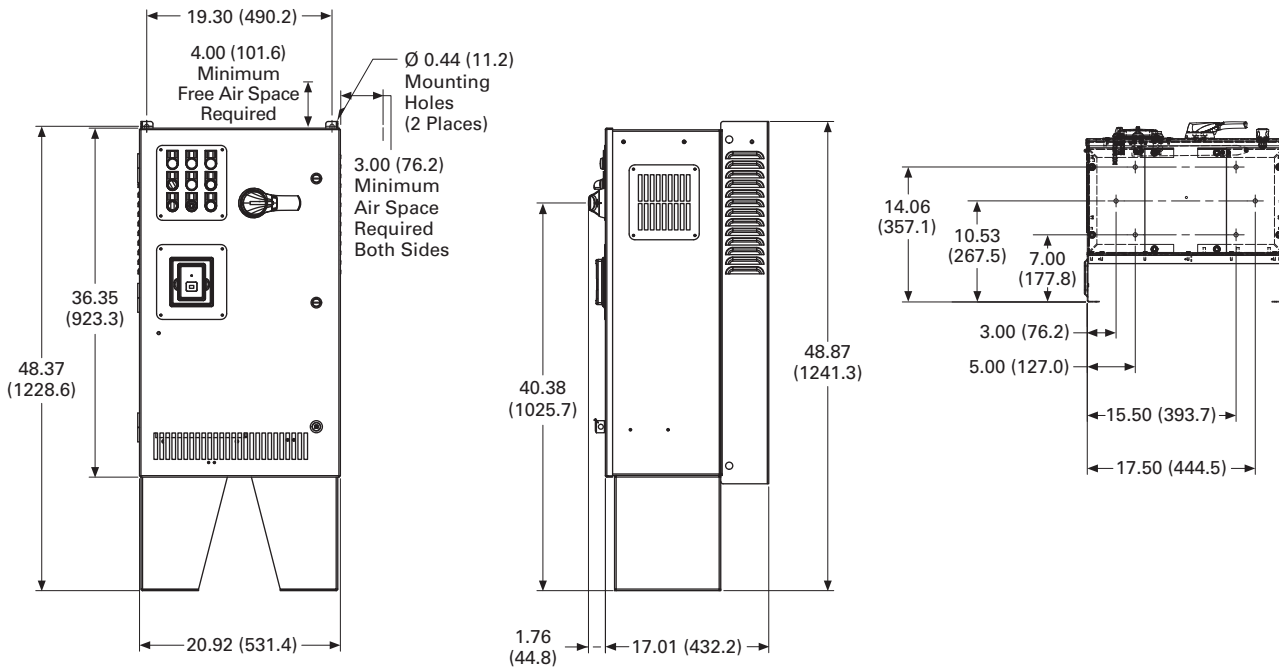


BX Box Type 1—22 Inch Floor Stands

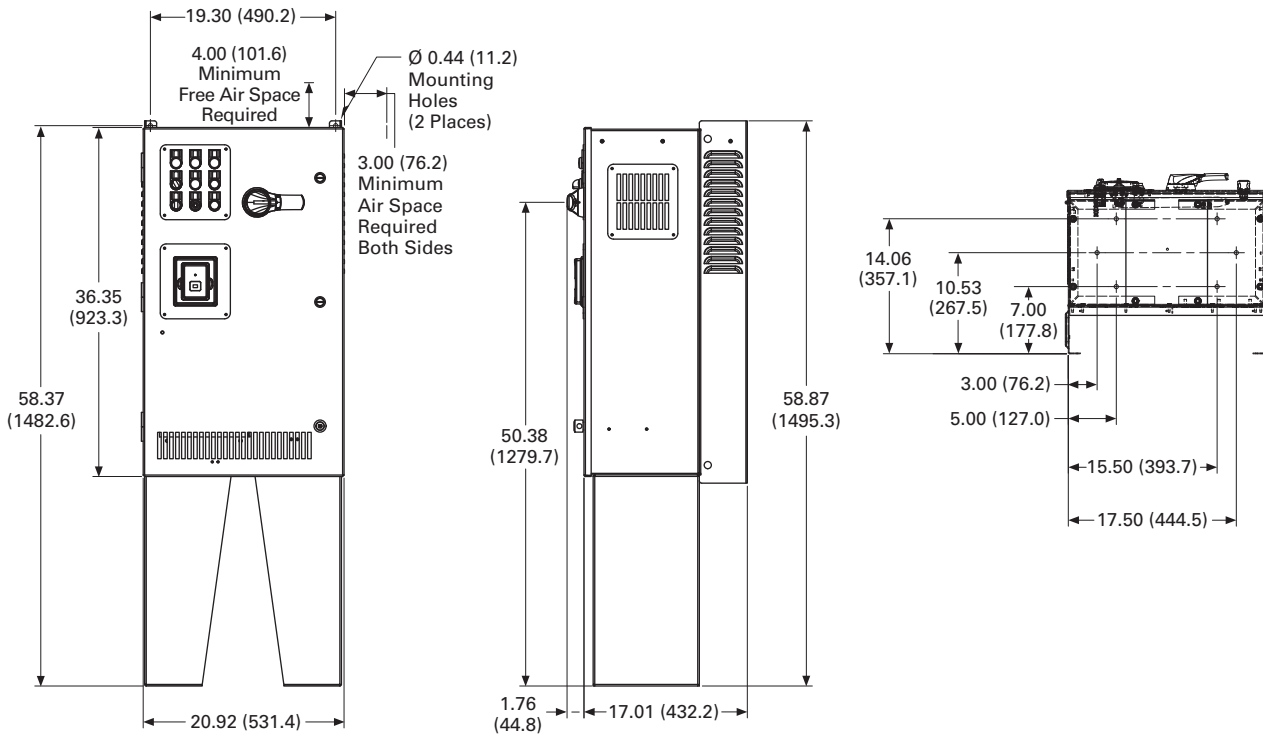


Approximate Dimensions in Inches (mm)

BX Box Type 12

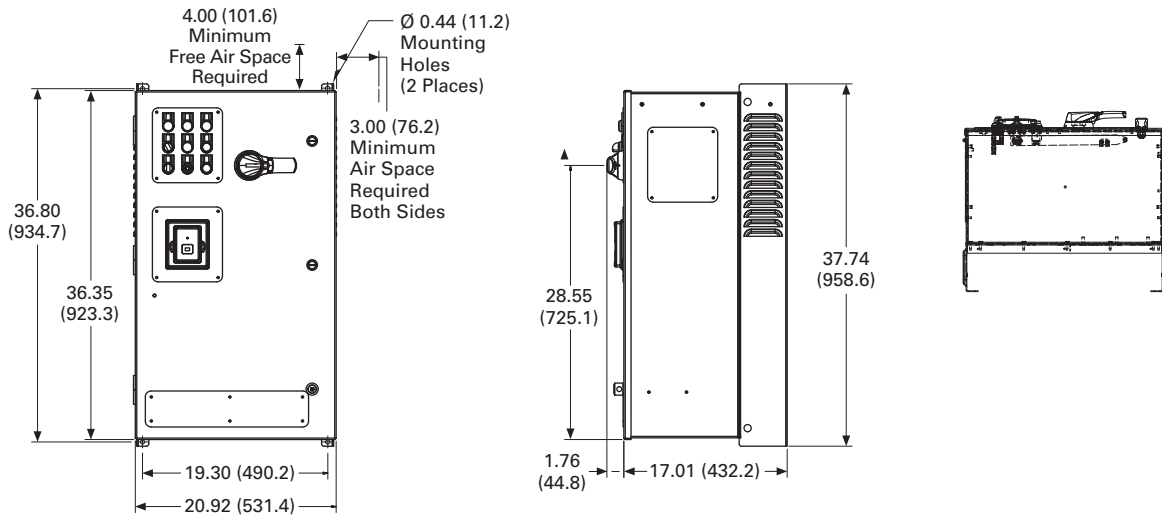

BX Box Type 12—12 Inch Floor Stands

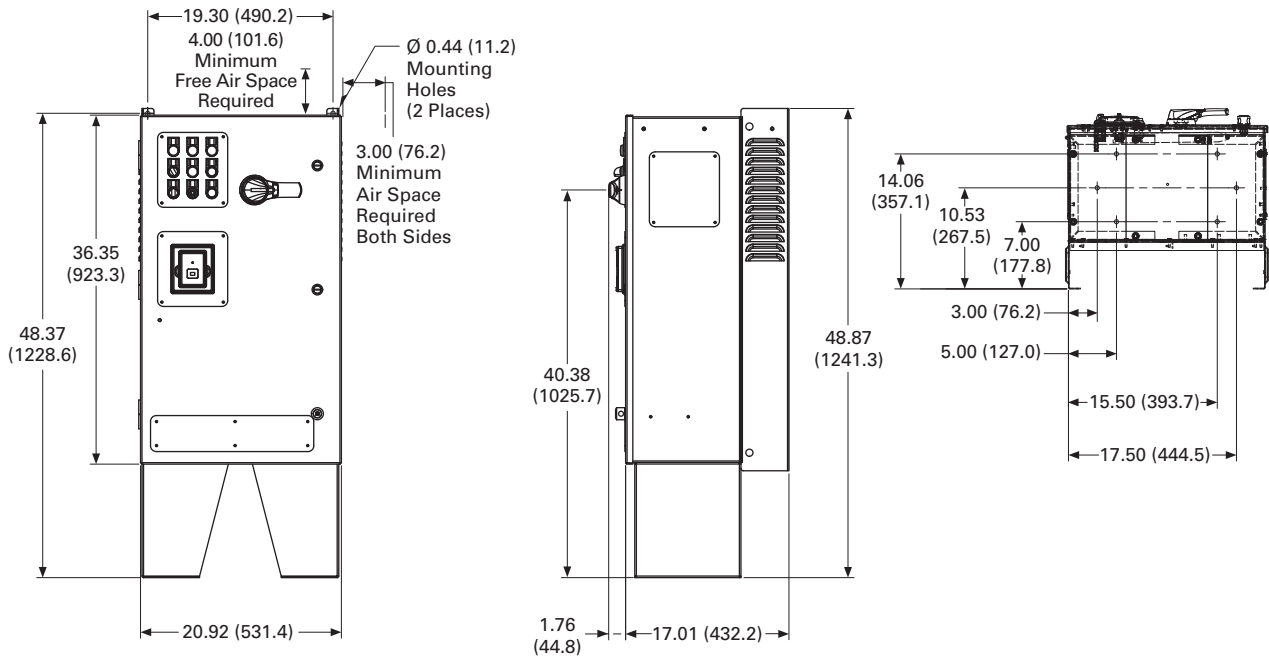

2.7


Adjustable Frequency Drives

SVX Drives


Approximate Dimensions in Inches (mm)

BX Box Type 12–22 Inch Floor Stands

2

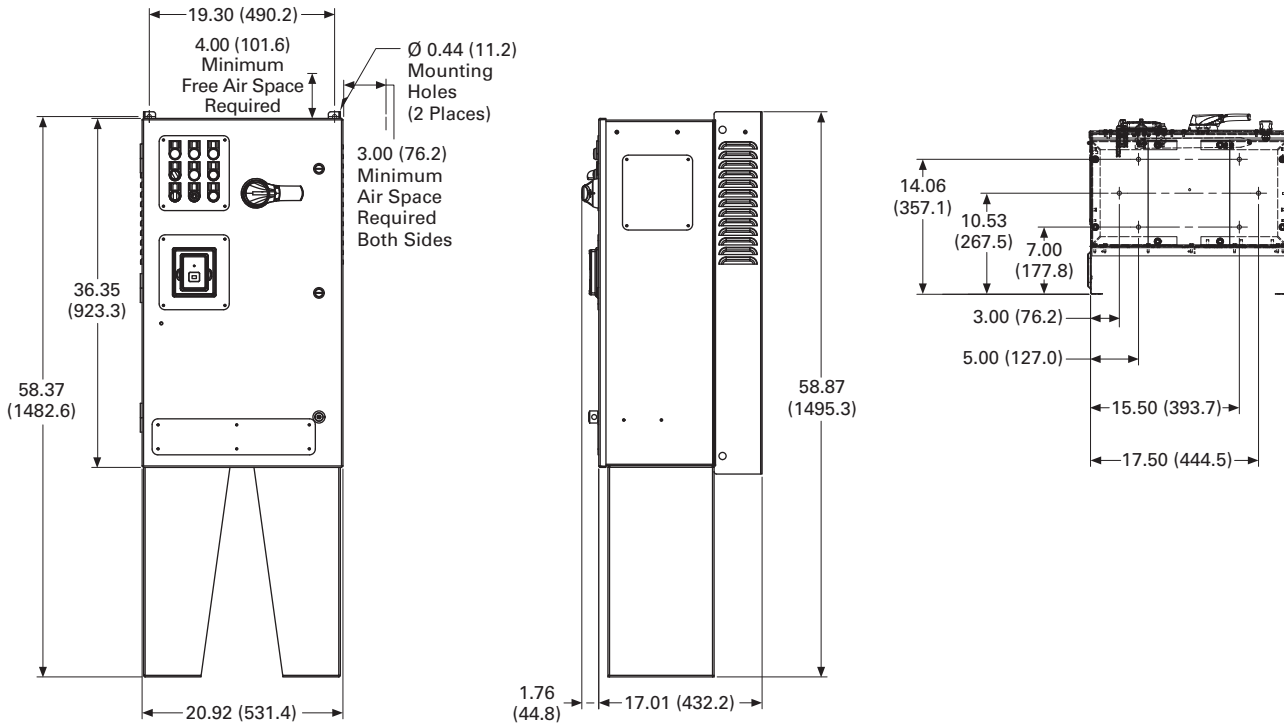


BX Box Type 3R

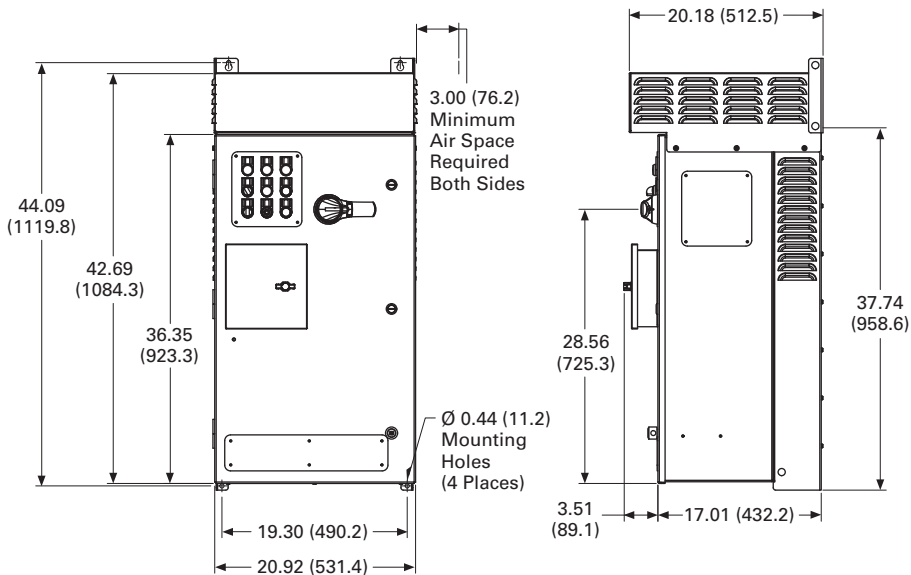


Approximate Dimensions in Inches (mm)

BX Box Type 3R—12 Inch Floor Stands

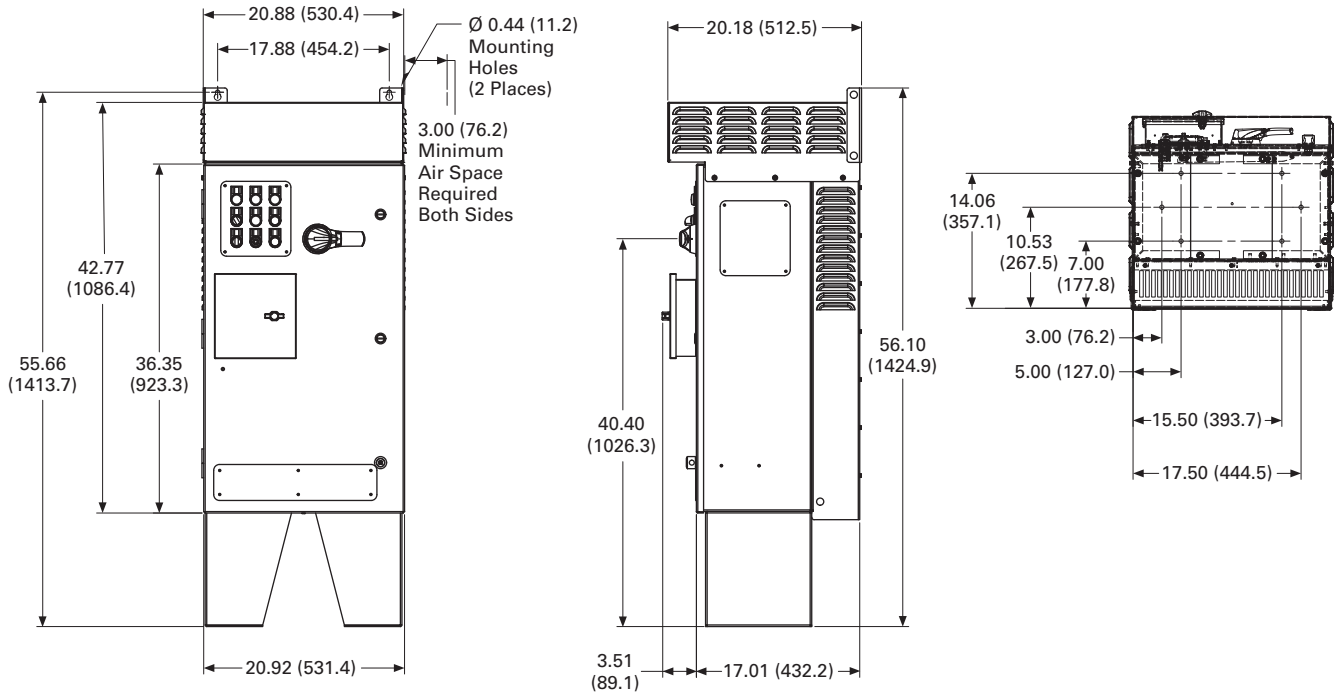

BX Box Type 3R—22 Inch Floor Stands

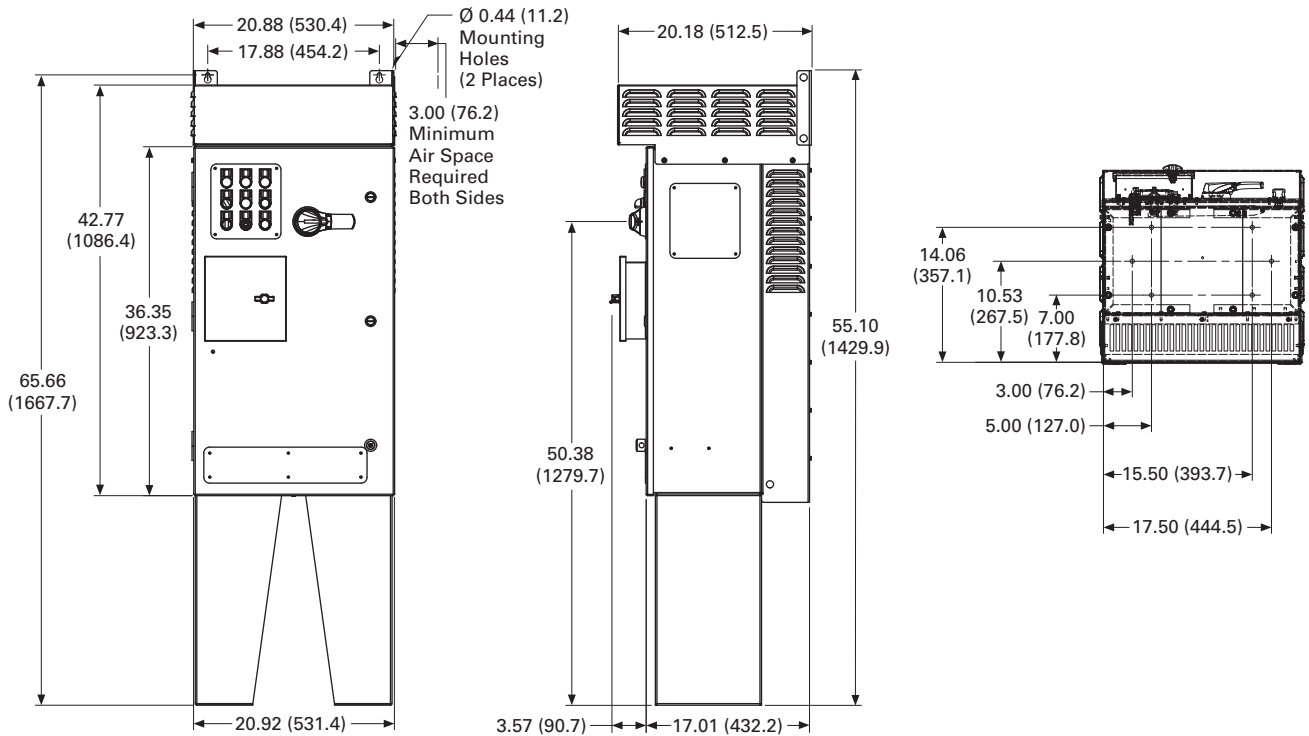

2.7


Adjustable Frequency Drives

SVX Drives


Approximate Dimensions in Inches (mm)

CX Box Type 1

2

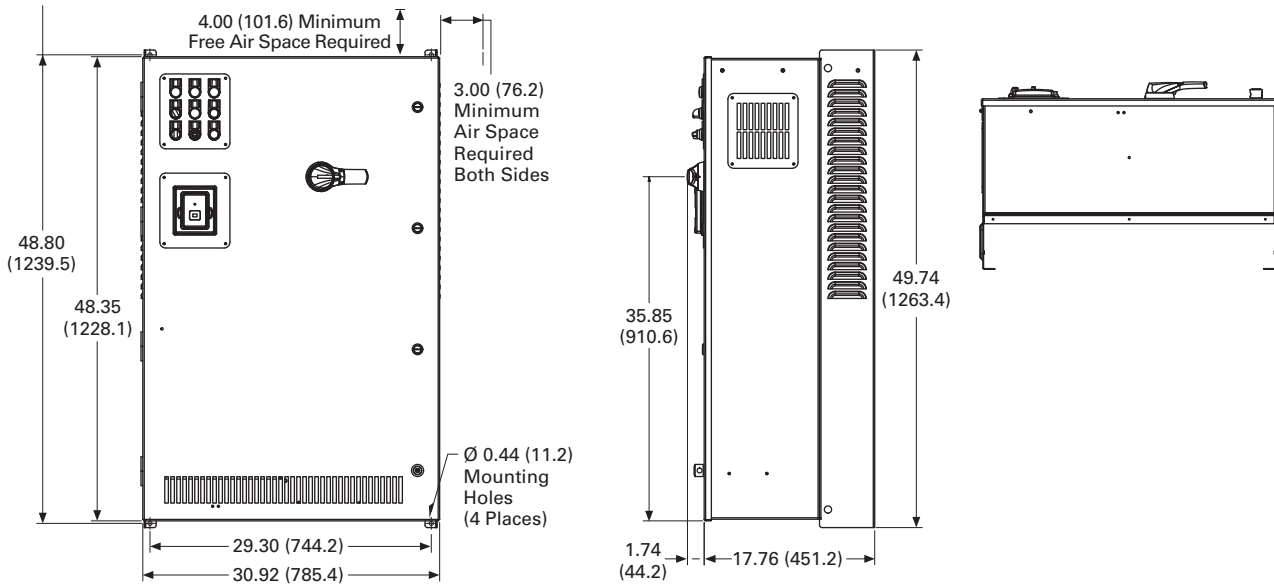


CX Box Type 1—12 Inch Floor Stands

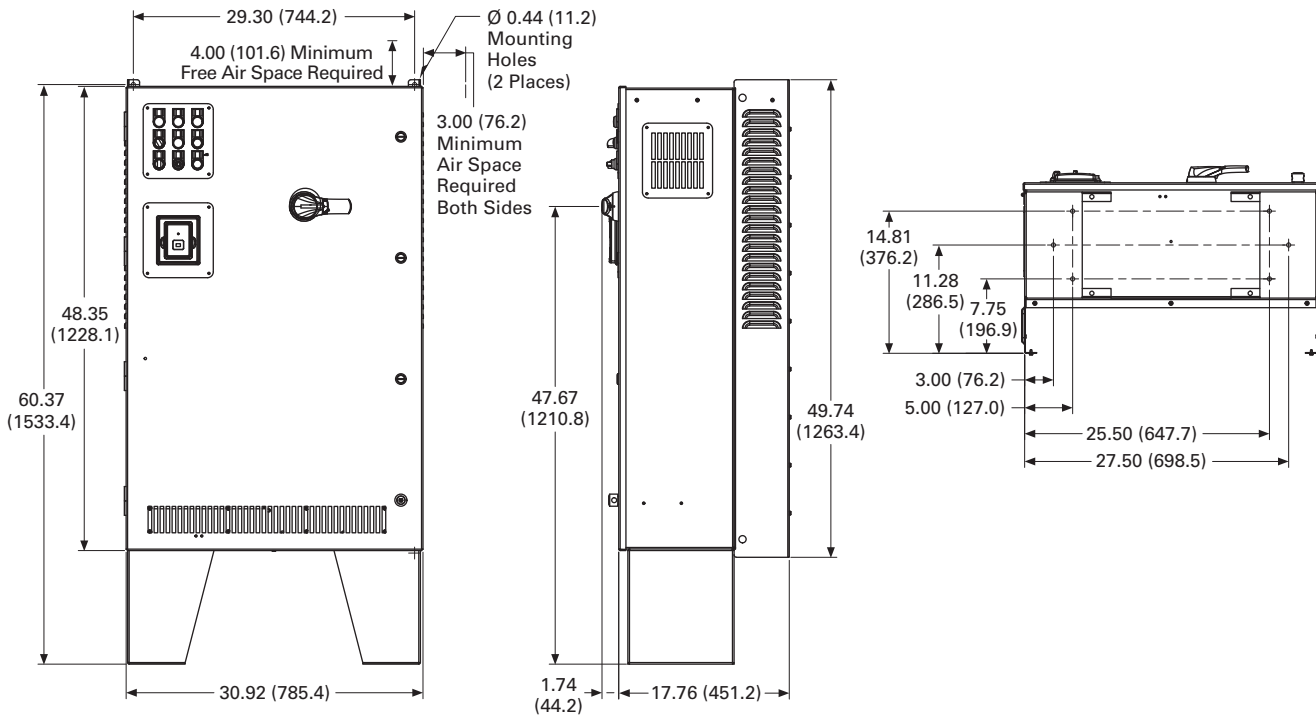


Approximate Dimensions in Inches (mm)

CX Box Type 1—22 Inch Floor Stands

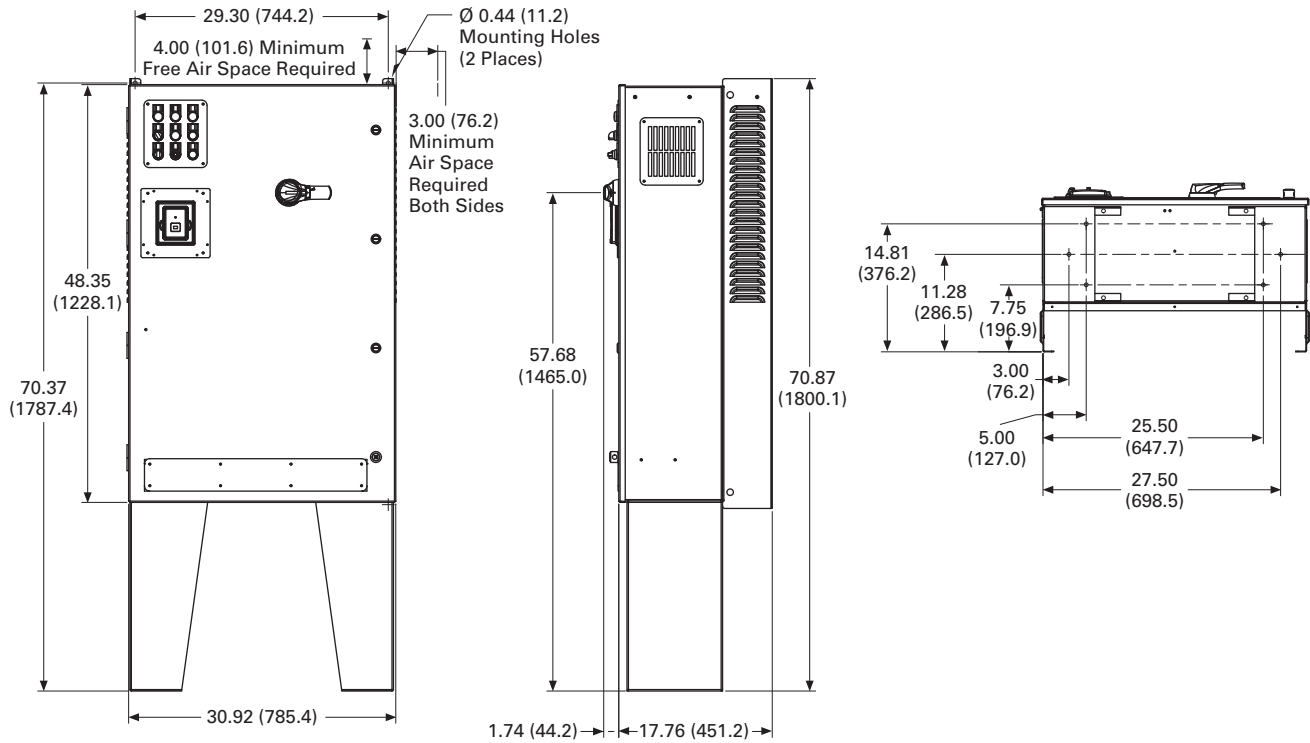

CX Box Type 12

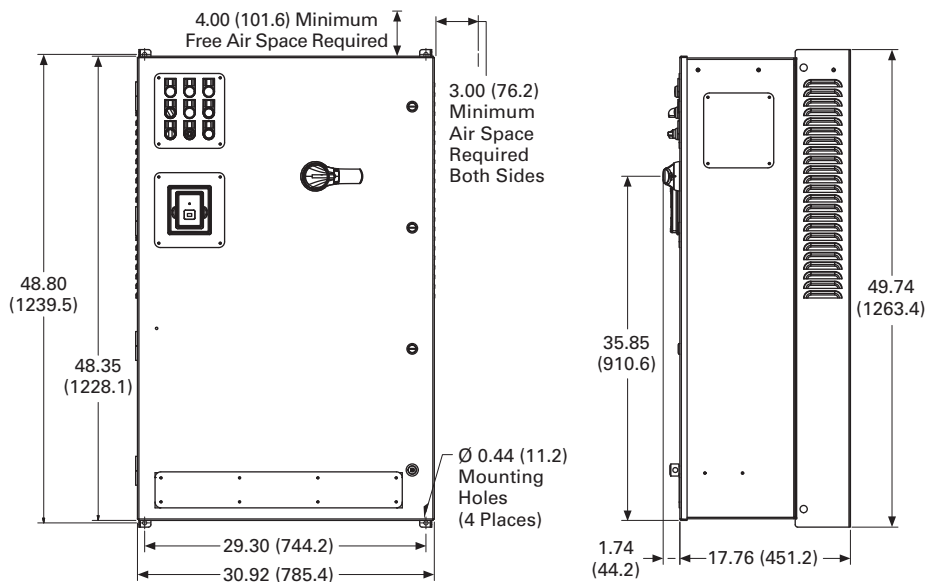

2.7


Adjustable Frequency Drives

SVX Drives


Approximate Dimensions in Inches (mm)

2



CX Box Type 12—12 Inch Floor Stands

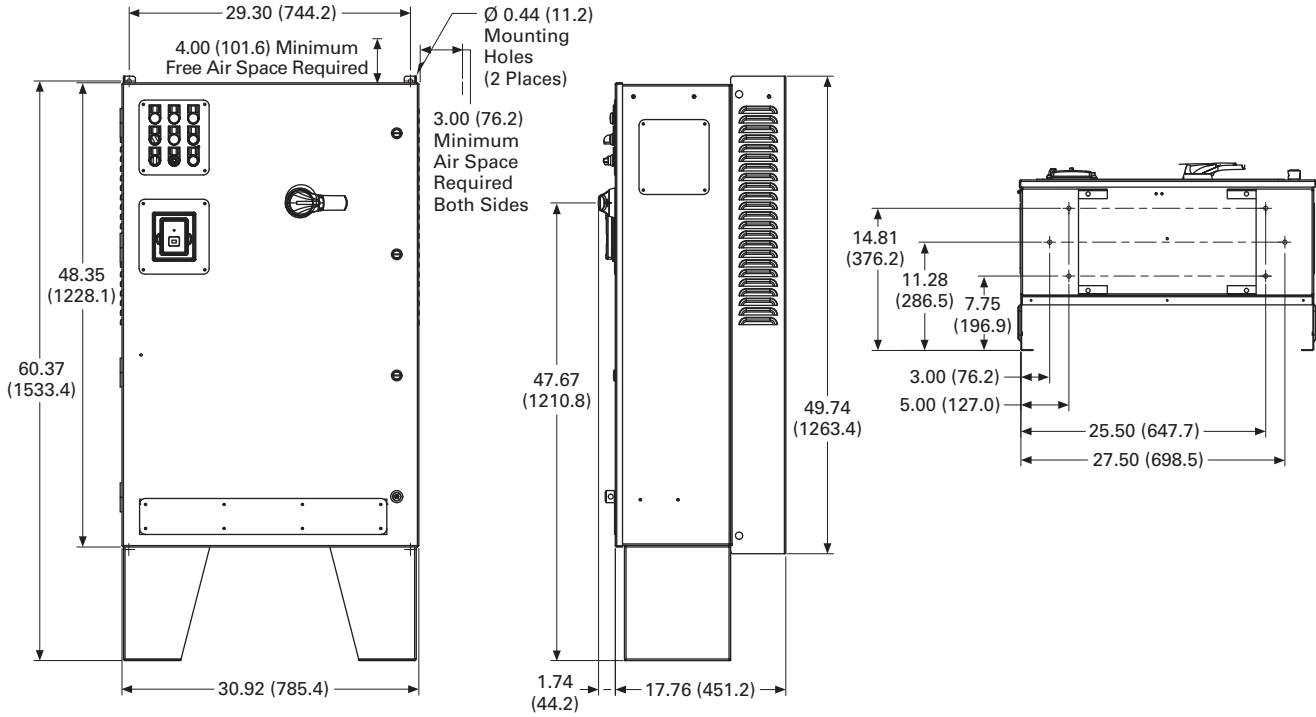

CX Box Type 12—22 Inch Floor Stands

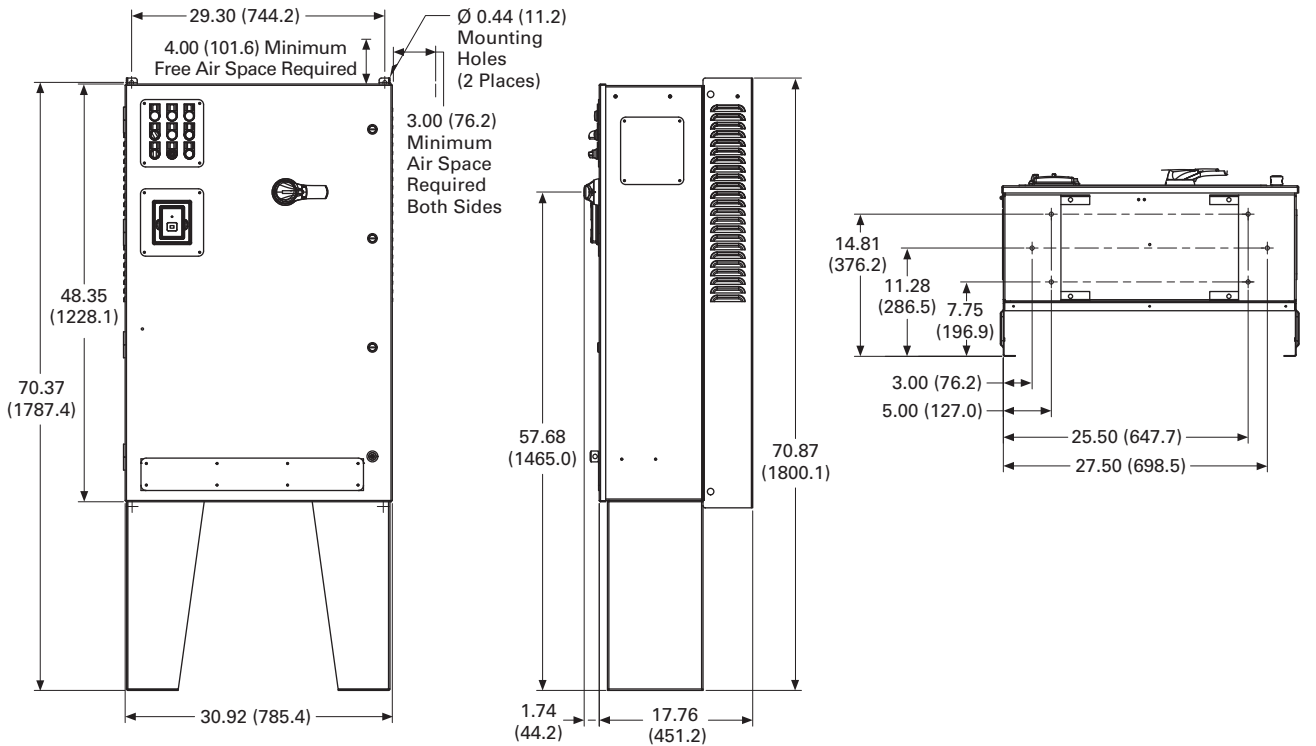

Approximate Dimensions in Inches (mm)

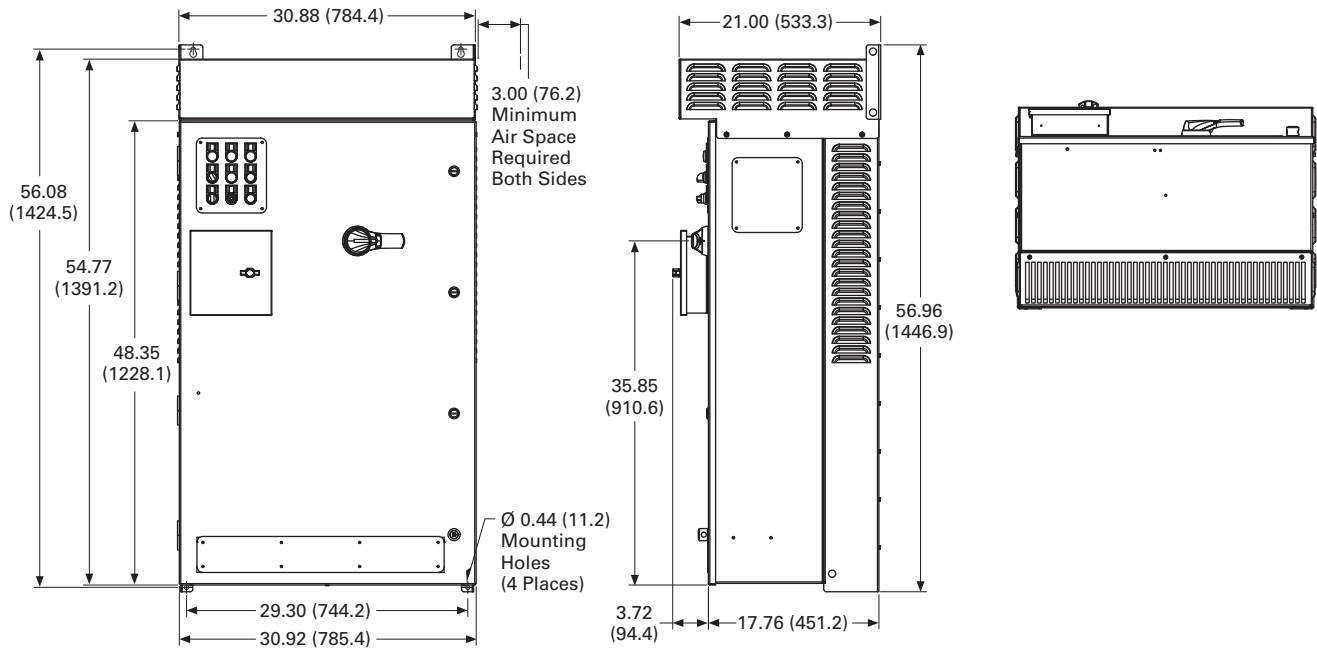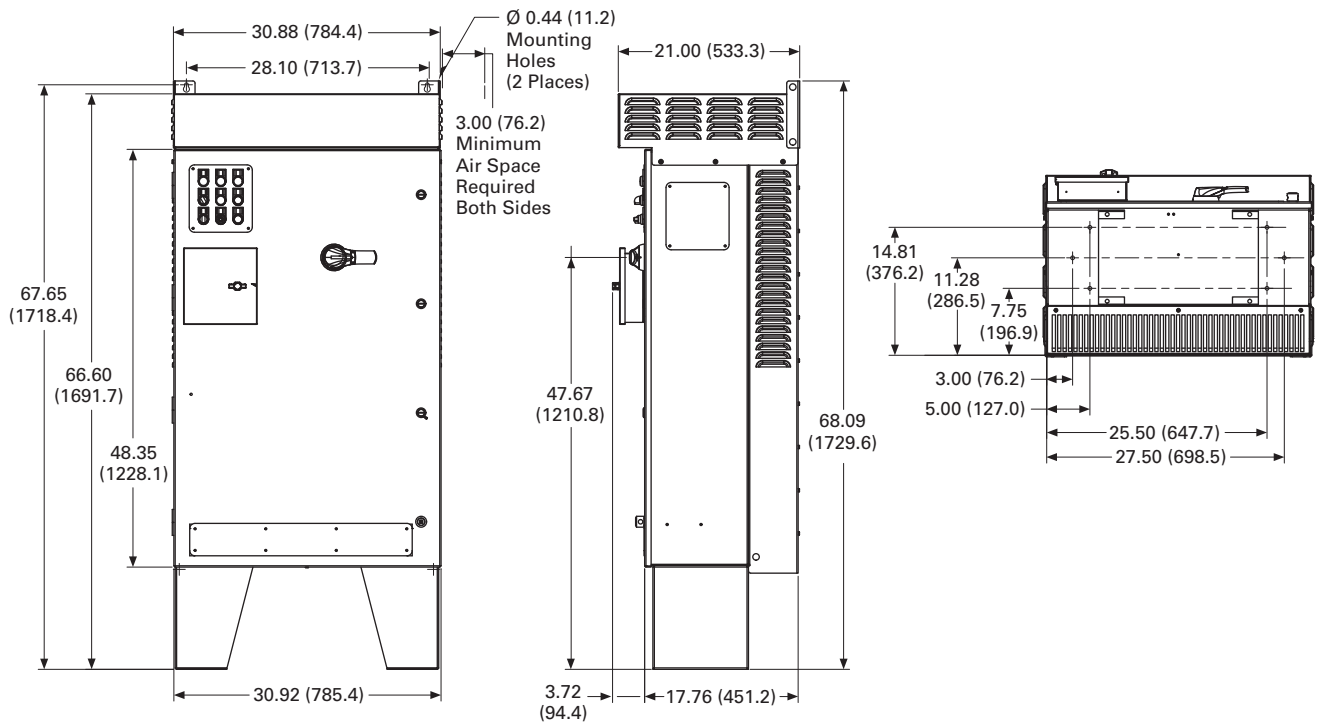CX Box Type 3R**CX Box Type 3R—12 Inch Floor Stands**

2.7


Adjustable Frequency Drives

SVX Drives


Approximate Dimensions in Inches (mm)

CX Box Type 3R—22 Inch Floor Stands

2

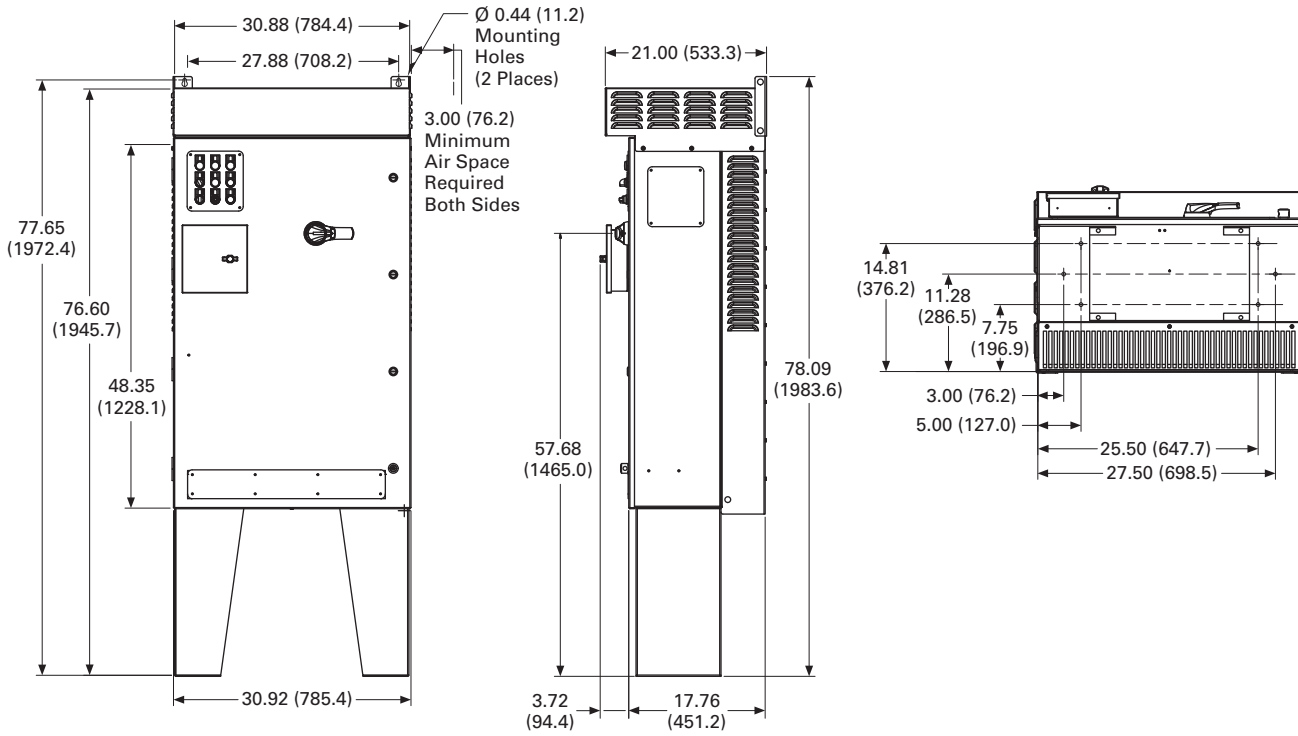


DX Box Type 1

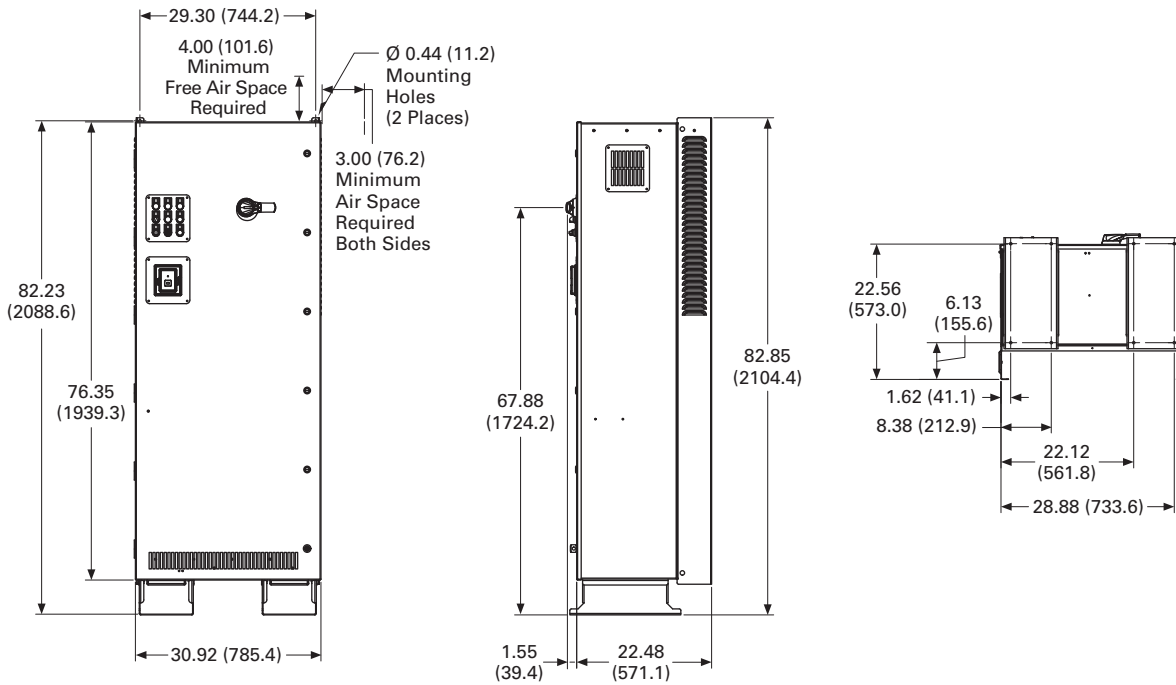


Approximate Dimensions in Inches (mm)

DX Box Type 12

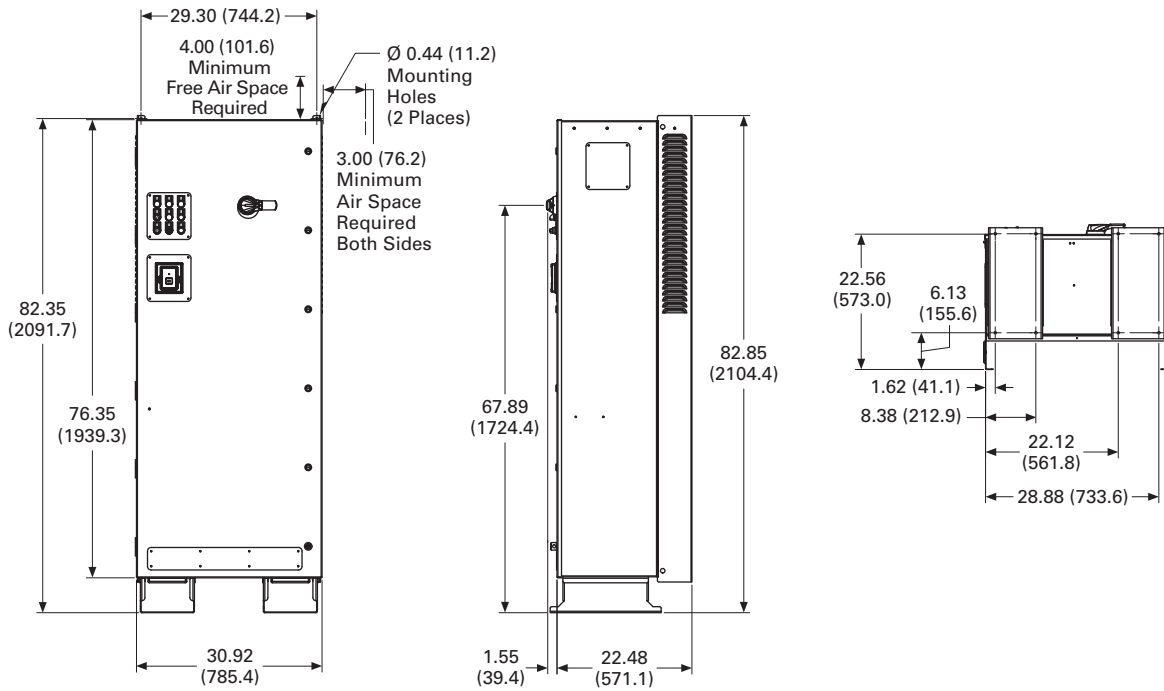

DX Box Type 3R

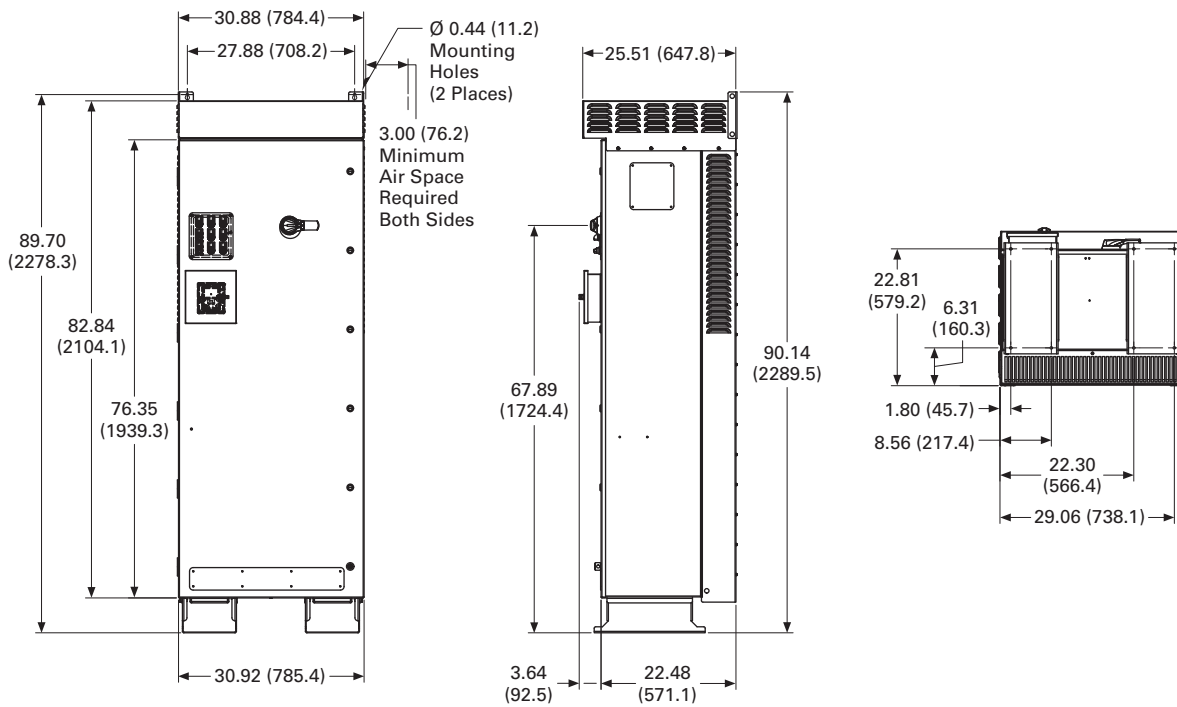

2.7


Adjustable Frequency Drives

SVX Drives

Approximate Dimensions in Inches (mm)

Size 5

2

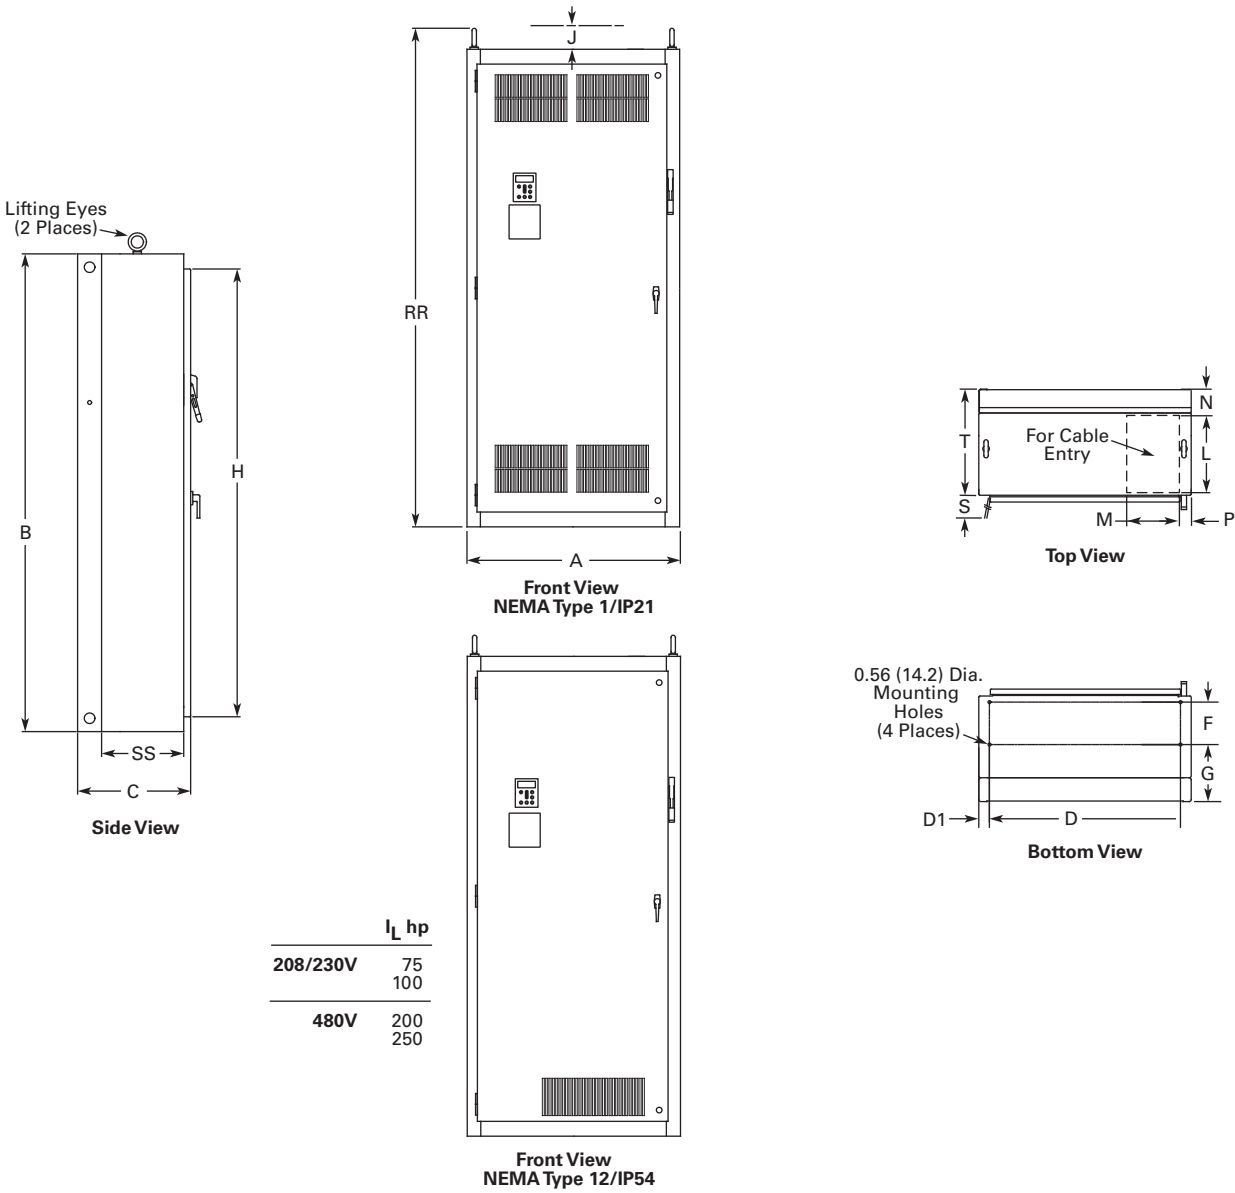


For reference only, dimensions are subject to change.

| Wide | High | Deep | Mounting | | | | | | | Door Height | Min. Air Space | |
|-------------|-------------|------------|------------|----------|---|----|-----------|------------|----|-------------|----------------|---|
| A | B | C | D | D1 | E | E1 | F | G | G1 | H | J | K |
| 40.0 (1016) | 90.0 (2286) | 21.3 (541) | 36.0 (914) | 2.0 (51) | — | — | 8.0 (203) | 10.8 (273) | — | 84.4 (2143) | 4.0 (102) | — |

| Cable Entry | | Door Clearance | | | | | | | | | | Max. Approx. Shipping Weight | | | |
|-------------|------------|----------------|----------|---|------------|------------|---|---|---|-------------|------------|------------------------------|----|----|------------|
| L | M | N | P | R | S | T | U | V | W | RR | SS | TT | UU | VV | Lbs (kg) |
| 15.0 (381) | 10.0 (254) | 4.8 (122) | 2.0 (51) | — | 36.3 (921) | 20.0 (508) | — | — | — | 94.0 (2387) | 15.5 (394) | — | — | — | 1275 (579) |

Approximate Dimensions in Inches (mm)

Size 6

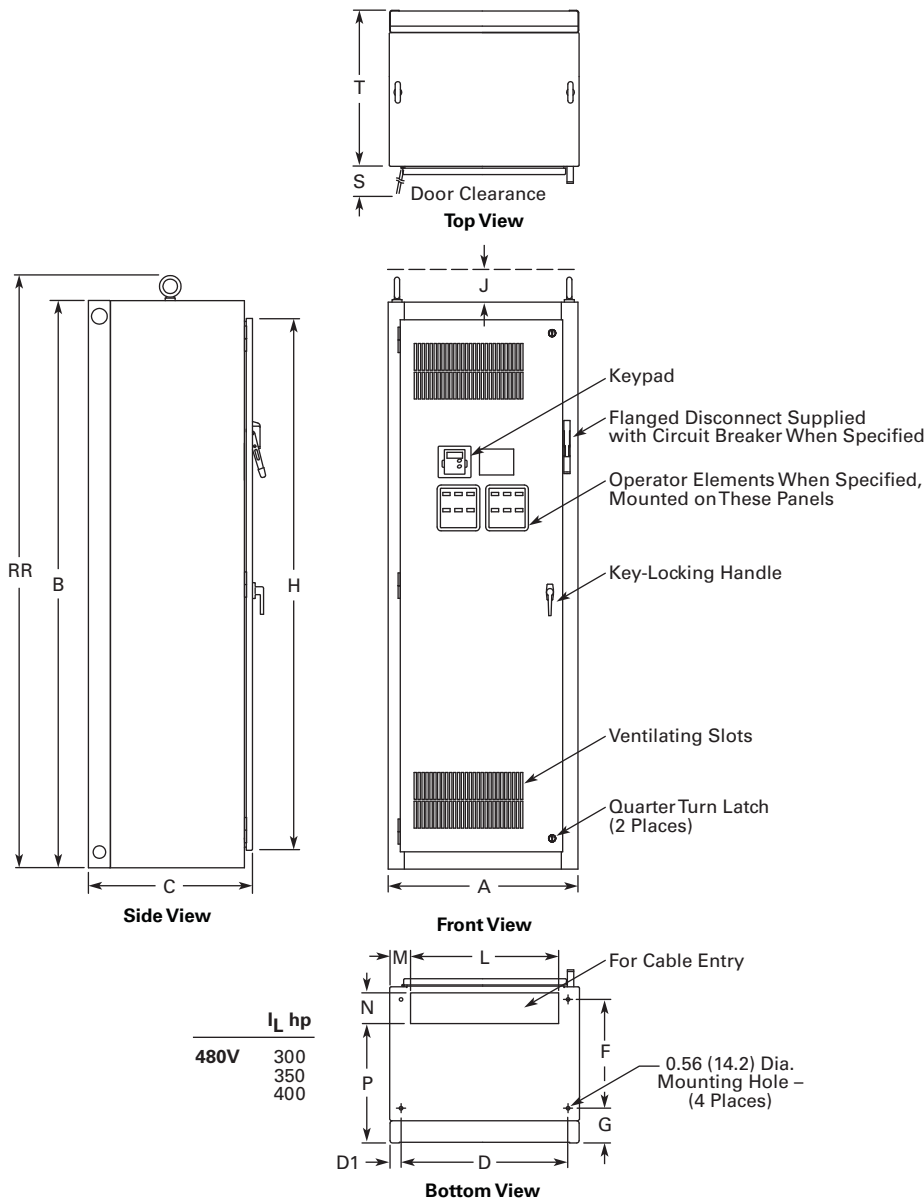

For reference only, dimensions are subject to change. See **Page V6-T2-145**, notes 3 and 5 for enclosure and option selection.

| Wide | High | Deep | Mounting | | | | | | | Door Height | Min. Air Space | |
|------------|-------------|------------|------------|----------|---|----|------------|-----------|----|-------------|----------------|---|
| A | B | C | D | D1 | E | E1 | F | G | G1 | H | J | K |
| 30.0 (762) | 90.0 (2286) | 26.0 (660) | 26.5 (673) | 1.8 (46) | — | — | 17.3 (438) | 5.5 (140) | — | 84.4 (2143) | 4.0 (102) | — |

| Cable Entry | | | Door Clearance | | | | | | | | | | Max. Approx. Shipping Weight | | |
|-------------|----------|-----------|----------------|---|------------|------------|---|---|---|-------------|----|----|------------------------------|----|------------|
| L | M | N | P | R | S | T | U | V | W | RR | SS | TT | UU | VV | Lbs (kg) |
| 23.5 (597) | 3.3 (84) | 4.5 (114) | 19.3 (490) | — | 26.2 (667) | 24.8 (629) | — | — | — | 93.9 (2386) | — | — | — | — | 1500 (681) |

2.7


Adjustable Frequency Drives

SVX Drives

Approximate Dimensions in Inches (mm)

Size 8

2

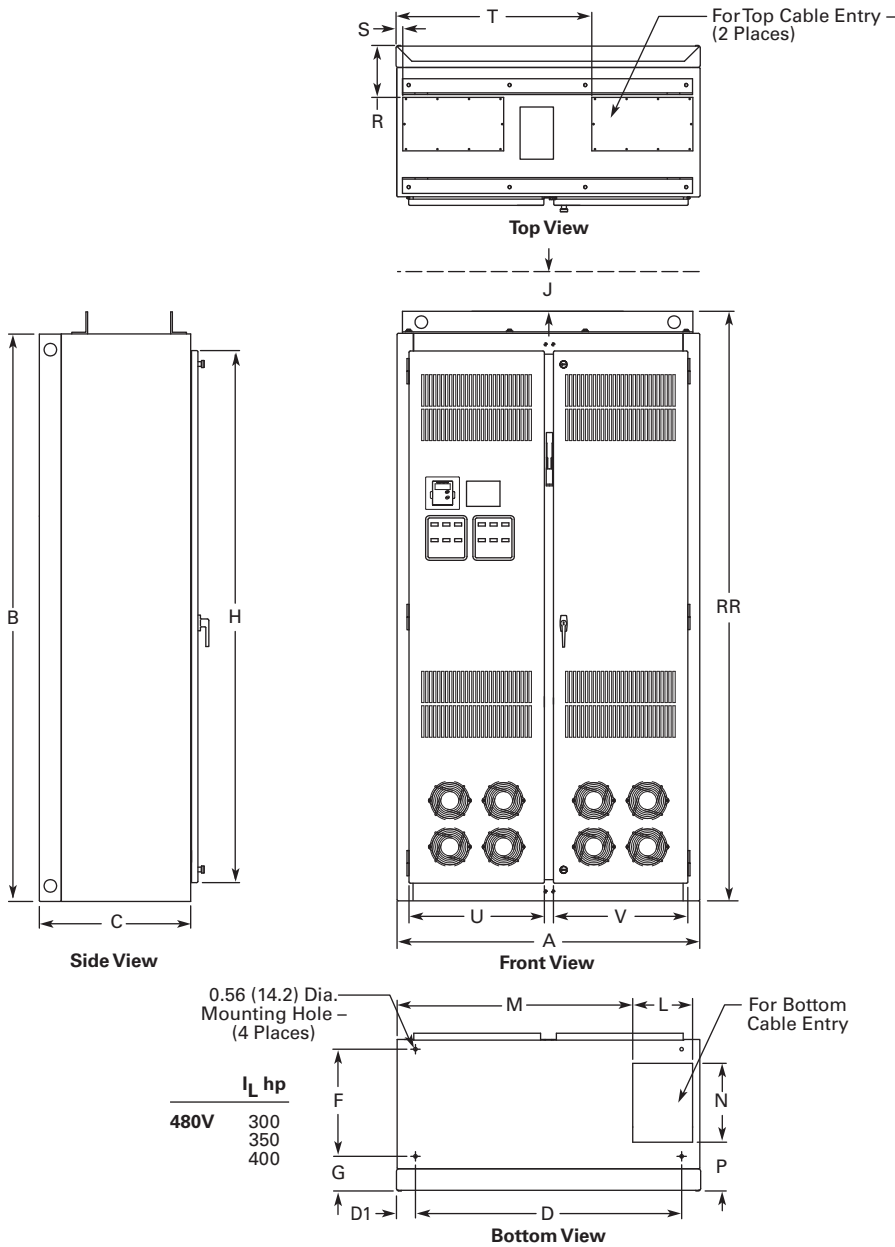


For reference only, dimensions are subject to change. See **Page V6-T2-145**, notes 3 and 5 for enclosure and option selection.

| Wide A | High B | Deep C | Mounting | | E | E1 | F | G | G1 | Door Height H | Min. Air Space J | K |
|-------------|-------------|------------|-------------|----------|---|----|---|-----------|----|------------------|---------------------|---|
| 48.0 (1219) | 90.0 (2286) | 24.0 (610) | 42.2 (1072) | 3.0 (77) | — | — | — | 5.5 (139) | — | 84.4 (2143) | 4.0 (102) | — |

| Cable Entry | | | | | | | | | | | Max. Approx. Shipping Weight Lbs (kg) | | | | | |
|--------------|---------------|---------------|--------------|--------------|-------------|---------------|---------------|---------------|---|----------------|--|----|----|----|------|-------|
| L | M | N | P | R | S | T | U | V | W | RR | SS | TT | UU | VV | | |
| 9.5 (241) | 37.5 (952) | 12.5 (318) | 7.7 (196) | 8.3 (210) | 1.3 (32) | 31.0 (787) | 21.5 (545) | 21.3 (541) | — | 93.5 (2375) | — | — | — | — | 2000 | (908) |

Approximate Dimensions in Inches (mm)

Size 9

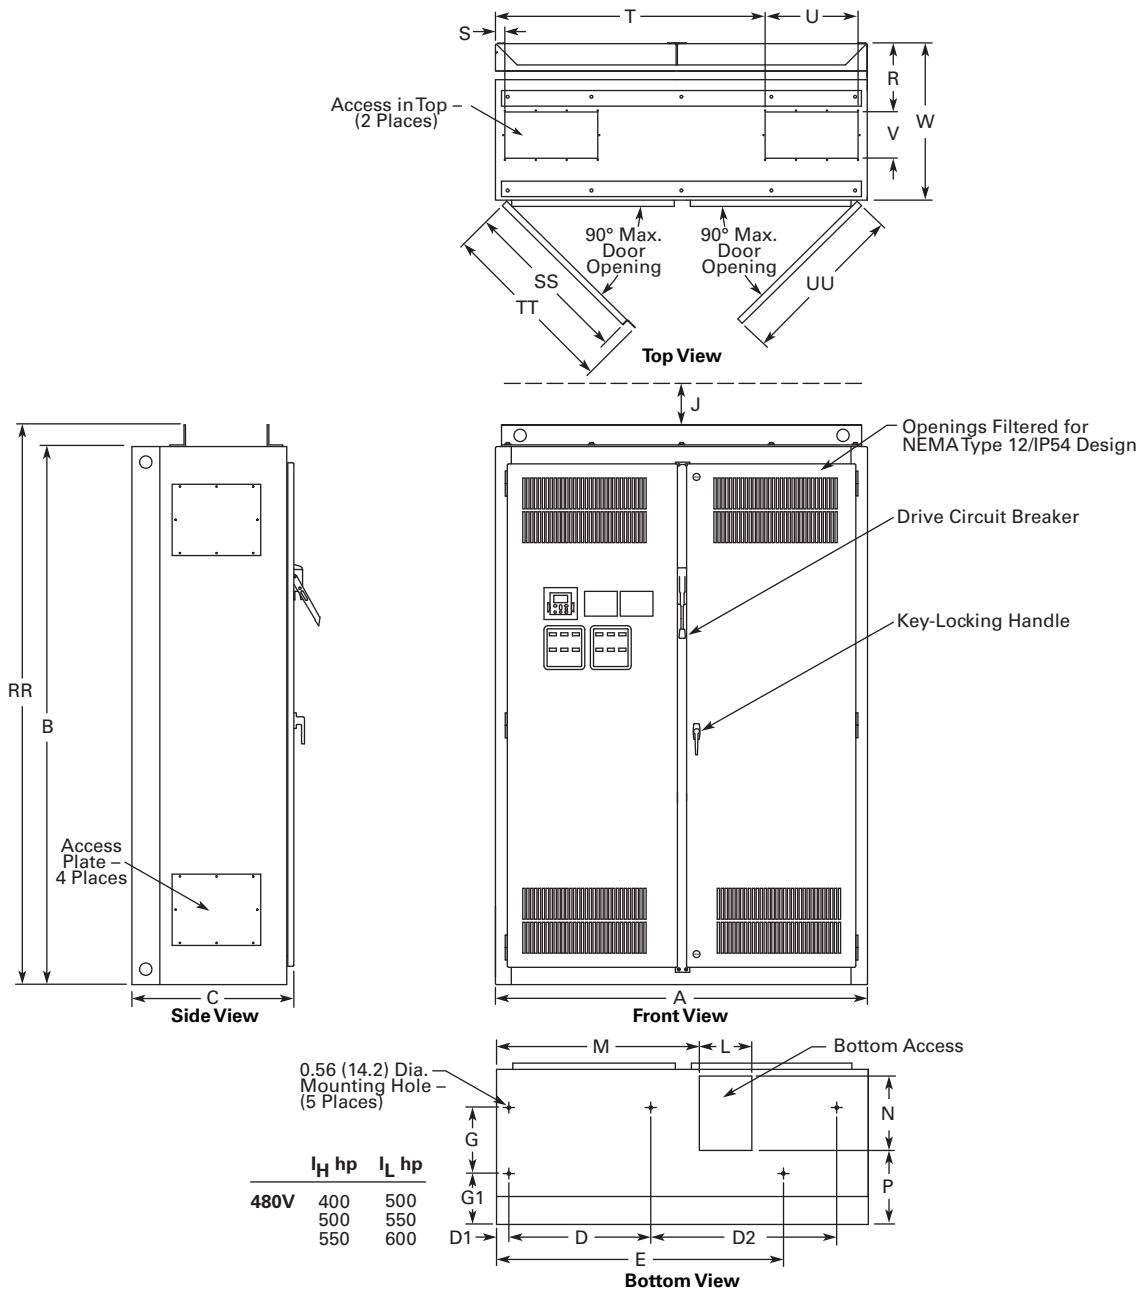

For reference only, dimensions are subject to change. See **Page V6-T2-145**, notes 3 and 5 for enclosure and option selection.

| Wide A | High B | Deep C | Mounting D | | D1 | E | E1 | F | G | G1 | Door Height H | Min. Air Space J | K |
|-------------|-------------|------------|---------------|----------|------------|-------------|------------|------------|-----------|----|------------------|---------------------|---|
| 60.0 (1524) | 90.0 (2286) | 26.1 (664) | 22.9 (582) | 2.0 (51) | 30.0 (762) | 44.3 (1125) | 10.6 (270) | 10.6 (270) | 8.2 (208) | — | 4.0 (102) | — | |

| Cable Entry | | | | | | | | | | | | | | | Max. Approx. Shipping Weight Lbs (kg) |
|--------------|---------------|---------------|---------------|--------------|-------------|----------------|---------------|--------------|---------------|----------------|---------------|----------------|----------------|----|--|
| L | M | N | P | R | S | T | U | V | W | RR | SS | TT | UU | VV | |
| 8.5 (216) | 32.7 (831) | 12.0 (305) | 11.9 (303) | 9.8 (249) | 1.5 (38) | 43.5 (1105) | 15.0 (381) | 7.5 (191) | 25.0 (635) | 93.5 (2375) | 27.4 (696) | 290.1 (738) | 270.1 (687) | — | 2500 (1135) |

2.7




Adjustable Frequency Drives

SVX Drives

Approximate Dimensions in Inches (mm)

Enclosure Size F

2

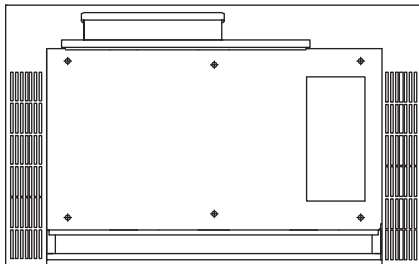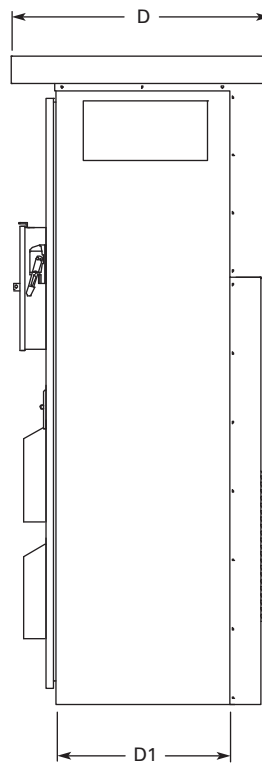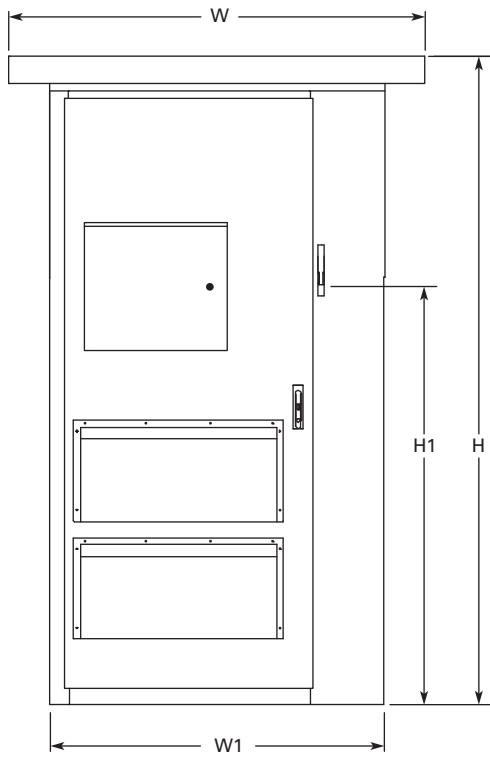

| H | H1 | W | W1 | D | D1 | Approximate Weight Lbs (kg) | Approximate Shipping Weight Lbs (kg) |
|-------------------|--------------------|-------------------|-------------------|------------------|------------------|--------------------------------|---|
| 93.58 (2376.9) | 69.51 (1765.60) | 60.00 (1524.0) | 48.00 (1219.2) | 37.50 (952.5) | 26.00 (660.4) | 1700 (771) | 1850 (839) |

DH1 HVAC/R Drive



Contents

| Description | Page |
|------------------------------------|-----------|
| PowerXL DH1 Series Drives | |
| Standards and Certifications | V6-T2-176 |
| Catalog Number Selection | V6-T2-176 |
| Product Selection | V6-T2-177 |
| Accessories | V6-T2-180 |
| Replacement Parts | V6-T2-186 |
| Technical Data and Specifications | V6-T2-188 |
| Dimensions | V6-T2-194 |
| PowerXL DH1 Series Enclosed Drives | V6-T2-195 |

PowerXL DH1 Series Drives

Product Description

The DH1 HVAC/R drives are part of Eaton's next generation PowerXL Series of adjustable frequency drives specifically engineered for today's demanding HVAC/R market. The power unit makes use of the most sophisticated semiconductor technology and a highly modular construction that can be flexibly adapted to meet the customer's needs.

The control module was designed to include today's standard HVAC/R communication protocols and I/O while still having the modularity to add additional option cards.

Eaton's patented Active Energy Control is also a standard feature on DH1 drives, offering customers increased efficiency, safety and reliability.

These drives continue the tradition of robust performance and raise the bar on features and functionality, ensuring the best solution at the right price.

Product Range

230 V to 125 hp, 312 A, 90 kW

480 V to 250 hp, 310 A, 160 kW

575 V to 250 hp, 250 A, 187 kW

Features and Benefits

Hardware

- Integrated common mode reduction 5% DC link choke with input surge protection
- Variable torque rated for HVAC/R demands
- 110% variable torque (1L)
- Type 1/IP21 and Type 12/IP54 enclosures available
- Real-time clock—supports calendaring and PLC functionality
- Graphic LCD display and keypad—supports simple menu navigation as well as on-screen diagnostics and troubleshooting
- AUTO operation from keypad and two configurable soft keys
- Conformal coated control and power boards standard
- Control logic can be powered from an external auxiliary control panel—internal drive functions and fieldbus if necessary
- Standard I/O:
 - 8DI, 1DO
 - 2AI, 2AO
 - 2FC, 1FA relays
- Standard communications:
 - BACnet/IP, Modbus TCP, Modbus RTU, BACnet MS/TP
- Two expansion slots—intended to support additional I/O or communication protocols as necessary
- Quick disconnect terminals for I/O connections—supports fast, easy installation

Software

- Active Energy Control—minimizes energy losses in the motor, resulting in industry-leading energy efficiency for your application
- Energy savings calculator
- Quick Start Wizard upon initial power-up supports fast, easy installation
- Standard applications:
 - Standard
 - Multi-PID
 - Advanced
- Copy/paste functionality on drive keypad—allows for fast setup of multiple drives
- Pre-programmed I/O—supports fast, easy installation for most applications
- Dynamic motor regenerative energy management
- Advanced PC Tool with diagnostic capabilities
- Two keypad software keys for easy menu navigation and shortcuts

2.8

Adjustable Frequency Drives

PowerXL DH1 Series Drives

Standards and Certifications

Product

- IEC/EN 61800-5-1
- IEC/EN 61800-5-2
- UL 508C
- IEC 61508
- EN 62061
- EN ISO 13849-1

EMC

- Immunity: IEC/EN 61800-3
- Category C2

Certification


- UL
- cUL
- CE
- C-Tick
- RoHS
- Plenum rated




Catalog Number Selection

Catalog Number Selection is for illustrative purposes only and not to be used to create new catalog numbers.

PowerXL Series—DH1 HVAC/R Drive

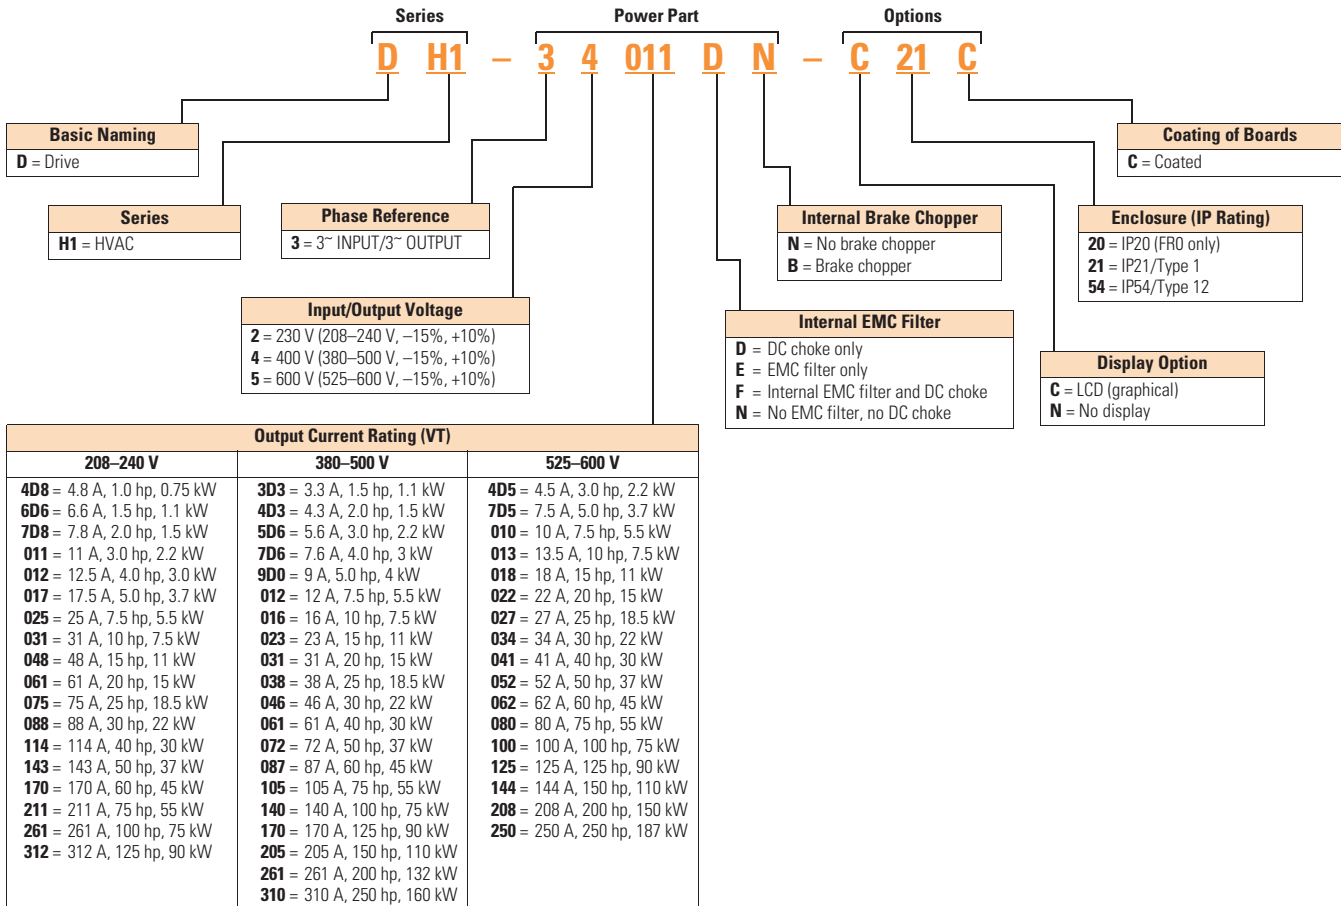

PowerXL Series—DH1 HVAC/R Drive Option Boards

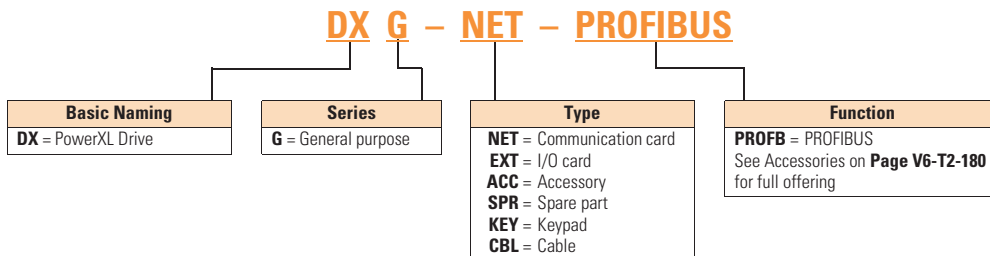

Product Selection

DH1 Series Drives—208–240 Volt

PowerXL Series—DH1 Type 1/IP21



| Frame Size | Variable Torque (VT) / Low Overload (I _L) | | | Catalog Number |
|------------|---|--------------------|--------------|--------------------|
| | 230 V, 50 Hz kW Rating | 230 V, 60 Hz hp | Current A | |
| FR0 | 0.75 | 1 | 4.8 | DH1-324D8EB-C20C ① |
| | 1.1 | 1.5 | 6.6 | DH1-326D6EB-C20C ① |
| | 1.5 | 2 | 7.8 | DH1-327D8EB-C20C ① |
| FR1 | 0.75 | 1 | 4.8 | DH1-324D8DN-C21C |
| | 1.1 | 1.5 | 6.6 | DH1-326D6DN-C21C |
| | 1.5 | 2 | 7.8 | DH1-327D8DN-C21C |
| | 2.2 | 3 | 11 | DH1-32011DN-C21C |
| | 3 | — | 12.5 | DH1-32012DN-C21C |
| FR2 | 3.7 | 5 | 17.5 | DH1-32017DN-C21C |
| | 5.5 | 7.5 | 25 | DH1-32025DN-C21C |
| | 7.5 | 10 | 31 | DH1-32031DN-C21C |
| FR3 | 11 | 15 | 48 | DH1-32048DN-C21C |
| | 15 | 20 | 61 | DH1-32061DN-C21C |
| FR4 | 18.5 | 25 | 75 | DH1-32075DN-C21C |
| | 22 | 30 | 88 | DH1-32088DN-C21C |
| | 30 | 40 | 114 | DH1-32114DN-C21C |
| FR5 | 37 | 50 | 143 | DH1-32143DN-C21C |
| | 45 | 60 | 170 | DH1-32170DN-C21C |
| | 55 | 75 | 211 | DH1-32211DN-C21C |
| FR6 | 75 | 100 | 261 | DH1-32261FN-C21C |
| | 90 | 125 | 312 | DH1-32312FN-C21C |

PowerXL Series—DH1 Type 12/IP54



| Frame Size | Variable Torque (VT) / Low Overload (I _L) | | | Catalog Number |
|------------|---|--------------------|--------------|------------------|
| | 230 V, 50 Hz kW Rating | 230 V, 60 Hz hp | Current A | |
| FR1 | 0.75 | 1 | 4.8 | DH1-324D8DN-C54C |
| | 1.1 | 1.5 | 6.6 | DH1-326D6DN-C54C |
| | 1.5 | 2 | 7.8 | DH1-327D8DN-C54C |
| | 2.2 | 3 | 11 | DH1-32011DN-C54C |
| | 3 | — | 12.5 | DH1-32012DN-C54C |
| FR2 | 3.7 | 5 | 17.5 | DH1-32017DN-C54C |
| | 5.5 | 7.5 | 25 | DH1-32025DN-C54C |
| | 7.5 | 10 | 31 | DH1-32031DN-C54C |
| FR3 | 11 | 15 | 48 | DH1-32048DN-C54C |
| | 15 | 20 | 61 | DH1-32061DN-C54C |
| FR4 | 18.5 | 25 | 75 | DH1-32075DN-C54C |
| | 22 | 30 | 88 | DH1-32088DN-C54C |
| | 30 | 40 | 114 | DH1-32114DN-C54C |
| FR5 | 37 | 50 | 143 | DH1-32143DN-C54C |
| | 45 | 60 | 170 | DH1-32170DN-C54C |
| | 55 | 75 | 211 | DH1-32211DN-C54C |
| FR6 | 75 | 100 | 261 | DH1-32261FN-C54C |
| | 90 | 125 | 312 | DH1-32312FN-C54C |

Note

① IP20 FR0 will be available in June 2018.

DH1 Series Drives—380–500 Volt

2

PowerXL Series—DH1

Type 1/IP21



| Frame Size | Variable Torque (VT) / Low Overload (I _L) | | | Catalog Number |
|------------|---|--------------------|--------------|--------------------|
| | 400 V, 50 Hz kW Rating | 460 V, 60 Hz hp | Current A | |
| FR0 | 1.1 | 1.5 | 3.3 | DH1-343D3EB-C20C ① |
| | 1.5 | 2 | 4.6 | DH1-344D3EB-C20C ① |
| | 2.2 | 3 | 5.6 | DH1-345D6EB-C20C ① |
| | 3 | 5 | 7.6 | DH1-347D6EB-C20C ① |
| FR1 | 1.1 | 1.5 | 3.3 | DH1-343D3DN-C21C |
| | 1.5 | 2 | 4.3 | DH1-344D3DN-C21C |
| | 2.2 | 3 | 5.6 | DH1-345D6DN-C21C |
| | 3 | 5 | 7.6 | DH1-347D6DN-C21C |
| | 4 | — | 9 | DH1-349D0DN-C21C |
| FR2 | 5.5 | 7.5 | 12 | DH1-34012DN-C21C |
| | 7.5 | 10 | 16 | DH1-34016DN-C21C |
| | 11 | 15 | 23 | DH1-34023DN-C21C |
| FR3 | 15 | 20 | 31 | DH1-34031DN-C21C |
| | 18.5 | 25 | 38 | DH1-34038DN-C21C |
| | 22 | 30 | 46 | DH1-34046DN-C21C |
| FR4 | 30 | 40 | 61 | DH1-34061DN-C21C |
| | 37 | 50 | 72 | DH1-34072DN-C21C |
| | 45 | 60 | 87 | DH1-34087DN-C21C |
| FR5 | 55 | 75 | 105 | DH1-34105DN-C21C |
| | 75 | 100 | 140 | DH1-34140DN-C21C |
| | 90 | 125 | 170 | DH1-34170DN-C21C |
| FR6 | 110 | 150 | 205 | DH1-34205DN-C21C |
| | 132 | 200 | 261 | DH1-34261FN-C21C |
| | 160 | 250 | 310 | DH1-34310FN-C21C |

PowerXL Series—DH1

Type 12/IP54



| Frame Size | Variable Torque (VT) / Low Overload (I _L) | | | Catalog Number |
|------------|---|--------------------|--------------|------------------|
| | 400 V, 50 Hz kW Rating | 460 V, 60 Hz hp | Current A | |
| FR1 | 1.1 | 1.5 | 3.3 | DH1-343D3DN-C54C |
| | 1.5 | 2 | 4.3 | DH1-344D3DN-C54C |
| | 2.2 | 3 | 5.6 | DH1-345D6DN-C54C |
| | 3 | 5 | 7.6 | DH1-347D6DN-C54C |
| | 4 | — | 9 | DH1-349D0DN-C54C |
| FR2 | 5.5 | 7.5 | 12 | DH1-34012DN-C54C |
| | 7.5 | 10 | 16 | DH1-34016DN-C54C |
| | 11 | 15 | 23 | DH1-34023DN-C54C |
| FR3 | 15 | 20 | 31 | DH1-34031DN-C54C |
| | 18.5 | 25 | 38 | DH1-34038DN-C54C |
| | 22 | 30 | 46 | DH1-34046DN-C54C |
| FR4 | 30 | 40 | 61 | DH1-34061DN-C54C |
| | 37 | 50 | 72 | DH1-34072DN-C54C |
| | 45 | 60 | 87 | DH1-34087DN-C54C |
| FR5 | 55 | 75 | 105 | DH1-34105DN-C54C |
| | 75 | 100 | 140 | DH1-34140DN-C54C |
| | 90 | 125 | 170 | DH1-34170DN-C54C |
| FR6 | 110 | 150 | 205 | DH1-34205DN-C54C |
| | 132 | 200 | 261 | DH1-34261FN-C54C |
| | 160 | 250 | 310 | DH1-34310FN-C54C |

Note

① IP20 FR0 will be available in June 2018.

DH1 Series Drives—575 Volt**PowerXL Series—DH1 Type 1/IP21**

| Frame Size | Variable Torque (VT) / Low Overload (I _L) | | | Catalog Number |
|------------|---|--------------------|--------------|------------------|
| | 575 V, 60 Hz kW Rating | 575 V, 60 Hz hp | Current A | |
| FR1 | 2.2 | 3 | 4.5 | DH1-354D5FB-C21C |
| | 3.7 | 5 | 7.5 | DH1-357D5FB-C21C |
| | 5.5 | 7.5 | 10 | DH1-35010FB-C21C |
| FR2 | 7.5 | 10 | 13.5 | DH1-35013FB-C21C |
| | 11 | 15 | 18 | DH1-35018FB-C21C |
| | 15 | 20 | 22 | DH1-35022FB-C21C |
| FR3 | 18.5 | 25 | 27 | DH1-35027FB-C21C |
| | 22 | 30 | 34 | DH1-35034FB-C21C |
| | 30 | 40 | 41 | DH1-35041FB-C21C |
| FR4 | 37 | 50 | 52 | DH1-35052FN-C21C |
| | 45 | 60 | 62 | DH1-35062FN-C21C |
| | 55 | 75 | 80 | DH1-35080FN-C21C |
| FR5 | 75 | 100 | 100 | DH1-35100FN-C21C |
| | 90 | 125 | 125 | DH1-35125FN-C21C |
| | 110 | 150 | 144 | DH1-35144FN-C21C |
| FR6 | 150 | 200 | 208 | DH1-35208FN-C21C |
| | 187 | 250 | 250 | DH1-35250FN-C21C |

PowerXL Series—DH1 Type 12/IP54

| Frame Size | Variable Torque (VT) / Low Overload (I _L) | | | Catalog Number |
|------------|---|--------------------|--------------|------------------|
| | 575 V, 60 Hz kW Rating | 575 V, 60 Hz hp | Current A | |
| FR1 | 2.2 | 3 | 4.5 | DH1-354D5FB-C54C |
| | 3.7 | 5 | 7.5 | DH1-357D5FB-C54C |
| | 5.5 | 7.5 | 10 | DH1-35010FB-C54C |
| FR2 | 7.5 | 10 | 13.5 | DH1-35013FB-C54C |
| | 11 | 15 | 18 | DH1-35018FB-C54C |
| | 15 | 20 | 22 | DH1-35022FB-C54C |
| FR3 | 18.5 | 25 | 27 | DH1-35027FB-C54C |
| | 22 | 30 | 34 | DH1-35034FB-C54C |
| | 30 | 40 | 41 | DH1-35041FB-C54C |
| FR4 | 37 | 50 | 52 | DH1-35052FN-C54C |
| | 45 | 60 | 62 | DH1-35062FN-C54C |
| | 55 | 75 | 80 | DH1-35080FN-C54C |
| FR5 | 75 | 100 | 100 | DH1-35100FN-C54C |
| | 90 | 125 | 125 | DH1-35125FN-C54C |
| | 110 | 150 | 144 | DH1-35144FN-C54C |
| FR6 | 150 | 200 | 208 | DH1-35208FN-C54C |
| | 187 | 250 | 250 | DH1-35250FN-C54C |

Accessories

The PowerXL Series—DH1 drives can accommodate a wide selection of expander and adapter option boards to customize the drive for your application needs. The drive's control unit is designed to accept a total of two additional option boards.

The PowerXL Series—DH1 drives come with a factory-installed standard board configuration including the following:

- Standard I/O:
 - 8DI, 1DO
 - 2AI, 2AO
 - 2FC, 1FA relays
- Standard communications:
 - BACnet MS/TP, BACnet/IP
 - Modbus TCP, Modbus RTU

PowerXL Series—DH1 I/O Card Kits

| Description | Catalog Number |
|--|-------------------------|
| 3 x DI, 3 x DO, 1 x thermistor, 24 Vdc/EXT option card | DXG-EXT-3DI3DO1T |
| 1 x AI, 2 x AO (isolated to control board) option card | DXG-EXT-1AI2AO |
| 3 x relay dry contact (2NO + 1NO/NC) option card | DXG-EXT-3RO |
| 3 x PT100 RTD thermistor input option card | DXG-EXT-THER1 |
| 6 x DI 240 Vac input option card | DXG-EXT-6DI |

PowerXL Series—DH1 Communication Card Kits

| Description | Catalog Number |
|------------------------------------|----------------------|
| PROFIBUS-DP communication card | DXG-NET-PROFB |
| PROFIBUS DB9 to 5-pin adapter card | DXG-NET-PROAD |

PowerXL Series—DH1 Keypad Kits

| Description | Catalog Number |
|--|------------------------|
| Standard keypad | DXH-KEY-LCD |
| Remote keypad kit (IP 54 rated keypad holder and 3 m cable) | DXG-KEY-RMTKIT |
| 1 m remote keypad cable | DXG-CBL-1M0 |
| 3 m remote keypad cable | DXG-CBL-3M0 |
| Remote keypad mounting holder only | DXG-KEY-HOLDER |
| Type 12/IP54 keypad hole plug (maintain rating without keypad) | DXG-KEY-N12PLUG |

PowerXL Series—DH1 Conversion and Flange Kits

The Type 12/IP54 option kit is used to convert a Type 1/IP21 to a Type 12/IP54 drive. The kit includes cover, fan and grommets.

Type 12/IP54 Conversion Kits ^①

| Description | Catalog Number |
|--------------------------------|---------------------------|
| Frame 1 230 V Type 12/IP54 kit | DXH-ACC-2FR1N12KIT |
| Frame 1 480 V Type 12/IP54 kit | DXH-ACC-4FR1N12KIT |
| Frame 2 Type 12/IP54 kit | DXH-ACC-FR2N12KIT |

The flange kit is used when the power section heat sink is mounted through the back panel of an enclosure. The kit includes hardware, top flange plate, bottom flange plate and two side flange plates.

Flange Kits

| Description | Catalog Number |
|---------------------------------|-------------------------|
| Frame 1 flange kit Type 12/IP54 | DXG-ACC-FR1N12FK |
| Frame 2 flange kit Type 12/IP54 | DXG-ACC-FR2N12FK |
| Frame 3 flange kit Type 12/IP54 | DXG-ACC-FR3N12FK |
| Frame 4 flange kit Type 12/IP54 | DXG-ACC-FR4N12FK |
| Frame 5 flange kit Type 12/IP54 | DXG-ACC-FR5N12FK |
| Frame 6 flange kit Type 12/IP54 | DXG-ACC-FR6N12FK |

PowerXL Series—DH1 Demo Unit

Demo Unit

| Description | Catalog Number |
|-------------------------------|------------------|
| DH1 control module demo stand | DH1-DEMO1 |

Note



^① NEMA 12 DH1 drives from W34 are available within 3 business days.

Power Xpert *inControl* Software

The PowerXL Series PC Tool is designed for programming, controlling and monitoring of the DH1 drives. Features include loading parameters that can be saved to a file or printed, setting references, starting and stopping the motor, monitoring signals in graphical or text form, and real-time display.

PowerXpert *inControl* Software

| Description | Catalog Number |
|---|------------------------|
| Software cable (USB to keypad [RJ45]) | DXG-CBL-PCCABLE |
| Real-time clock battery (approximately 10,000 hours life) | DXG-ACC-RTBATT |

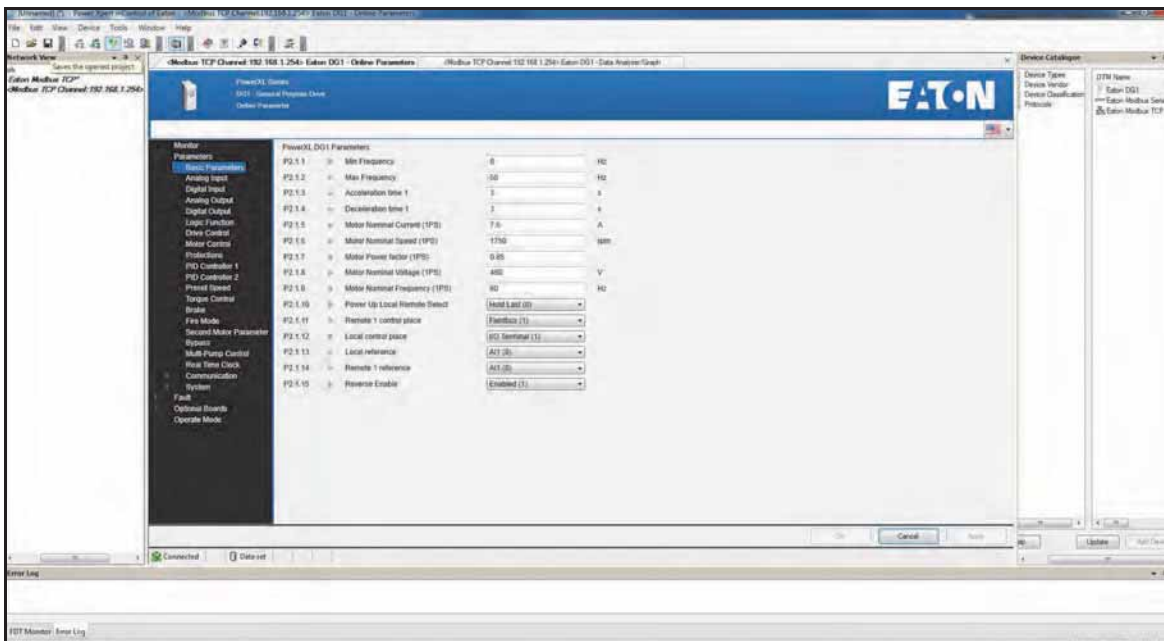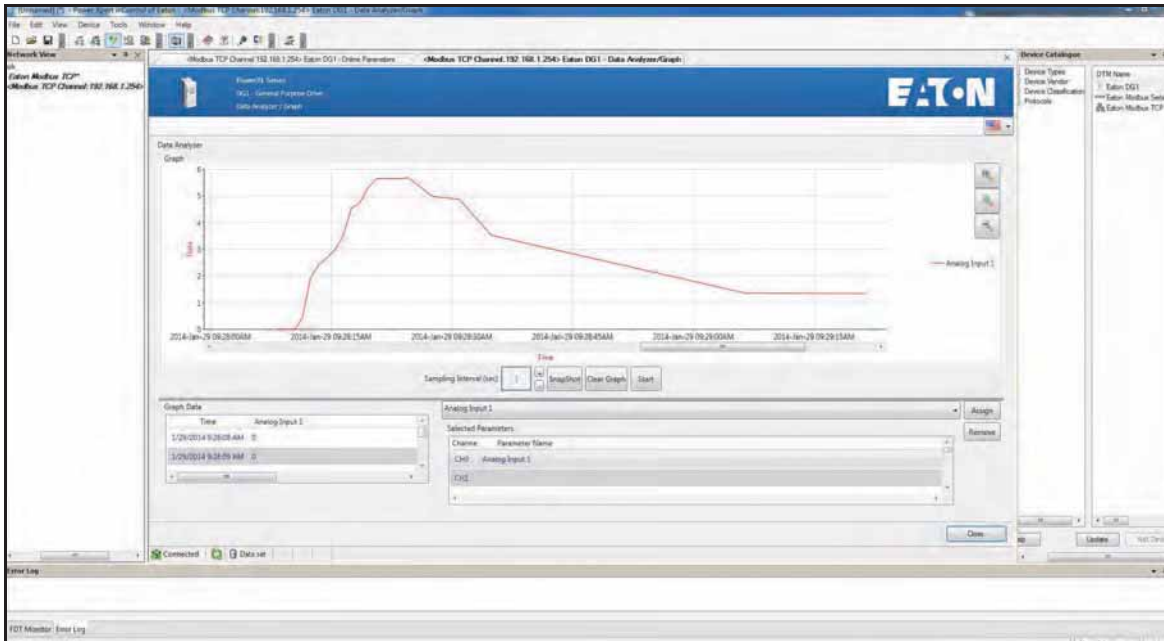

2.8

Adjustable Frequency Drives

PowerXL DH1 Series Drives

2

Brake Chopper Options

The brake chopper circuit option is used for applications that require dynamic braking. Dynamic braking resistors are not included with drive purchase. Consult the factory for additional dynamic braking resistor selections that are supplied separately. A list of common resistors are listed below and are complete indoor assemblies, include a pre-wired terminal block and a thermal switch, and are not UL Listed.


Duty Cycle

The duty cycle rating is based on a 60-second period. For example, the 20% duty cycle resistor can carry 100% current for 12 seconds out of every 60 seconds, while the 50% duty cycle resistor can carry 150% current for 30 seconds out of every 60 seconds.

Torque

If the braking torque required is less than 15%, dynamic braking is not required because the regenerated energy will be dissipated in the drive and motor losses.

Dynamic Brake Resistor—Catalog Number Selection

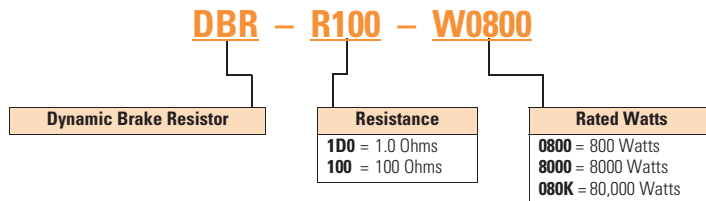

230 V Brake Resistors

| Drive hp (CT/Hz) | Minimum Ohms | 20% Duty Cycle, 100% Torque | | 50% Duty Cycle, 150% Torque | |
|---------------------|-----------------|-----------------------------|------------------|-----------------------------|------------------|
| | | Catalog Number | Dimensions | Catalog Number | Dimensions |
| 0.75 | 15.0 | DBR-R100-W0400 | 12W x 5D x 5H | DBR-R100-W0800 | 12W x 7D x 5H |
| 1 | 15.0 | DBR-R100-W0400 | 12W x 5D x 5H | DBR-R100-W0800 | 12W x 7D x 5H |
| 1.5 | 15.0 | DBR-R100-W0400 | 12W x 5D x 5H | DBR-R036-W1200 | 12W x 10D x 5H |
| 2 | 15.0 | DBR-R100-W0400 | 12W x 5D x 5H | DBR-R036-W1200 | 12W x 10D x 5H |
| 3 | 15.0 | DBR-R036-W0800 | 12W x 7D x 5H | DBR-R036-W2000 | 12W x 16D x 5H |
| 4 | 9.0 | DBR-R036-W0800 | 12W x 7D x 5H | DBR-R012-W2400 | 19W x 10D x 5H |
| 5 | 9.0 | DBR-R036-W0800 | 12W x 7D x 5H | DBR-R020-W2800 | 19W x 13D x 5H |
| 7.5 | 9.0 | DBR-R020-W1200 | 12W x 10D x 5H | DBR-R012-W4800 | 26.5W x 10D x 5H |
| 10 | 7.0 | DBR-R015-W1600 | 12W x 13D x 5H | DBR-R112-W6000 | 26.5W x 13D x 5H |
| 15 | 7.0 | DBR-R012-W2400 | 19W x 10D x 5H | DBR-R7D8-W9000 | 28W x 10D x 10H |
| 20 | 2.0 | DBR-R9D3-W3200 | 19W x 10D x 5H | DBR-R3D4-W012K | 28W x 10D x 10H |
| 25 | 2.0 | DBR-R5D5-W4000 | 26.5W x 10D x 5H | DBR-R5D1-W015K | 28W x 16D x 10H |
| 30 | 2.0 | DBR-R4D8-W4800 | 26.5W x 10D x 5H | DBR-R4D1-W020K | 28W x 16D x 10H |
| 40 | 2.0 | DBR-R004-W6000 | 26.5W x 13D x 5H | DBR-R3D4-W025K | 30W x 18D x 16H |
| 50 | 2.0 | DBR-R3D1-W7500 | 26.5W x 16D x 5H | DBR-R2D1-W030K | 30W x 18D x 24H |
| 60 | 2.0 | DBR-R2D8-W9000 | 26.5W x 16D x 5H | DBR-R002-W036K | 30W x 18D x 24H |
| 75 | 2.0 | DBR-R2D6-W012K | 28W x 10D x 10H | DBR-R002-W045K | 30W x 18D x 32H |
| 100 | 2.0 | DBR-R002-W015K | 28W x 16D x 10H | DBR-R002-W060K | 30W x 18D x 48H |

480 V Brake Resistors

| Drive hp (CT/1 _H) | Minimum Ohms | 20% Duty Cycle, 100% Torque | |
|----------------------------------|-----------------|-----------------------------|------------------|
| | | Catalog Number | Dimensions |
| 1 | 36.0 | DBR-R100-W0400 | 12W x 5D x 5H |
| 1.5 | 36.0 | DBR-R100-W0400 | 12W x 5D x 5H |
| 2 | 36.0 | DBR-R100-W0400 | 12W x 5D x 5H |
| 3 | 36.0 | DBR-R100-W0800 | 12W x 7D x 5H |
| 5 | 36.0 | DBR-R100-W0800 | 12W x 7D x 5H |
| 6 | 36.0 | DBR-R100-W1200 | 12W x 10D x 5H |
| 7.5 | 18.0 | DBR-R100-W1200 | 12W x 10D x 5H |
| 10 | 18.0 | DBR-R063-W1600 | 12W x 13D x 5H |
| 15 | 18.0 | DBR-R030-W2400 | 19W x 10D x 5H |
| 20 | 13.0 | DBR-R030-W3200 | 19W x 13D x 5H |
| 25 | 13.0 | DBR-R030-W4000 | 19W x 16D x 5H |
| 30 | 13.0 | DBR-R020-W4800 | 26.5W x 13D x 5H |
| 40 | 2.0 | DBR-R112-W6000 | 26.5W x 13D x 5H |
| 50 | 2.0 | DBR-R013-W7500 | 26.5W x 16D x 5H |
| 60 | 2.0 | DBR-R010-W9000 | 28W x 10D x 10H |
| 75 | 2.0 | DBR-R009-W012K | 28W x 13D x 10H |
| 100 | 2.0 | DBR-R5D1-W015K | 28W x 16D x 10H |
| 125 | 2.0 | DBR-R4D1-W020K | 28W x 16D x 10H |
| 150 | 2.0 | DBR-R3D4-W025K | 30W x 18D x 16H |
| 200 | 2.0 | DBR-R3D3-W030K | 30W x 18D x 24H |

| 50% Duty Cycle, 150% Torque | |
|-----------------------------|------------------|
| Catalog Number | Dimensions |
| DBR-R100-W0800 | 12W x 7D x 5H |
| DBR-R100-W1200 | 12W x 10D x 5H |
| DBR-R100-W1200 | 12W x 10D x 5H |
| DBR-R100-W2000 | 12W x 16D x 5H |
| DBR-R100-W2800 | 19W x 13D x 5H |
| DBR-R070-W4000 | 19W x 16D x 5H |
| DBR-R020-W4800 | 26.5W x 13D x 5H |
| DBR-R030-W6000 | 26.5W x 16D x 5H |
| DBR-R030-W9000 | 28W x 10D x 10H |
| DBR-R023-W012K | 28W x 13D x 10H |
| DBR-R013-W015K | 28W x 16D x 10H |
| DBR-R014-W020K | 30W x 18D x 24H |
| DBR-R007-W025K | 30W x 18D x 16H |
| DBR-R8D5-W030K | 30W x 18D x 24H |
| DBR-R7D3-W036K | 30W x 18D x 24H |
| DBR-R002-W045K | 30W x 18D x 32H |
| DBR-R004-W060K | 30W x 18D x 40H |
| DBR-R004-W070K | 30W x 18D x 48H |
| DBR-R3D5-W085K | 30W x 18D x 56H |
| DBR-R2D6-W110K | 30W x 18D x 64H |

575 V Brake Resistors

| Drive hp (CT/1 _H) | Minimum Ohms | 20% Duty Cycle, 100% Torque | |
|----------------------------------|-----------------|-----------------------------|------------------|
| | | Catalog Number | Dimensions |
| 2 | 100.0 | DBR-R100-W0400 | 12W x 5D x 5H |
| 3 | 100.0 | DBR-R100-W0800 | 12W x 7D x 5H |
| 4 | 100.0 | DBR-R100-W0800 | 12W x 7D x 5H |
| 5 | 100.0 | DBR-R100-W0800 | 12W x 7D x 5H |
| 7.5 | 100.0 | DBR-R100-W1200 | 12W x 10D x 5H |
| 10 | 30.0 | DBR-R063-W1600 | 12W x 13D x 5H |
| 15 | 30.0 | DBR-R042-W2400 | 19W x 10D x 5H |
| 20 | 30.0 | DBR-R030-W3200 | 19W x 13D x 5H |
| 25 | 30.0 | DBR-R030-W4000 | 19W x 16D x 5H |
| 30 | 18.0 | DBR-R020-W4800 | 26.5W x 13D x 5H |
| 40 | 18.0 | DBR-R030-W6000 | 26.5W x 16D x 5H |
| 50 | 9.0 | DBR-R013-W7500 | 26.5W x 16D x 5H |
| 60 | 9.0 | DBR-R010-W9000 | 28W x 10D x 10H |
| 75 | 9.0 | DBR-R009-W012K | 28W x 13D x 10H |
| 100 | 7.0 | DBR-R013-W015K | 28W x 16D x 10H |
| 125 | 7.0 | DBR-R8D2-W020K | 30W x 18D x 10H |
| 150 | 7.0 | DBR-R007-W025K | 30W x 18D x 16H |
| 200 | 2.5 | DBR-R3D3-W030K | 30W x 18D x 24H |

| 50% Duty Cycle, 150% Torque | |
|-----------------------------|------------------|
| Catalog Number | Dimensions |
| DBR-R100-W1200 | 12W x 10D x 5H |
| DBR-R100-W2000 | 12W x 16D x 5H |
| DBR-R100-W2400 | 19W x 10D x 5H |
| DBR-R100-W2800 | 19W x 13D x 5H |
| DBR-R100-W4800 | 26.5W x 13D x 5H |
| DBR-R063-W6000 | 26.5W x 16D x 5H |
| DBR-R042-W9000 | 28W x 10D x 10H |
| DBR-R030-W012K | 28W x 13D x 10H |
| DBR-R030-W015K | 28W x 16D x 10H |
| DBR-R020-W020K | 30W x 18D x 16H |
| DBR-R184-W025K | 30W x 18D x 16H |
| DBR-R012-W030K | 30W x 18D x 24H |
| DBR-R010-W036K | 30W x 18D x 24H |
| DBR-R009-W045K | 30W x 18D x 24H |
| DBR-R8D4-W060K | 30W x 18D x 40H |
| DBR-R007-W070K | 30W x 18D x 40H |
| DBR-R006-W085K | 30W x 18D x 56H |
| DBR-R2D6-W110K | 30W x 18D x 64H |

2.8

Adjustable Frequency Drives

PowerXL DH1 Series Drives

2

Line and Load Reactors

A line and load reactor is a three-phase inductance filter that can be placed on the line and load side of the AFD to help improve the harmonic performance of the system. Consult the factory for additional filtering options and further technical details.


DR1 Line Reactor

A line reactor helps to provide a moderate reduction in current harmonics similar to a DC choke. It also provides increased input protection for AFD and its semiconductors from line transients helping to extend the life of the AFD.

DR2 Output Reactor

An output filter is used to reduce the transient voltage (dV/dt) at the motor terminals. The output filter is recommended for cable lengths exceeding 100 ft (30 m) with a drive of 3 hp and above and for cable lengths of 33 ft (10 m) with a drive of 2 hp and below.

Line and Load Reactors—Catalog Number Selection

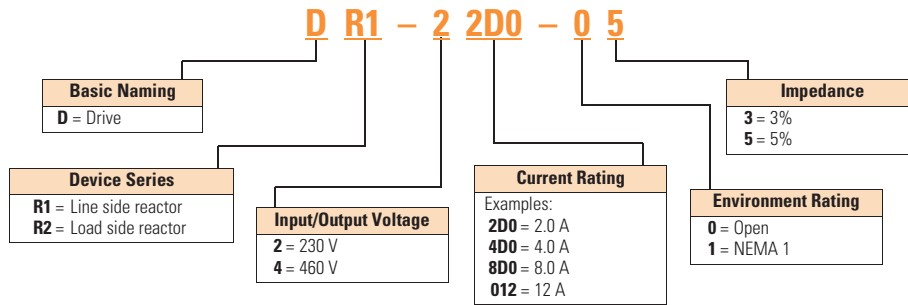

Line and Load Reactors—230 V

| hp (CT) | Open Line Reactor | | Load Reactor | | NEMA 1 Line Reactor | | Load Reactor | |
|---------|-------------------|-------------|--------------|-------------|---------------------|-------------|--------------|-------------|
| | 3% | 5% | 3% | 5% | 3% | 5% | 3% | 5% |
| 0.75 | DR1-23D2-03 | DR1-23D2-05 | DR2-24D0-03 | DR2-24D0-05 | DR1-23D2-13 | DR1-23D2-15 | DR2-24D0-13 | DR2-24D0-15 |
| 1 | DR1-24D2-03 | DR1-24D2-05 | DR2-24D0-03 | DR2-28D0-05 | DR1-24D2-13 | DR1-24D2-15 | DR2-24D0-13 | DR2-28D0-15 |
| 1.5 | DR1-26D0-03 | DR1-26D0-05 | DR2-28D0-03 | DR2-28D0-05 | DR1-26D0-13 | DR1-26D0-15 | DR2-28D0-13 | DR2-28D0-15 |
| 2 | DR1-26D8-03 | DR1-26D8-05 | DR2-28D0-03 | DR2-28D0-05 | DR1-26D8-13 | DR1-26D8-15 | DR2-28D0-13 | DR2-28D0-15 |
| 3 | DR1-29D6-03 | DR1-29D6-05 | DR2-2012-03 | DR2-2012-05 | DR1-29D6-13 | DR1-29D6-15 | DR2-2012-13 | DR2-2012-15 |
| 5 | DR1-2015-03 | DR1-2015-05 | DR2-2018-03 | DR2-2018-05 | DR1-2015-13 | DR1-2015-15 | DR2-2018-13 | DR2-2018-15 |
| 7.5 | DR1-2022-03 | DR1-2022-05 | DR2-2025-03 | DR2-2025-05 | DR1-2022-13 | DR1-2022-15 | DR2-2025-13 | DR2-2025-15 |
| 10 | DR1-2028-03 | DR1-2028-05 | DR2-2035-03 | DR2-2035-05 | DR1-2028-13 | DR1-2028-15 | DR2-2035-13 | DR2-2035-15 |
| 15 | DR1-2042-03 | DR1-2042-05 | DR2-2045-03 | DR2-2045-05 | DR1-2042-13 | DR1-2042-15 | DR2-2045-13 | DR2-2045-15 |
| 20 | DR1-2054-03 | DR1-2054-05 | DR2-2055-03 | DR2-2055-05 | DR1-2054-13 | DR1-2054-15 | DR2-2055-13 | DR2-2055-15 |
| 25 | DR1-2068-03 | DR1-2068-05 | DR2-2080-03 | DR2-2080-05 | DR1-2068-13 | DR1-2068-15 | DR2-2080-13 | DR2-2080-15 |
| 30 | DR1-2080-03 | DR1-2080-05 | DR2-2080-03 | DR2-2100-05 | DR1-2080-13 | DR1-2080-15 | DR2-2080-13 | DR2-2100-15 |
| 40 | DR1-2104-03 | DR1-2104-05 | DR2-2100-03 | DR2-2100-05 | DR1-2104-13 | DR1-2104-15 | DR2-2100-13 | DR2-2100-15 |
| 50 | DR1-2130-03 | DR1-2130-05 | DR2-2130-03 | DR2-2130-05 | DR1-2130-13 | DR1-2130-15 | DR2-2130-13 | DR2-2130-15 |
| 60 | DR1-2154-03 | DR1-2154-05 | DR2-2160-03 | DR2-2200-15 | DR1-2154-13 | DR1-2154-15 | DR2-2160-13 | DR2-2200-15 |
| 75 | DR1-2192-03 | DR1-2192-05 | DR2-2200-13 | DR2-2200-15 | DR1-2192-13 | DR1-2192-15 | DR2-2200-13 | DR2-2200-15 |
| 100 | DR1-2248-03 | DR1-2248-05 | DR2-2225-13 | DR2-2225-15 | DR1-2248-13 | DR1-2248-15 | DR2-2225-13 | DR2-2225-15 |

Line and Load Reactors—480 V

| hp (CT) | Open | | | | NEMA 1 | | | |
|---------|--------------|-------------|--------------|-------------|--------------|-------------|--------------|-------------|
| | Line Reactor | | Load Reactor | | Line Reactor | | Load Reactor | |
| | 3% | 5% | 3% | 5% | 3% | 5% | 3% | 5% |
| 1 | DR1-42D1-03 | DR1-42D1-05 | DR2-42D0-05 | DR2-42D0-05 | DR1-42D1-13 | DR1-42D1-15 | DR2-42D0-13 | DR2-42D0-15 |
| 1.5 | DR1-43D0-03 | DR1-43D0-05 | DR2-44D0-05 | DR2-44D0-05 | DR1-43D0-13 | DR1-43D0-15 | DR2-44D0-13 | DR2-44D0-15 |
| 2 | DR1-43D4-03 | DR1-43D4-05 | DR2-44D0-03 | DR2-44D0-05 | DR1-43D4-13 | DR1-43D4-15 | DR2-44D0-13 | DR2-44D0-15 |
| 3 | DR1-44D8-03 | DR1-44D8-05 | DR2-48D0-03 | DR2-48D0-05 | DR1-44D8-13 | DR1-44D8-15 | DR2-48D0-13 | DR2-48D0-15 |
| 5 | DR1-47D6-03 | DR1-47D6-05 | DR2-48D0-03 | DR2-48D0-05 | DR1-47D6-13 | DR1-47D6-15 | DR2-48D0-13 | DR2-48D0-15 |
| 7.5 | DR1-4011-03 | DR1-4011-05 | DR2-4012-03 | DR2-4012-05 | DR1-4011-13 | DR1-4011-15 | DR2-4012-13 | DR2-4012-15 |
| 10 | DR1-4014-03 | DR1-4014-05 | DR2-4018-03 | DR2-4018-05 | DR1-4014-13 | DR1-4014-15 | DR2-4018-13 | DR2-4018-15 |
| 15 | DR1-4021-03 | DR1-4021-05 | DR2-4025-03 | DR2-4025-05 | DR1-4021-13 | DR1-4021-15 | DR2-4025-13 | DR2-4025-15 |
| 20 | DR1-4027-03 | DR1-4027-05 | DR2-4025-03 | DR2-4025-05 | DR1-4027-13 | DR1-4027-15 | DR2-4025-13 | DR2-4025-15 |
| 25 | DR1-4034-03 | DR1-4034-05 | DR2-4035-03 | DR2-4035-05 | DR1-4034-13 | DR1-4034-15 | DR2-4035-13 | DR2-4035-15 |
| 30 | DR1-4040-03 | DR1-4040-05 | DR2-4045-03 | DR2-4045-05 | DR1-4040-13 | DR1-4040-15 | DR2-4045-13 | DR2-4045-15 |
| 40 | DR1-4052-03 | DR1-4052-05 | DR2-4055-03 | DR2-4055-05 | DR1-4052-13 | DR1-4052-15 | DR2-4055-13 | DR2-4055-15 |
| 50 | DR1-4065-03 | DR1-4065-05 | DR2-4080-03 | DR2-4080-05 | DR1-4065-13 | DR1-4065-15 | DR2-4080-13 | DR2-4080-15 |
| 60 | DR1-4077-03 | DR1-4077-05 | DR2-4100-03 | DR2-4080-05 | DR1-4077-13 | DR1-4077-15 | DR2-4100-13 | DR2-4080-15 |
| 75 | DR1-4096-03 | DR1-4096-05 | DR2-4100-03 | DR2-4100-05 | DR1-4096-13 | DR1-4096-15 | DR2-4100-13 | DR2-4100-15 |
| 100 | DR1-4124-03 | DR1-4124-05 | DR2-4130-03 | DR2-4130-05 | DR1-4124-13 | DR1-4124-15 | DR2-4130-13 | DR2-4130-15 |
| 125 | DR1-4156-03 | DR1-4156-05 | DR2-4160-03 | DR2-4160-05 | DR1-4156-13 | DR1-4156-15 | DR2-4160-13 | DR2-4160-15 |
| 150 | DR1-4180-03 | DR1-4180-05 | DR2-4200-13 | DR2-4200-15 | DR1-4180-13 | DR1-4180-15 | DR2-4200-13 | DR2-4200-15 |
| 200 | DR1-4240-03 | DR1-4240-05 | DR2-4250-13 | DR2-4250-15 | DR1-4240-13 | DR1-4240-15 | DR2-4250-13 | DR2-4250-15 |

Line and Load Reactors—575 V

| hp (CT) | Open | | | | NEMA 1 | | | |
|---------|--------------|-------------|--------------|-------------|--------------|-------------|--------------|-------------|
| | Line Reactor | | Load Reactor | | Line Reactor | | Load Reactor | |
| | 3% | 5% | 3% | 5% | 3% | 5% | 3% | 5% |
| 2 | DR1-52D7-03 | DR1-52D7-05 | DR2-54D0-03 | DR2-54D0-05 | DR1-52D7-13 | DR1-52D7-15 | DR2-54D0-13 | DR2-54D0-15 |
| 3 | DR1-53D9-03 | DR1-53D9-05 | DR2-54D0-03 | DR2-54D0-05 | DR1-53D9-13 | DR1-53D9-15 | DR2-54D0-13 | DR2-54D0-15 |
| 5 | DR1-56D1-03 | DR1-56D1-05 | DR2-58D0-03 | DR2-58D0-05 | DR1-56D1-13 | DR1-56D1-15 | DR2-58D0-13 | DR2-58D0-15 |
| 7.5 | DR1-59D0-03 | DR1-59D0-05 | DR2-58D0-03 | DR2-58D0-05 | DR1-59D0-13 | DR1-59D0-15 | DR2-58D0-13 | DR2-58D0-15 |
| 10 | DR1-5011-03 | DR1-5011-05 | DR2-5012-03 | DR2-5012-05 | DR1-5011-13 | DR1-5011-15 | DR2-5012-13 | DR2-5012-15 |
| 15 | DR1-5017-03 | DR1-5017-05 | DR2-5018-03 | DR2-5018-05 | DR1-5017-13 | DR1-5017-15 | DR2-5018-13 | DR2-5018-15 |
| 20 | DR1-5022-03 | DR1-5022-05 | DR2-5025-03 | DR2-5025-05 | DR1-5022-13 | DR1-5022-15 | DR2-5025-13 | DR2-5025-15 |
| 25 | DR1-5027-03 | DR1-5027-05 | DR2-5025-03 | DR2-5025-05 | DR1-5027-13 | DR1-5027-15 | DR2-5025-13 | DR2-5025-15 |
| 30 | DR1-5032-03 | DR1-5032-05 | DR2-5035-03 | DR2-5035-05 | DR1-5032-13 | DR1-5032-15 | DR2-5035-13 | DR2-5035-15 |
| 40 | DR1-5041-03 | DR1-5041-05 | DR2-5045-03 | DR2-5045-05 | DR1-5041-13 | DR1-5041-15 | DR2-5045-13 | DR2-5045-15 |
| 50 | DR1-5052-03 | DR1-5052-05 | DR2-5055-03 | DR2-5055-05 | DR1-5052-13 | DR1-5052-15 | DR2-5055-13 | DR2-5055-15 |
| 60 | DR1-5062-03 | DR1-5062-05 | DR2-5080-03 | DR2-5080-05 | DR1-5062-13 | DR1-5062-15 | DR2-5080-13 | DR2-5080-15 |
| 75 | DR1-5077-03 | DR1-5077-05 | DR2-5080-03 | DR2-5080-05 | DR1-5077-13 | DR1-5077-15 | DR2-5080-13 | DR2-5080-15 |
| 100 | DR1-5100-03 | DR1-5100-05 | DR2-5100-03 | DR2-5100-05 | DR1-5100-13 | DR1-5100-15 | DR2-5100-13 | DR2-5100-15 |
| 125 | DR1-5125-03 | DR1-5125-05 | DR2-5130-03 | DR2-5130-05 | DR1-5125-13 | DR1-5125-15 | DR2-5130-13 | DR2-5130-15 |
| 150 | DR1-5144-03 | DR1-5144-05 | DR2-5160-03 | DR2-5160-05 | DR1-5144-13 | DR1-5144-15 | DR2-5160-13 | DR2-5160-15 |
| 200 | DR1-5192-03 | DR1-5192-05 | DR2-5200-13 | DR2-5200-15 | DR1-5192-13 | DR1-5192-15 | DR2-5200-13 | DR2-5200-15 |

Replacement Parts

2

Frame 1

| Description | 230 V | 480 V | 600 V |
|--|--------------------|--------------------|--------------------|
| | Catalog Number | Catalog Number | Catalog Number |
| Standard keypad | DXH-KEY-LCD | DXH-KEY-LCD | DXH-KEY-LCD |
| Control module kit with keypad | DXH-SPR-CTRLKIT | DXH-SPR-CTRLKIT | DXH-SPR-CTRLKIT |
| Control module kit without keypad | DXH-SPR-CTRLBOARD | DXH-SPR-CTRLBOARD | DXH-SPR-CTRLBOARD |
| Software kit (software, cable, manual) | DXH-ACC-SOFTWARE | DXH-ACC-SOFTWARE | DXH-ACC-SOFTWARE |
| Type 1/IP21 standard cover | DXH-SPR-FR1CVR | DXH-SPR-FR1CVR | DXH-SPR-FR1CVR |
| EMI board | DXH-SPR-2FR1EB | DXH-SPR-4FR1EB | DXG-SPR-5FR1EB |
| Type 12/IP54 kit | DXH-ACC-2FR1N12KIT | DXH-ACC-4FR1N12KIT | DXH-ACC-4FR1N12KIT |
| Main power board | DXH-SPR-2FR1MPB | DXH-SPR-4FR1MPB | DXG-SPR-5FR1MPB |

Frame 2

| Description | 230 V | 480 V | 600 V |
|--|-------------------|-------------------|-------------------|
| | Catalog Number | Catalog Number | Catalog Number |
| Standard keypad | DXH-KEY-LCD | DXH-KEY-LCD | DXH-KEY-LCD |
| Control module kit with keypad | DXH-SPR-CTRLKIT | DXH-SPR-CTRLKIT | DXH-SPR-CTRLKIT |
| Control module kit without keypad | DXH-SPR-CTRLBOARD | DXH-SPR-CTRLBOARD | DXH-SPR-CTRLBOARD |
| Software kit (software, cable, manual) | DXH-ACC-SOFTWARE | DXH-ACC-SOFTWARE | DXH-ACC-SOFTWARE |
| Type 1/IP21 standard cover | DXH-SPR-FR2CVR | DXH-SPR-FR2CVR | DXH-SPR-FR2CVR |
| EMI board | DXH-SPR-2FR2EB | DXH-SPR-4FR2EB | DXG-SPR-5FR2EB |
| Type 12/IP54 kit | DXH-ACC-FR2N12KIT | DXH-ACC-FR2N12KIT | DXH-ACC-FR2N12KIT |
| Main power board | DXH-SPR-2FR2MPB | DXH-SPR-4FR2MPB | DXG-SPR-5FR2MPB |

Frame 3

| Description | 230 V | 480 V | 600 V |
|--|-------------------|-------------------|-------------------|
| | Catalog Number | Catalog Number | Catalog Number |
| Standard keypad | DXH-KEY-LCD | DXH-KEY-LCD | DXH-KEY-LCD |
| Control module kit with keypad | DXH-SPR-CTRLKIT | DXH-SPR-CTRLKIT | DXH-SPR-CTRLKIT |
| Control module kit without keypad | DXH-SPR-CTRLBOARD | DXH-SPR-CTRLBOARD | DXH-SPR-CTRLBOARD |
| Software kit (software, cable, manual) | DXH-ACC-SOFTWARE | DXH-ACC-SOFTWARE | DXH-ACC-SOFTWARE |
| Type 1/IP21 standard cover | DXH-SPR-FR3CVR | DXH-SPR-FR3CVR | DXH-SPR-FR3CVR |
| EMI board | DXH-SPR-2FR3EB | DXH-SPR-4FR3EB | DXG-SPR-5FR3EB |
| Drive board | DXH-SPR-2FR3DB | DXH-SPR-4FR3DB | DXG-SPR-5FR3DB |
| Main power board | DXG-SPR-2FR3MPB | DXG-SPR-4FR3MPB | DXG-SPR-5FR3MPB |

Note

① Factory recommended spare parts.

Frame 4

| Description | 230 V | 480 V | 600 V |
|--|-------------------|-------------------|-------------------|
| | Catalog Number | Catalog Number | Catalog Number |
| Standard keypad | DXH-KEY-LCD | DXH-KEY-LCD | DXH-KEY-LCD |
| Control module kit with keypad | DXH-SPR-CTRLKIT | DXH-SPR-CTRLKIT | DXH-SPR-CTRLKIT |
| Control module kit without keypad | DXH-SPR-CTRLBOARD | DXH-SPR-CTRLBOARD | DXH-SPR-CTRLBOARD |
| Software kit (software, cable, manual) | DXH-ACC-SOFTWARE | DXH-ACC-SOFTWARE | DXH-ACC-SOFTWARE |
| Type 1/IP21 standard cover | DXH-SPR-FR4CVR | DXH-SPR-FR4CVR | DXH-SPR-FR4CVR |
| EMI board | DXG-SPR-2FR4EB | DXG-SPR-4FR4EB | DXG-SPR-5FR4EB |
| Softstart board | DXH-SPR-2FR4SB | DXH-SPR-4FR4SB | DXG-SPR-5FR4SB |
| Main power board | DXH-SPR-2FR4MPB | DXH-SPR-4FR4MPB | DXG-SPR-5FR4MPB |

Frame 5

| Description | 230 V | 480 V | 600 V |
|--|-------------------|-------------------|-------------------|
| | Catalog Number | Catalog Number | Catalog Number |
| Standard keypad | DXH-KEY-LCD | DXH-KEY-LCD | DXH-KEY-LCD |
| Control module kit with keypad | DXH-SPR-CTRLKIT | DXH-SPR-CTRLKIT | DXH-SPR-CTRLKIT |
| Control module kit without keypad | DXH-SPR-CTRLBOARD | DXH-SPR-CTRLBOARD | DXH-SPR-CTRLBOARD |
| Software kit (software, cable, manual) | DXH-ACC-SOFTWARE | DXH-ACC-SOFTWARE | DXH-ACC-SOFTWARE |
| Type 1/IP21 standard cover | DXH-SPR-FR5CVR | DXH-SPR-FR5CVR | DXH-SPR-FR5CVR |
| EMI-1 board | DXH-SPR-2FR5E1B | DXG-SPR-4FR5E1B | DXG-SPR-5FR5E1B |
| EMI-2 board | — | — | DXG-SPR-5FR5E2B |
| Main power board | DXH-SPR-2FR5MPB | DXH-SPR-4FR5MPB | DXG-SPR-5FR5MPB |

Frame 6

| Description | 230 V | 480 V | 600 V |
|--|-------------------|-------------------|-------------------|
| | Catalog Number | Catalog Number | Catalog Number |
| Standard keypad | DXH-KEY-LCD | DXH-KEY-LCD | DXH-KEY-LCD |
| Control module kit with keypad | DXH-SPR-CTRLKIT | DXH-SPR-CTRLKIT | DXH-SPR-CTRLKIT |
| Control module kit without keypad | DXH-SPR-CTRLBOARD | DXH-SPR-CTRLBOARD | DXH-SPR-CTRLBOARD |
| Software kit (software, cable, manual) | DXH-ACC-SOFTWARE | DXH-ACC-SOFTWARE | DXH-ACC-SOFTWARE |
| Type 1/IP21 standard cover | DXH-SPR-FR6CVR | DXH-SPR-FR6CVR | DXH-SPR-FR6CVR |
| EMI board | DXG-SPR-FR6EB | DXG-SPR-FR6EB | DXG-SPR-FR6EB |
| Main power board | DXG-SPR-2FR6MPB | DXG-SPR-4FR6MPB | DXG-SPR-5FR6MPB |
| Softstart board | DXG-SPR-2FR6SB | DXG-SPR-4FR6SB | DXG-SPR-5FR6SB |

Note

① Factory recommended spare parts.

Technical Data and Specifications

PowerXL Series—DH1 Technical Data and Specifications

2

| Attribute | Description | Specification | |
|---|--------------------------------|--|--|
| Input ratings | Input voltage U_{in} | 208 V to 240 V, 380 V to 500 V, 525 V to 600 V, –15 to 10% | |
| | Input frequency | 50 Hz to 60 Hz (variation up to 45 Hz to 66 Hz) | |
| | Connection to power | Once per minute or less | |
| | Starting delay | 3 s (FR1 to FR2), 4 s (FR3), 5 s (FR4), 6 s (FR5 and FR6) | |
| | Short-circuit withstand rating | 100 kAIC (fuses and circuit breakers); 5 kAIC (without fuses or breakers) | |
| Output ratings | Output voltage | 0 to U_{in} | |
| | Continuous output current | I_L : ambient temperature maximum 40 °C, up to 60 °C with derating, overload 1.1 x I_L (1 min./10 min.) | |
| | Overload current | 110% for variable torque | |
| | Initial output current | 200% (2 s / 20 s) | |
| | Output frequency | 0–400 Hz (standard) | |
| | Frequency resolution | 0.01 Hz | |
| Control characteristics | Control methods | Frequency control Speed control Open-loop speed control Open-loop torque control | |
| | Switching frequency | 230 V / 480 V range: FR1–3: 1 kHz to 12 kHz FR4–6: 1 kHz to 10 kHz 230 V / 480 V defaults: FR1–3: 4 kHz FR4–5: 3.6 kHz FR6: 2 kHz 575 V range: FR1–6: 1 kHz to 6 kHz 575 V defaults: FR1–4: 3 kHz FR5–6: 2 kHz Automatic switching frequency derating in case of overload. | |
| | Frequency reference | Analog input: resolution 0.1% (10-bit), accuracy +1% Analog output: resolution 0.1% (10-bit), accuracy +1% Panel reference: resolution 0.01 Hz | |
| | Field weakening point | 20 Hz to 400 Hz | |
| | Acceleration time | 0.1 s to 3000 s | |
| | Deceleration time | 0.1 s to 3000 s | |
| | Braking torque | DC brake: 30% x Motor Rated Torque (T_n) (without brake chopper) Dynamic braking (with optional brake chopper using an external brake resistor): 100% continuous maximum rating | |
| | Ambient conditions | Ambient operating temperature | –10 °C (no frost) to +50 °C, up to +60 °C with derating (CT) –10 °C (no frost) to +40 °C, up to +60 °C with derating (VT) |
| | | Storage temperature | –40 °C to +70 °C |
| | | Relative humidity | 0–95% RH, noncondensing, non-corrosive |
| Air quality: • Chemical vapors • Mechanical particles | | Tested according to IEC 60068-2-60 Test Key: Flowing mixed gas corrosion test, Method 1 (H2S [hydrogen sulfide] and SO2 [sulfur dioxide]) Designed according to: IEC 60721-3-3, unit in operation, class 3C2 IEC 60721-3-3, unit in operation, class 3S2 | |
| Altitude | | 100% load capacity (no derating) up to 3280 ft (1000 m); 1% derating for each 328 ft (100 m) above 3280 ft (1000 m); max. 9842 ft (3000 m) (2000 m for corner grounded earth main systems) For 575 V product, maximum altitude is 6561 ft (2000 m) regardless of main system | |

PowerXL Series—DH1 Technical Data and Specifications, continued

| Attribute | Description | Specification |
|-------------------------------|--|---|
| Ambient conditions, continued | Vibration: | 5–150 Hz |
| | • EN 61800-5-1 | Displacement amplitude: 1 mm (peak) at 5 Hz to 15.8 Hz (FR1–FR6) |
| | • EN 60668-2-6 | Maximum acceleration amplitude: 1g at 15.8 Hz to 150 Hz (FR1–FR6) |
| | Shock: | Storage and shipping: maximum 15 g, 11 ms (in package) |
| | • ISTA 1 A | |
| | • EN 60068-2-27 | |
| | Overvoltage | Overvoltage Category III |
| | Pollution degree | Pollution Degree 2 |
| | Enclosure class | IP21/Type 1 standard in entire kW/hp range IP54/Type 12 option Note: Keypad or keypad hole plug required to be mounted in drive for IP54/Type 12 rating |
| | Immunity | Fulfills EN 61800-3 (2004), first and second environment |
| MTBF | | FR1: 165,457 hours |
| | | FR2: 134,833 hours |
| | | FR3: 102,515 hours |
| | | FR4: 121,567 hours |
| | | FR5: 108,189 hours |
| | | FR6: 100,000 hours |
| Noise | | FR1: 51.2 dB |
| | | FR2: 58.6 dB |
| | | FR3: 61.0 dB |
| | | FR4: 68.0 dB |
| | | FR5: 69.1 dB |
| | | FR6: 73.2 dB |
| Standards | Safety | UL 508C, CSA C22.2 No. 274-13 and EN 61800-5-1 |
| | EMC | +EMC2: EN 61800-3 (2004), Category C2 The drive can be modified for IT networks and corner grounding TN system |
| | Electrostatic discharge | Second environment, IEC 61000-4-2, 4 kV CD or 8 kV AD, Criterion B |
| | Fast transient burst | Second environment, IEC 61000-4-4, 2 kV/5 kHz, Criterion B |
| | Dielectrical strength | Primary to secondary: 3600 Vac/5100 Vdc Primary to earth: 2000 Vac/2828 Vdc |
| | Approvals | EAC, RCM (C-Tick), RoHS, CE, UL and cUL (see nameplate for more detailed approvals) |
| Fieldbus connections | Onboard: BACnet/IP, BACnet MS/TP, Modbus TCP, Modbus RTU | |

PowerXL Series—DH1 Technical Data and Specifications, continued

| Attribute | Description | Specification |
|-------------------------|---|---|
| 2 Safety/protections | Overvoltage protection | Yes |
| | Overvoltage trip limit | 230 V drives: 456 V 480 V drives: 911 V 575 V drives: 1100 V |
| | Undervoltage protection | Yes |
| | Undervoltage trip limit | 230 V drives: 211 V 480 V drives: 370 V 575 V drives: 550 V |
| | Earth fault protection | Yes Default: 15% motor FLA Minimum: 0% motor FLA Maximum: 30% motor FLA |
| | Input phase supervision | Yes |
| | Motor phase supervision | Yes |
| | Overcurrent protection | Yes |
| | Unit overtemperature protection | Yes |
| | Motor overload protection | Yes |
| | Motor stall protection | Yes |
| | Motor underload protection | Yes |
| | DC bus overvoltage control | Yes |
| | Short-circuit protection of 24 V reference voltages | Yes |
| | Surge protection | Yes (differential mode 2 kV; common mode 4 kV 230 V drives: 275 Vac, 10,000 A 480 V drives: 320 Vac, 8000 A 575 V drives: 385 Vac, 10,000 A) |
| | Common coated boards | Yes (prevents corrosion) |

PowerXL Series—DH1 Technical Data and Specifications—Efficiency**230 V**

| Frame Size | Load Torque | Efficiency | |
|------------|-------------|------------|------------|
| | | VT | Input THDi |
| FR1 | 25% | 92.10% | 42.8% |
| | 50% | 95.20% | 35.2% |
| | 100% | 96.70% | 29.9% |
| FR2 | 25% | 90.80% | 70.0% |
| | 50% | 96.64% | 46.6% |
| | 100% | 97.30% | 33.3% |
| FR3 | 25% | 97.23% | 53.1% |
| | 50% | 97.37% | 43.6% |
| | 100% | 97.00% | 30.8% |
| FR4 | 25% | 94.60% | 39.4% |
| | 50% | 97.20% | 32.4% |
| | 100% | 97.60% | 25.6% |
| FR5 | 25% | 94.5 | 30.50% |
| | 50% | 97.80% | 30.8% |
| | 100% | 97.70% | 25.0% |

480 V

| Frame Size | Load Torque | Efficiency | |
|------------|-------------|------------|------------|
| | | VT | Input THDi |
| FR1 | 25% | 93.30% | 54.0% |
| | 50% | 97.10% | 46.8% |
| | 100% | 97.61% | 35.3% |
| FR2 | 25% | 95.90% | 59.8% |
| | 50% | 97.81% | 42.7% |
| | 100% | 98.11% | 33.8% |
| FR3 | 25% | 96.40% | 69.2% |
| | 50% | 97.87% | 45.2% |
| | 100% | 97.79% | 32.6% |
| FR4 | 25% | 98.00% | 56.5% |
| | 50% | 97.97% | 39.8% |
| | 100% | 97.96% | 31.5% |
| FR5 | 25% | 97.8 | 50.3% |
| | 50% | 98.39% | 37.0% |
| | 100% | 98.14% | 29.5% |

575 V

| Frame Size | Load Torque | Efficiency | |
|------------|-------------|------------|------------|
| | | VT | Input THDi |
| FR1 | 25% | 97.48% | 62.6% |
| | 50% | 97.79% | 45.6% |
| | 100% | 98.10% | 36.8% |
| FR2 | 25% | 98.06% | 60.6% |
| | 50% | 98.19% | 47.2% |
| | 100% | 98.20% | 36.7% |
| FR3 | 25% | 97.98% | 78.9% |
| | 50% | 98.32% | 55.5% |
| | 100% | 98.10% | 36.3% |
| FR4 | 25% | 98.27% | 66.1% |
| | 50% | 98.57% | 41.6% |
| | 100% | 98.30% | 31.2% |
| FR5 | 25% | 98.60% | 52.80% |
| | 50% | 98.81% | 35.9% |
| | 100% | 98.60% | 28.4% |

Wiring Diagram

2

PowerXL Series—DH1 Control Wiring Diagram

| External Wiring | Pin | Signal Name | Signal | Default Setting | Description |
|-----------------|-----|-------------|-------------------------|--------------------|---|
| | 1 | +10 V | Ref. Output Voltage | — | 10 Vdc Supply Source |
| | 2 | AI1+ | Analog Input 1 | 0–10 V | Voltage Speed Reference (Programmable to 4 mA to 20 mA) |
| | 3 | AI1– | Analog Input 1 Ground | — | Analog Input 1 Common (Ground) |
| | 4 | AI2+ | Analog Input 2 | 4 mA to 20 mA | Current Speed Reference (Programmable to 0–10 V) |
| | 5 | AI2– | Analog Input 2 Ground | — | Analog Input 2 Common (Ground) |
| | 6 | GND | I/O Signal Ground | — | I/O Ground for Reference and Control |
| | 7 | DIN5 | Digital Input 5 | Preset Speed B0 | Sets frequency output to Preset Speed 1 |
| | 8 | DIN6 | Digital Input 6 | Preset Speed B1 | Sets frequency output to Preset Speed 2 |
| | 9 | DIN7 | Digital Input 7 | — | — |
| | 10 | DIN8 | Digital Input 8 | Force Remote (TI+) | Input takes VFD from Local to Remote |
| | 11 | CMB | DI5 to DI8 Common | Grounded | Allows source input |
| | 12 | GND | I/O Signal Ground | — | I/O Ground for Reference and Control |
| | 13 | 24 V | +24 Vdc Output | — | Control voltage output (100 mA max.) |
| | 14 | DO1 | Digital Output 1 | Ready | Shows the drive is ready to run |
| | 15 | 24 Vo | +24 Vdc Output | — | Control voltage output (100 mA max.) |
| | 16 | GND | I/O Signal Ground | — | I/O Ground for Reference and Control |
| | 17 | AO1+ | Analog Output 1 | Output Frequency | Shows Output frequency to motor 0–60 Hz (4 mA to 20 mA) |
| | 18 | AO2+ | Analog Output 2 | Motor Current | Shows Motor current of motor 0–FLA (4 mA to 20 mA) |
| | 19 | 24 Vi | +24 Vdc Input | — | External control voltage input |
| | 20 | DIN1 | Digital Input 1 | Run Forward | Input starts drive in forward direction (start enable) |
| | 21 | DIN2 | Digital Input 2 | Run Reverse | Input starts drive in reverse direction (start enable) |
| | 22 | DIN3 | Digital Input 3 | External Fault | Input causes drive to fault |
| | 23 | DIN4 | Digital Input 4 | Fault Reset | Input resets active faults |
| | 24 | CMA | DI1 to DI4 Common | Grounded | Allows source input |
| | 25 | A | RS-485 Signal A | — | Fieldbus Communication (Modbus, BACnet) |
| | 26 | B | RS-485 Signal B | — | Fieldbus Communication (Modbus, BACnet) |
| | 27 | R3NO | Relay 3 Normally Open | At Speed | Relay output 3 shows VFD is at Ref. Frequency |
| | 28 | R1NC | Relay 1 Normally Closed | Run | Relay output 1 shows VFD is in a run state |
| | 29 | R1CM | Relay 1 Common | — | — |
| | 30 | R1NO | Relay 1 Normally Open | — | — |
| | 31 | R3CM | Relay 3 Common | At Speed | Relay output 3 shows VFD is at Ref. Frequency |
| | 32 | R2NC | Relay 2 Normally Closed | Fault | Relay output 2 shows VFD is in a fault state |
| | 33 | R2CM | Relay 2 Common | — | — |
| | 34 | R2NO | Relay 2 Normally Open | — | — |

Notes

The above wiring demonstrates a SINK configuration. It is important that CMA and CMB are wired to ground (as shown by dashed line).


If a SOURCE configuration is desired, wire 24 V to CMA and CMB and close the inputs to ground.

When using the +10 V for AI1, it is important to wire AI1– to ground (as shown by dashed line).

If using +10 V for AI1 or AI2, terminals 3, 5 and 6 need to be jumpered together.

Control Board Layout

PowerXL Series—DH1 Control Board Layout

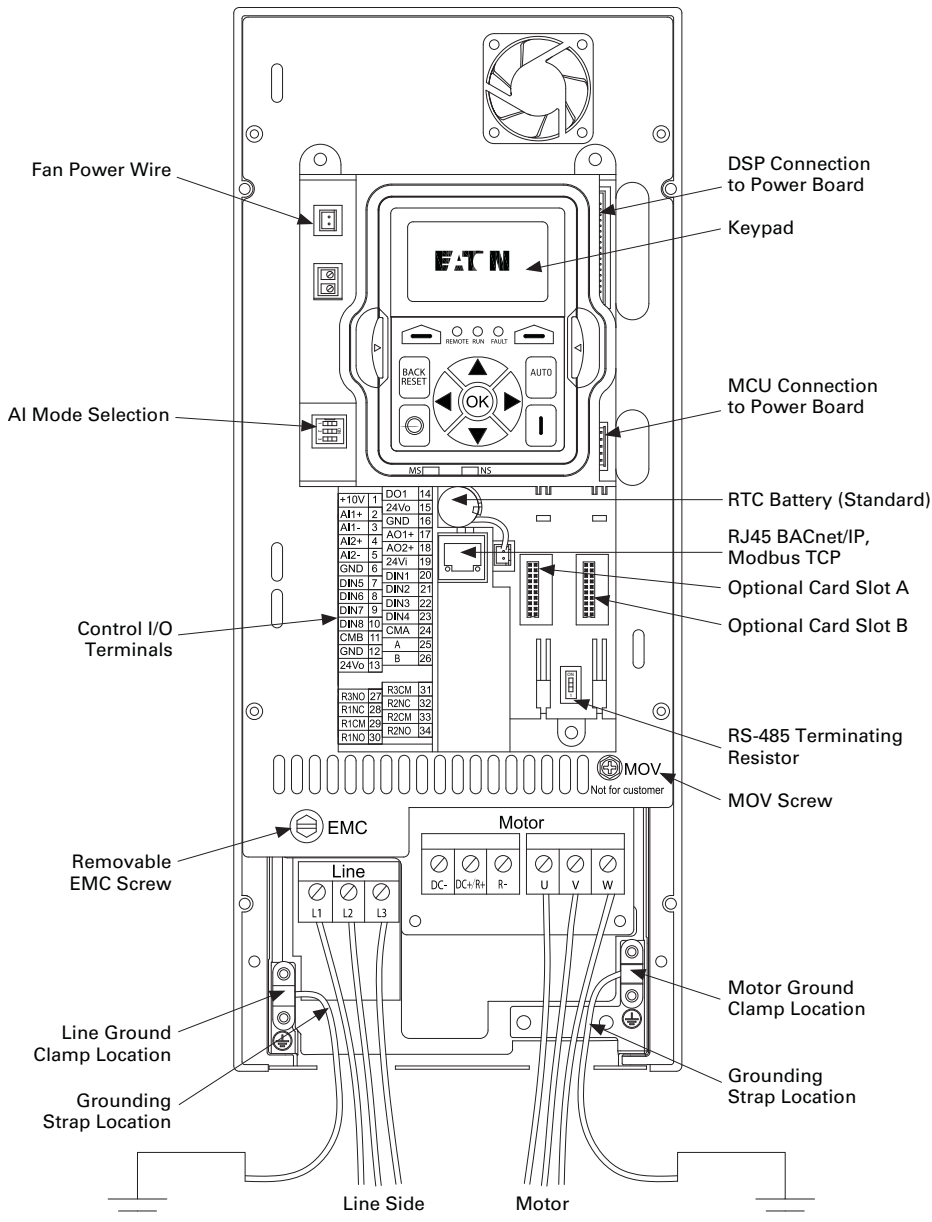

2.8

Adjustable Frequency Drives


PowerXL DH1 Series Drives

Dimensions

Approximate Dimensions in Inches (mm)

2

PowerXL Series—DH1 Dimensions

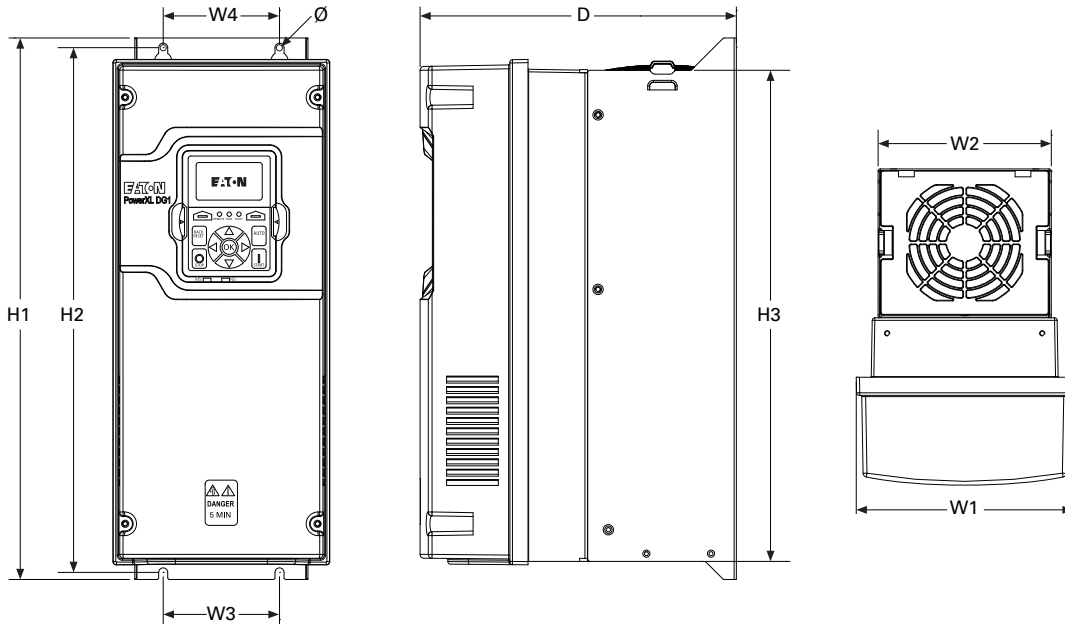

| Frame Size | Voltage | hp (CT/I _H) | kW | Amperes (CT/I _H) | Approximate Dimensions in Inches (mm) | | | | | | | | | | Weight Lb (kg) |
|------------|---------|-------------------------|----------|------------------------------|---------------------------------------|---------|---------|----------|---------|---------|---------|---------|-------|---------|----------------|
| | | | | | D | H1 | H2 | H3 | W1 | W2 | W3 | W4 | Ø | | |
| FR0 | 230 Vac | 1–2 | 0.75–1.5 | 4.8–7.8 | 6.83 | 10.58 | 10.16 | 9.54 | 5.00 | 4.97 | 4.26 | 4.26 | 0.28 | 4.41 | |
| | 480 Vac | 1.5–5 | 1.1–3 | 3.3–7.6 | (173.5) | (268.7) | (258.0) | (242.3) | (127.0) | (126.3) | (108.3) | (108.3) | (7.0) | (2.0) | |
| FR1 | 230 Vac | 1–4 | 0.75–3 | 4.8–12.5 | 7.91 | 12.87 | 12.28 | 11.50 | 6.02 | 4.80 | 3.94 | 3.94 | 0.28 | 14.33 | |
| | 480 Vac | 1.5–7.5 | 1.1–5.5 | 3.3–12 | (200.9) | (326.9) | (311.9) | (292.1) | (153.0) | (121.9) | (100.1) | (100.1) | (7.0) | (6.5) | |
| | 575 Vac | 3–7.5 | 2.2–5.5 | 4.5–10 | | | | | | | | | | | |
| FR2 | 230 Vac | 5–10 | 3.7–7.5 | 17.5–31 | 9.63 | 16.50 | 15.98 | 14.96 | 6.61 | 5.28 | 3.54 | 3.54 | 0.28 | 23.37 | |
| | 480 Vac | 10–20 | 7.5–15 | 16–31 | (244.7) | (419.1) | (405.9) | (380.0) | (167.8) | (134.1) | (90.0) | (90.0) | (7.0) | (10.6) | |
| | 575 Vac | 10–20 | 7.5–15 | 13.5–22 | | | | | | | | | | | |
| FR3 | 230 Vac | 15–20 | 11–15 | 48–61 | 10.44 | 21.97 | 21.46 | 20.41 | 8.06 | 7.24 | 4.92 | 4.92 | 0.35 | 49.82 | |
| | 480 Vac | 25–40 | 18.5–30 | 38–61 | (265.1) | (558.0) | (545.0) | (518.5) | (204.6) | (183.9) | (125.0) | (125.0) | (9.0) | (22.6) | |
| | 575 Vac | 25–40 | 18.5–30 | 27–41 | | | | | | | | | | | |
| FR4 | 230 Vac | 25–40 | 18.5–30 | 75–114 | 11.57 | 24.80 | 24.31 | 23.27 | 9.36 | 9.13 | 8.07 | 8.07 | 0.35 | 77.60 | |
| | 480 Vac | 50–75 | 37–55 | 72–105 | (294.0) | (629.9) | (617.5) | (591.1) | (237.7) | (231.9) | (205.0) | (205.0) | (9.0) | (35.2) | |
| | 575 Vac | 50–75 | 37–55 | 52–80 | | | | | | | | | | | |
| FR5 | 230 Vac | 50–75 | 37–55 | 143–211 | 13.41 | 34.98 | 29.65 | 27.83 | 11.34 | 11.10 | 8.66 | 8.66 | 0.35 | 154.32 | |
| | 480 Vac | 100–150 | 75–110 | 140–205 | (340.7) | (888.5) | (753.1) | (706.9) | (288.0) | (281.9) | (220.0) | (220.0) | (9.0) | (70.0) | |
| | 575 Vac | 100–150 | 75–110 | 100–144 | | | | | | | | | | | |
| FR6 | 230 Vac | 100–125 | 75–90 | 261–312 | 14.61 | 34.04 | 33.27 | 40.75 | 19.13 | 18.90 | 15.75 | 15.75 | 0.35 | 281.3 | |
| | 480 Vac | 200–250 | 132–160 | 261–310 | (371.0) | (864.5) | (845.0) | (1035.0) | (486.0) | (480.0) | (400.0) | (400.0) | (9.0) | (127.6) | |
| | 575 Vac | 200–250 | 150–187 | 208–250 | | | | | | | | | | | |

PowerXL DH1 Series HVAC/R Enclosed Drive



Contents

| <i>Description</i> | <i>Page</i> |
|------------------------------------|-------------|
| PowerXL DH1 Series Drives | V6-T2-175 |
| PowerXL DH1 Series Enclosed Drives | |
| Catalog Number Selection | V6-T2-196 |
| Product Selection | V6-T2-197 |
| Options | V6-T2-206 |
| Dimensions | V6-T2-207 |

PowerXL DH1 Series Enclosed Drives

Product Description

The DH1 enclosed drive family incorporates the latest Eaton drive technology into pre-engineered enclosed solutions covering the HVAC/R industry's most common applications. Using the benefits of the PowerXL DH1, the enclosed family provides enhanced user safety with short circuit current ratings up to 100 kAIC as well as industry-leading energy efficiency from the patented Active Energy Control[®] algorithm.

Features and Benefits

- VT rated to meet HVAC/R industry standards
 - Available circuit breaker, motor circuit protector, fused disconnect and isolation fusing options to provide input power protection up to 100 kAIC
 - Standard 2 and 3 contactor bypass configurations
 - Multi-color LED pilot device allows for one light to represent multiple drive states
 - Compact disconnect enclosure allows for simple 100 kAIC disconnect platform for simple HVAC/R applications
 - Standard NEMA 12 and 3R designs allow for optimized product footprint
 - Onboard HVAC/R communications allow for easy connection to most building management systems
 - Plenum rated
 - DC link choke provides reduction in input harmonics equal to or better than 5% AC line reactor
- The PowerXL DH1 comes standard with the following communication protocols:
 - BACnet/IP
 - Modbus/TCP
 - Modbus RTU
 - BACnet MS/TP

Standards and Certifications

- UL 508C



Enclosure Ratings

- NEMA Type 1
- NEMA Type 12
- NEMA Type 3R

Mounting

- Wall mount
- Floor mount: 12-inch legs
- Floor mount: 22-inch legs

Product Range


- 208 V: 1–100 hp
- 230 V: 1–125 hp
- 480 V: 1.5–250 hp

Catalog Number Selection

Catalog Number Selection is for reference only. Not all option combinations may be available.

2

PowerXL DH1 Series Enclosed Drives

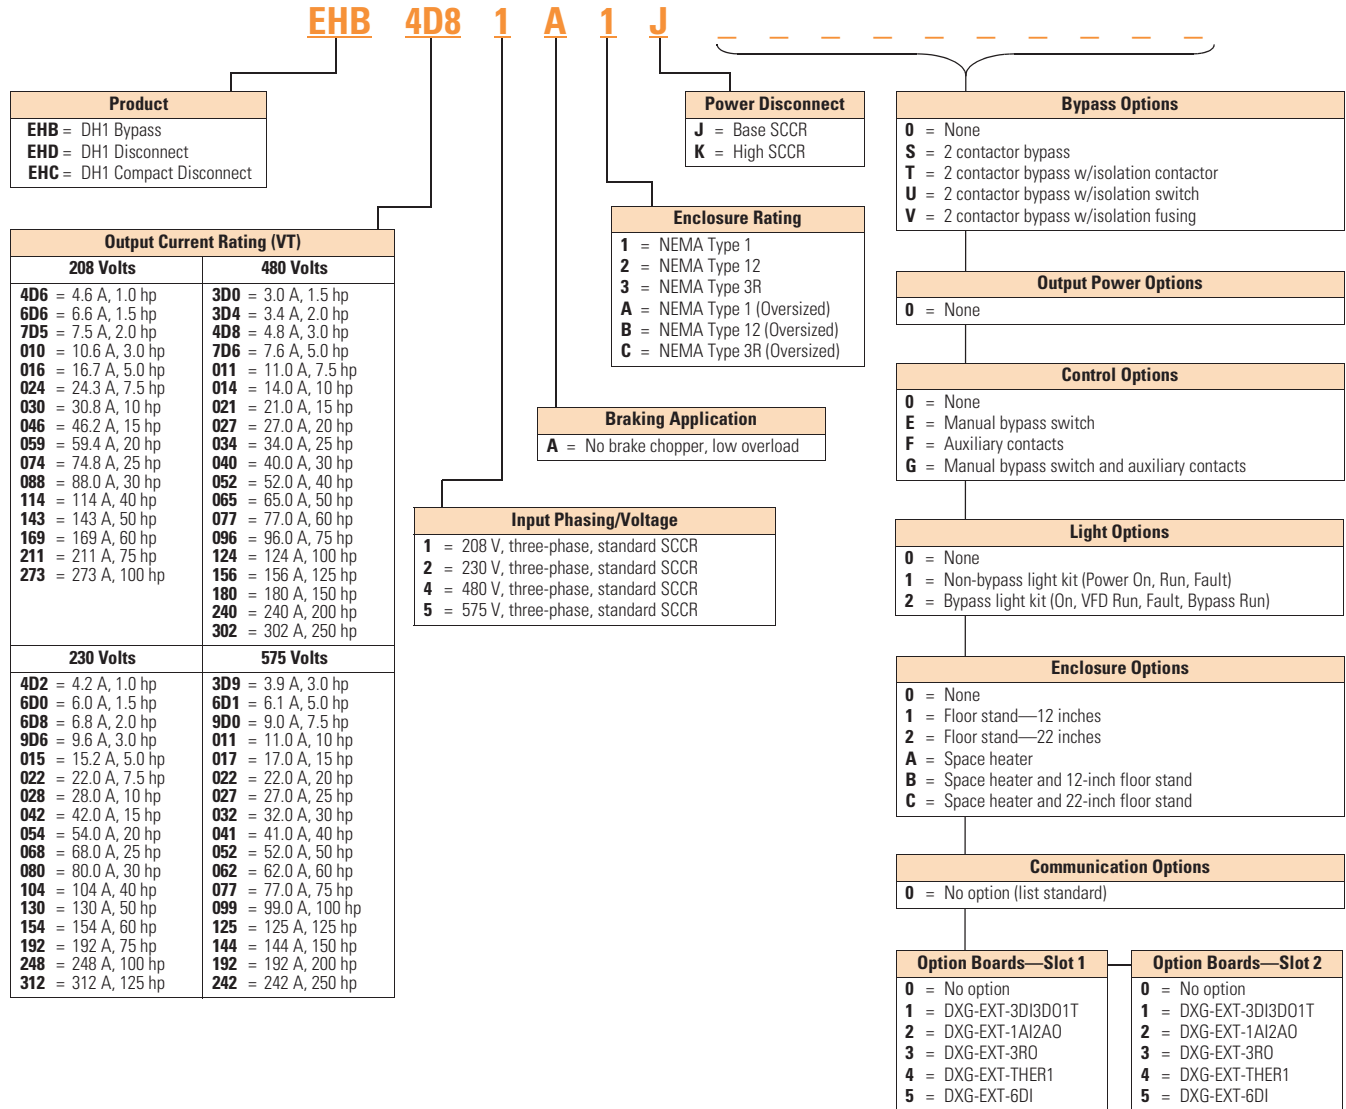

Product Selection

EHC—DH1 Compact Disconnect

EHC



208 V

| Horsepower | Drive Rated NEC Amps | Catalog Number |
|-----------------------|-------------------------|--------------------|
| Frame Size H1D | | |
| 1 | 4.6 | EHC4D61A1K00000000 |
| 1.5 | 6.6 | EHC6D61A1K00000000 |
| 2 | 7.5 | EHC7D51A1K00000000 |
| 3 | 10.6 | EHC0101A1K00000000 |
| Frame Size H2D | | |
| 5 | 16.7 | EHC0161A1K00000000 |
| 7.5 | 24.3 | EHC0241A1K00000000 |
| 10 | 30.8 | EHC0301A1K00000000 |
| Frame Size H3D | | |
| 15 | 46.2 | EHC0461A1K00000000 |
| 20 | 59.4 | EHC0591A1K00000000 |
| Frame Size H4D | | |
| 25 | 74.8 | EHC0741A1K00000000 |
| 30 | 88 | EHC0881A1K00000000 |
| 40 | 114 | EHC1141A1K00000000 |

230 V

| Horsepower | Drive Rated NEC Amps | Catalog Number |
|-----------------------|-------------------------|--------------------|
| Frame Size H1D | | |
| 1 | 4.2 | EHC4D22A1K00000000 |
| 1.5 | 6 | EHC6D02A1K00000000 |
| 2 | 6.8 | EHC6D82A1K00000000 |
| 3 | 9.6 | EHC9D62A1K00000000 |
| Frame Size H2D | | |
| 5 | 15.2 | EHC0152A1K00000000 |
| 7.5 | 22 | EHC0222A1K00000000 |
| 10 | 28 | EHC0282A1K00000000 |
| Frame Size H3D | | |
| 15 | 42 | EHC0422A1K00000000 |
| 20 | 54 | EHC0542A1K00000000 |
| Frame Size H4D | | |
| 25 | 68 | EHC0682A1K00000000 |
| 30 | 80 | EHC0802A1K00000000 |
| 40 | 104 | EHC1042A1K00000000 |

480 V

| Horsepower | Drive Rated NEC Amps | Catalog Number |
|-----------------------|-------------------------|--------------------|
| Frame Size H1D | | |
| 1.5 | 3 | EHC3D04A1K00000000 |
| 2 | 3.4 | EHC3D44A1K00000000 |
| 3 | 4.8 | EHC4D84A1K00000000 |
| 5 | 7.6 | EHC7D64A1K00000000 |
| 7.5 | 11 | EHC0114A1K00000000 |
| Frame Size H2D | | |
| 10 | 14 | EHC0144A1K00000000 |
| 15 | 21 | EHC0214A1K00000000 |
| 20 | 27 | EHC0274A1K00000000 |
| Frame Size H3D | | |
| 25 | 34 | EHC0344A1K00000000 |
| 30 | 40 | EHC0404A1K00000000 |
| 40 | 52 | EHC0524A1K00000000 |
| Frame Size H4D | | |
| 50 | 65 | EHC0654A1K00000000 |
| 60 | 77 | EHC0774A1K00000000 |
| 75 | 96 | EHC0964A1K00000000 |

575 V

| Horsepower | Drive Rated NEC Amps | Catalog Number |
|-----------------------|-------------------------|--------------------|
| Frame Size H1D | | |
| 3 | 3.9 | EHC3D95A1K00000000 |
| 5 | 6.1 | EHC6D15A1K00000000 |
| 7.5 | 9 | EHC9D05A1K00000000 |
| Frame Size H2D | | |
| 10 | 11 | EHC0115A1K00000000 |
| 15 | 17 | EHC0175A1K00000000 |
| 20 | 22 | EHC0225A1K00000000 |
| Frame Size H3D | | |
| 25 | 27 | EHC0275A1K00000000 |
| 30 | 32 | EHC0325A1K00000000 |
| 40 | 41 | EHC0415A1K00000000 |
| Frame Size H4D | | |
| 50 | 52 | EHC0525A1K00000000 |
| 60 | 62 | EHC0625A1K00000000 |
| 75 | 77 | EHC0775A1K00000000 |

EHD—DH1 Disconnect

2



EHD_

208 V—NEMA Type 1

| Horsepower | Drive Rated NEC Amps | Catalog Number |
|-----------------------|-------------------------|--------------------|
| Frame Size H1S | | |
| 1 | 4.6 | EHD4D61A1J00000000 |
| 1.5 | 6.6 | EHD6D61A1J00000000 |
| 2 | 7.5 | EHD7D51A1J00000000 |
| 3 | 10.6 | EHD0101A1J00000000 |
| Frame Size H2S | | |
| 5 | 16.7 | EHD0161A1J00000000 |
| 7.5 | 24.3 | EHD0241A1J00000000 |
| 10 | 30.8 | EHD0301A1J00000000 |
| Frame Size H3 | | |
| 15 | 46.2 | EHD0461A1J00000000 |
| 20 | 59.4 | EHD0591A1J00000000 |
| Frame Size H4 | | |
| 25 | 74.8 | EHD0741A1K00000000 |
| 30 | 88 | EHD0881A1K00000000 |
| 40 | 114 | EHD1141A1K00000000 |
| Frame Size CX | | |
| 50 | 143 | EHD1431A1K00000000 |
| 60 | 169 | EHD1691A1K00000000 |
| 75 | 211 | EHD2111A1K00000000 |
| Frame Size DX | | |
| 100 | 273 | EHD2731A1K00000000 |

208 V—NEMA Type 12

| Horsepower | Drive Rated NEC Amps | Catalog Number |
|-----------------------|-------------------------|--------------------|
| Frame Size H3X | | |
| 1 | 4.6 | EHD4D61A2J00000000 |
| 1.5 | 6.6 | EHD6D61A2J00000000 |
| 2 | 7.5 | EHD7D51A2J00000000 |
| 3 | 10.6 | EHD0101A2J00000000 |
| 5 | 16.7 | EHD0161A2J00000000 |
| 7.5 | 24.3 | EHD0241A2J00000000 |
| 10 | 30.8 | EHD0301A2J00000000 |
| 15 | 46.2 | EHD0461A2J00000000 |
| 20 | 59.4 | EHD0591A2J00000000 |
| Frame Size BX | | |
| 25 | 74.8 | EHD0741A2K00000000 |
| 30 | 88 | EHD0881A2K00000000 |
| 40 | 114 | EHD1141A2K00000000 |
| Frame Size CX | | |
| 50 | 143 | EHD1431A2K00000000 |
| 60 | 169 | EHD1691A2K00000000 |
| 75 | 211 | EHD2111A2K00000000 |
| Frame Size DX | | |
| 100 | 273 | EHD2731A2K00000000 |

208 V—NEMA Type 3R

| Horsepower | Drive Rated NEC Amps | Catalog Number |
|-----------------------|-------------------------|--------------------|
| Frame Size H3X | | |
| 1 | 4.6 | EHD4D61A3J00000000 |
| 1.5 | 6.6 | EHD6D61A3J00000000 |
| 2 | 7.5 | EHD7D51A3J00000000 |
| 3 | 10.6 | EHD0101A3J00000000 |
| 5 | 16.7 | EHD0161A3J00000000 |
| 7.5 | 24.3 | EHD0241A3J00000000 |
| 10 | 30.8 | EHD0301A3J00000000 |
| 15 | 46.2 | EHD0461A3J00000000 |
| 20 | 59.4 | EHD0591A3J00000000 |
| Frame Size BX | | |
| 25 | 74.8 | EHD0741A3K00000000 |
| 30 | 88 | EHD0881A3K00000000 |
| 40 | 114 | EHD1141A3K00000000 |
| Frame Size CX | | |
| 50 | 143 | EHD1431A3K00000000 |
| 60 | 169 | EHD1691A3K00000000 |
| 75 | 211 | EHD2111A3K00000000 |
| Frame Size DX | | |
| 100 | 273 | EHD2731A3K00000000 |

EHD_

**230 V—NEMA Type 1**

| Horsepower | Drive Rated NEC Amps | Catalog Number |
|-----------------------|-------------------------|--------------------|
| Frame Size H1S | | |
| 1 | 4.2 | EHD4D22A1J00000000 |
| 1.5 | 6 | EHD6D02A1J00000000 |
| 2 | 6.8 | EHD6D82A1J00000000 |
| 3 | 9.6 | EHD9D62A1J00000000 |
| Frame Size H2S | | |
| 5 | 15.2 | EHD0152A1J00000000 |
| 7.5 | 22 | EHD0222A1J00000000 |
| 10 | 28 | EHD0282A1J00000000 |
| Frame Size H3 | | |
| 15 | 42 | EHD0422A1J00000000 |
| 20 | 54 | EHD0542A1J00000000 |
| Frame Size H4 | | |
| 25 | 68 | EHD0682A1K00000000 |
| 30 | 80 | EHD0802A1K00000000 |
| 40 | 104 | EHD1042A1K00000000 |
| Frame Size CX | | |
| 50 | 130 | EHD1302A1K00000000 |
| 60 | 154 | EHD1542A1K00000000 |
| 75 | 192 | EHD1922A1K00000000 |
| Frame Size DX | | |
| 100 | 248 | EHD2482A1K00000000 |
| 125 | 312 | EHD3122A1K00000000 |

230 V—NEMA Type 12

| Horsepower | Drive Rated NEC Amps | Catalog Number |
|-----------------------|-------------------------|--------------------|
| Frame Size H3X | | |
| 1 | 4.2 | EHD4D22A2J00000000 |
| 1.5 | 6 | EHD6D02A2J00000000 |
| 2 | 6.8 | EHD6D82A2J00000000 |
| 3 | 9.6 | EHD9D62A2J00000000 |
| 5 | 15.2 | EHD0152A2J00000000 |
| 7.5 | 22 | EHD0222A2J00000000 |
| 10 | 28 | EHD0282A2J00000000 |
| 15 | 42 | EHD0422A2J00000000 |
| 20 | 54 | EHD0542A2J00000000 |
| Frame Size BX | | |
| 25 | 68 | EHD0682A2K00000000 |
| 30 | 80 | EHD0802A2K00000000 |
| 40 | 104 | EHD1042A2K00000000 |
| Frame Size CX | | |
| 50 | 130 | EHD1302A2K00000000 |
| 60 | 154 | EHD1542A2K00000000 |
| 75 | 192 | EHD1922A2K00000000 |
| Frame Size DX | | |
| 100 | 248 | EHD2482A2K00000000 |
| 125 | 312 | EHD3122A2K00000000 |

230 V—NEMA Type 3R

| Horsepower | Drive Rated NEC Amps | Catalog Number |
|-----------------------|-------------------------|--------------------|
| Frame Size H3X | | |
| 1 | 4.2 | EHD4D22A3J00000000 |
| 1.5 | 6 | EHD6D02A3J00000000 |
| 2 | 6.8 | EHD6D82A3J00000000 |
| 3 | 9.6 | EHD9D62A3J00000000 |
| 5 | 15.2 | EHD0152A3J00000000 |
| 7.5 | 22 | EHD0222A3J00000000 |
| 10 | 28 | EHD0282A3J00000000 |
| 15 | 42 | EHD0422A3J00000000 |
| 20 | 54 | EHD0542A3J00000000 |
| Frame Size BX | | |
| 25 | 68 | EHD0682A3K00000000 |
| 30 | 80 | EHD0802A3K00000000 |
| 40 | 104 | EHD1042A3K00000000 |
| Frame Size CX | | |
| 50 | 130 | EHD1302A3K00000000 |
| 60 | 154 | EHD1542A3K00000000 |
| 75 | 192 | EHD1922A3K00000000 |
| Frame Size DX | | |
| 100 | 248 | EHD2482A3K00000000 |
| 125 | 312 | EHD3122A3K00000000 |

EHD_

2



480 V—NEMA Type 1

| Horsepower | Drive Rated NEC Amps | Catalog Number |
|-----------------------|-------------------------|--------------------|
| Frame Size H1S | | |
| 1.5 | 3 | EHD3D04A1J00000000 |
| 2 | 3.4 | EHD3D44A1J00000000 |
| 3 | 4.8 | EHD4D84A1J00000000 |
| 5 | 7.6 | EHD7D64A1J00000000 |
| 7.5 | 11 | EHD0114A1J00000000 |
| Frame Size H2 | | |
| 10 | 14 | EHD0144A1J00000000 |
| 15 | 21 | EHD0214A1J00000000 |
| 20 | 27 | EHD0274A1J00000000 |
| Frame Size H3 | | |
| 25 | 34 | EHD0344A1J00000000 |
| 30 | 40 | EHD0404A1J00000000 |
| 40 | 52 | EHD0524A1J00000000 |
| Frame Size H4 | | |
| 50 | 65 | EHD0654A1K00000000 |
| 60 | 77 | EHD0774A1K00000000 |
| 75 | 96 | EHD0964A1K00000000 |
| Frame Size CX | | |
| 100 | 124 | EHD1244A1K00000000 |
| 125 | 156 | EHD1564A1K00000000 |
| 150 | 180 | EHD1804A1K00000000 |
| Frame Size DX | | |
| 200 | 240 | EHD2404A1K00000000 |
| 250 | 302 | EHD3024A1K00000000 |

480 V—NEMA Type 12

| Horsepower | Drive Rated NEC Amps | Catalog Number |
|-----------------------|-------------------------|--------------------|
| Frame Size H3X | | |
| 1.5 | 3 | EHD3D04A2J00000000 |
| 2 | 3.4 | EHD3D44A2J00000000 |
| 3 | 4.8 | EHD4D84A2J00000000 |
| 5 | 7.6 | EHD7D64A2J00000000 |
| 7.5 | 11 | EHD0114A2J00000000 |
| 10 | 14 | EHD0144A2J00000000 |
| 15 | 21 | EHD0214A2J00000000 |
| 20 | 27 | EHD0274A2J00000000 |
| 25 | 34 | EHD0344A2J00000000 |
| 30 | 40 | EHD0404A2J00000000 |
| 40 | 52 | EHD0524A2J00000000 |
| Frame Size BX | | |
| 50 | 65 | EHD0654A2K00000000 |
| 60 | 77 | EHD0774A2K00000000 |
| 75 | 96 | EHD0964A2K00000000 |
| Frame Size CX | | |
| 100 | 124 | EHD1244A2K00000000 |
| 125 | 156 | EHD1564A2K00000000 |
| 150 | 180 | EHD1804A2K00000000 |
| Frame Size DX | | |
| 200 | 240 | EHD2404A2K00000000 |
| 250 | 302 | EHD3024A2K00000000 |

480 V—NEMA Type 3R

| Horsepower | Drive Rated NEC Amps | Catalog Number |
|-----------------------|-------------------------|--------------------|
| Frame Size H3X | | |
| 1.5 | 3 | EHD3D04A3J00000000 |
| 2 | 3.4 | EHD3D44A3J00000000 |
| 3 | 4.8 | EHD4D84A3J00000000 |
| 5 | 7.6 | EHD7D64A3J00000000 |
| 7.5 | 11 | EHD0114A3J00000000 |
| 10 | 14 | EHD0144A3J00000000 |
| 15 | 21 | EHD0214A3J00000000 |
| 20 | 27 | EHD0274A3J00000000 |
| 25 | 34 | EHD0344A3J00000000 |
| 30 | 40 | EHD0404A3J00000000 |
| 40 | 52 | EHD0524A3J00000000 |
| Frame Size BX | | |
| 50 | 65 | EHD0654A3K00000000 |
| 60 | 77 | EHD0774A3K00000000 |
| 75 | 96 | EHD0964A3K00000000 |
| Frame Size CX | | |
| 100 | 124 | EHD1244A3K00000000 |
| 125 | 156 | EHD1564A3K00000000 |
| 150 | 180 | EHD1804A3K00000000 |
| Frame Size DX | | |
| 200 | 240 | EHD2404A3K00000000 |
| 250 | 302 | EHD3024A3K00000000 |

EHD_



575 V—NEMA Type 1

| Horsepower | Drive Rated NEC Amps | Catalog Number |
|----------------------|-------------------------|--------------------|
| Frame Size H1 | | |
| 3 | 3.9 | EHD3D95A1K00000000 |
| 5 | 6.1 | EHD6D15A1K00000000 |
| 7.5 | 9 | EHD9D05A1K00000000 |
| Frame Size H2 | | |
| 10 | 11 | EHD0115A1K00000000 |
| 15 | 17 | EHD0175A1K00000000 |
| 20 | 22 | EHD0225A1K00000000 |
| Frame Size H3 | | |
| 25 | 27 | EHD0275A1K00000000 |
| 30 | 32 | EHD0325A1K00000000 |
| 40 | 41 | EHD0415A1K00000000 |
| Frame Size H4 | | |
| 50 | 52 | EHD0525A1K00000000 |
| 60 | 62 | EHD0625A1K00000000 |
| 75 | 77 | EHD0775A1K00000000 |
| Frame Size CX | | |
| 100 | 99 | EHD0995A1K00000000 |
| 125 | 125 | EHD1255A1K00000000 |
| 150 | 144 | EHD1445A1K00000000 |
| Frame Size DX | | |
| 200 | 192 | EHD1925A1K00000000 |
| 250 | 242 | EHD2425A1K00000000 |

575 V—NEMA Type 12

| Horsepower | Drive Rated NEC Amps | Catalog Number |
|-----------------------|-------------------------|--------------------|
| Frame Size H3X | | |
| 3 | 3.9 | EHD3D95A2K00000000 |
| 5 | 6.1 | EHD6D15A2K00000000 |
| 7.5 | 9 | EHD9D05A2K00000000 |
| 10 | 11 | EHD0115A2K00000000 |
| 15 | 17 | EHD0175A2K00000000 |
| 20 | 22 | EHD0225A2K00000000 |
| 25 | 27 | EHD0275A2K00000000 |
| 30 | 32 | EHD0325A2K00000000 |
| 40 | 41 | EHD0415A2K00000000 |
| Frame Size BX | | |
| 50 | 52 | EHD0525A2K00000000 |
| 60 | 62 | EHD0625A2K00000000 |
| 75 | 77 | EHD0775A2K00000000 |
| Frame Size CX | | |
| 100 | 99 | EHD0995A2K00000000 |
| 125 | 125 | EHD1255A2K00000000 |
| 150 | 144 | EHD1445A2K00000000 |
| Frame Size DX | | |
| 200 | 192 | EHD1925A2K00000000 |
| 250 | 242 | EHD2425A2K00000000 |

575 V—NEMA Type 3R

| Horsepower | Drive Rated NEC Amps | Catalog Number |
|-----------------------|-------------------------|--------------------|
| Frame Size H3X | | |
| 3 | 3.9 | EHD3D95A3K00000000 |
| 5 | 6.1 | EHD6D15A3K00000000 |
| 7.5 | 9 | EHD9D05A3K00000000 |
| 10 | 11 | EHD0115A3K00000000 |
| 15 | 17 | EHD0175A3K00000000 |
| 20 | 22 | EHD0225A3K00000000 |
| 25 | 27 | EHD0275A3K00000000 |
| 30 | 32 | EHD0325A3K00000000 |
| 40 | 41 | EHD0415A3K00000000 |
| Frame Size BX | | |
| 50 | 52 | EHD0525A3K00000000 |
| 60 | 62 | EHD0625A3K00000000 |
| 75 | 77 | EHD0775A3K00000000 |
| Frame Size CX | | |
| 100 | 99 | EHD0995A3K00000000 |
| 125 | 125 | EHD1255A3K00000000 |
| 150 | 144 | EHD1445A3K00000000 |
| Frame Size DX | | |
| 200 | 192 | EHD1925A3K00000000 |
| 250 | 242 | EHD2425A3K00000000 |

EHB—DH1 Bypass

2

EHB



208 V—NEMA Type 1

| Horsepower | Drive Rated NEC Amps | Catalog Number ① |
|-----------------------|----------------------|--------------------|
| Frame Size H1S | | |
| 1 | 4.6 | EHB4D61A1JS0000000 |
| 1.5 | 6.6 | EHB6D61A1JS0000000 |
| 2 | 7.5 | EHB7D51A1JS0000000 |
| 3 | 10.6 | EHB0101A1JS0000000 |
| Frame Size H2S | | |
| 5 | 16.7 | EHB0161A1JS0000000 |
| 7.5 | 24.3 | EHB0241A1JS0000000 |
| 10 | 30.8 | EHB0301A1JS0000000 |
| Frame Size H3 | | |
| 15 | 46.2 | EHB0461A1JS0000000 |
| 20 | 59.4 | EHB0591A1JS0000000 |
| Frame Size H4 | | |
| 25 | 74.8 | EHB0741A1KS0000000 |
| 30 | 88 | EHB0881A1KS0000000 |
| 40 | 114 | EHB1141A1KS0000000 |
| Frame Size DX | | |
| 50 | 143 | EHB1431A1KS0000000 |
| 60 | 169 | EHB1691A1KS0000000 |
| 75 | 211 | EHB2111A1KS0000000 |
| 100 | 273 | EHB2731A1KS0000000 |

208 V—NEMA Type 12

| Horsepower | Drive Rated NEC Amps | Catalog Number |
|-----------------------|----------------------|--------------------|
| Frame Size H3X | | |
| 1 | 4.6 | EHB4D61A2JS0000000 |
| 1.5 | 6.6 | EHB6D61A2JS0000000 |
| 2 | 7.5 | EHB7D51A2JS0000000 |
| 3 | 10.6 | EHB0101A2JS0000000 |
| 5 | 16.7 | EHB0161A2JS0000000 |
| 7.5 | 24.3 | EHB0241A2JS0000000 |
| 10 | 30.8 | EHB0301A2JS0000000 |
| 15 | 46.2 | EHB0461A2JS0000000 |
| 20 | 59.4 | EHB0591A2JS0000000 |
| Frame Size CX | | |
| 25 | 74.8 | EHB0741A2KS0000000 |
| 30 | 88 | EHB0881A2KS0000000 |
| 40 | 114 | EHB1141A2KS0000000 |
| Frame Size DX | | |
| 50 | 143 | EHB1431A2KS0000000 |
| 60 | 169 | EHB1691A2KS0000000 |
| 75 | 211 | EHB2111A2KS0000000 |
| 100 | 273 | EHB2731A2KS0000000 |

208 V—NEMA Type 3R

| Horsepower | Drive Rated NEC Amps | Catalog Number |
|-----------------------|----------------------|--------------------|
| Frame Size H3X | | |
| 1 | 4.6 | EHB4D61A3JS0000000 |
| 1.5 | 6.6 | EHB6D61A3JS0000000 |
| 2 | 7.5 | EHB7D51A3JS0000000 |
| 3 | 10.6 | EHB0101A3JS0000000 |
| 5 | 16.7 | EHB0161A3JS0000000 |
| 7.5 | 24.3 | EHB0241A3JS0000000 |
| 10 | 30.8 | EHB0301A3JS0000000 |
| 15 | 46.2 | EHB0461A3JS0000000 |
| 20 | 59.4 | EHB0591A3JS0000000 |
| Frame Size CX | | |
| 25 | 74.8 | EHB0741A3KS0000000 |
| 30 | 88 | EHB0881A3KS0000000 |
| 40 | 114 | EHB1141A3KS0000000 |
| Frame Size DX | | |
| 50 | 143 | EHB1431A3KS0000000 |
| 60 | 169 | EHB1691A3KS0000000 |
| 75 | 211 | EHB2111A3KS0000000 |
| 100 | 273 | EHB2731A3KS0000000 |

Note

① Two contactors.

EHB_

**230 V—NEMA Type 1**

| Horsepower | Drive Rated NEC Amps | Catalog Number ^① |
|-----------------------|-------------------------|-----------------------------|
| Frame Size H1S | | |
| 1 | 4.2 | EHB4D22A1JS0000000 |
| 1.5 | 6 | EHB6D02A1JS0000000 |
| 2 | 6.8 | EHB6D82A1JS0000000 |
| 3 | 9.6 | EHB9D62A1JS0000000 |
| Frame Size H2S | | |
| 5 | 15.2 | EHB0152A1JS0000000 |
| 7.5 | 22 | EHB0222A1JS0000000 |
| 10 | 28 | EHB0282A1JS0000000 |
| Frame Size H3 | | |
| 15 | 42 | EHB0422A1JS0000000 |
| 20 | 54 | EHB0542A1JS0000000 |
| Frame Size H4 | | |
| 25 | 68 | EHB0682A1KS0000000 |
| 30 | 80 | EHB0802A1KS0000000 |
| 40 | 104 | EHB1042A1KS0000000 |
| Frame Size DX | | |
| 50 | 130 | EHB1302A1KS0000000 |
| 60 | 154 | EHB1542A1KS0000000 |
| 75 | 192 | EHB1922A1KS0000000 |
| 100 | 248 | EHB2482A1KS0000000 |
| 125 | 312 | EHB3122A1KS0000000 |

230 V—NEMA Type 12

| Horsepower | Drive Rated NEC Amps | Catalog Number |
|-----------------------|-------------------------|--------------------|
| Frame Size H3X | | |
| 1 | 4.2 | EHB4D22A2JS0000000 |
| 1.5 | 6 | EHB6D02A2JS0000000 |
| 2 | 6.8 | EHB6D82A2JS0000000 |
| 3 | 9.6 | EHB9D62A2JS0000000 |
| 5 | 15.2 | EHB0152A2JS0000000 |
| 7.5 | 22 | EHB0222A2JS0000000 |
| 10 | 28 | EHB0282A2JS0000000 |
| 15 | 42 | EHB0422A2JS0000000 |
| 20 | 54 | EHB0542A2JS0000000 |
| Frame Size CX | | |
| 25 | 68 | EHB0682A2KS0000000 |
| 30 | 80 | EHB0802A2KS0000000 |
| 40 | 104 | EHB1042A2KS0000000 |
| Frame Size DX | | |
| 50 | 130 | EHB1302A2KS0000000 |
| 60 | 154 | EHB1542A2KS0000000 |
| 75 | 192 | EHB1922A2KS0000000 |
| 100 | 248 | EHB2482A2KS0000000 |
| 125 | 312 | EHB3122A2KS0000000 |

230 V—NEMA Type 3R

| Horsepower | Drive Rated NEC Amps | Catalog Number |
|-----------------------|-------------------------|--------------------|
| Frame Size H3X | | |
| 1 | 4.2 | EHB4D22A3JS0000000 |
| 1.5 | 6 | EHB6D02A3JS0000000 |
| 2 | 6.8 | EHB6D82A3JS0000000 |
| 3 | 9.6 | EHB9D62A3JS0000000 |
| 5 | 15.2 | EHB0152A3JS0000000 |
| 7.5 | 22 | EHB0222A3JS0000000 |
| 10 | 28 | EHB0282A3JS0000000 |
| 15 | 42 | EHB0422A3JS0000000 |
| 20 | 54 | EHB0542A3JS0000000 |
| Frame Size CX | | |
| 25 | 68 | EHB0682A3KS0000000 |
| 30 | 80 | EHB0802A3KS0000000 |
| 40 | 104 | EHB1042A3KS0000000 |
| Frame Size DX | | |
| 50 | 130 | EHB1302A3KS0000000 |
| 60 | 154 | EHB1542A3KS0000000 |
| 75 | 192 | EHB1922A3KS0000000 |
| 100 | 248 | EHB2482A3KS0000000 |
| 125 | 312 | EHB3122A3KS0000000 |

Note

① Two contactors.



480 V—NEMA Type 1

| Horsepower | Drive Rated NEC Amps | Catalog Number ^① |
|-----------------------|-------------------------|-----------------------------|
| Frame Size H1S | | |
| 1.5 | 3 | EHB3D04A1JS0000000 |
| 2 | 3.4 | EHB3D44A1JS0000000 |
| 3 | 4.8 | EHB4D84A1JS0000000 |
| 5 | 7.6 | EHB7D64A1JS0000000 |
| 7.5 | 11 | EHB0114A1JS0000000 |
| Frame Size H2S | | |
| 10 | 14 | EHB0144A1JS0000000 |
| 15 | 21 | EHB0214A1JS0000000 |
| 20 | 27 | EHB0274A1JS0000000 |
| Frame Size H3 | | |
| 25 | 34 | EHB0344A1JS0000000 |
| 30 | 40 | EHB0404A1JS0000000 |
| 40 | 52 | EHB0524A1JS0000000 |
| Frame Size H4 | | |
| 50 | 65 | EHB0654A1KS0000000 |
| 60 | 77 | EHB0774A1KS0000000 |
| 75 | 96 | EHB0964A1KS0000000 |
| Frame Size DX | | |
| 100 | 124 | EHB1244A1KS0000000 |
| 125 | 156 | EHB1564A1KS0000000 |
| 150 | 180 | EHB1804A1KS0000000 |
| 200 | 240 | EHB2404A1KS0000000 |
| 250 | 302 | EHB3024A1KS0000000 |

480 V—NEMA Type 12

| Horsepower | Drive Rated NEC Amps | Catalog Number |
|-----------------------|-------------------------|--------------------|
| Frame Size H3X | | |
| 1.5 | 3 | EHB3D04A2JS0000000 |
| 2 | 3.4 | EHB3D44A2JS0000000 |
| 3 | 4.8 | EHB4D84A2JS0000000 |
| 5 | 7.6 | EHB7D64A2JS0000000 |
| 7.5 | 11 | EHB0114A2JS0000000 |
| 10 | 14 | EHB0144A2JS0000000 |
| 15 | 21 | EHB0214A2JS0000000 |
| 20 | 27 | EHB0274A2JS0000000 |
| 25 | 34 | EHB0344A2JS0000000 |
| 30 | 40 | EHB0404A2JS0000000 |
| 40 | 52 | EHB0524A2JS0000000 |
| Frame Size CX | | |
| 50 | 65 | EHB0654A2KS0000000 |
| 60 | 77 | EHB0774A2KS0000000 |
| 75 | 96 | EHB0964A2KS0000000 |
| Frame Size DX | | |
| 100 | 124 | EHB1244A2KS0000000 |
| 125 | 156 | EHB1564A2KS0000000 |
| 150 | 180 | EHB1804A2KS0000000 |
| 200 | 240 | EHB2404A2KS0000000 |
| 250 | 302 | EHB3024A2KS0000000 |

480 V—NEMA Type 3R

| Horsepower | Drive Rated NEC Amps | Catalog Number |
|-----------------------|-------------------------|--------------------|
| Frame Size H3X | | |
| 1.5 | 3 | EHB3D04A3JS0000000 |
| 2 | 3.4 | EHB3D44A3JS0000000 |
| 3 | 4.8 | EHB4D84A3JS0000000 |
| 5 | 7.6 | EHB7D64A3JS0000000 |
| 7.5 | 11 | EHB0114A3JS0000000 |
| 10 | 14 | EHB0144A3JS0000000 |
| 15 | 21 | EHB0214A3JS0000000 |
| 20 | 27 | EHB0274A3JS0000000 |
| 25 | 34 | EHB0344A3JS0000000 |
| 30 | 40 | EHB0404A3JS0000000 |
| 40 | 52 | EHB0524A3JS0000000 |
| Frame Size CX | | |
| 50 | 65 | EHB0654A3KS0000000 |
| 60 | 77 | EHB0774A3KS0000000 |
| 75 | 96 | EHB0964A3KS0000000 |
| Frame Size DX | | |
| 100 | 124 | EHB1244A3KS0000000 |
| 125 | 156 | EHB1564A3KS0000000 |
| 150 | 180 | EHB1804A3KS0000000 |
| 200 | 240 | EHB2404A3KS0000000 |
| 250 | 302 | EHB3024A3KS0000000 |

Note

① Two contactors.

EHB_



575 V—NEMA Type 1

| Horsepower | Drive Rated NEC Amps | Catalog Number ^① |
|----------------------|-------------------------|-----------------------------|
| Frame Size H1 | | |
| 3 | 3.9 | EHB3D95A1KS0000000 |
| 5 | 6.1 | EHB6D15A1KS0000000 |
| 7.5 | 9 | EHB9D05A1KS0000000 |
| Frame Size H2 | | |
| 10 | 11 | EHB0115A1KS0000000 |
| 15 | 17 | EHB0175A1KS0000000 |
| 20 | 22 | EHB0225A1KS0000000 |
| Frame Size H3 | | |
| 25 | 27 | EHB0275A1KS0000000 |
| 30 | 32 | EHB0325A1KS0000000 |
| 40 | 41 | EHB0415A1KS0000000 |
| Frame Size H4 | | |
| 50 | 52 | EHB0525A1KS0000000 |
| 60 | 62 | EHB0625A1KS0000000 |
| 75 | 77 | EHB0775A1KS0000000 |
| Frame Size DX | | |
| 100 | 99 | EHB0995A1KS0000000 |
| 125 | 125 | EHB1255A1KS0000000 |
| 150 | 144 | EHB1445A1KS0000000 |
| 200 | 192 | EHB1925A1KS0000000 |
| 250 | 242 | EHB2425A1KS0000000 |

575 V—NEMA Type 12

| Horsepower | Drive Rated NEC Amps | Catalog Number |
|-----------------------|-------------------------|--------------------|
| Frame Size H3X | | |
| 3 | 3.9 | EHB3D95A2KS0000000 |
| 5 | 6.1 | EHB6D15A2KS0000000 |
| 7.5 | 9 | EHB9D05A2KS0000000 |
| 10 | 11 | EHB0115A2KS0000000 |
| 15 | 17 | EHB0175A2KS0000000 |
| 20 | 22 | EHB0225A2KS0000000 |
| 25 | 27 | EHB0275A2KS0000000 |
| 30 | 32 | EHB0325A2KS0000000 |
| 40 | 41 | EHB0415A2KS0000000 |
| Frame Size CX | | |
| 50 | 52 | EHB0525A2KS0000000 |
| 60 | 62 | EHB0625A2KS0000000 |
| 75 | 77 | EHB0775A2KS0000000 |
| Frame Size DX | | |
| 100 | 99 | EHB0995A2KS0000000 |
| 125 | 125 | EHB1255A2KS0000000 |
| 150 | 144 | EHB1445A2KS0000000 |
| 200 | 192 | EHB1925A2KS0000000 |
| 250 | 242 | EHB2425A2KS0000000 |

575 V—NEMA Type 3R

| Horsepower | Drive Rated NEC Amps | Catalog Number |
|-----------------------|-------------------------|--------------------|
| Frame Size H3X | | |
| 3 | 3.9 | EHB2425A3KS0000000 |
| 5 | 6.1 | EHB3D95A3KS0000000 |
| 7.5 | 9 | EHB6D15A3KS0000000 |
| 10 | 11 | EHB9D05A3KS0000000 |
| 15 | 17 | EHB0115A3KS0000000 |
| 20 | 22 | EHB0175A3KS0000000 |
| 25 | 27 | EHB0225A3KS0000000 |
| 30 | 32 | EHB0275A3KS0000000 |
| 40 | 41 | EHB0325A3KS0000000 |
| Frame Size CX | | |
| 50 | 52 | EHB0415A3KS0000000 |
| 60 | 62 | EHB0525A3KS0000000 |
| 75 | 77 | EHB0625A3KS0000000 |
| Frame Size DX | | |
| 100 | 99 | EHB0775A3KS0000000 |
| 125 | 125 | EHB0995A3KS0000000 |
| 150 | 144 | EHB1255A3KS0000000 |
| 200 | 192 | EHB1445A3KS0000000 |
| 250 | 242 | EHB1925A3KS0000000 |

Note

① Two contactors.

Options

DH1 Series Drives Options

2

Option Boards Slots 1 and 2

| Description | Suffix Number | Catalog Number |
|--|---------------|-------------------------|
| None | 0 | — |
| 3 x DI, 3 x DO, 1 x thermistor, 24 Vdc/EXT option card | 1 | DXG-EXT-3DI3DO1T |
| 1 x AI, 2 x AO (isolated to control board) option card | 2 | DXG-EXT-1AI2AO |
| 3 x relay dry contact (2NO + 1NO/NC) option card | 3 | DXG-EXT-3R0 |
| 3 x PT100 RTD thermistor input option card | 4 | DXG-EXT-THER1 |
| 6 x DI 240 Vac input option card | 5 | DXG-EXT-6DI |

Light Options

| Description | Suffix Number |
|---|---------------|
| None | 0 |
| Non-bypass light kit (Power On, Run, Fault) | 1 |
| Bypass light kit (On, VFD Run, Fault, Bypass Run) | 2 |

Enclosure Options






| Description | Suffix Number |
|---------------------------------------|---------------|
| None | 0 |
| Floor stand—12 inches | 1 |
| Floor stand—22 inches | 2 |
| Space heater | A |
| Space heater and 12-inch floor stands | B |
| Space heater and 22-inch floor stands | C |

Note: Floor stands are only an option for BX and CX enclosures.

Note: No communication options.

Dimensions

Approximate Dimensions in Inches (mm)

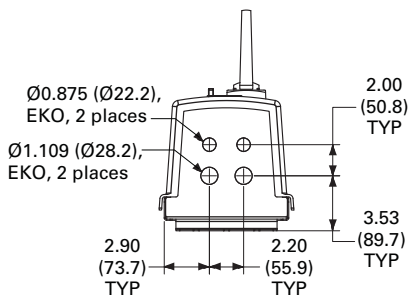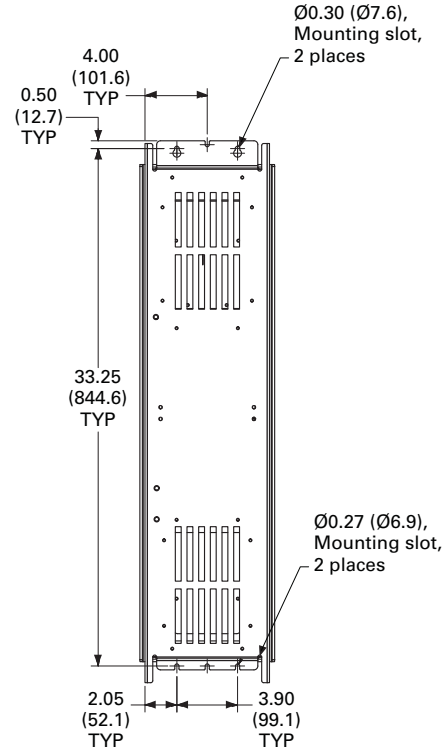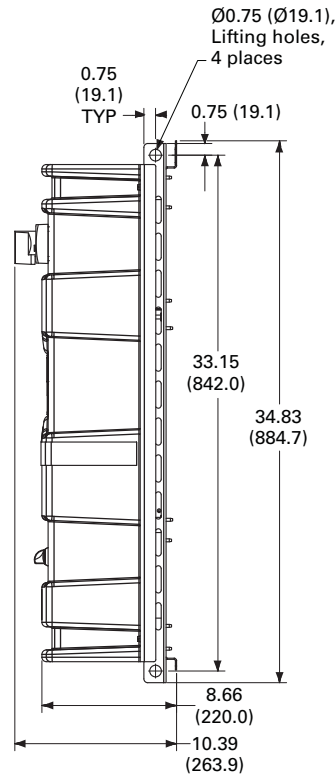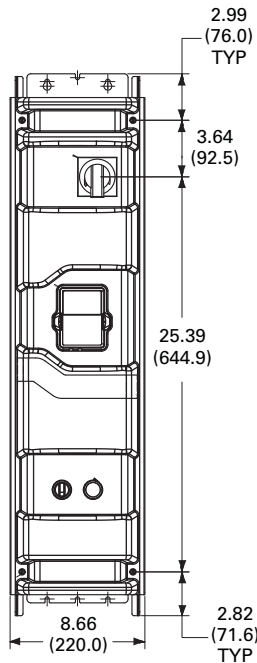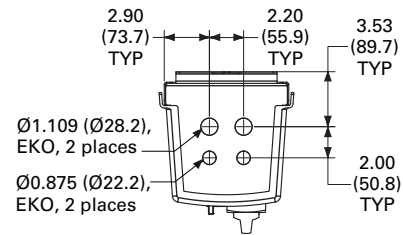H1S

2.8


Adjustable Frequency Drives

PowerXL DH1 Series Drives

Approximate Dimensions in Inches (mm)






H1

2

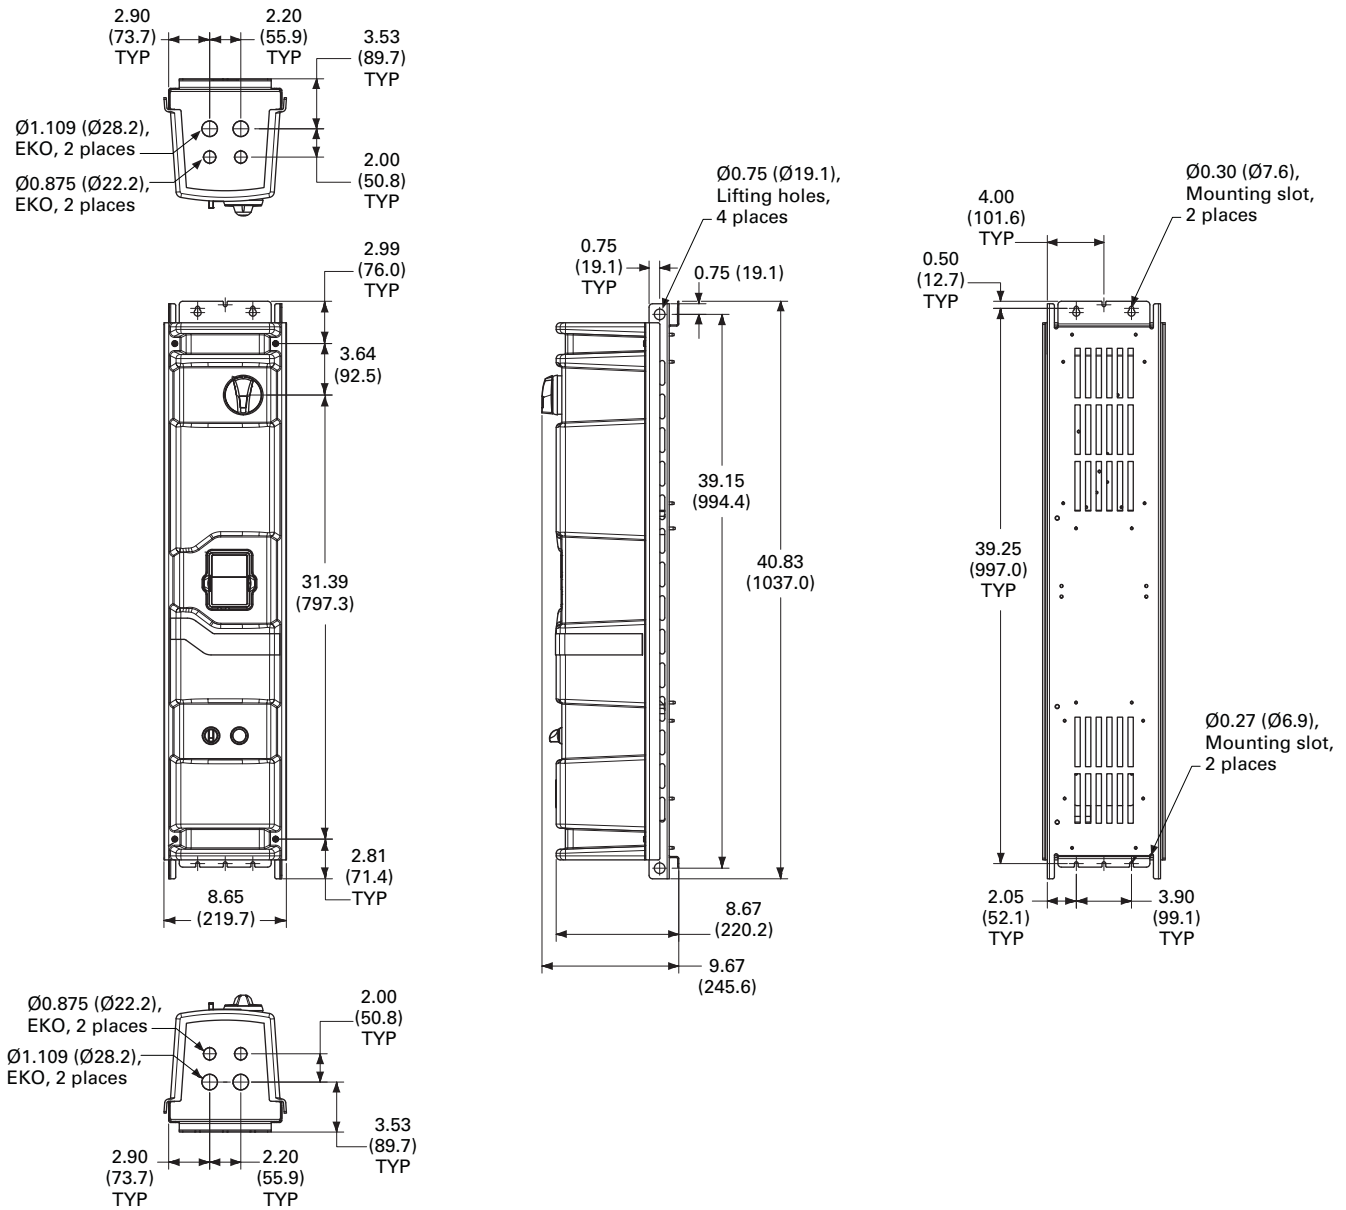

Approximate Dimensions in Inches (mm)

H2S

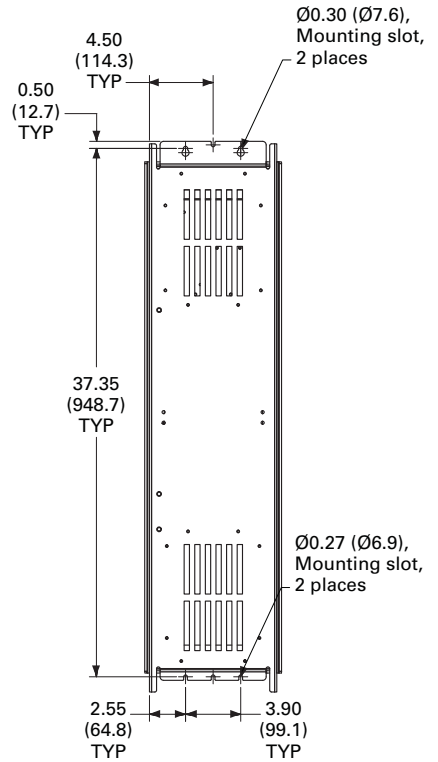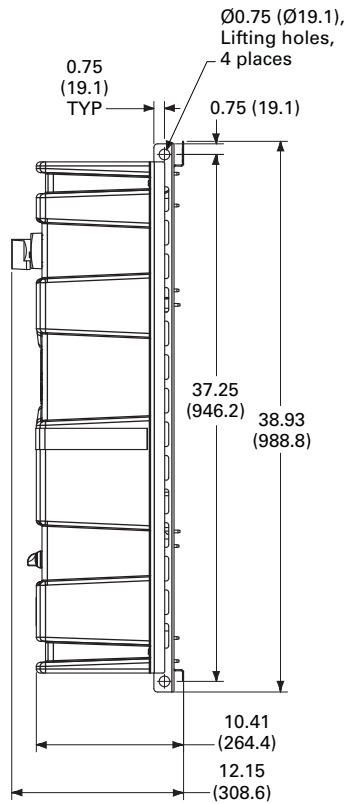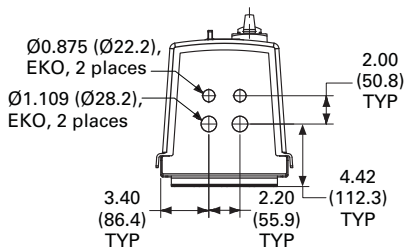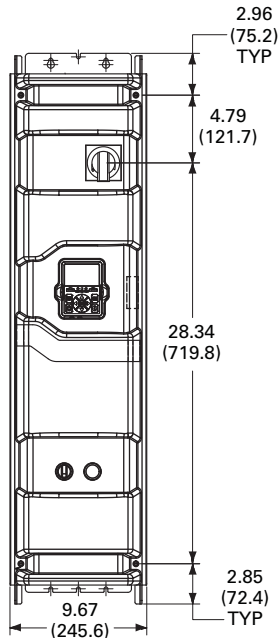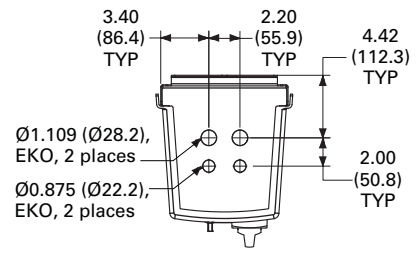

2.8


Adjustable Frequency Drives

PowerXL DH1 Series Drives

Approximate Dimensions in Inches (mm)






H2

2

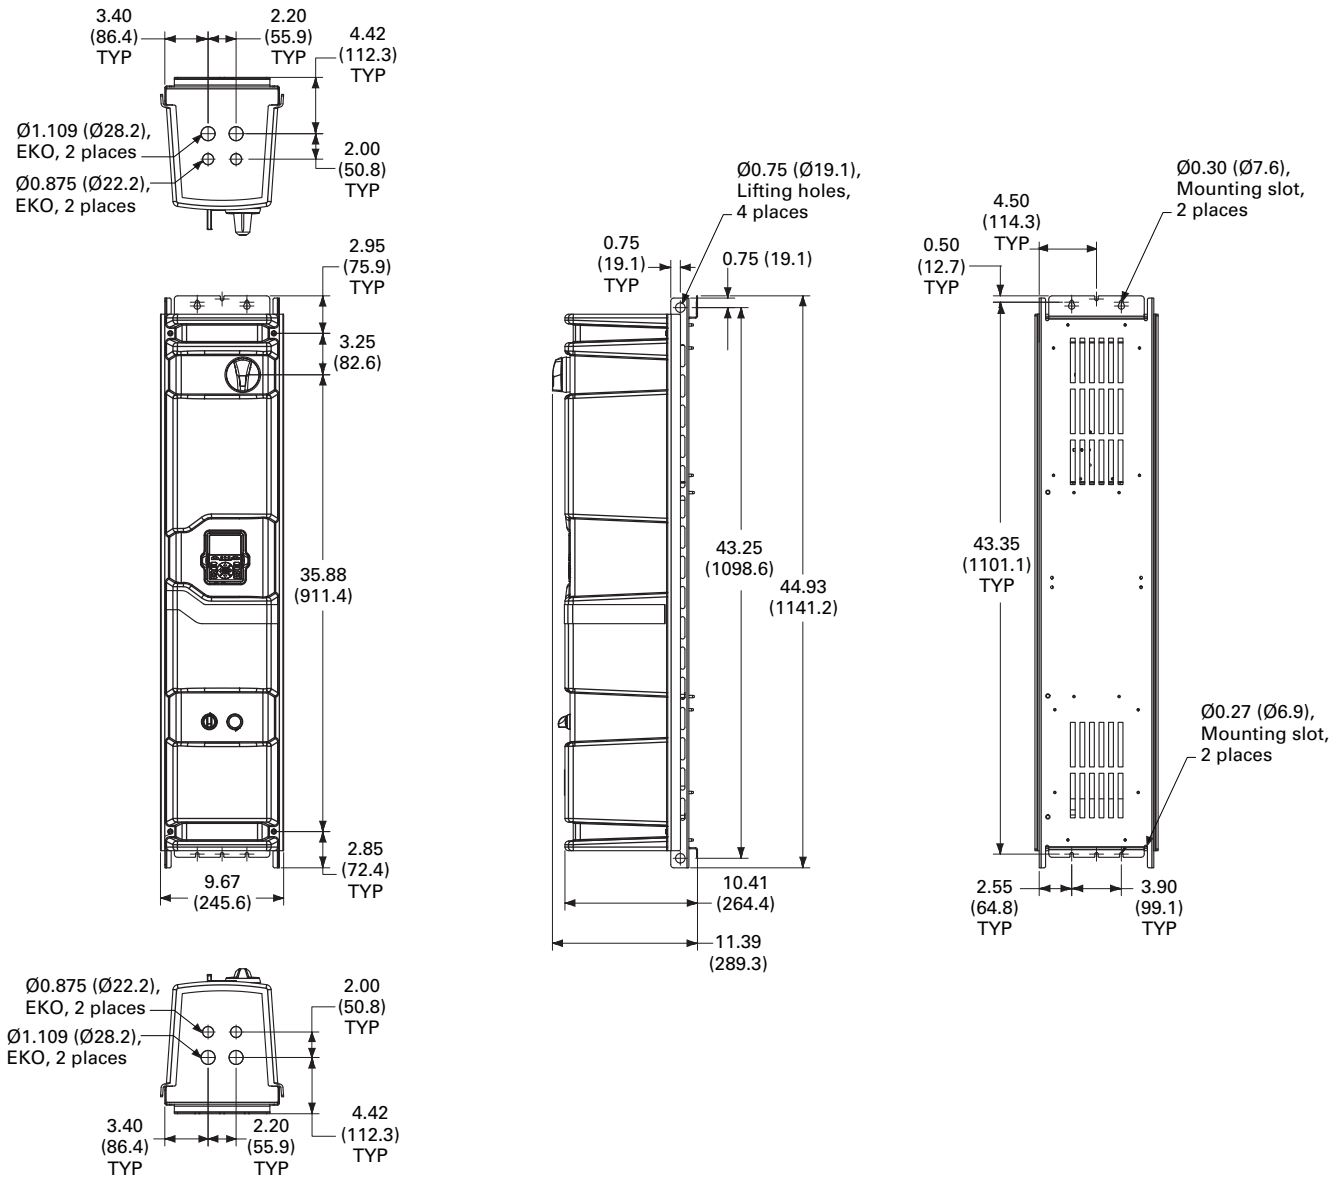

Approximate Dimensions in Inches (mm)

H3

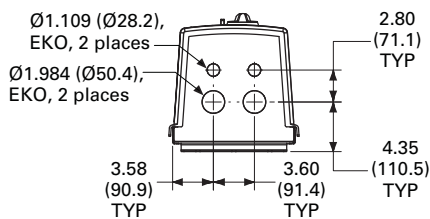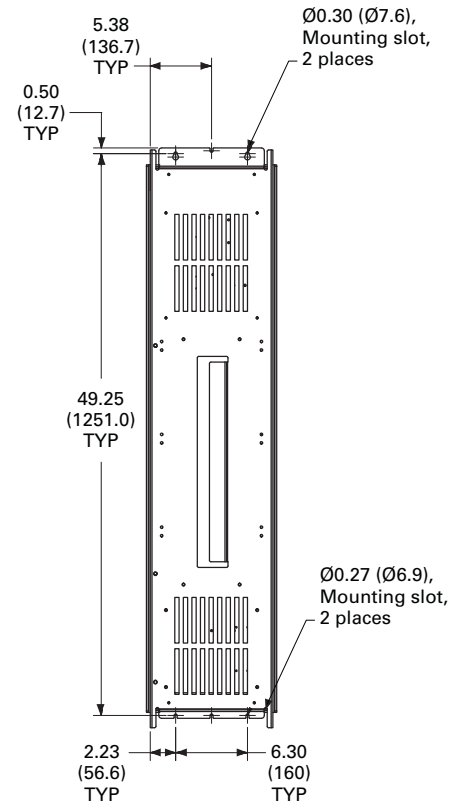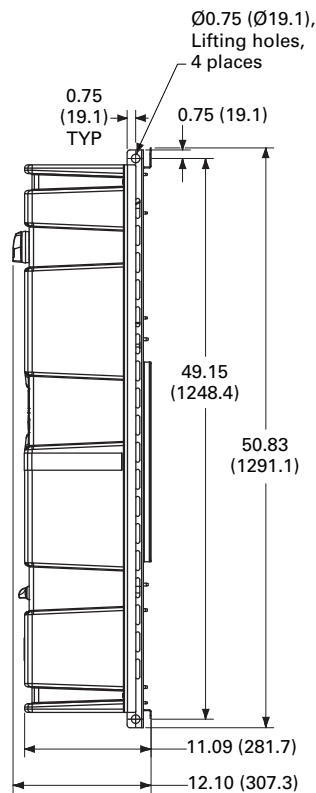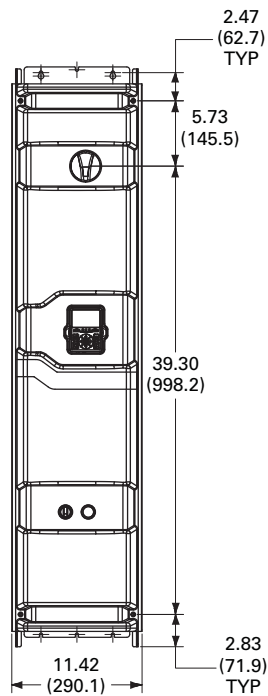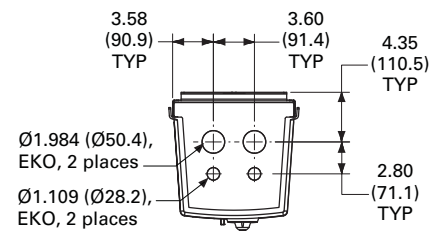

2.8


Adjustable Frequency Drives

PowerXL DH1 Series Drives

Approximate Dimensions in Inches (mm)


H4

2

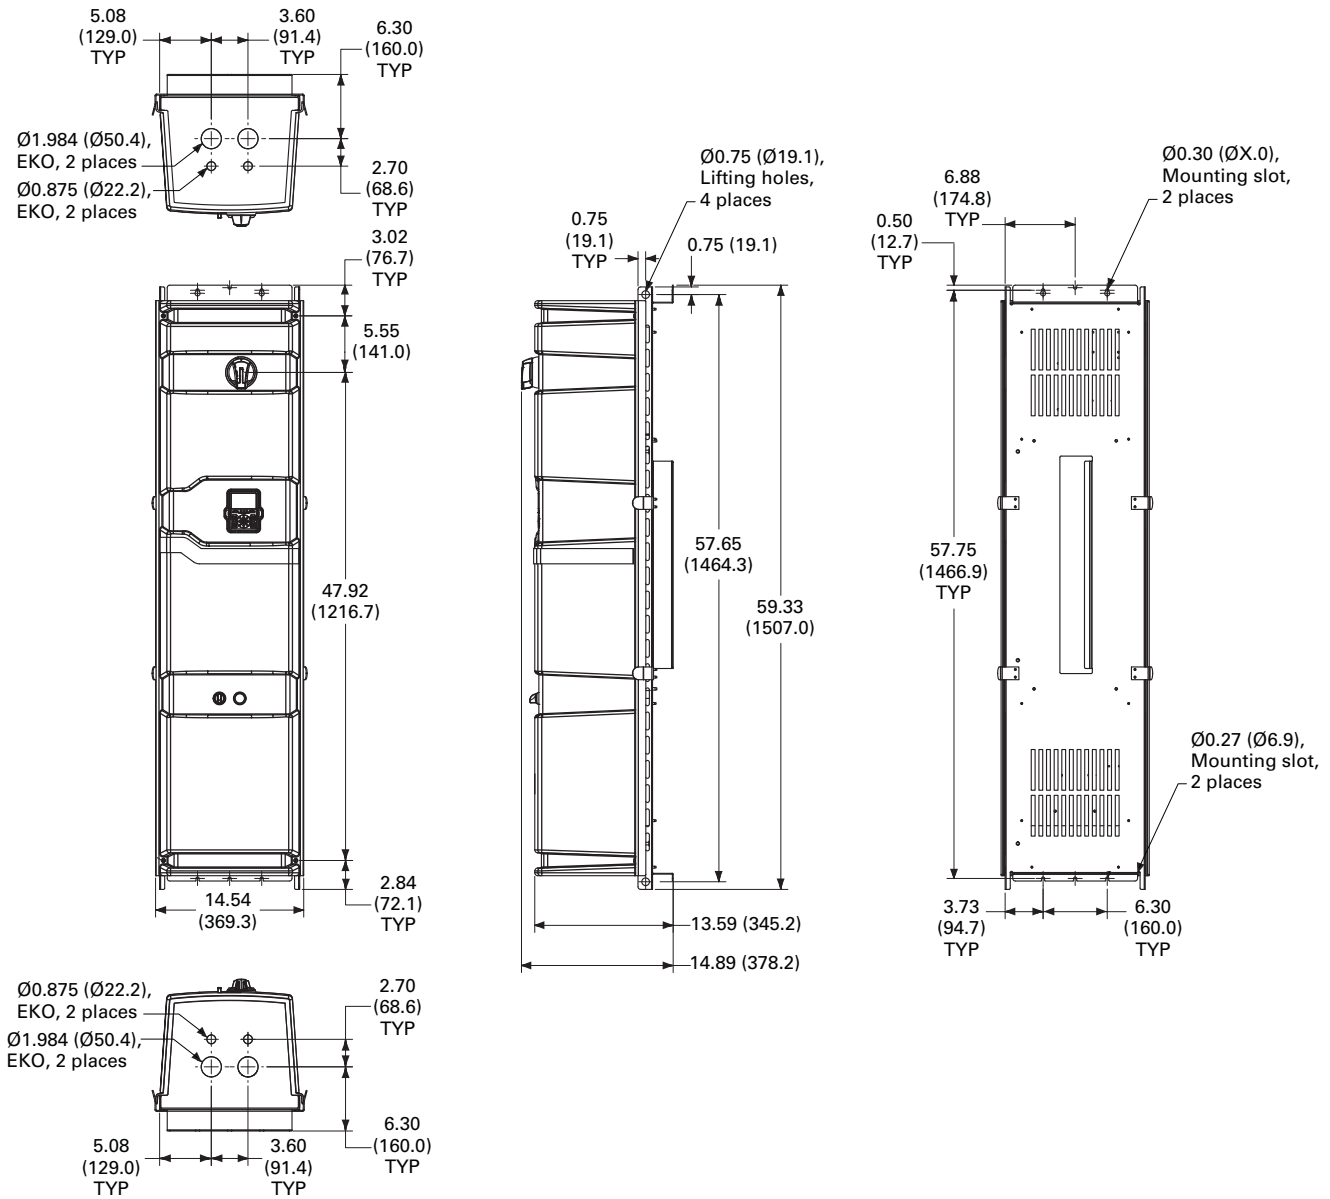


Approximate Dimensions in Inches (mm)

H1D

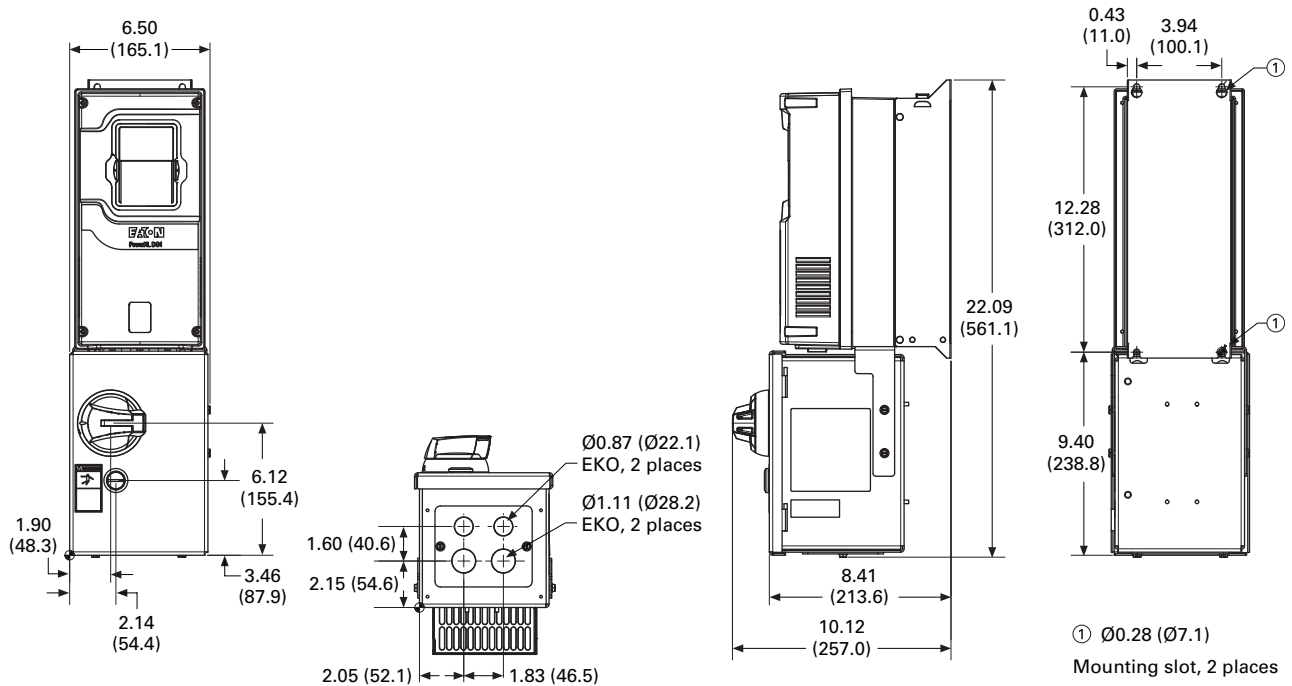

H2D

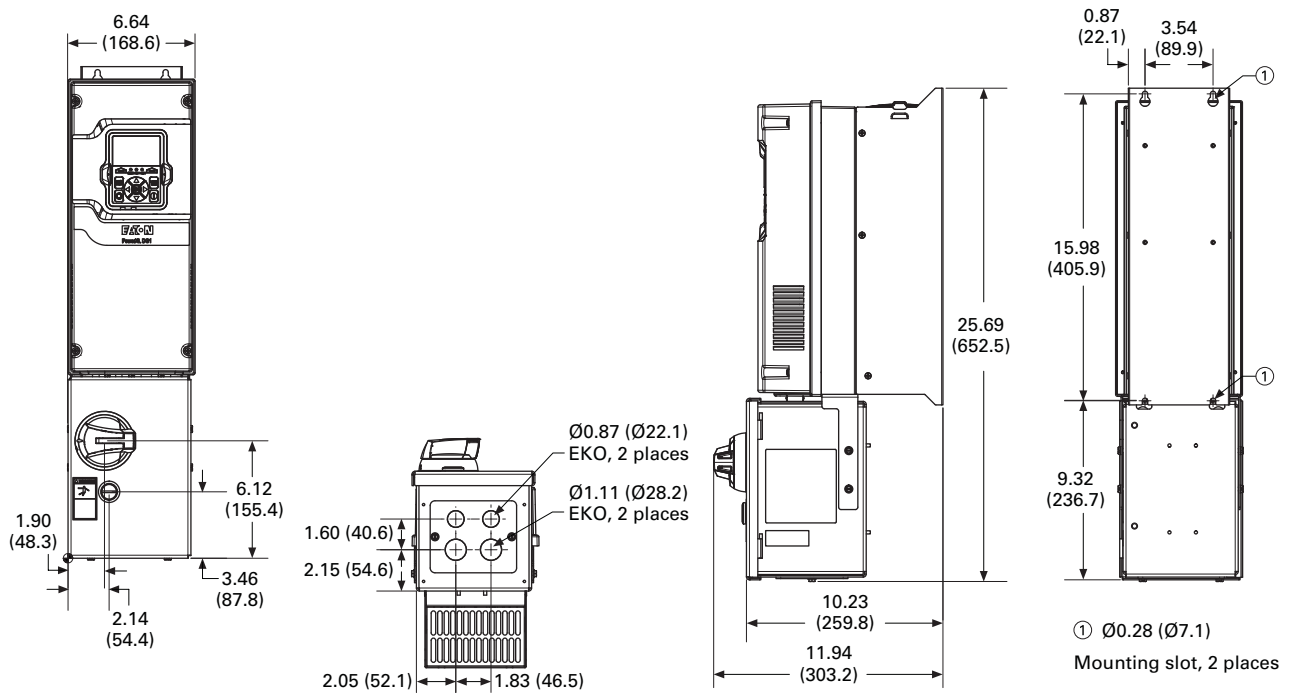

2.8


Adjustable Frequency Drives

PowerXL DH1 Series Drives


Approximate Dimensions in Inches (mm)

H3D



2

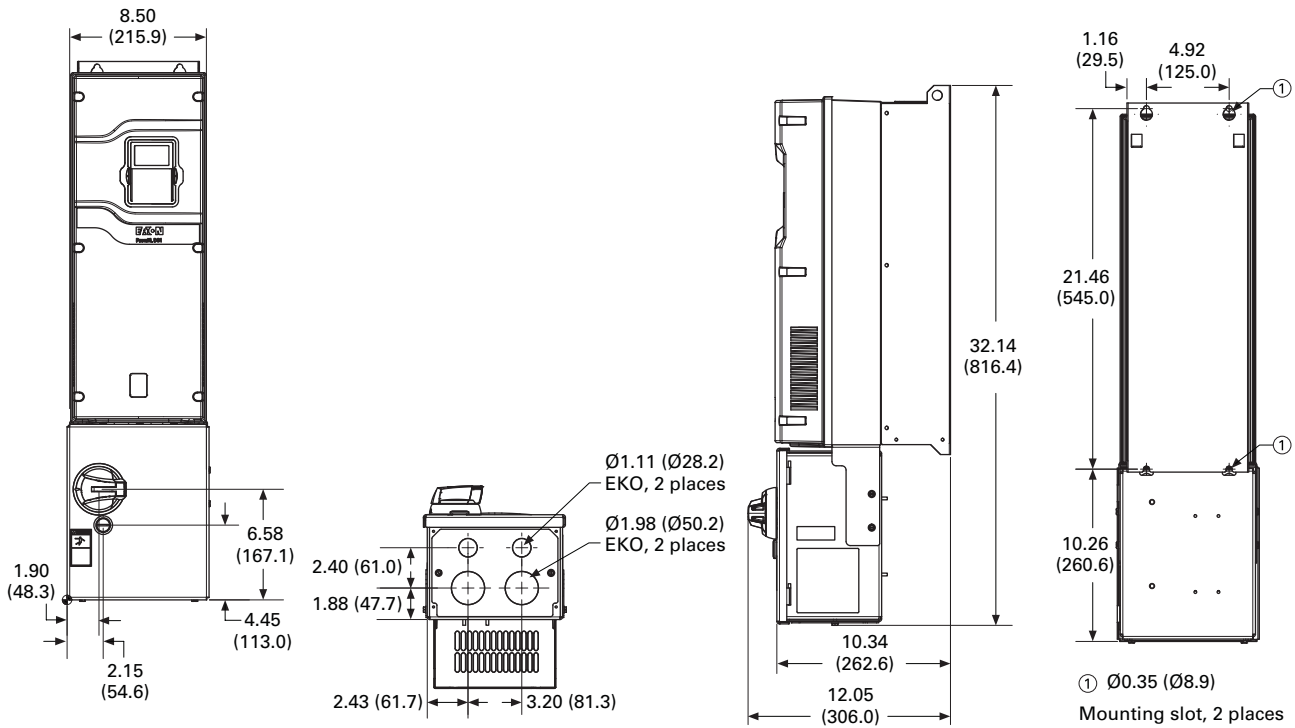

H4D

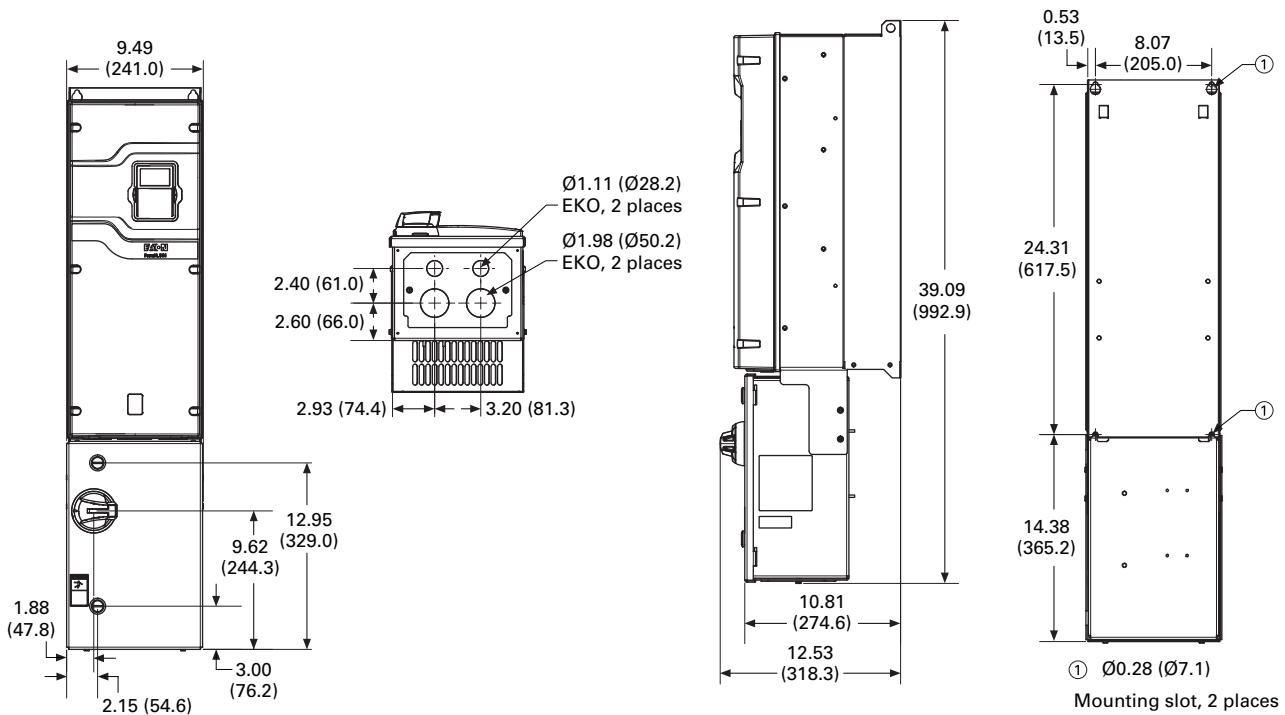

Approximate Dimensions in Inches (mm)

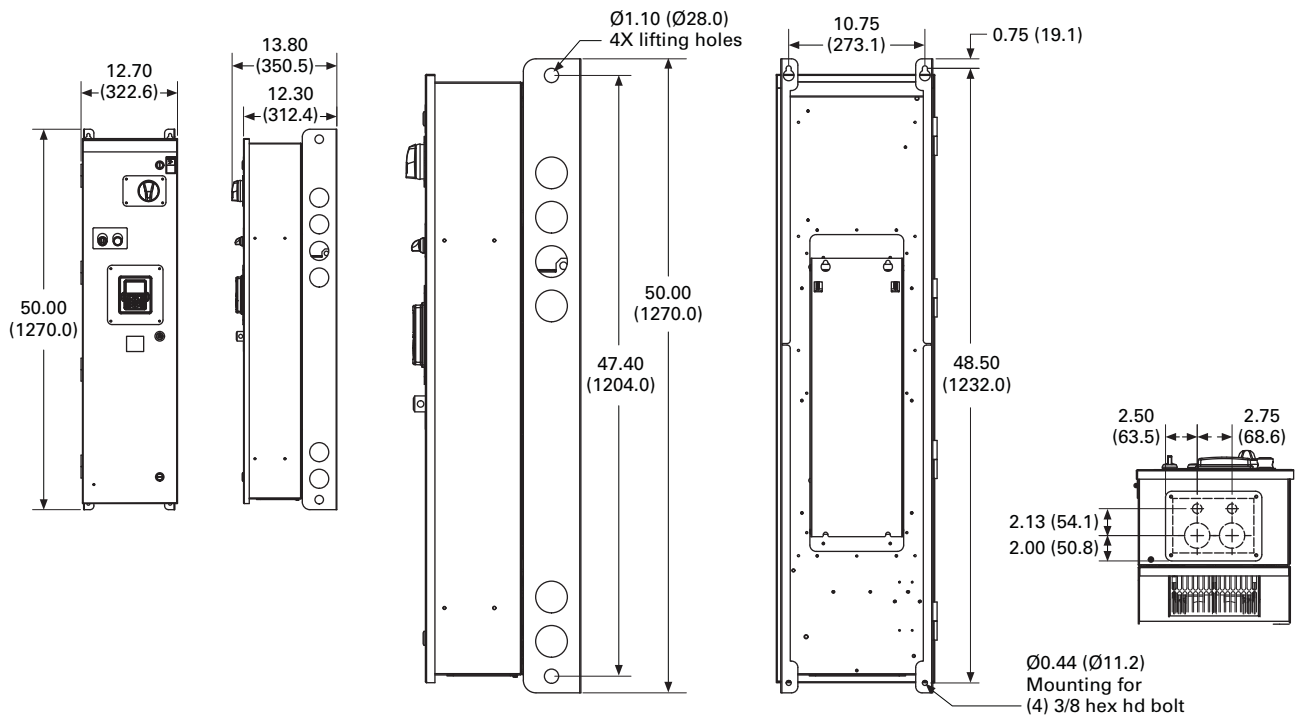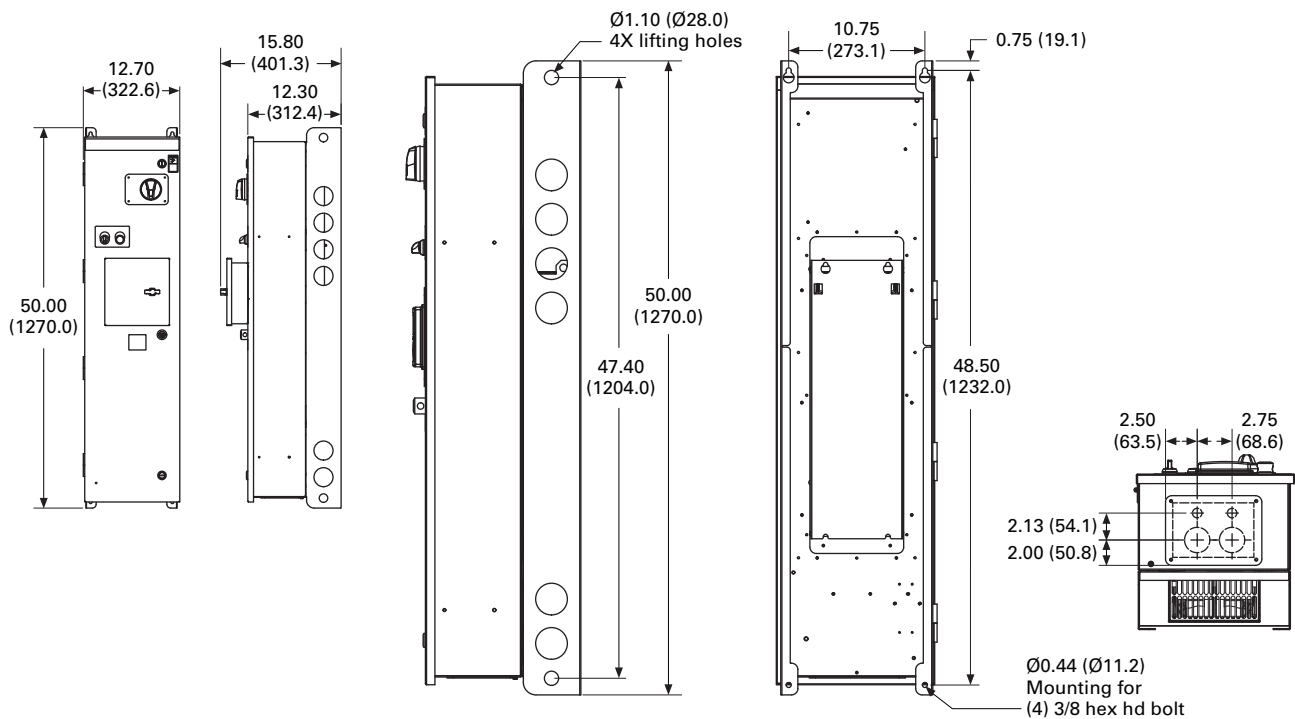H3X—Type 12**H3X—Type 3R**

2.8


Adjustable Frequency Drives

PowerXL DH1 Series Drives


Approximate Dimensions in Inches (mm)

BX—Type 12

2

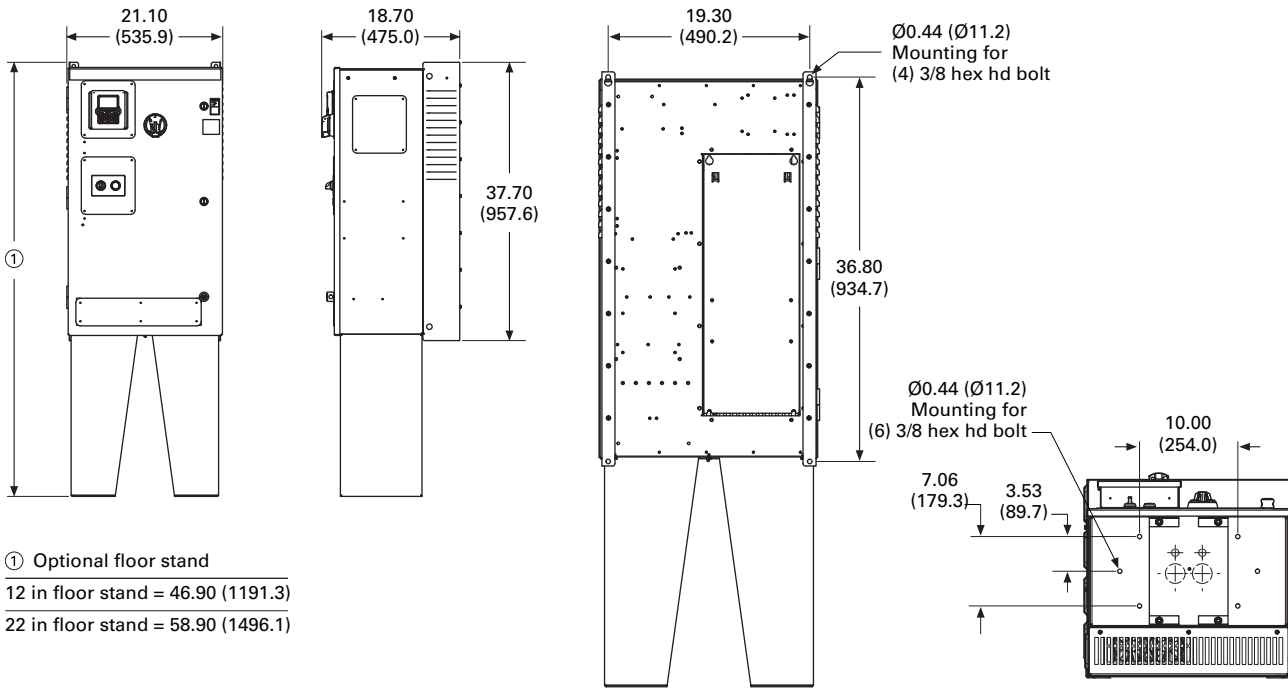


BX—Type 3R

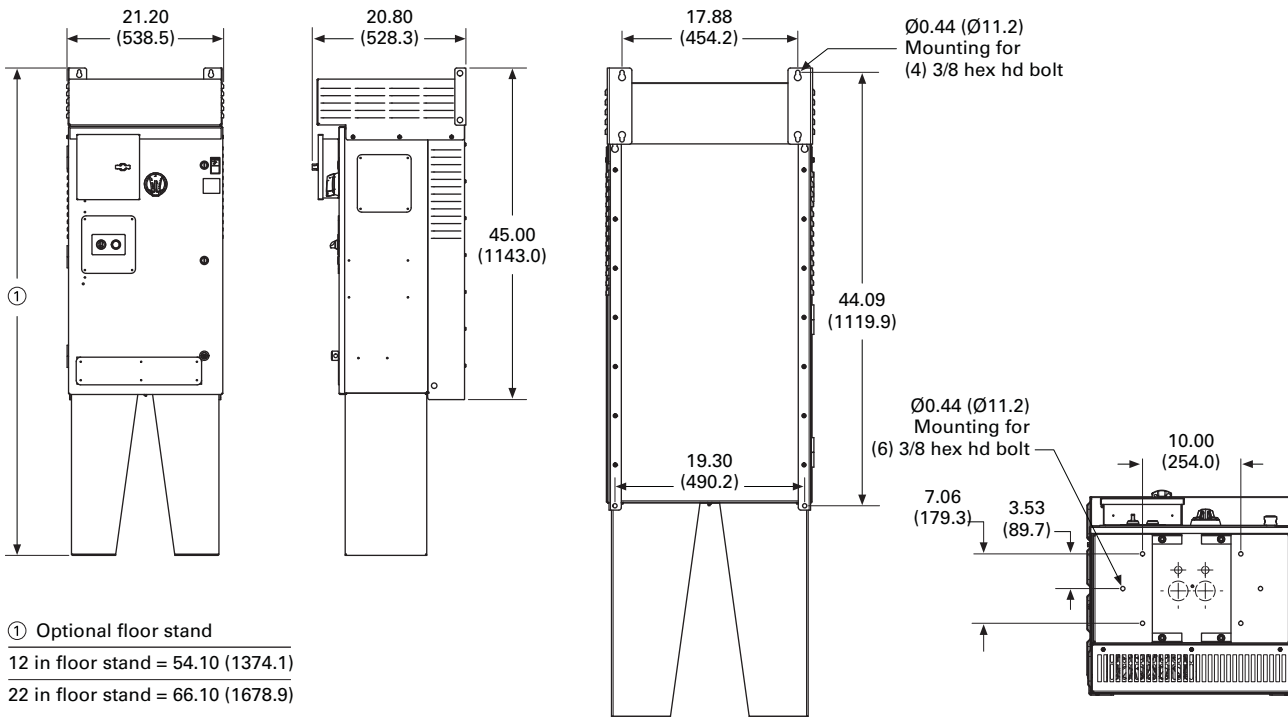


Approximate Dimensions in Inches (mm)

CX—Type 1 and Type 12

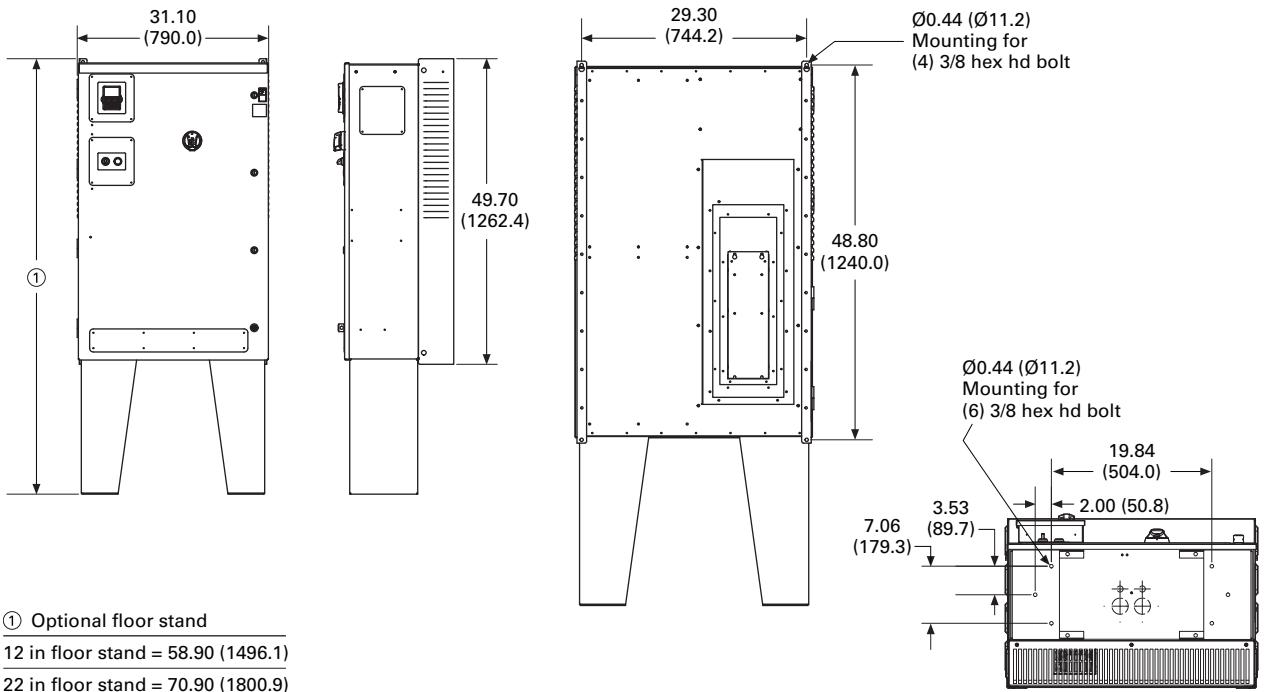

CX—Type 3R

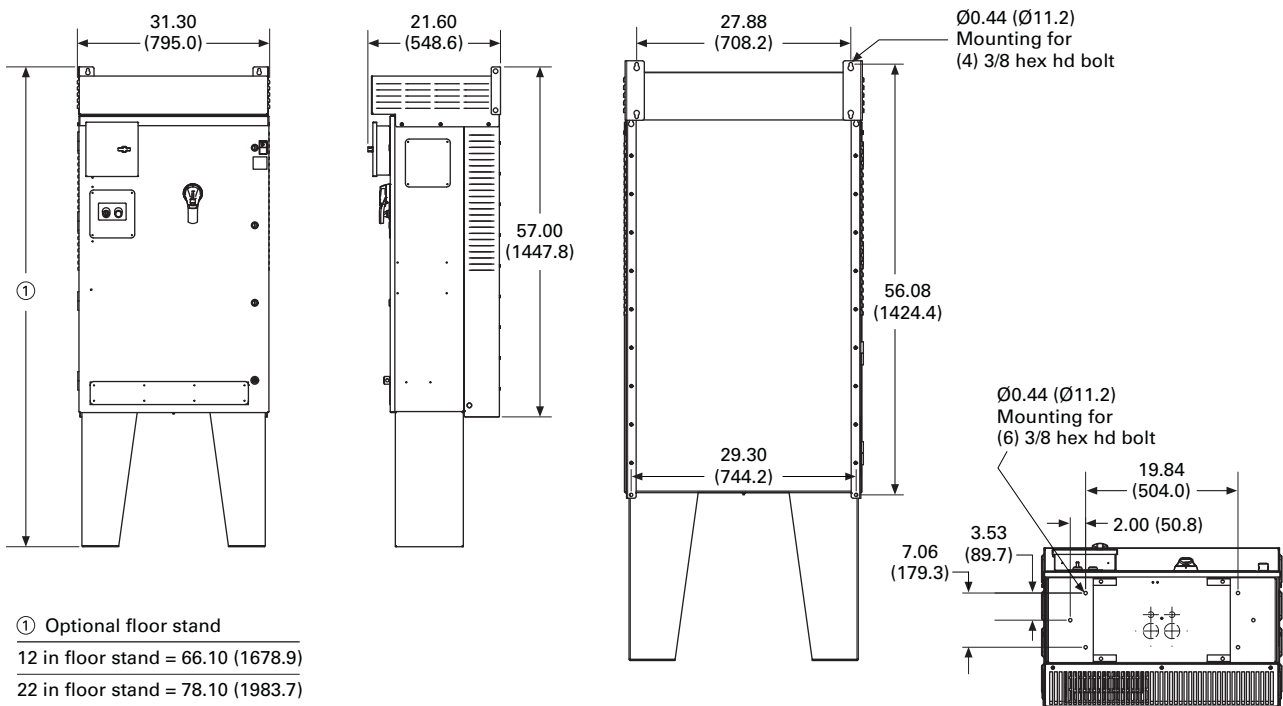

2.8


Adjustable Frequency Drives

PowerXL DH1 Series Drives


Approximate Dimensions in Inches (mm)

CX-XL—Type 1 and Type 12

2

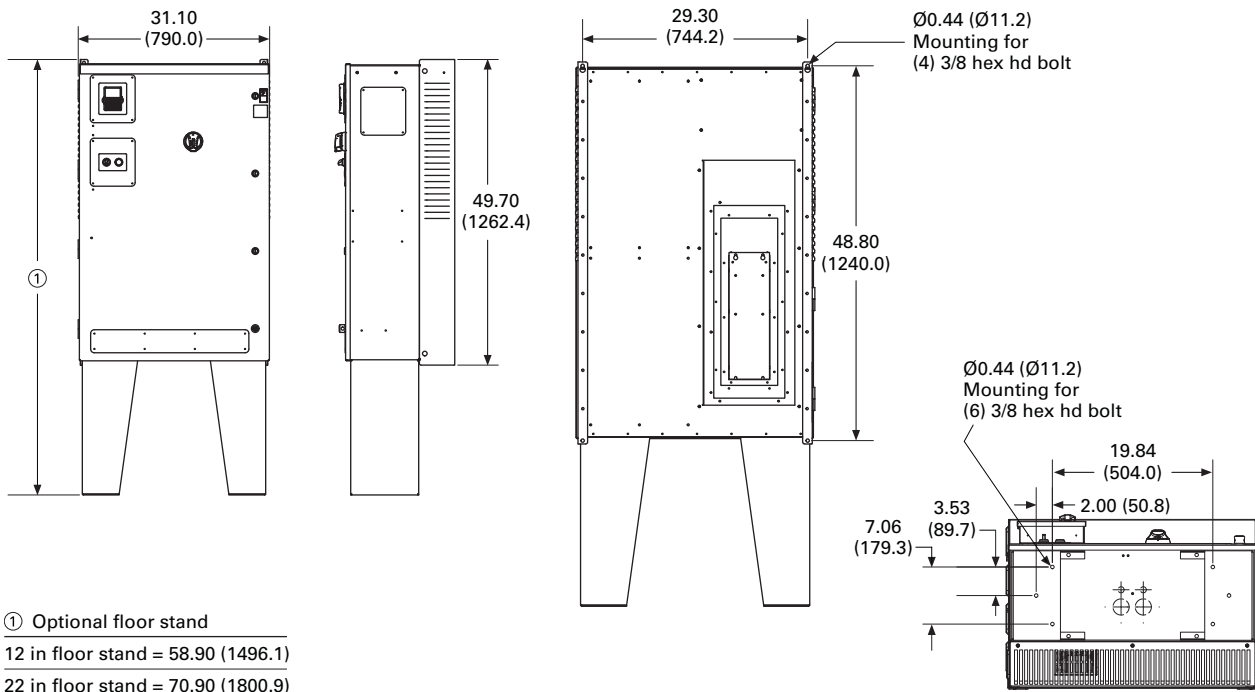


CX-XL—Type 3R

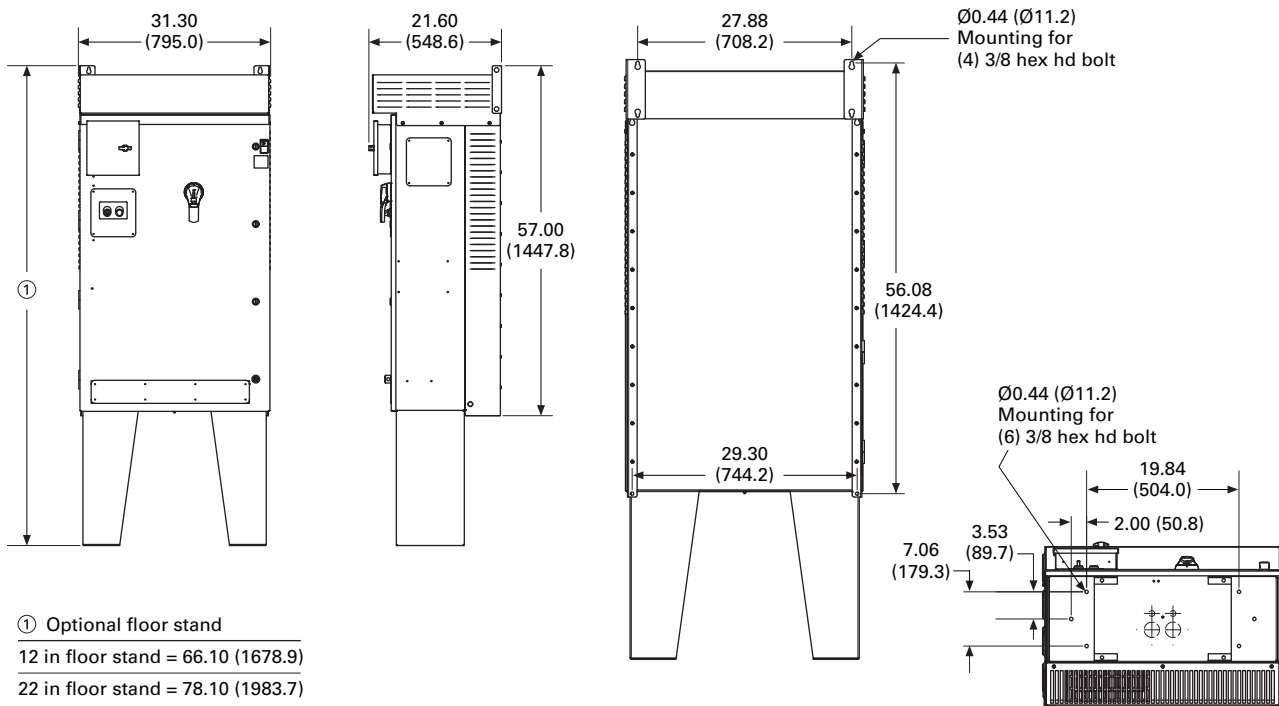


Approximate Dimensions in Inches (mm)

DX—Type 1 and Type 12 (FR5 and FR6)

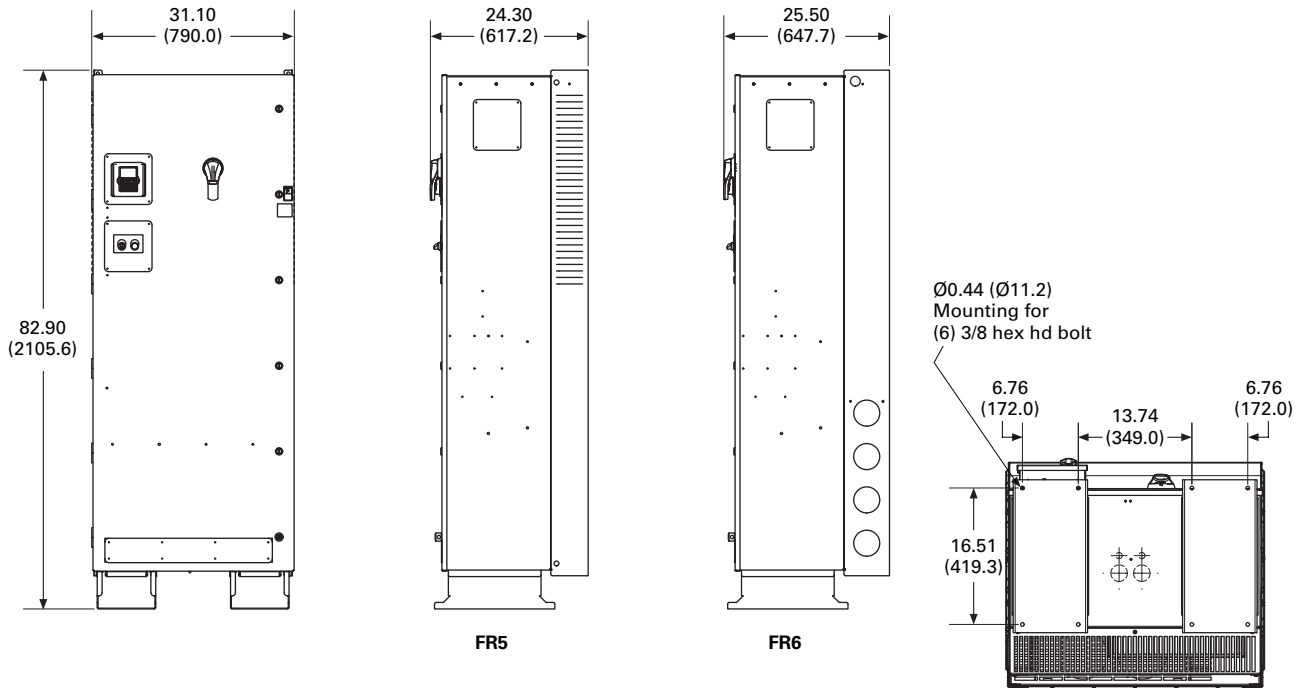

DX—Type 3R (FR5 and FR6)

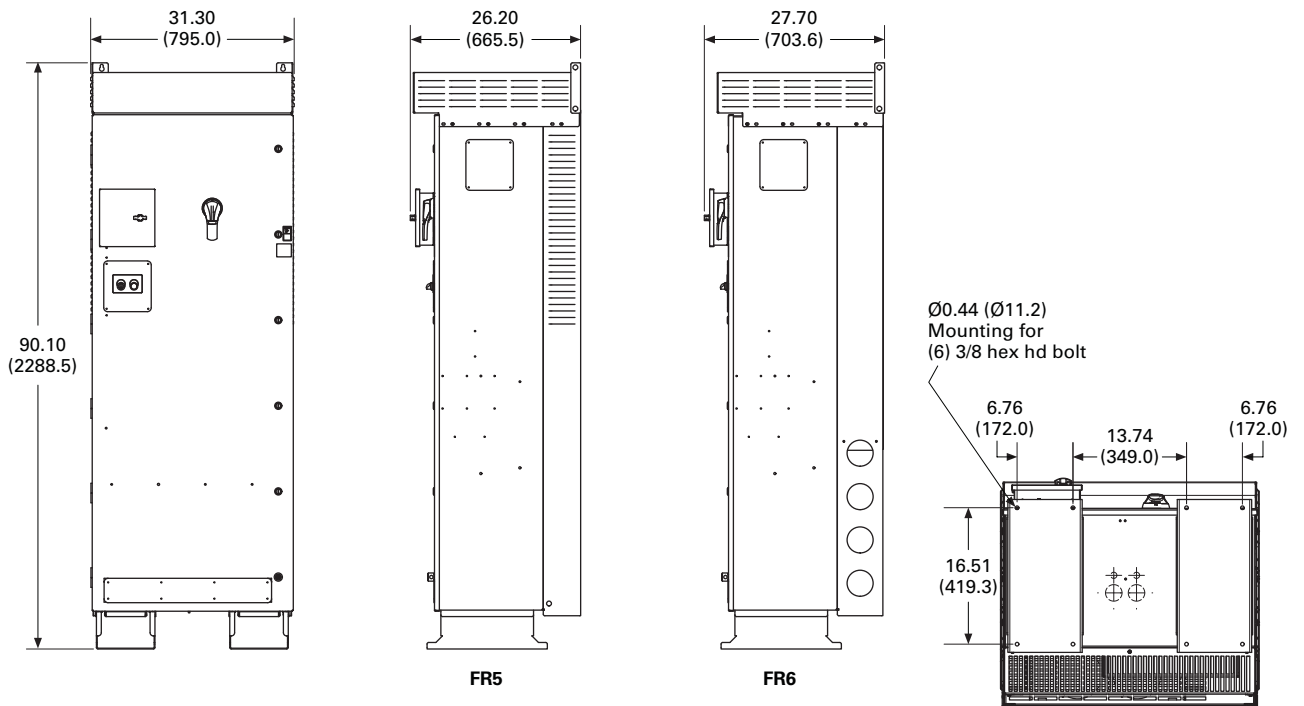

2.8




Adjustable Frequency Drives

PowerXL DH1 Series Drives




Approximate Dimensions in Inches (mm)

DX-XL—Type 1 and Type 12

2

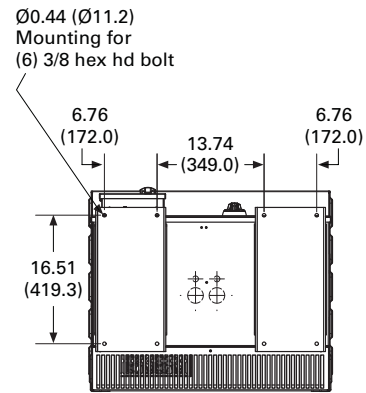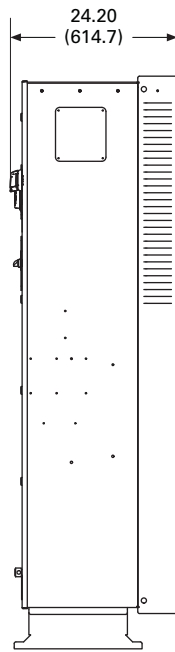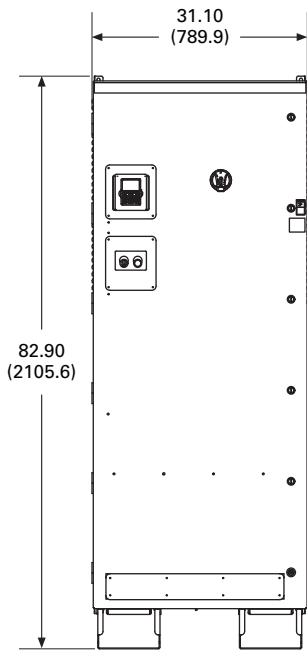


DX-XL—Type 3R

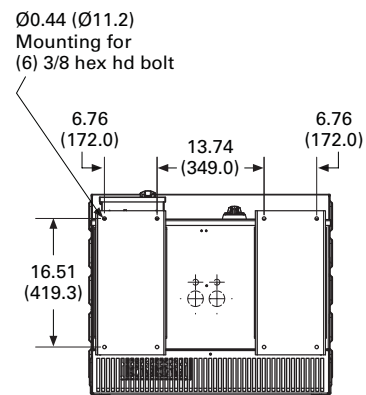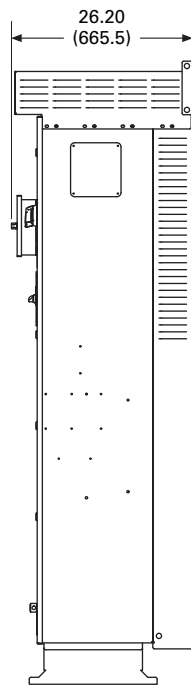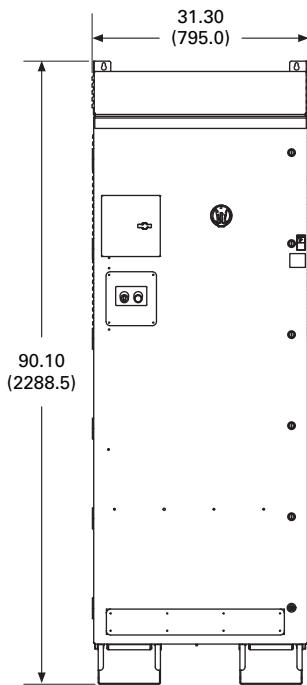


Approximate Dimensions in Inches (mm)

EX-XL—Type 1 and Type 12

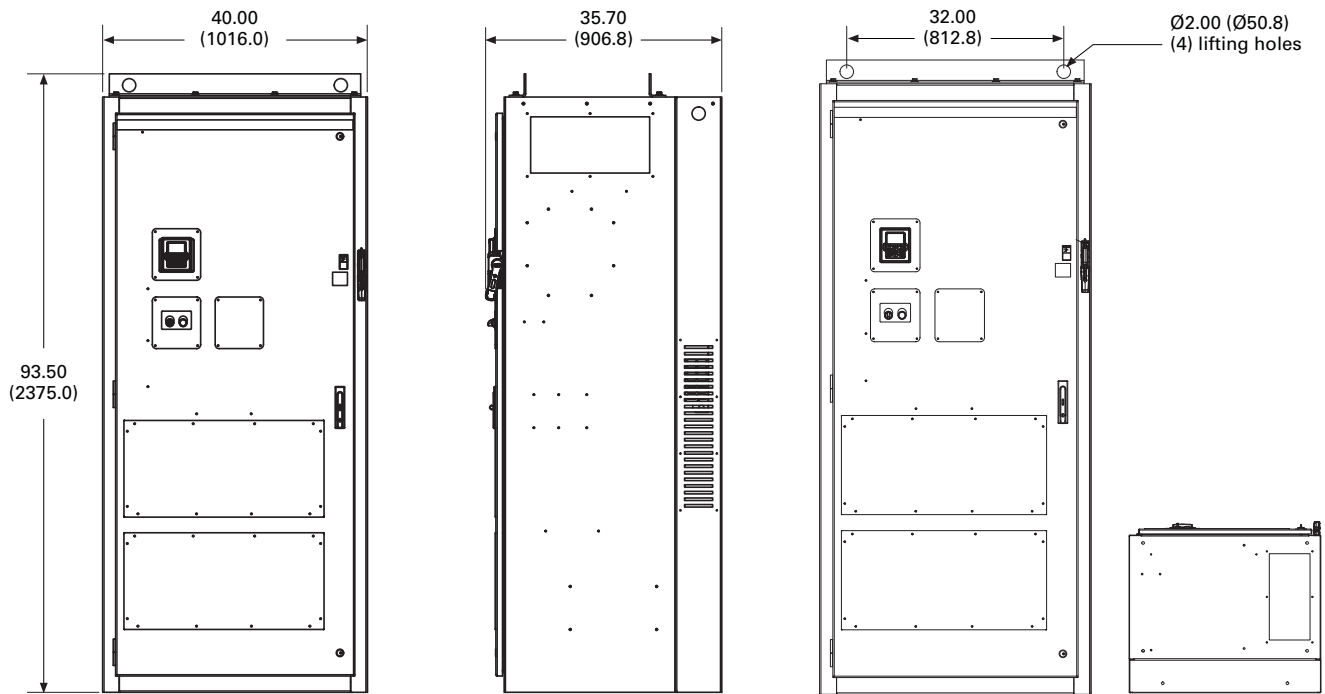

EX-XL—Type 3R

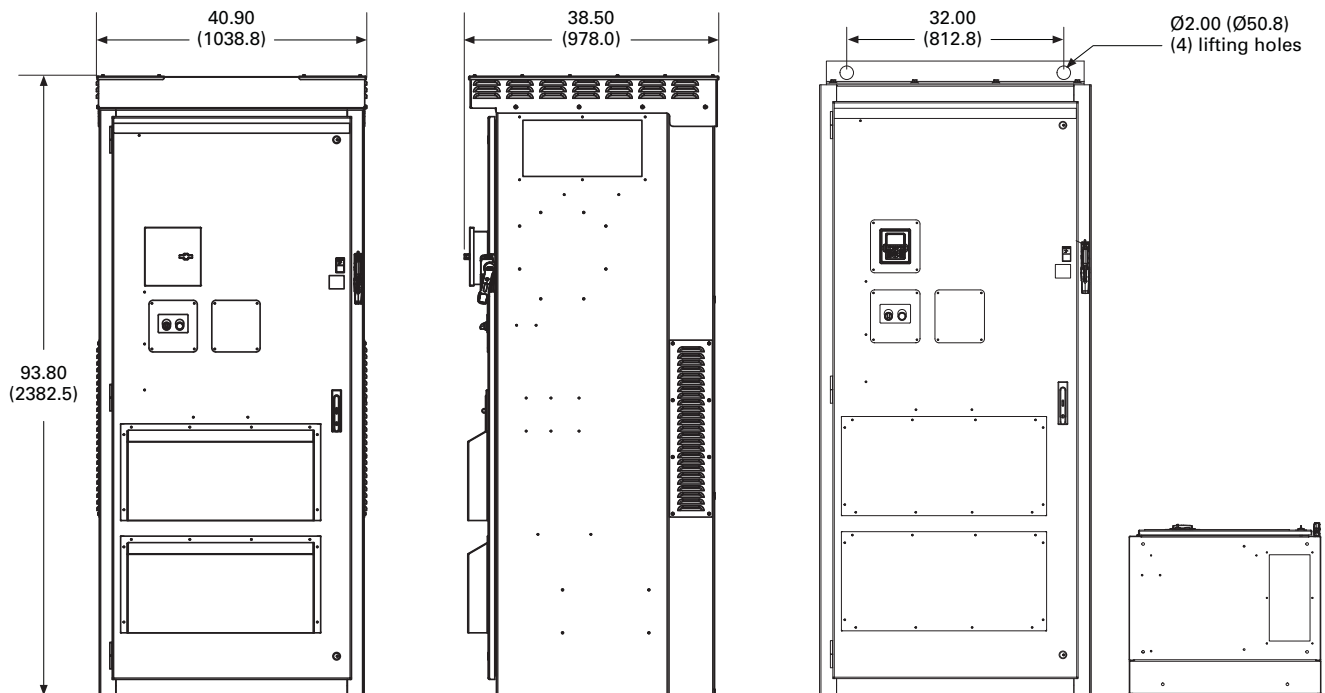

2.8


Adjustable Frequency Drives

PowerXL DH1 Series Drives


Approximate Dimensions in Inches (mm)

FX-XL—Type 1 and Type 12

2

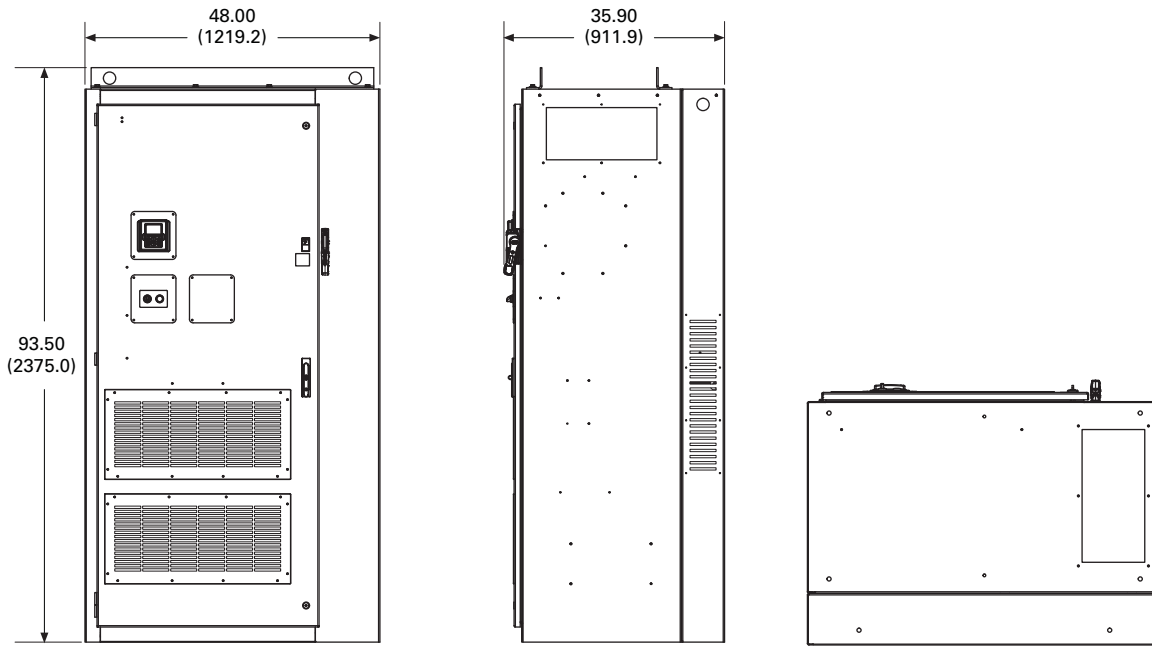

FX-XL—Type 3R

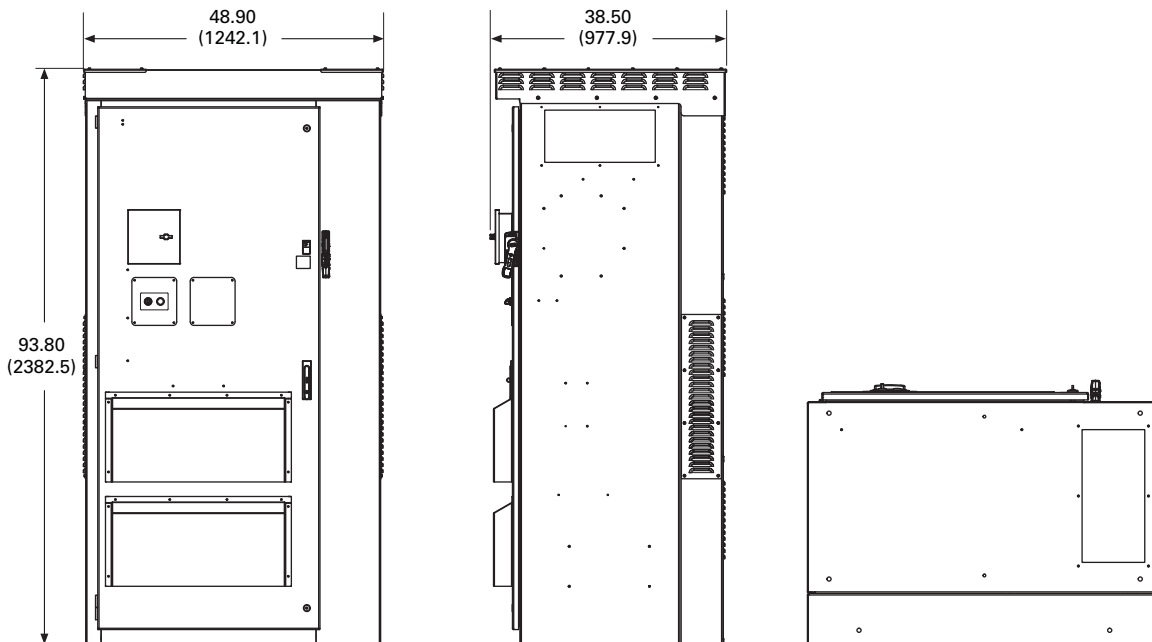

H-Max Drives



H-Max Drives

Product Description

Eaton's H-Max Series VFD has software and hardware designed specifically for the HVAC, pump industry. The ultra-efficient DC capacitor and power structure allows the drive to consume less energy, lowering greenhouse gases.

The I/O configuration is designed with wiring ergonomics in mind by including removable terminal blocks. The main, easily removable, control board used for all drive frames with six digital IN, two analog IN, one analog OUT, three relay OUT accepts two additional I/O or communication board. In addition, the control board has built-in RS-485 and Ethernet communication.

These drives continue the tradition of robust performance, and raise the bar on features and functionality, ensuring the best solution at the right price.

In addition to the Active Energy Control Algorithm to maximize motor efficiency, the drive boasts an ultra-efficient DC capacitor and power structure to allow less energy consumption, lowering greenhouse gases.

Features and Benefits

Hardware

- Thin metal capacitor design—ultra-efficient drive operation and extended self life (up to five years without reforming)
- Integrated 5% DC link choke with Input surge protection—protects against voltage spikes and provides a clean wave form to the motor
- EMI/RFI filters standard on all drives—meets EMC Category 2 for commercial applications
- Real-time clock—supports calendaring and time stamped fault history
- Graphic LCD display and keypad—supports simple menu navigation as well as on-screen diagnostics and troubleshooting
- HAND-OFF-AUTO and drive-bypass selector on keypad—simplifies control
- Standard I/O: 6DI, 2AI, 1AO, 2 Form C RO (NO/NC), 1 Form A RO (NO)—supports requirements for most installations

Contents


Description

| Description | Page |
|--|-----------|
| H-Max Drives | |
| Catalog Number Selection | V6-T2-224 |
| Product Selection | V6-T2-225 |
| Accessories | V6-T2-229 |
| Replacement Parts | V6-T2-229 |
| Technical Data and Specifications | V6-T2-232 |
| Wiring Diagram | V6-T2-233 |
| Dimensions | V6-T2-234 |
| H-Max IntelliPass and IntelliDisconnect Drives | V6-T2-235 |

Standards and Certifications

Product

- IEC 61800-5-1
- CE
- UL508C
- cUL
- C-Tick Mark
- OSHPD Seismic Certified
- Plenum Rated



- Onboard RS 485: Modbus, N2, BACnet—meets needs of most communication requirements
- Onboard Ethernet: BACnet/IP, Modbus/TCP—meets needs of most communication requirements
- Two expansion slots—intended to support additional I/O or communication protocols as necessary
- Quick disconnect terminals for I/O connections—supports fast easy installation

Software

- Active energy control—minimizes energy losses in your motor resulting in industry leading energy efficiency for your application
- Quick Start Wizard upon initial power up—supports fast easy installation
- Copy/paste functionality on drive keypad—allows for fast setup of multiple drives
- Pre-programmed I/O—supports fast easy installation for most applications

2.9


Adjustable Frequency Drives

H-Max Series Drives

Catalog Number Selection

H-Max Series Drives

2

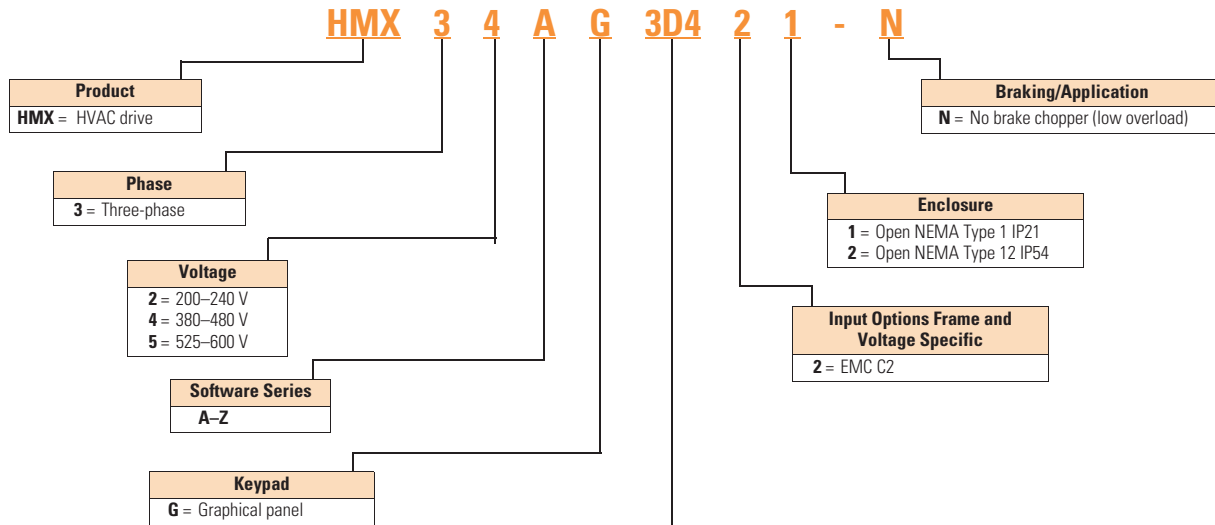

| Amperes | | |
|-------------------------------------|-----------------------------------|------------------------------------|
| 200–240 Volts | 380–480 Volts | 525–600 Volts |
| 3D7 = 3.7 A–0.75 hp, 0.55 kW | 3D4 = 3.4 A–1.5 hp, 1.1 kW | 3D9 = 3.9 A, 3 hp, 2.2 kW |
| 4D8 = 4.8 A–1 hp, 0.75 kW | 4D8 = 4.8–2 hp, 1.5 kW | 6D1 = 6.1 A, 5 hp, 3.7 kW |
| 6D6 = 6.6 A–1.5 hp, 1.1 kW | 5D6 = 5.6 A–3 hp, 2.2 kW | 9D0 = 9 A, 7.5 hp, 5.5 kW |
| 8D0 = 8 A–2 hp, 1.5 kW | 8D0 = 8 A–4 hp, 3 kW | 011 = 11 A, 10 hp, 7.5 kW |
| 011 = 11 A–3 hp, 2.2 kW | 9D6 = 9.6 A–5 hp, 4 kW | 018 = 18 A, 15 hp, 11 kW |
| 012 = 12 A–4 hp, 3 kW | 012 = 12 A–7.5 hp, 5.5 kW | 022 = 22 A, 20 hp, 15 kW |
| 018 = 18 A–5 hp, 4 kW | 016 = 16 A–10 hp, 7.5 kW | 027 = 27 A, 25 hp, 18 kW |
| 024 = 24 A–7.5 hp, 5.5 kW | 023 = 23 A–15 hp, 11 kW | 034 = 34 A, 30 hp, 22 kW |
| 031 = 31 A–10 hp, 7.5 kW | 031 = 31 A–20 hp, 15 kW | 041 = 41 A, 40 hp, 30 kW |
| 048 = 48 A–15 hp, 11 kW | 038 = 38 A–25 hp, 18.5 kW | 052 = 52 A, 50 hp, 37 kW |
| 062 = 62 A–20 hp, 15 kW | 046 = 46 A–30 hp, 22 kW | 062 = 62 A, 60 hp, 45 kW |
| 075 = 75 A–25 hp, 18.5 kW | 061 = 61 A–40 hp, 30 kW | 080 = 80 A, 75 hp, 55 kW |
| 088 = 88 A–30 hp, 22 kW | 072 = 72 A–50 hp, 37 kW | 100 = 100 A, 100 hp, 75 kW |
| 105 = 105 A–40 hp, 30 kW | 087 = 87 A–60 hp, 45 kW | 125 = 125 A, 125 hp, 90 kW |
| 140 = 140 A–50 hp, 37 kW | 105 = 105 A–75 hp, 55 kW | 144 = 144 A, 150 hp, 110 kW |
| 170 = 170 A–60 hp, 45 kW | 140 = 140 A–100 hp, 75 kW | 208 = 208 A, 200 hp, 160 kW |
| 205 = 205 A–75 hp, 55 kW | 170 = 170 A–125 hp, 90 kW | |
| 261 = 261 A–100 hp, 75 kW | 205 = 205 A–150 hp, 110 kW | |
| 310 = 310 A–125 hp, 90 kW | 261 = 261 A–200 hp, 132 kW | |
| | 310 = 310 A–250 hp, 160 kW | |

Notes

- All boards are varnished (conformed coated). Corrosion resistant.
- Battery included in all drives for real-time clock.
- Keypad kit includes HOA bypass.
- Keypad kit includes HOA, back reset for Europe application.
- EMI/RFI filters included.
- DC link choke included.

Product Selection

H-Max Series Drives—230 Vac

NEMA Type 1



NEMA Type 1/IP21

| FS Frame Size | Drive Output Current | | Assigned Motor Ratings | | | Catalog Number |
|---------------|--------------------------------------|------------|---------------------------|-----------------------|--------------------------------------|----------------|
| | Low Overload Full Load Amps at 40 °C | Horsepower | Drive kW 230 Vac/50 Hz | 230 Vac NEC Amps ① | Low Overload Full Load Amps at 50 °C | |
| 4 | 3.7 | 0.75 | 0.55 | 3.2 | 2.6 | HMX32AG3D721-N |
| | 4.8 | 1 | 0.75 | 4.2 | 3.7 | HMX32AG4D821-N |
| | 6.6 | 1.5 | 1.1 | 6.6 | 4.8 | HMX32AG6D621-N |
| | 8 | 2 | 1.5 | 6.8 | 6.6 | HMX32AG8D021-N |
| | 11 | 3 | 2.2 | 9.6 | 8 | HMX32AG01121-N |
| | 12.5 | 4 | 3 | N/A | 11 | HMX32AG01221-N |
| 5 | 18 | 5 | 4 | 15.2 | 12.5 | HMX32AG01821-N |
| | 24 | 7.5 | 5.5 | 22 | 18 | HMX32AG02421-N |
| | 31 | 10 | 7.5 | 28 | 24 | HMX32AG03121-N |
| 6 | 48 | 15 | 11 | 42 | 31 | HMX32AG04821-N |
| | 62 | 20 | 15 | 54 | 48 | HMX32AG06221-N |
| 7 | 75 | 25 | 18.5 | 68 | 62 | HMX32AG07521-N |
| | 88 | 30 | 22 | 80 | 75 | HMX32AG08821-N |
| | 105 | 40 | 30 | 104 | 88 | HMX32AG10521-N |
| 8 | 140 | 50 | 37 | 130 | 105 | HMX32AG14021-N |
| | 170 | 60 | 45 | 154 | 140 | HMX32AG17021-N |
| | 205 | 75 | 55 | 192 | 170 | HMX32AG20521-N |
| 9 | 261 | 100 | 75 | 248 | 205 | HMX32AG26121-N |
| | 310 | 125 | 90 | N/A | 261 | HMX32AG31021-N |

NEMA Type 12



NEMA Type 12/IP54

| FS Frame Size | Drive Output Current | | Assigned Motor Ratings | | | Catalog Number |
|---------------|--------------------------------------|------------|---------------------------|-----------------------|--------------------------------------|----------------|
| | Low Overload Full Load Amps at 40 °C | Horsepower | Drive kW 230 Vac/50 Hz | 230 Vac NEC Amps ① | Low Overload Full Load Amps at 50 °C | |
| 4 | 3.7 | 0.75 | 0.55 | 3.2 | 2.6 | HMX32AG3D722-N |
| | 4.8 | 1 | 0.75 | 4.2 | 3.7 | HMX32AG4D822-N |
| | 6.6 | 1.5 | 1.1 | 6.6 | 4.8 | HMX32AG6D622-N |
| | 8 | 2 | 1.5 | 6.8 | 6.6 | HMX32AG8D022-N |
| | 11 | 3 | 2.2 | 9.6 | 8 | HMX32AG01122-N |
| | 12.5 | 4 | 3 | N/A | 11 | HMX32AG01222-N |
| 5 | 18 | 5 | 4 | 15.2 | 12 | HMX32AG01822-N |
| | 24 | 7.5 | 5.5 | 22 | 18 | HMX32AG02422-N |
| | 31 | 10 | 7.5 | 28 | 24 | HMX32AG03122-N |
| 6 | 48 | 15 | 11 | 42 | 31 | HMX32AG04822-N |
| | 62 | 20 | 15 | 54 | 48 | HMX32AG06222-N |
| 7 | 75 | 25 | 18.5 | 68 | 62 | HMX32AG07522-N |
| | 88 | 30 | 22 | 80 | 75 | HMX32AG08822-N |
| | 105 | 40 | 30 | 104 | 88 | HMX32AG10522-N |
| 8 | 140 | 50 | 37 | 130 | 105 | HMX32AG14022-N |
| | 170 | 60 | 45 | 154 | 140 | HMX32AG17022-N |
| | 205 | 75 | 55 | 192 | 170 | HMX32AG20522-N |
| 9 | 261 | 100 | 75 | 248 | 205 | HMX32AG26122-N |
| | 310 | 125 | 90 | N/A | 261 | HMX32AG31022-N |

Note

① For sizing reference.

H-Max Series Drives—480 Vac

2

NEMA Type 1



NEMA Type 1/IP21

| FS Frame Size | Drive Output Current | | Assigned Motor Ratings | | | Catalog Number |
|---------------|--------------------------------------|------------|---------------------------|-----------------------|--------------------------------------|----------------|
| | Low Overload Full Load Amps at 40 °C | Horsepower | Drive kW 400 Vac/50 Hz | 480 Vac NEC Amps ① | Low Overload Full Load Amps at 50 °C | |
| 4 | 3.4 | 1.5 | 1.1 | 2.1 | 2.6 | HMX34AG3D421-N |
| | 4.8 | 2 | 1.5 | 3.4 | 3.4 | HMX34AG4D821-N |
| | 5.6 | 3 | 2.2 | 5.6 | 4.8 | HMX34AG5D621-N |
| | 8.0 | 4 | 3.0 | N/A | 5.6 | HMX34AG8D021-N |
| | 9.6 | 5 | 4 | 7.6 | 8 | HMX34AG9D621-N |
| | 12 | 7.5 | 5.5 | 11 | 9.6 | HMX34AG01221-N |
| 5 | 16 | 10 | 7.5 | 14 | 12 | HMX34AG01621-N |
| | 23 | 15 | 11 | 21 | 16 | HMX34AG02321-N |
| | 31 | 20 | 15 | 27 | 23 | HMX34AG03121-N |
| 6 | 38 | 25 | 18.5 | 34 | 31 | HMX34AG03821-N |
| | 46 | 30 | 22 | 40 | 38 | HMX34AG04621-N |
| | 61 | 40 | 30 | 52 | 46 | HMX34AG06121-N |
| 7 | 72 | 50 | 37 | 65 | 61 | HMX34AG07221-N |
| | 87 | 60 | 45 | 77 | 72 | HMX34AG08721-N |
| | 105 | 75 | 55 | 96 | 87 | HMX34AG10521-N |
| 8 | 140 | 100 | 75 | 124 | 105 | HMX34AG14021-N |
| | 170 | 125 | 90 | 156 | 140 | HMX34AG17021-N |
| | 205 | 150 | 110 | 180 | 170 | HMX34AG20521-N |
| 9 | 261 | 200 | 132 | 240 | 205 | HMX34AG26121-N |
| | 310 | 250 | 160 | 302 | 261 | HMX34AG31021-N |

NEMA Type 12



NEMA Type 12/IP54

| FS Frame Size | Drive Output Current | | Assigned Motor Ratings | | | Catalog Number |
|---------------|--------------------------------------|------------|---------------------------|-----------------------|--------------------------------------|----------------|
| | Low Overload Full Load Amps at 40 °C | Horsepower | Drive kW 400 Vac/50 Hz | 480 Vac NEC Amps ① | Low Overload Full Load Amps at 50 °C | |
| 4 | 3.4 | 1.5 | 1.1 | 2.1 | 2.6 | HMX34AG3D422-N |
| | 4.8 | 2 | 1.5 | 3.4 | 3.4 | HMX34AG4D822-N |
| | 5.6 | 3 | 2.2 | 5.6 | 4.8 | HMX34AG5D622-N |
| | 8.0 | 4 | 3.0 | N/A | 5.6 | HMX34AG8D022-N |
| | 9.6 | 5 | 4 | 7.6 | 8 | HMX34AG9D622-N |
| | 12 | 7.5 | 5.5 | 11 | 9.6 | HMX34AG01222-N |
| 5 | 16 | 10 | 7.5 | 14 | 12 | HMX34AG01622-N |
| | 23 | 15 | 11 | 21 | 16 | HMX34AG02322-N |
| | 31 | 20 | 15 | 27 | 23 | HMX34AG03122-N |
| 6 | 38 | 25 | 18.5 | 34 | 31 | HMX34AG03822-N |
| | 46 | 30 | 22 | 40 | 38 | HMX34AG04622-N |
| | 61 | 40 | 30 | 52 | 46 | HMX34AG06122-N |
| 7 | 72 | 50 | 37 | 65 | 61 | HMX34AG07222-N |
| | 87 | 60 | 45 | 77 | 72 | HMX34AG08722-N |
| | 105 | 75 | 55 | 96 | 87 | HMX34AG10522-N |
| 8 | 140 | 100 | 75 | 124 | 105 | HMX34AG14022-N |
| | 170 | 125 | 90 | 156 | 140 | HMX34AG17022-N |
| | 205 | 150 | 110 | 180 | 170 | HMX34AG20522-N |
| 9 | 261 | 200 | 132 | 240 | 205 | HMX34AG26122-N |
| | 310 | 250 | 160 | 302 | 261 | HMX34AG31022-N |

Note

① For sizing reference.

H-Max Series Drives—600 Vac

NEMA Type 1



NEMA Type 1/IP21

| FS Frame Size | Drive Output Current | | Assigned Motor Ratings | | | Catalog Number |
|---------------|--------------------------------------|------------|---------------------------|-----------------------|--------------------------------------|----------------|
| | Low Overload Full Load Amps at 40 °C | Horsepower | Drive kW 575 Vac/50 Hz | 575 Vac NEC Amps ① | Low Overload Full Load Amps at 50 °C | |
| 5 | 3.9 | 3 | 2.2 | 4.6 | 3.3 | HMX35AG3D921-N |
| | 6.1 | 5 | 3.7 | 6.8 | 5.2 | HMX35AG6D121-N |
| | 9 | 7.5 | 5.5 | 9 | 7.7 | HMX35AG9D021-N |
| | 11 | 10 | 7.5 | 10.5 | 9.4 | HMX35AG01121-N |
| 6 | 18 | 15 | 11 | 19.9 | 15.3 | HMX35AG01821-N |
| | 22 | 20 | 15 | 23.3 | 18.7 | HMX35AG02221-N |
| | 27 | 25 | 18 | 27.2 | 23 | HMX35AG02721-N |
| | 34 | 30 | 22 | 32.8 | 28.9 | HMX35AG03421-N |
| 7 | 41 | 40 | 30 | 45.3 | 34.9 | HMX35AG04121-N |
| | 52 | 50 | 37 | 53.8 | 44.2 | HMX35AG05221-N |
| | 62 | 60 | 45 | 62.2 | 52.7 | HMX35AG06221-N |
| 8 | 80 | 75 | 55 | 90 | 68 | HMX35AG08021-N |
| | 100 | 100 | 75 | 106 | 85 | HMX35AG10021-N |
| | 125 | 125 | 90 | 127 | 106.3 | HMX35AG12521-N |
| 9 | 144 | 150 | 110 | 156 | 122.4 | HMX35AG14421-N |
| | 208 | 200 | 160 | 212 | 176.8 | HMX35AG20821-N |

NEMA Type 12



NEMA Type 12/IP54

| FS Frame Size | Drive Output Current | | Assigned Motor Ratings | | | Catalog Number |
|---------------|--------------------------------------|------------|---------------------------|-----------------------|--------------------------------------|----------------|
| | Low Overload Full Load Amps at 40 °C | Horsepower | Drive kW 575 Vac/50 Hz | 575 Vac NEC Amps ① | Low Overload Full Load Amps at 50 °C | |
| 5 | 3.9 | 3 | 2.2 | 4.6 | 3.3 | HMX35AG3D922-N |
| | 6.1 | 5 | 3.7 | 6.8 | 5.2 | HMX35AG6D122-N |
| | 9 | 7.5 | 5.5 | 9 | 7.7 | HMX35AG9D022-N |
| | 11 | 10 | 7.5 | 10.5 | 9.4 | HMX35AG01122-N |
| 6 | 18 | 15 | 11 | 19.9 | 15.3 | HMX35AG01822-N |
| | 22 | 20 | 15 | 23.3 | 18.7 | HMX35AG02222-N |
| | 27 | 25 | 18 | 27.2 | 23 | HMX35AG02722-N |
| | 34 | 30 | 22 | 32.8 | 28.9 | HMX35AG03422-N |
| 7 | 41 | 40 | 30 | 45.3 | 34.9 | HMX35AG04122-N |
| | 52 | 50 | 37 | 53.8 | 44.2 | HMX35AG05222-N |
| | 62 | 60 | 45 | 62.2 | 52.7 | HMX35AG06222-N |
| 8 | 80 | 75 | 55 | 90 | 68 | HMX35AG08022-N |
| | 100 | 100 | 75 | 106 | 85 | HMX35AG10022-N |
| | 125 | 125 | 90 | 127 | 106.3 | HMX35AG12522-N |
| 9 | 144 | 150 | 110 | 156 | 122.4 | HMX35AG14422-N |
| | 208 | 200 | 160 | 212 | 176.8 | HMX35AG20822-N |

Note

① For sizing reference.

Onboard Network Communications

Johnson Controls Metasys N2

H-Max Series provides communication between the drive and a Johnson Controls Metasys™ N2 network. With this connection, the drive can be controlled, monitored and programmed from the Metasys system. N2 can be selected and programmed by the drive keypad.

BACnet

H-Max Series provides communication to BACnet networks. Data transfer is master-slave/token passing (MS/TP) RS-485.

BACnet/IP

100Base-T interface.

Modbus TCP

Ethernet based protocol.

Modbus RTU

H-Max Series provides communication to Modbus RTU RS-485 as a slave on a Modbus network. Other communication parameters include an address range from 1–247; a parity of None, Odd or Even; and the stop bit is 1.

H-Max Series Option Board Kits Available for Slot B

The factory issued relay option board can be replaced with the following option

boards to customize the drive for your application needs.

The standard board provides 2 Form C RO (NO/NC) and 1 Form A RO (NO).

Option Boards Mounted in Slot B

| Option Kit Description | Option Kit Catalog Number |
|--|---------------------------|
| I/O expander card, 2 RO and thermistor input | Relay Board 2 |

H-Max Series Option Board Kits Available for Slots D and E

Note: Slot C is inactive.

The H-Max Series drives can accommodate a wide selection of expander and adapter option boards to

customize the drive for your application needs. The drive's control unit is designed to accept a total of two option boards.

The H-Max Series factory-installed standard board configuration includes an I/O board and a relay output board.

Option Boards Mounted in Slots D and E

| Option Kit Description | Option Kit Catalog Number |
|---|---------------------------|
| 6 x DI /DO, each digital input can be individually programmed as digital output | XXM-IO-B1-A |
| 1RO Form C (NO/NC), 1RO Form A (NO), 1 thermistor | XXM-IO-B2-A |
| 1 x AI, 2 x AO (isolated) | XXM-IO-B4-A |
| 3 x RO Form A (NO) | XXM-IO-B5-A |
| 1RO Form A (NO), 5DI 42–240 Vac input | XXM-IO-B9-A |
| 1 x AO, 1 x DO, 1 x RO | XXM-IO-BF-A |
| LonWorks® | XXM-COM-C4-A |

NEMA Type 1 to NEMA Type 12/IP54 Conversion Kit

The NEMA Type 12/IP54 option kit is used to convert a NEMA Type 1 to a NEMA Type 12 drive.

Kit consists of a drive cover, fan kit and plugs.

NEMA Type 12/IP54 Cover

| Option Kit Description | Option Kit Catalog Number |
|---|---------------------------|
| FS4-branded N12/IP54 cover with gasket, plastic plug, fans, Eaton logos | FS4-N12KIT |
| FS5-branded N12/IP54 cover with gasket, plastic plug, fans, Eaton logos | FS5-N12KIT |
| FS6-branded N12/IP54 cover with gasket, plastic plug, fans, Eaton logos | FS6-N12KIT |

Accessories

Flange Kits

The flange kit is used when the power section heat sink is mounted through the back panel of an enclosure.

Flange Kit NEMA Type 12/IP54

Includes flange, mounting brackets, NEMA Type 12 fan components, air shroud screws and plugs.

Frames FS4–FS7 ^{①②}

| Description | Catalog Number |
|---|--------------------------|
| NEMA Type 12/IP54 | |
| FS4 N12/IP54 flange kit (mounting N1 drive into N12 enclosure) | FS4-Flange-N12KIT |
| FS5 N12/IP54 flange kit (mounting N1 drive into N12 enclosure) | FS5-Flange-N12KIT |
| FS6 N12/IP54 flange kit (mounting N1 drive into N12 enclosure) | FS6-Flange-N12KIT |
| FS7 N12/IP54 flange kit (mounting N1 drive into N12 enclosure) | FS7-Flange-N12KIT |

Keypad Accessories

Remote Mounting Keypad Kit

Frames FS4–FS9

| Description | Catalog Number |
|--|-----------------------------|
| Remote mounting keypad kit—bezel and cable | OPTRMT-BP-HMAX-WLABL |

Drive Demo

H-Max Series Drive Demo

Demos and Power Supply

| Description | Catalog Number |
|---|--------------------------|
| H-Max Series bypass demo | H-MAX-BYPASS-DEMO |
| Hand-held 24 V auxiliary power supply—used to supply power to the control module in order to perform keypad programming before the drive is connected to line voltage | 9000XAUX24 V |

Notes

- ① For installation of a NEMA Type 1 drive into a NEMA Type 12 oversized enclosure.
- ② Frame size 8 and 9 must be ordered from the factory as a flange mount unit.

Replacement Parts

Control Board/Keypad

| Description | Current Catalog Number |
|----------------------------------|---------------------------|
| H-Max series graphic bypass, HOA | KeypadbypassHOA |
| H-Max series graphic back, HOA | KeypadbackHOA |
| H-Max control board replacement | HMX-CONTROLBOARD-B |

PC Cable

| Description | Catalog Number |
|--|---------------------|
| Remote download USB to RJ-45 cable with software driver disk | REM-USB-Down |

Replacement Relay Board in Slot B

| Description | Catalog Number |
|---|----------------------|
| Replacement relay board qty 2 Form C relay, qty 1 Form A relay | Relay board 1 |

Main Fan

| Description | Catalog Number |
|--------------|---------------------|
| FS4 main fan | FS4-Main Fan |
| FS5 main fan | FS5-Main Fan |
| FS6 main fan | FS6-Main Fan |
| FS7 main fan | FS7-Main Fan |
| FS8 main fan | FS8-Main Fan |
| FS9 main fan | FS9-Main Fan |

Internal Fan

| Description | Catalog Number |
|---------------------------------|-------------------------|
| FS4 internal fan (IP54/NEMA 12) | FS4-Internal Fan |
| FS5 internal fan (IP54/NEMA 12) | FS5-Internal Fan |
| FS6 internal fan (IP54/NEMA 12) | FS6-Internal Fan |
| FS7 internal fan (IP54/NEMA 12) | FS7-Internal Fan |
| FS8 internal fan (IP54/NEMA 12) | FS8-Internal Fan |
| FS9 internal fan (IP54/NEMA 12) | FS9-Internal Fan |

2.9

Adjustable Frequency Drives

H-Max Series Drives

2

Line and Load Reactors

A line and load reactor is a three-phase inductance filter that can be placed on the line and load side of the AFD to help improve the harmonic performance of the system. Consult the factory for additional filtering options and further technical details.


DR1 Line Reactor

A line reactor helps to provide a moderate reduction in current harmonics similar to a DC choke. It also provides increased input protection for AFD and its semiconductors from line transients helping to extend the life of the AFD.

DR2 Output Reactor

An output filter is used to reduce the transient voltage (dV/dt) at the motor terminals. The output filter is recommended for cable lengths exceeding 100 ft (30 m) with a drive of 3 hp and above and for cable lengths of 33 ft (10 m) with a drive of 2 hp and below.

Line and Load Reactors—Catalog Number Selection

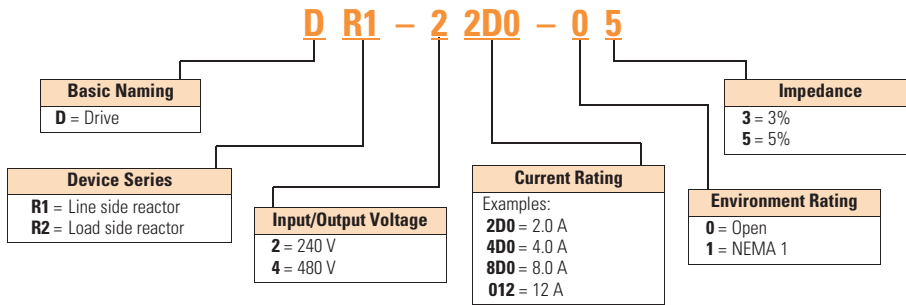

Line and Load Reactors—240 V

| hp (VT) | Open Load Reactor | | Line Reactor | | NEMA 1 Load Reactor | | Line Reactor | |
|---------|-------------------|-------------|--------------|-------------|---------------------|-------------|--------------|-------------|
| | 3% | 5% | 3% | 5% | 3% | 5% | 3% | 5% |
| 0.75 | DR2-24D0-03 | DR2-24D0-05 | DR1-23D2-03 | DR1-23D2-05 | DR2-24D0-13 | DR2-24D0-15 | DR1-23D2-13 | DR1-23D2-15 |
| 1 | DR2-24D0-03 | DR2-28D0-05 | DR1-24D2-03 | DR1-24D2-05 | DR2-24D0-13 | DR2-28D0-15 | DR1-24D2-13 | DR1-24D2-15 |
| 1.5 | DR2-28D0-03 | DR2-28D0-05 | DR1-26D0-03 | DR1-26D0-05 | DR2-28D0-13 | DR2-28D0-15 | DR1-26D0-13 | DR1-26D0-15 |
| 2 | DR2-28D0-03 | DR2-28D0-05 | DR1-26D8-03 | DR1-26D8-05 | DR2-28D0-13 | DR2-28D0-15 | DR1-26D8-13 | DR1-26D8-15 |
| 3 | DR2-2012-03 | DR2-2012-05 | DR1-29D6-03 | DR1-29D6-05 | DR2-2012-13 | DR2-2012-15 | DR1-29D6-13 | DR1-29D6-15 |
| 5 | DR2-2018-03 | DR2-2018-05 | DR1-2015-03 | DR1-2015-05 | DR2-2018-13 | DR2-2018-15 | DR1-2015-13 | DR1-2015-15 |
| 7.5 | DR2-2025-03 | DR2-2025-05 | DR1-2022-03 | DR1-2022-05 | DR2-2025-13 | DR2-2025-15 | DR1-2022-13 | DR1-2022-15 |
| 10 | DR2-2035-03 | DR2-2035-05 | DR1-2028-03 | DR1-2028-05 | DR2-2035-13 | DR2-2035-15 | DR1-2028-13 | DR1-2028-15 |
| 15 | DR2-2045-03 | DR2-2045-05 | DR1-2042-03 | DR1-2042-05 | DR2-2045-13 | DR2-2045-15 | DR1-2042-13 | DR1-2042-15 |
| 20 | DR2-2055-03 | DR2-2055-05 | DR1-2054-03 | DR1-2054-05 | DR2-2055-13 | DR2-2055-15 | DR1-2054-13 | DR1-2054-15 |
| 25 | DR2-2080-03 | DR2-2080-05 | DR1-2068-03 | DR1-2068-05 | DR2-2080-13 | DR2-2080-15 | DR1-2068-13 | DR1-2068-15 |
| 30 | DR2-2080-03 | DR2-2100-05 | DR1-2080-03 | DR1-2080-05 | DR2-2080-13 | DR2-2100-15 | DR1-2080-13 | DR1-2080-15 |
| 40 | DR2-2100-03 | DR2-2100-05 | DR1-2104-03 | DR1-2104-05 | DR2-2100-13 | DR2-2100-15 | DR1-2104-13 | DR1-2104-15 |
| 50 | DR2-2130-03 | DR2-2130-05 | DR1-2130-03 | DR1-2130-05 | DR2-2130-13 | DR2-2130-15 | DR1-2130-13 | DR1-2130-15 |
| 60 | DR2-2160-03 | DR2-2200-15 | DR1-2154-03 | DR1-2154-05 | DR2-2160-13 | DR2-2200-15 | DR1-2154-13 | DR1-2154-15 |
| 75 | DR2-2200-13 | DR2-2200-15 | DR1-2192-03 | DR1-2192-05 | DR2-2200-13 | DR2-2200-15 | DR1-2192-13 | DR1-2192-15 |
| 100 | DR2-2225-13 | DR2-2225-15 | DR1-2248-03 | DR1-2248-05 | DR2-2225-13 | DR2-2225-15 | DR1-2248-13 | DR1-2248-15 |
| 125 | DR2-2320-13 | DR2-2320-15 | DR1-2312-03 | DR1-2312-05 | DR2-2320-13 | DR2-2320-15 | DR1-2312-13 | DR1-2312-15 |

Line and Load Reactors—480 V

| hp (VT) | Open Load Reactor | | Line Reactor | | NEMA 1 Load Reactor | | Line Reactor | |
|---------|-------------------|-------------|--------------|-------------|---------------------|-------------|--------------|-------------|
| | 3% | 5% | 3% | 5% | 3% | 5% | 3% | 5% |
| 1.5 | DR2-44D0-05 | DR2-44D0-05 | DR1-43D0-03 | DR1-43D0-05 | DR2-44D0-13 | DR2-44D0-15 | DR1-43D0-13 | DR1-43D0-15 |
| 2 | DR2-44D0-03 | DR2-44D0-05 | DR1-43D4-03 | DR1-43D4-05 | DR2-44D0-13 | DR2-44D0-15 | DR1-43D4-13 | DR1-43D4-15 |
| 3 | DR2-48D0-03 | DR2-48D0-05 | DR1-44D8-03 | DR1-44D8-05 | DR2-48D0-13 | DR2-48D0-15 | DR1-44D8-13 | DR1-44D8-15 |
| 5 | DR2-48D0-03 | DR2-48D0-05 | DR1-47D6-03 | DR1-47D6-05 | DR2-48D0-13 | DR2-48D0-15 | DR1-47D6-13 | DR1-47D6-15 |
| 7.5 | DR2-4012-03 | DR2-4012-05 | DR1-4011-03 | DR1-4011-05 | DR2-4012-13 | DR2-4012-15 | DR1-4011-13 | DR1-4011-15 |
| 10 | DR2-4018-03 | DR2-4018-05 | DR1-4014-03 | DR1-4014-05 | DR2-4018-13 | DR2-4018-15 | DR1-4014-13 | DR1-4014-15 |
| 15 | DR2-4025-03 | DR2-4025-05 | DR1-4021-03 | DR1-4021-05 | DR2-4025-13 | DR2-4025-15 | DR1-4021-13 | DR1-4021-15 |
| 20 | DR2-4025-03 | DR2-4025-05 | DR1-4027-03 | DR1-4027-05 | DR2-4025-13 | DR2-4025-15 | DR1-4027-13 | DR1-4027-15 |
| 25 | DR2-4035-03 | DR2-4035-05 | DR1-4034-03 | DR1-4034-05 | DR2-4035-13 | DR2-4035-15 | DR1-4034-13 | DR1-4034-15 |
| 30 | DR2-4045-03 | DR2-4045-05 | DR1-4040-03 | DR1-4040-05 | DR2-4045-13 | DR2-4045-15 | DR1-4040-13 | DR1-4040-15 |
| 40 | DR2-4055-03 | DR2-4055-05 | DR1-4052-03 | DR1-4052-05 | DR2-4055-13 | DR2-4055-15 | DR1-4052-13 | DR1-4052-15 |
| 50 | DR2-4080-03 | DR2-4080-05 | DR1-4065-03 | DR1-4065-05 | DR2-4080-13 | DR2-4080-15 | DR1-4065-13 | DR1-4065-15 |
| 60 | DR2-4100-03 | DR2-4080-05 | DR1-4077-03 | DR1-4077-05 | DR2-4100-13 | DR2-4080-15 | DR1-4077-13 | DR1-4077-15 |
| 75 | DR2-4100-03 | DR2-4100-05 | DR1-4096-03 | DR1-4096-05 | DR2-4100-13 | DR2-4100-15 | DR1-4096-13 | DR1-4096-15 |
| 100 | DR2-4130-03 | DR2-4130-05 | DR1-4124-03 | DR1-4124-05 | DR2-4130-13 | DR2-4130-15 | DR1-4124-13 | DR1-4124-15 |
| 125 | DR2-4160-03 | DR2-4160-05 | DR1-4156-03 | DR1-4156-05 | DR2-4160-13 | DR2-4160-15 | DR1-4156-13 | DR1-4156-15 |
| 150 | DR2-4200-13 | DR2-4200-15 | DR1-4180-03 | DR1-4180-05 | DR2-4200-13 | DR2-4200-15 | DR1-4180-13 | DR1-4180-15 |
| 200 | DR2-4250-13 | DR2-4250-15 | DR1-4240-03 | DR1-4240-05 | DR2-4250-13 | DR2-4250-15 | DR1-4240-13 | DR1-4240-15 |

Technical Data and Specifications

2


H-Max Series Drives

| Description | Specification |
|--------------------------------|--|
| Input Ratings | |
| Input voltage (V_{in}) | 200–240 Vac, 380–480 Vac, 525–600 Vac, –10%/+10% |
| Input frequency (f_{in}) | 50/60 Hz (variation up to 47–66 Hz) |
| Connection to power | Once per minute or less (typical operation) |
| Short-circuit withstand rating | 100 kAIC |
| Output Ratings | |
| Output voltage | 0 to V_{in}/U_{in} line voltage in |
| Continuous output current | Ambient temperature max. 104 °F (40 °C) |
| I_L overload | 1.1 x I_L (1 min./10 min.) |
| Overload current | 110% (1 min./10 min.) |
| Initial output current | 150% for two seconds |
| Output frequency | 0 to 320 Hz |
| Frequency resolution | 0.01 Hz |
| Control Characteristics | |
| Control method | Frequency control (V/f) open loop sensorless vector control |
| Switching frequency | 1–310 amps FS4–9: default 6 kHz |
| Frequency reference | Analog input: Resolution 0.1% (10-bit), accuracy $\pm 1\%$ Panel reference: Resolution 0.01 Hz |
| Field weakening point | 8 to 320 Hz |
| Acceleration time | 0.1 to 3000 seconds |
| Deceleration time | 0.1 to 3000 seconds |
| Braking torque | DC brake: 30% x T_n |
| Ambient Conditions | |
| Ambient operating temperature | FS4–FS9: 14 °F (–10 °C), no frost to 104 °F (40 °C) (Drive can operate at 122 °F (50 °C), see Pages V6-T2-225 and V6-T2-226) |
| Storage temperature | –40° to 158 °F (–40° to 70 °C) |
| Relative humidity | 0 to 95% RH, noncondensing, non-corrosive, no dripping water |
| Air quality | Chemical vapors: IEC 60721-3-3, unit in operation, Class 3C2; Mechanical particles: IEC 60721-3-3, unit in operation, Class 3S2 |
| Altitude | 100% load capacity (no derating) up to 3280 ft (1000 m); 1% derating for each 328 ft (100 m) above 3280 ft (1000 m); max. 9842 ft (3000 m); 380–480 V |
| Vibration | FS4–FS9: EN 61800-5-1, EN 60068-2-6; 5 to 150 Hz, displacement amplitude 1 mm (peak) at 5 to 15.8 Hz, max. acceleration amplitude 1G at 15.8 to 150 Hz |
| Shock | EN 61800-5-1, EN 60068-2-27 UPS Drop test (for applicable UPS weights) Storage and shipping: max. 15 g, 11 ms (in package) |
| Enclosure class | NEMA Type 1/IP21 or NEMA Type 12/IP54 (keypad required for IP54/Type 12) |
| Standards | |
| EMC | Immunity: Fulfills all EMC immunity requirements; Emissions: EN 61800-3, LEVEL H (EMC C2) |
| Emissions | EMC level dependent— +EMC 2: EN61800-3 (2004) Category C2 Delivered with Class C2 EMC filtering as default. |
| Efficiency | 97.5% at 480 V 96.6% at 208/230 V |

| Description | Specification |
|-------------------------------------|--|
| Control Connections | |
| Analog input voltage | 0 to 10 V, $R = 200$ kohms differential Resolution 0.1%; Accuracy $\pm 1\%$ DIP switch selection (voltage/current) |
| Analog input current | 0(4) to 20 mA; R_i –250 ohms differential |
| Digital inputs (6) | Positive or negative logic; 18 to 30 Vdc |
| Auxiliary voltage | +24 V $\pm 10\%$, max. 250 mA |
| Output reference voltage | +10 V +3%, max. load 10 mA |
| Analog output | 0–10 V, 0(4) to 20 mA; R_L max. 500 ohms; Resolution 10 bit; Accuracy $\pm 2\%$ DIP switch selection (voltage/current) |
| Relay outputs | 3 programmable, 2 Form C, 1 Form A relay outputs Switching capacity: 24 Vdc/8 A, 250 Vac/8 A, 125 Vdc/0.4 A |
| Hard wire jumper | Between terminal 6 and 10 factory default |
| DIP switch setting default | RS-485 = off A01 = current A12 = current A11 = voltage |
| Protections | |
| Overcurrent protection | Yes |
| Overvoltage protection | Yes |
| DC bus regulation anti-trip | Yes (accelerates or decelerates the load) |
| Undervoltage protection | Yes |
| Earth fault protection | Yes (in case of earth fault in motor or motor cable, only the frequency converter is protected) |
| Input phase supervision | Yes (trips if any of the input phases are missing) |
| Motor phase supervision | Yes (trips if any of the output phases are missing) |
| Overtemperature protection | Yes |
| Motor overload protection | Yes |
| Motor stall protection | Yes |
| Motor underload protection | Yes |
| Short-circuit protection | Yes |
| Surge protection | Yes (varistor input) |
| Conformed coated (varnished) boards | Yes (prevents corrosion) |

Wiring Diagram

Control Input/Output, PID Application

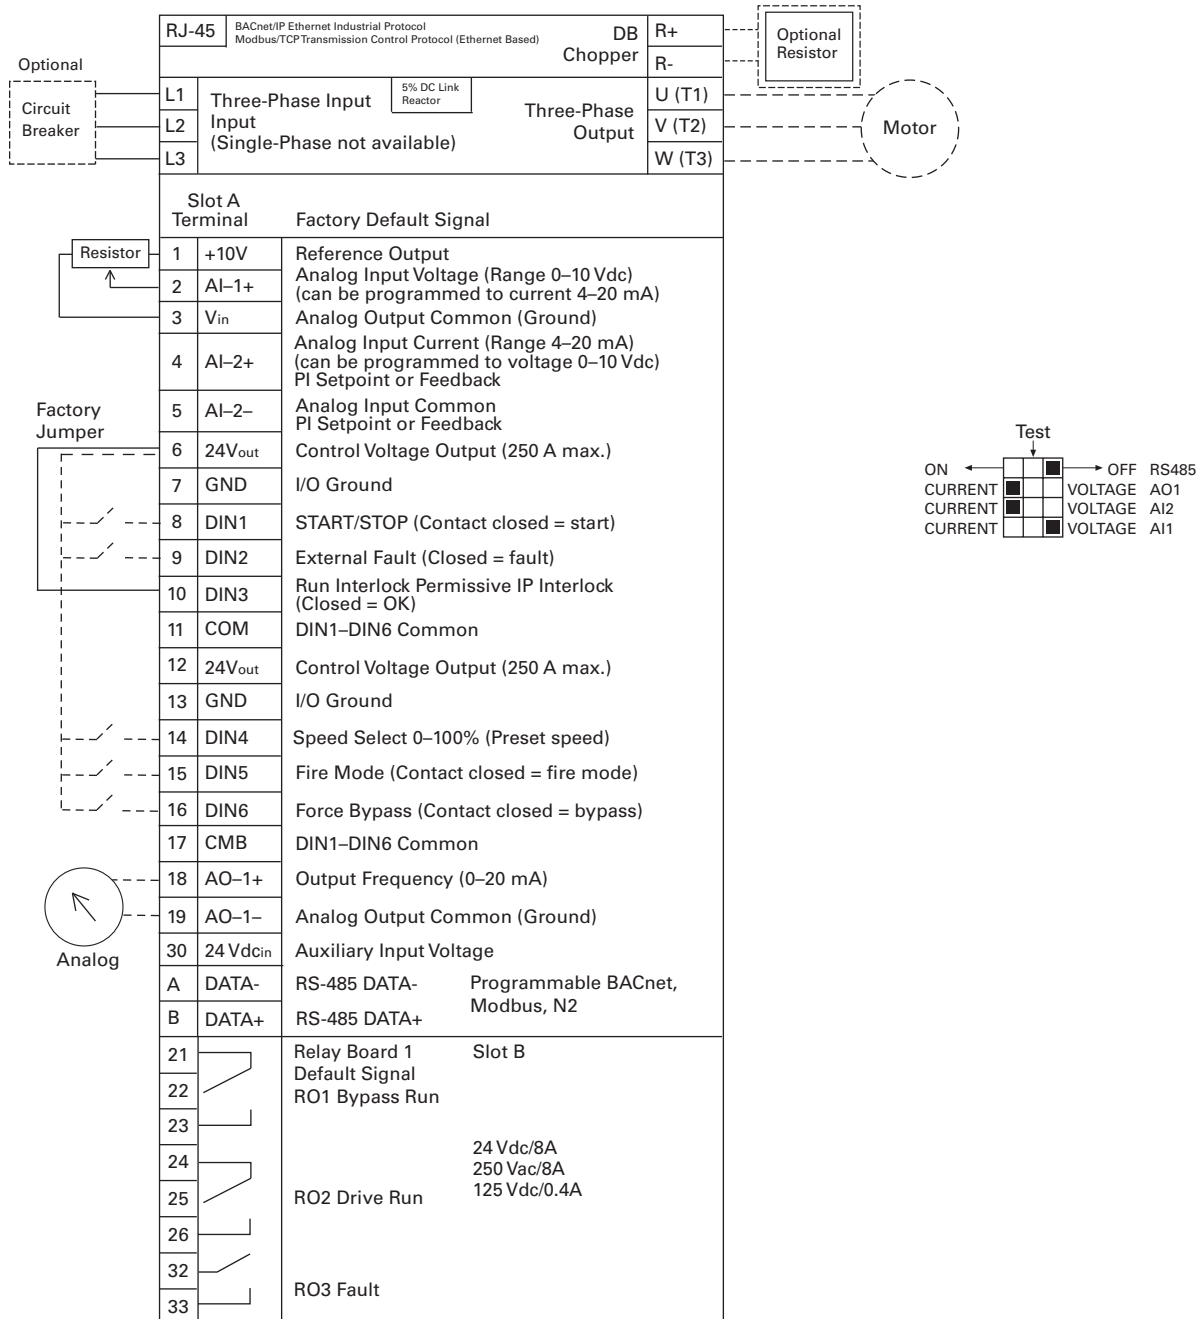**Standards**

- Digital inputs D1–D6, relay out, analog in/out are freely programmed
- The user can assign a single input to multiple functions

Includes

- Six digital input
- Two analog input
- One analog output
- Three relay output
- RS-485
- Ethernet (BACnet and Modbus)

Reliability

- Pretested components
- Conformal coated (varnished) boards
- 40 °C rated
- 110% overload for one minute
- Eaton Electrical Services & Systems national network of AF drive specialists

2.9

Adjustable Frequency Drives


H-Max Series Drives

Dimensions

Approximate Dimensions in Inches (mm)


2

H-Max Series Frames FS4–FS7

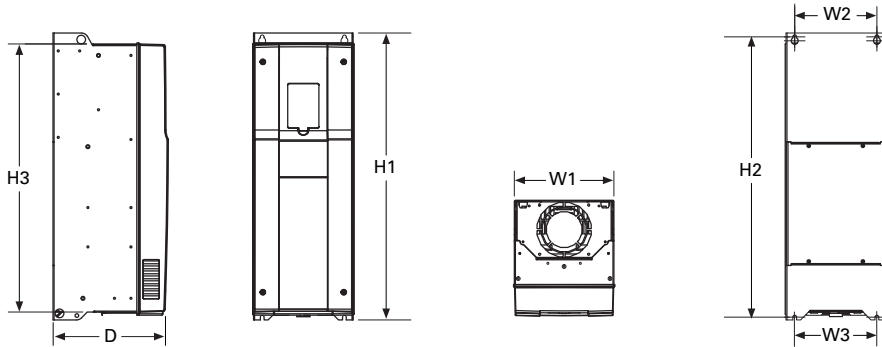

| Voltage | hp | kW | Amps | D | H1 | Hole Center-to-Center H2 | H3 | W1 | W2 | W3 | Weight in Lbs (kg) |
|------------|---------|----------|----------|------------------|------------------|--------------------------------|------------------|-----------------|-----------------|-----------------|-----------------------|
| FS4 | | | | | | | | | | | |
| 230 Vac | 0.75–4 | 0.55–3.0 | 3.7–12.5 | 7.77 (197.3) | 12.89 (327.5) | 12.32 (313.0) | 11.22 (285.0) | 5.04 (128.0) | 3.94 (100.0) | 3.94 (100.0) | 13.2 (6) |
| 480 Vac | 1.5–7.5 | 1.1–5.5 | 3.4–12 | | | | | | | | |
| FS5 | | | | | | | | | | | |
| 230 Vac | 5–10 | 4–7.5 | 18–31 | 8.73 (221.6) | 16.50 (419.0) | 15.98 (406.0) | 15.04 (382.0) | 5.67 (144.0) | 4.53 (115.0) | 3.94 (100.0) | 22.0 (10) |
| 480 Vac | 10–20 | 7.5–15 | 16–31 | | | | | | | | |
| FS6 | | | | | | | | | | | |
| 230 Vac | 15–20 | 11–15 | 48–62 | 9.29 (236.0) | 21.93 (557.0) | 21.28 (540.5) | 20.24 (514.0) | 7.68 (195.0) | 5.83 (148.0) | 5.83 (148.0) | 44.1 (20) |
| 480 Vac | 25–40 | 18.5–30 | 38–61 | | | | | | | | |
| FS7 | | | | | | | | | | | |
| 230 Vac | 25–30 | 18.5–30 | 75–105 | 10.49 (266.5) | 25.98 (660.0) | 25.39 (645.0) | 24.29 (617.0) | 9.06 (230.0) | 7.48 (190.0) | 7.48 (190.0) | 82.6 (37.5) |
| 480 Vac | 50–75 | 37–55 | 72–105 | | | | | | | | |

H-Max Series Frames FS8 and FS9

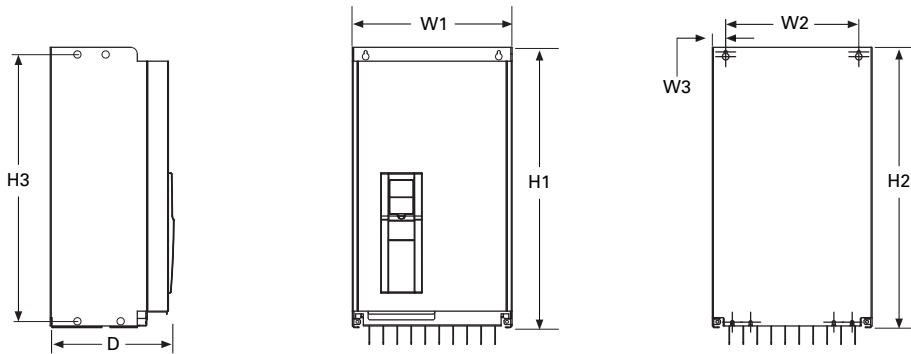

| Voltage | hp | kW | Amps | D | H1 | Hole Center-to-Center H2 | H3 | W1 | W2 | W3 | Weight in Lbs (kg) |
|------------|---------|---------|---------|------------------|------------------|--------------------------------|------------------|------------------|------------------|----------------|-----------------------|
| FS8 | | | | | | | | | | | |
| 230 Vac | 50–75 | 37–55 | 140–205 | 13.76 (349.6) | 38.02 (965.7) | 37.26 (946.4) | 37.26 (946.4) | 11.42 (290.1) | 9.29 (236.0) | 1.42 (36.0) | 154.3 (70) |
| 480 Vac | 100–150 | 75–110 | | | | | | | | | |
| FS9 | | | | | | | | | | | |
| 230 Vac | 100–120 | 75–90 | 261–310 | 14.63 (371.6) | 33.09 (890.4) | 31.89 (810.0) | 31.89 (810.0) | 18.90 (480.0) | 15.75 (400.0) | 1.57 (40.0) | 238.1 (108) |
| 480 Vac | 200–250 | 132–160 | | | | | | | | | |

Note: For flange dimension, please reference User Manual.

H-Max IntelliPass and IntelliDisconnect Drives



Contents

| Description | Page |
|--|-------------|
| H-Max Drives | V6-T2-223 |
| H-Max IntelliPass and IntelliDisconnect Drives | |
| Catalog Number Selection | V6-T2-236 |
| Product Selection | V6-T2-237 |
| Technical Data and Specifications | V6-T2-247 |
| Wiring Diagrams | V6-T2-248 |
| Dimensions | V6-T2-250 |

H-Max IntelliPass and IntelliDisconnect Drives

Product Description

The IntelliPass electronic bypass is a two or optional three contactor design using a 24 Vdc **XT** Series contactor with an optional manual override switch that allows the unit to run in bypass without the H-Max Series drive.

The IntelliPass software parameters utilize engineering units common to the HVAC industry. Onboard startup wizard guarantees flawless commissioning with plug-and-play screen entry. Available in NEMA/UL Type 1, Type 12 and Type 3R with optional pre-engineered operator devices to meet all customized specification requirements.

The IntelliPass construction features allow for easy installation, reliable operation and serviceability with additional onboard wire space, and removable conduit plates with knockouts.

Features and Benefits

Industry-leading energy saving solution—uses the Eaton H-Max drive with Active Energy Control algorithm.

Built to be as tough as the application—Eaton's robust design boasts an industrial grade enclosure and industry proven components.

- Industrial Power Supply
- **XT** Contactors
- 22 mm Pilot Devices

Built-in electronic bypass capability with external 24 Vdc power supply allows the H-Max drive to control the bypass circuit through the keypad, digital input or BMS communications and in fault conditions.

Designed with Our Customers in Mind

- Removable top and bottom entry panels
- Door-mounted graphic display and keypad
- Easily accessible connection terminals with removable I/O terminal connections

Engineered Product Solution

- The Eaton H-Max IntelliPass and IntelliDisconnect products are available with a variety of factory tested and certified options meeting or exceeding UL508C requirements

Standards and Certifications

Product


- IEC 61800-5-1
- UL508C
- cUL
- OSHPD Seismic Certified



Catalog Number Selection

H-Max Series IntelliPass and IntelliDisconnect Drives

2

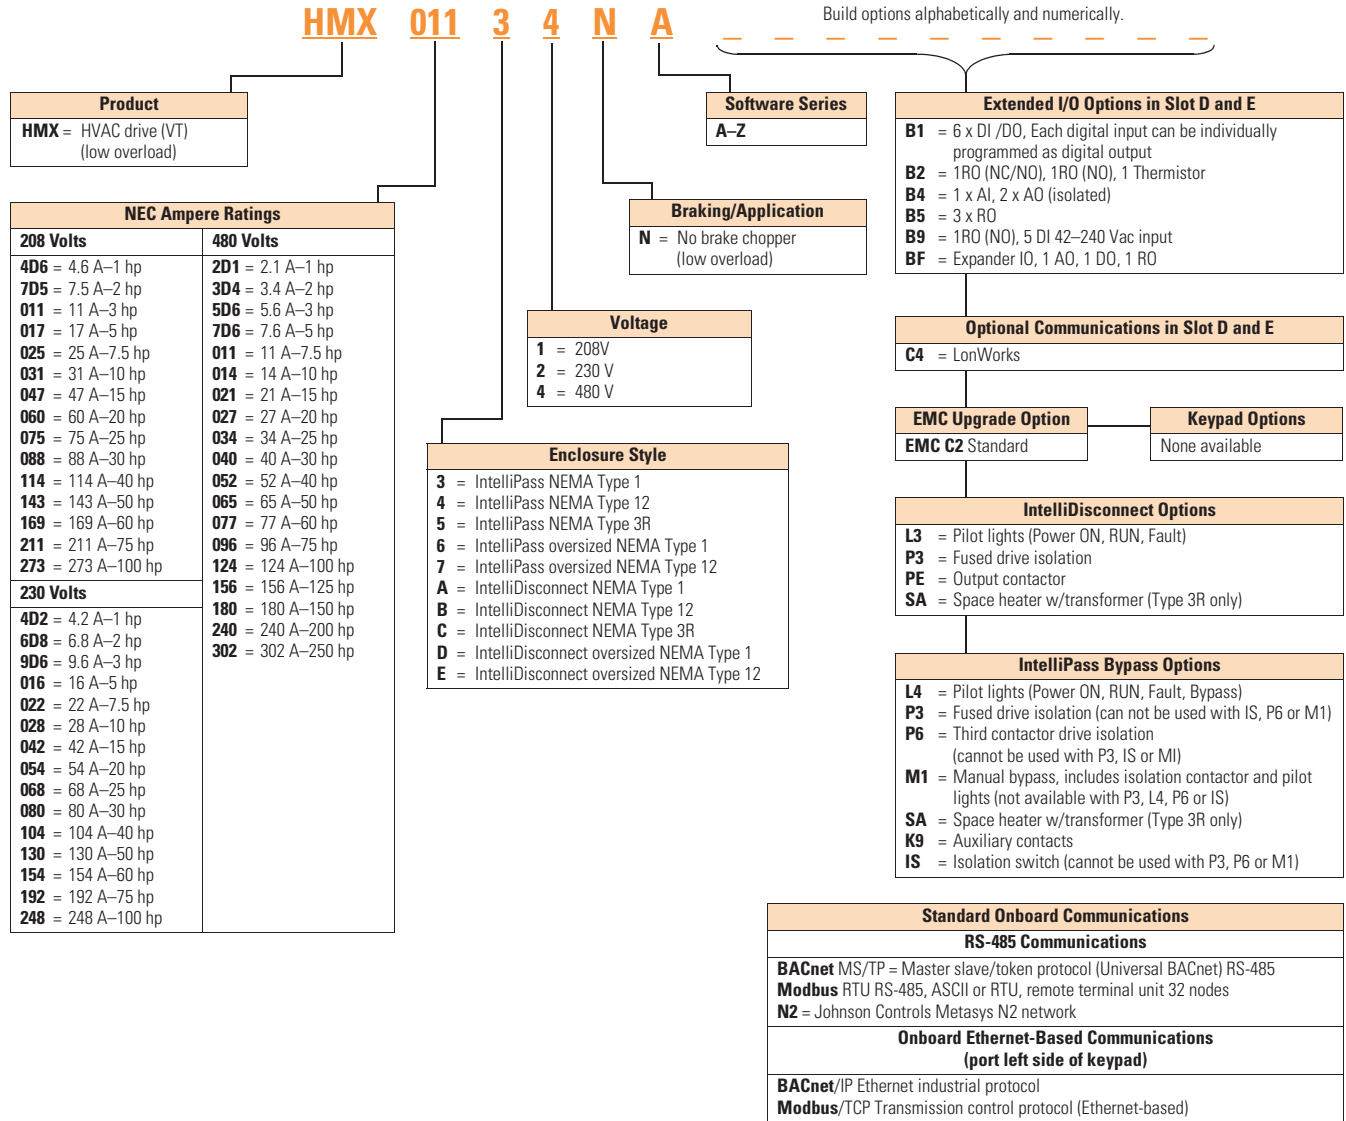

Notes

- IntelliPass—two contactor electronic bypass standard.
- All boards are varnished. Corrosion resistant.
- Battery included in all drives for real-time clock. Three year lifetime.
- Keypad kit includes HOA bypass.
- EMI/RFI filters included.
- DC link choke included.
- IntelliDisconnect includes 1 Form C and 1 Form A
- IntelliPass includes 1 Form A.
- When L3 or L4 option is selected, 1 Form A relay is used as well.
- For more relays required, select/order the B5 option card.

Product Selection

H-Max Series IntelliPass NEMA Type 1—Two Contactor Bypass Standard

HMX

**208 Vac**

| Enclosure Frame Size | Horsepower | Drive Rated NEC Amps | Catalog Number |
|----------------------|------------|----------------------|----------------|
| FS4 | 1 | 4.6 | HMX4D631NA |
| | 2 | 7.5 | HMX7D531NA |
| | 3 | 11 | HMX01131NA |
| FS5 | 5 | 17 | HMX01731NA |
| | 7.5 | 25 | HMX02531NA |
| | 10 | 31 | HMX03131NA |
| FS6 | 15 | 47 | HMX04731NA |
| FS7 | 20 | 60 | HMX06031NA |
| | 25 | 75 | HMX07531NA |
| | 30 | 88 | HMX08831NA |

230 Vac

| Enclosure Frame Size | Horsepower | Drive Rated NEC Amps | Catalog Number |
|----------------------|------------|----------------------|----------------|
| FS4 | 1 | 4.2 | HMX4D232NA |
| | 2 | 6.8 | HMX6D832NA |
| | 3 | 9.6 | HMX9D632NA |
| FS5 | 5 | 16 | HMX01632NA |
| | 7.5 | 22 | HMX02232NA |
| | 10 | 28 | HMX02832NA |
| FS6 | 15 | 42 | HMX04232NA |
| FS7 | 20 | 54 | HMX05432NA |
| | 25 | 68 | HMX06832NA |
| | 30 | 80 | HMX08032NA |

480 Vac

| Enclosure Frame Size | Horsepower | Drive Rated NEC Amps | Catalog Number |
|----------------------|------------|----------------------|----------------|
| FS4 | 1 | 2.1 | HMX2D134NA |
| | 2 | 3.4 | HMX3D434NA |
| | 3 | 5.6 | HMX5D634NA |
| | 5 | 7.6 | HMX7D634NA |
| | 7.5 | 11 | HMX01134NA |
| FS5 | 10 | 14 | HMX01434NA |
| | 15 | 21 | HMX02134NA |
| | 20 | 27 | HMX02734NA |
| FS6 | 25 | 34 | HMX03434NA |
| | 30 | 40 | HMX04034NA |
| | 40 | 52 | HMX05234NA |
| FS7 | 50 | 65 | HMX06534NA |
| | 60 | 77 | HMX07734NA |
| | 75 | 96 | HMX09634NA |

NotesFor Wiring Diagrams, see **Page V6-T2-249**.For NEMA 12 or 3R enclosures, see Catalog Number Selection on **Page V6-T2-236**.

Call Technical Support for NEMA 3R specifics. Enclosure size and weight differ from NEMA 1 and 12 products.

H-Max Series IntelliPass NEMA Type 12—Two Contactor Bypass Standard

2

HMX_

**208 Vac**

| Enclosure Frame Size | Horsepower | Drive Rated NEC Amps | Catalog Number |
|----------------------|------------|----------------------|----------------|
| FS4 | 1 | 4.6 | HMX4D641NA |
| | 2 | 7.5 | HMX7D541NA |
| | 3 | 11 | HMX01141NA |
| FS5 | 5 | 17 | HMX01741NA |
| | 7.5 | 25 | HMX02541NA |
| | 10 | 31 | HMX03141NA |
| FS6 | 15 | 47 | HMX04741NA |
| FS7 | 20 | 60 | HMX06041NA |
| | 25 | 75 | HMX07541NA |
| | 30 | 88 | HMX08841NA |
| D | 40 | 114 | HMX11471NA |
| | 50 | 143 | HMX14371NA |
| | 60 | 169 | HMX16971NA |
| 5 | 75 | 211 | HMX21171NA |
| | 100 | 273 | HMX27371NA |

230 Vac

| Enclosure Frame Size | Horsepower | Drive Rated NEC Amps | Catalog Number |
|----------------------|------------|----------------------|----------------|
| FS4 | 1 | 4.2 | HMX4D242NA |
| | 2 | 6.8 | HMX6D842NA |
| | 3 | 9.6 | HMX9D642NA |
| FS5 | 5 | 16 | HMX01642NA |
| | 7.5 | 22 | HMX02242NA |
| | 10 | 28 | HMX02842NA |
| FS6 | 15 | 42 | HMX04242NA |
| FS7 | 20 | 54 | HMX05442NA |
| | 25 | 68 | HMX06842NA |
| | 30 | 80 | HMX08042NA |
| D | 40 | 104 | HMX10472NA |
| | 50 | 130 | HMX13072NA |
| | 60 | 154 | HMX15472NA |
| | 75 | 192 | HMX19272NA |
| 5 | 100 | 248 | HMX24872NA |

Notes

For Wiring Diagrams, see **Page V6-T2-249**.

For NEMA 12 or 3R enclosures, see Catalog Number Selection on **Page V6-T2-236**.

Call Technical Support for NEMA 3R specifics. Enclosure size and weight differ from NEMA 1 and 12 products.

HMX_

480 Vac



| Enclosure Frame Size | Horsepower | Drive Rated NEC Amps | Catalog Number |
|----------------------|------------|----------------------|----------------|
| FS4 | 1 | 2.1 | HMX2D144NA |
| | 2 | 3.4 | HMX3D444NA |
| | 3 | 5.6 | HMX5D644NA |
| | 5 | 7.6 | HMX7D644NA |
| | 7.5 | 11 | HMX01144NA |
| FS5 | 10 | 14 | HMX01444NA |
| | 15 | 21 | HMX02144NA |
| | 20 | 27 | HMX02744NA |
| FS6 | 25 | 34 | HMX03444NA |
| | 30 | 40 | HMX04044NA |
| | 40 | 52 | HMX05244NA |
| FS7 | 50 | 65 | HMX06544NA |
| | 60 | 77 | HMX07744NA |
| | 75 | 96 | HMX09644NA |
| D | 100 | 124 | HMX12747NA |
| | 125 | 156 | HMX15674NA |
| | 150 | 180 | HMX18074NA |
| 5 | 200 | 240 | HMX24074NA |
| | 250 | 302 | HMX30274NA |

H-Max Series IntelliPass NEMA Type 3R—Two Contactor Bypass Standard

HMX_

208 Vac



| Enclosure Frame Size | Horsepower | Drive Rated NEC Amps | Catalog Number |
|----------------------|------------|----------------------|----------------|
| A | 1 | 4.6 | HMX4D651NA |
| | 2 | 7.5 | HMX7D551NA |
| | 3 | 11 | HMX01151NA |
| A | 5 | 17 | HMX01751NA |
| | 7.5 | 25 | HMX02551NA |
| | 10 | 31 | HMX03151NA |
| B | 15 | 47 | HMX04751NA |
| C | 20 | 60 | HMX06051NA |
| | 25 | 75 | HMX07551NA |
| | 30 | 88 | HMX08851NA |
| D | 40 | 114 | HMX11451NA |
| | 50 | 143 | HMX14351NA |
| | 60 | 169 | HMX16951NA |
| F | 75 | 211 | HMX21151NA |
| | 100 | 273 | HMA27351NA |

NotesFor Wiring Diagrams, see **Page V6-T2-249**.For NEMA 12 or 3R enclosures, see Catalog Number Selection on **Page V6-T2-236**.

Call Technical Support for NEMA 3R specifics. Enclosure size and weight differ from NEMA 1 and 12 products.

HMX_

**230 Vac**

| Enclosure Frame Size | Horsepower | Drive Rated NEC Amps | Catalog Number |
|----------------------|------------|----------------------|----------------|
| A | 1 | 4.2 | HMX4D252NA |
| | 2 | 6.8 | HMX6D852NA |
| | 3 | 9.6 | HMX9D652NA |
| A | 5 | 16 | HMX01652NA |
| | 7.5 | 22 | HMX02252NA |
| | 10 | 28 | HMX02852NA |
| | 15 | 42 | HMX04252NA |
| | B | 20 | 54 |
| C | 25 | 68 | HMX06852NA |
| | 30 | 80 | HMX08052NA |
| D | 40 | 104 | HMX10452NA |
| | 50 | 130 | HMX13052NA |
| | 60 | 154 | HMX15452NA |
| | 75 | 192 | HMX19252NA |
| F | 100 | 248 | HMX24852NA |

480 Vac

| Enclosure Frame Size | Horsepower | Drive Rated NEC Amps | Catalog Number |
|----------------------|------------|----------------------|----------------|
| A | 1 | 2.1 | HMX2D154NA |
| | 2 | 3.4 | HMX3D454NA |
| | 3 | 5.6 | HMX5D654NA |
| | 5 | 7.6 | HMX7D654NA |
| | 7.5 | 11 | HMX01154NA |
| A | 10 | 14 | HMX01454NA |
| | 15 | 21 | HMX02154NA |
| | 20 | 27 | HMX02754NA |
| B | 25 | 34 | HMX03454NA |
| | 30 | 40 | HMX04054NA |
| | 40 | 52 | HMX05254NA |
| C | 50 | 65 | HMX06554NA |
| | 60 | 77 | HMX07754NA |
| | 75 | 96 | HMX09654NA |
| D | 100 | 124 | HMX12544NA |
| | 125 | 156 | HMX15654NA |
| | 150 | 180 | HMX18054NA |
| F | 200 | 240 | HMX24054NA |
| | 250 | 302 | HMX30254NA |

Notes

For Wiring Diagrams, see **Page V6-T2-249**.

For NEMA 12 or 3R enclosures, see Catalog Number Selection on **Page V6-T2-236**.

Call Technical Support for NEMA 3R specifics. Enclosure size and weight differ from NEMA 1 and 12 products.

H-Max Series IntelliDisconnect NEMA Type 1—Main Disconnect Standard

HMX

**208 Vac**

| Enclosure Frame Size | Horsepower | Drive Rated NEC Amps | Catalog Number |
|----------------------|------------|----------------------|----------------|
| FS4 | 1 | 4.6 | HMX4D6A1NA |
| | 2 | 7.5 | HMX7D5A1NA |
| | 3 | 11 | HMX011A1NA |
| FS5 | 5 | 17 | HMX017A1NA |
| | 7.5 | 25 | HMX025A1NA |
| | 10 | 31 | HMX031A1NA |
| FS6 | 15 | 47 | HMX047A1NA |
| FS7 | 20 | 60 | HMX060A1NA |
| | 25 | 75 | HMX075A1NA |
| | 30 | 88 | HMX088A1NA |

230 Vac

| Enclosure Frame Size | Horsepower | Drive Rated NEC Amps | Catalog Number |
|----------------------|------------|----------------------|----------------|
| FS4 | 1 | 4.2 | HMX4D2A2NA |
| | 2 | 6.8 | HMX6D8A2NA |
| | 3 | 9.6 | HMX9D6A2NA |
| FS5 | 5 | 16 | HMX016A2NA |
| | 7.5 | 22 | HMX022A2NA |
| | 10 | 28 | HMX028A2NA |
| FS6 | 15 | 42 | HMX042A2NA |
| FS7 | 20 | 54 | HMX054A2NA |
| | 25 | 68 | HMX068A2NA |
| | 30 | 80 | HMX080A2NA |

480 Vac

| Enclosure Frame Size | Horsepower | Drive Rated NEC Amps | Catalog Number |
|----------------------|------------|----------------------|----------------|
| FS4 | 1 | 2.1 | HMX2D1A4NA |
| | 2 | 3.4 | HMX3D4A4NA |
| | 3 | 5.6 | HMX5D6A4NA |
| | 5 | 7.6 | HMX7D6A4NA |
| | 7.5 | 11 | HMX011A4NA |
| FS5 | 10 | 14 | HMX014A4NA |
| | 15 | 21 | HMX021A4NA |
| | 20 | 27 | HMX027A4NA |
| FS6 | 25 | 34 | HMX034A4NA |
| | 30 | 40 | HMX040A4NA |
| | 40 | 52 | HMX052A4NA |
| FS7 | 50 | 65 | HMX065A4NA |
| | 60 | 77 | HMX077A4NA |
| | 75 | 96 | HMX096A4NA |

Notes

For Wiring Diagrams, see [Page V6-T2-249](#).

For NEMA 12 or 3R enclosures, see Catalog Number Selection on [Page V6-T2-236](#).

Call Technical Support for NEMA 3R specifics. Enclosure size and weight differ from NEMA 1 and 12 products.

H-Max Series IntelliDisconnect NEMA Type 12—Main Disconnect Standard

2

HMX_

**208 Vac**

| Enclosure Frame Size | Horsepower | Drive Rated NEC Amps | Catalog Number |
|----------------------|------------|----------------------|----------------|
| FS4 | 1 | 4.6 | HMX4D6B1NA |
| | 2 | 7.5 | HMX7D5B1NA |
| | 3 | 11 | HMX011B1NA |
| FS5 | 5 | 17 | HMX017B1NA |
| | 7.5 | 25 | HMX025B1NA |
| | 10 | 31 | HMX031B1NA |
| FS6 | 15 | 47 | HMX047B1NA |
| FS7 | 20 | 60 | HMX060B1NA |
| | 25 | 75 | HMX075B1NA |
| | 30 | 88 | HMX088B1NA |
| D | 40 | 114 | HMX114E1NA |
| | 50 | 143 | HMX143E1NA |
| | 60 | 169 | HMX169E1NA |
| 5 | 75 | 211 | HMX211E1NA |
| | 100 | 273 | HMA273E1NA |

230 Vac

| Enclosure Frame Size | Horsepower | Drive Rated NEC Amps | Catalog Number |
|----------------------|------------|----------------------|----------------|
| FS4 | 1 | 4.2 | HMX4D2B2NA |
| | 2 | 6.8 | HMX6D8B2NA |
| | 3 | 9.6 | HMX9D6B2NA |
| FS5 | 5 | 16 | HMX016B2NA |
| | 7.5 | 22 | HMX022B2NA |
| | 10 | 28 | HMX028B2NA |
| FS6 | 15 | 42 | HMX042B2NA |
| FS7 | 20 | 54 | HMX054B2NA |
| | 25 | 68 | HMX068B2NA |
| | 30 | 80 | HMX080B2NA |
| D | 40 | 104 | HMX104E2NA |
| | 50 | 130 | HMX130E2NA |
| | 60 | 154 | HMX154E2NA |
| | 75 | 192 | HMX192E2NA |
| 5 | 100 | 248 | HMX248E2NA |

Notes

For Wiring Diagrams, see **Page V6-T2-249**.

For NEMA 12 or 3R enclosures, see Catalog Number Selection on **Page V6-T2-236**.

Call Technical Support for NEMA 3R specifics. Enclosure size and weight differ from NEMA 1 and 12 products.

HMX_

**480 Vac**

| Enclosure Frame Size | Horsepower | Drive Rated NEC Amps | Catalog Number |
|----------------------|------------|----------------------|----------------|
| FS4 | 1 | 2.1 | HMX2D1B4NA |
| | 2 | 3.4 | HMX3D4B4NA |
| | 3 | 5.6 | HMX5D6B4NA |
| | 5 | 7.6 | HMX7D6B4NA |
| | 7.5 | 11 | HMX011B4NA |
| FS5 | 10 | 14 | HMX014B4NA |
| | 15 | 21 | HMX021B4NA |
| | 20 | 27 | HMX027B4NA |
| FS6 | 25 | 34 | HMX034B4NA |
| | 30 | 40 | HMX040B4NA |
| | 40 | 52 | HMX052B4NA |
| FS7 | 50 | 65 | HMX065B4NA |
| | 60 | 77 | HMX077B4NA |
| | 75 | 96 | HMX096B4NA |
| D | 100 | 124 | HMX12E44NA |
| | 125 | 156 | HMX156E4NA |
| | 150 | 180 | HMX180E4NA |
| 5 | 200 | 240 | HMX240E4NA |
| | 250 | 302 | HMX302E4NA |

Notes

For Wiring Diagrams, see **Page V6-T2-249**.

For NEMA 12 or 3R enclosures, see Catalog Number Selection on **Page V6-T2-236**.

Call Technical Support for NEMA 3R specifics. Enclosure size and weight differ from NEMA 1 and 12 products.

H-Max Series IntelliDisconnect NEMA Type 3R—Main Disconnect Standard

2

HMX

**208 Vac**

| Enclosure Frame Size | Horsepower | Drive Rated NEC Amps | Catalog Number |
|----------------------|------------|----------------------|----------------|
| A | 1 | 4.6 | HMX4D6C1NA |
| | 2 | 7.5 | HMX7D5C1NA |
| | 3 | 11 | HMX011C1NA |
| A | 5 | 17 | HMX017C1NA |
| | 7.5 | 25 | HMX025C1NA |
| | 10 | 31 | HMX031C1NA |
| | 15 | 47 | HMX047C1NA |
| B | 20 | 60 | HMX060C1NA |
| C | 25 | 75 | HMX075C1NA |
| | 30 | 88 | HMX088C1NA |
| D | 40 | 114 | HMX114C1NA |
| | 50 | 143 | HMX143C1NA |
| | 60 | 169 | HMX169C1NA |
| F | 75 | 211 | HMX211C1NA |
| | 100 | 273 | HMA273C1NA |

230 Vac

| Enclosure Frame Size | Horsepower | Drive Rated NEC Amps | Catalog Number |
|----------------------|------------|----------------------|----------------|
| A | 1 | 4.2 | HMX4D2C2NA |
| | 2 | 6.8 | HMX6D8C2NA |
| | 3 | 9.6 | HMX9D6C2NA |
| A | 5 | 16 | HMX016C2NA |
| | 7.5 | 22 | HMX022C2NA |
| | 10 | 28 | HMX028C2NA |
| | 15 | 42 | HMX042C2NA |
| B | 20 | 54 | HMX054C2NA |
| C | 25 | 68 | HMX068C2NA |
| | 30 | 80 | HMX080C2NA |
| D | 40 | 104 | HMX104C2NA |
| | 50 | 130 | HMX130C2NA |
| | 60 | 154 | HMX154C2NA |
| | 75 | 192 | HMX192C2NA |
| F | 100 | 248 | HMX248C2NA |

Notes

For Wiring Diagrams, see **Page V6-T2-249**.

For NEMA 12 or 3R enclosures, see Catalog Number Selection on **Page V6-T2-236**.

Call Technical Support for NEMA 3R specifics. Enclosure size and weight differ from NEMA 1 and 12 products.

HMX_

480 Vac



| Enclosure Frame Size | Horsepower | Drive Rated NEC Amps | Catalog Number |
|----------------------|------------|----------------------|----------------|
| A | 1 | 2.1 | HMX2D1C4NA |
| | 2 | 3.4 | HMX3D4C4NA |
| | 3 | 5.6 | HMX5D6C4NA |
| | 5 | 7.6 | HMX7D6C4NA |
| | 7.5 | 11 | HMX011C4NA |
| A | 10 | 14 | HMX014C4NA |
| | 15 | 21 | HMX021C4NA |
| | 20 | 27 | HMX027C4NA |
| B | 25 | 34 | HMX034C4NA |
| | 30 | 40 | HMX040C4NA |
| | 40 | 52 | HMX052C4NA |
| C | 50 | 65 | HMX065C4NA |
| | 60 | 77 | HMX077C4NA |
| | 75 | 96 | HMX096C4NA |
| D | 100 | 124 | HMX124C4NA |
| | 125 | 156 | HMX156C4NA |
| | 150 | 180 | HMX180C4NA |
| F | 200 | 240 | HMX240C4NA |
| | 250 | 302 | HMX302C4NA |

NotesFor Wiring Diagrams, see **Page V6-T2-249**.For NEMA 12 or 3R enclosures, see Catalog Number Selection on **Page V6-T2-236**.

Call Technical Support for NEMA 3R specifics. Enclosure size and weight differ from NEMA 1 and 12 products.

Onboard Network Communications**Johnson Controls Metasys N2**

H-Max Series provides communication between the drive and a Johnson Controls Metasys™ N2 network. With this connection, the drive can be controlled, monitored and programmed from the Metasys system. N2 can be selected and programmed by the drive keypad.

BACnet

H-Max Series provides communication to BACnet networks. Data transfer is master-slave/token passing (MS/TP) RS-485.

BACnet/IP

100Base-T interface.

Modbus TCP

Ethernet based protocol.

Modbus RTU

H-Max Series provides communication to Modbus RTU RS-485 as a slave on a Modbus network. Other communication parameters include an address range from 1 to 247; a parity of None, Odd or Even; and the stop bit is 1.

2.9

Adjustable Frequency Drives

H-Max Series Drives

2

H-Max Series Option Board Kits Available for Slots D and E

The H-Max Series drives can accommodate a wide selection of expander and adapter option boards to

customize the drive for your application needs. The drive's control unit is designed to accept a total of two option boards.

The H-Max Series factory-installed standard board configuration includes an I/O board and a relay output board.

Option Boards Mounted in Slots D and E

| Option Kit Description | Option Kit Catalog Number |
|---|---------------------------|
| 6 x DI /DO, each digital input can be individually programmed as digital output | XXM-IO-B1-A |
| 1RO Form C (NO/NC), 1RO Form A (NO), 1 thermistor | XXM-IO-B2-A |
| 1 x AI, 2 x AO (isolated) | XXM-IO-B4-A |
| 3 x RO Form A (NO) | XXM-IO-B5-A |
| 1RO Form A (NO), 5DI 42–240 Vac input | XXM-IO-B9-A |
| LonWorks | XXM-COM-C4-A |
| 1 x AO, 1 x DO, 1 x RO | XXM-IO-BF-A |

Extended I/O Options in Slot D and E

| Description | Suffix Number |
|---|---------------|
| 6 x DI /DO, Each digital input can be individually programmed as digital output | B1 |
| 1RO (NC/NO), 1RO (NO), 1 Thermistor | B2 |
| 1 x AI, 2 x AO (isolated) | B4 |
| 3 x RO | B5 |
| 1RO (NO), 5 DI 42–240 Vac input | B9 |
| Expander IO, 1 AO, 1 DO, 1 RO | BF |

Optional Communications in Slot D and E

| Description | Suffix Number |
|-------------|---------------|
| LonWorks | C4 |

IntelliDisconnect Options

| Description | Suffix Number |
|--|---------------|
| Pilot lights (Power ON, RUN, Fault) | L3 |
| Fused drive isolation (cannot be used with PE) | P3 |
| Output contactor (cannot be used with P3) | PE |
| Space heater w/transformer (Type 3R only) | SA |

IntelliPass Bypass Options

| Description | Suffix Number |
|--|---------------|
| Pilot lights (Power ON, RUN, Fault) | L4 |
| Fused drive isolation (can not be used with P6) | P3 |
| Third contactor drive isolation (cannot be used with P3 or IS) | P6 |
| Manual bypass switch located on front door | M1 |
| Space heater w/transformer (Type 3R only) | SA |
| Auxiliary contacts | K9 |
| Isolation switch | IS |

Standard Onboard Communications

| Description | Suffix Number |
|---|---------------|
| RS-485 Communications | |
| BACnet MS/TP = Master slave/token protocol (Universal BACnet) RS-485 | BACnet |
| Modbus RTU RS-485, ASCII or RTU, remote terminal unit 32 nodes | Modbus |
| Johnson Controls Metasys N2 network | N2 |
| Onboard Ethernet-Based Communications (port left side of keypad) | |
| BACnet/IP Ethernet industrial protocol | BACnet |
| Modbus/TCP Transmission control protocol (Ethernet-based) | Modbus |

Technical Data and Specifications

Primary Design Features

| Description | IntelliPass | IntelliDisconnect |
|-----------------------------|-------------|-------------------|
| CB MMP | Standard | Standard |
| 2 contactor bypass | Standard | N/A |
| Electrical interlock | Standard | N/A |
| Third contactor (isolation) | Optional | N/A |

H-Max Series Drives

| Description | Specification |
|--------------------------------|---|
| Input Ratings | |
| Input voltage (V_{in}) | 208, 230, 480 Vac, -10%/+10% |
| Input frequency (f_{in}) | 50/60 Hz (variation up to 47–66 Hz) |
| Connection to power | Once per minute or less (typical operation) |
| Short-circuit withstand rating | 65 kAIC combination |
| Output Ratings | |
| Output voltage | 0 to V_{in}/U_{in} line voltage in |
| Continuous output current | Ambient temperature max. 104 °F (40 °C) |
| I_L overload | 1.1 x I_L (1 min./10 min.) |
| Overload current | 110% (1 min./10 min.) |
| Initial output current | 150% for two seconds |
| Output frequency | 0 to 320 Hz |
| Frequency resolution | 0.01 Hz |
| Control Characteristics | |
| Control method | Frequency control (V/f) open loop sensorless vector control |
| Switching frequency | 1–310 amps; adjustable with parameter 2.6.9 FS4–FS7: default 6 kHz |
| Frequency reference | Analog input: Resolution 0.1% (10-bit), accuracy $\pm 1\%$ Panel reference: Resolution 0.01 Hz |
| Field weakening point | 8 to 320 Hz |
| Acceleration time | 0.1 to 3000 seconds |
| Deceleration time | 0.1 to 3000 seconds |
| Braking torque | DC brake: 30% x T_n |
| Ambient Conditions | |
| Ambient operating temperature | FS4–FS7: 14 °F (-10 °C), no frost to 104 °F (40 °C) (Drive can operate at 122 °F (50 °C)) |
| Storage temperature | -40° to 158 °F (-40° to 70 °C) |
| Relative humidity | 0 to 95% RH, noncondensing, non-corrosive, no dripping water |
| Air quality | Chemical vapors: IEC 60721-3-3, unit in operation, Class 3C2; Mechanical particles: IEC 60721-3-3, unit in operation, Class 3S2 |
| Altitude | 100% load capacity (no derating) up to 3280 ft (1000 m); 1% derating for each 328 ft (100 m) above 3280 ft (1000 m); max. 9842 ft (3000 m); 380–480 V |
| Enclosure class | NEMA Type 1/IP21 or NEMA Type 12/IP54 (keypad required for IP54/Type 12) |


| Description | IntelliPass | IntelliDisconnect |
|----------------------|-------------|-------------------|
| Isolation switch | Optional | N/A |
| Top entry (power) | Standard | Standard |
| Bottom entry (power) | Standard | Standard |
| Output contactor | Standard | Optional |

| Description | Specification |
|------------------------------------|--|
| Standards | |
| EMC | Immunity: Fulfills all EMC immunity requirements; Emissions: EN 61800-3, LEVEL H (EMC C2) |
| Emissions | EMC level dependent— +EMC 2: EN61800-3 (2004) Category C2 Delivered with Class C2 EMC filtering as default. |
| Control Connections | |
| Analog input voltage | 0 to 10 V, $R = 200$ kohms differential Resolution 0.1%; Accuracy $\pm 1\%$ DIP switch selection (voltage/current) |
| Analog input current | 0(4) to 20 mA; $R_i = 250$ ohms differential |
| Digital inputs (6) | Positive or negative logic; 18 to 30 Vdc |
| Auxiliary voltage | +24 V $\pm 10\%$, max. 250 mA |
| Output reference voltage | +10 V $\pm 3\%$, max. load 10 mA |
| Analog output | 0–10 V, 0(4) to 20 mA; R_L max. 500 ohms; Resolution 10 bit; Accuracy $\pm 2\%$; DIP switch selection (voltage/current) |
| Relay outputs | IntelliDisconnect: 2 programmable, 1 Form C, 1 Form A IntelliPass: 1 programmable, 1 Form A With L3 or L4 option, 1 Form A relay is used Switching capacity: 24 Vdc/8 A, 250 Vac/8 A, 125 Vdc/0.4 A |
| Hard wire jumper | Between terminal 6 and 10 factory default |
| DIP switch setting default | RS-485 = off A01 = current A12 = current A11 = voltage |
| Protections | |
| Overcurrent protection | Yes |
| Overvoltage protection | Yes |
| DC bus regulation anti-trip | Yes (accelerates or decelerates the load) |
| Undervoltage protection | Yes |
| Earth fault protection | Yes (in case of earth fault in motor or motor cable, only the frequency converter is protected) |
| Input phase supervision | Yes (trips if any of the input phases are missing) |
| Motor phase supervision | Yes (trips if any of the output phases are missing) |
| Overtemperature protection | Yes |
| Motor overload protection | Yes |
| Motor stall protection | Yes |
| Motor underload protection | Yes |
| Short-circuit protection | Yes |
| Surge protection | Yes (varistor input) |
| Conformed coated (varnished) board | Yes (prevents corrosion) |

Wiring Diagrams

Control Input/Output, PID Application

2

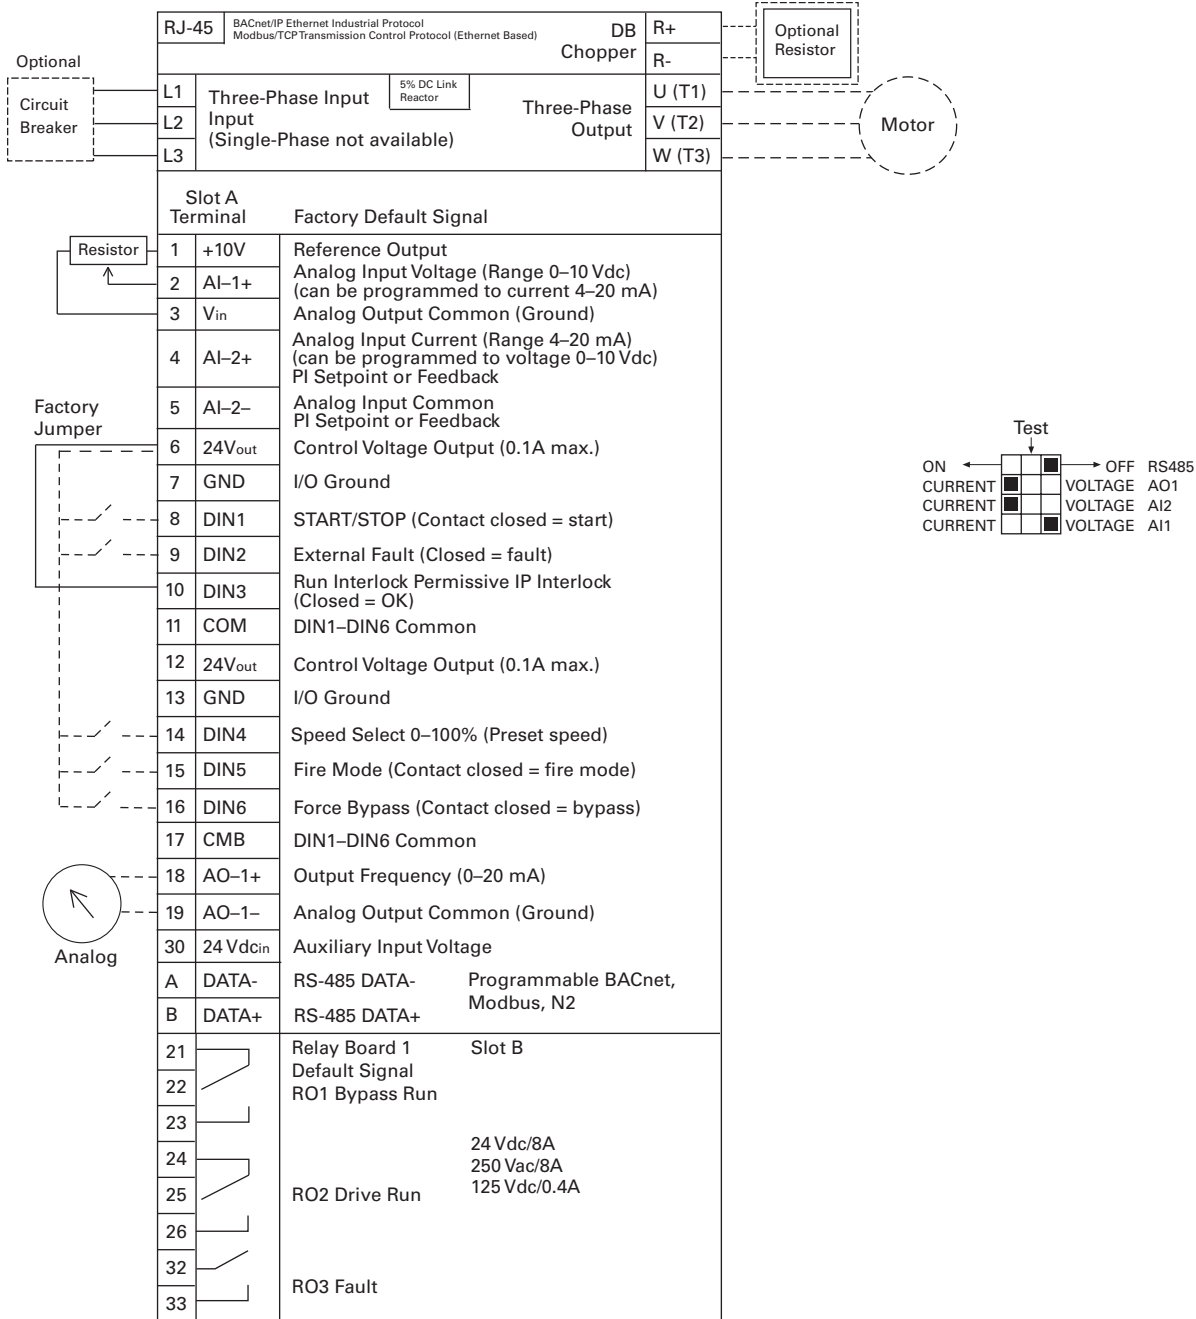

Standards

- Digital inputs D1–D6, relay out, analog in/out are freely programmed
- The user can assign a single input to multiple functions


Includes

- Six digital input
- Two analog input
- One analog output
- Three relay outputs (2 relays are factory wired for bypass operation in IntelliPass configurations)
- RS-485
- Ethernet


Reliability

- Pretested components
- Conformal coated (varnished) boards
- 40 °C rated
- 110% overload for one minute
- Eaton Electrical Services & Systems national network of AF drive specialists

H-Max Series IntelliPass

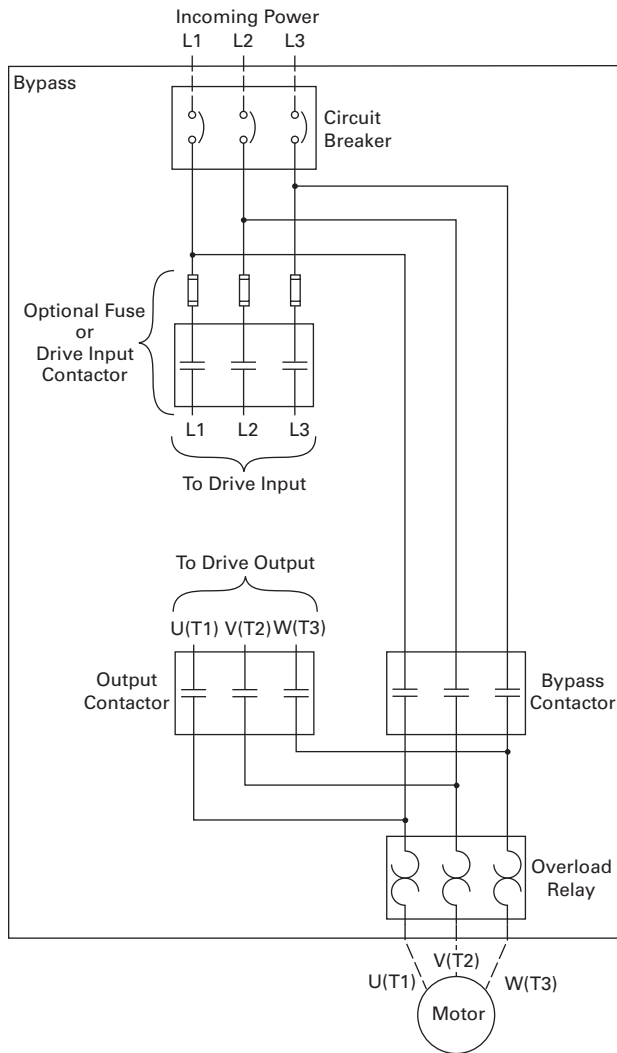

H-Max Series IntelliDisconnect Power Wiring

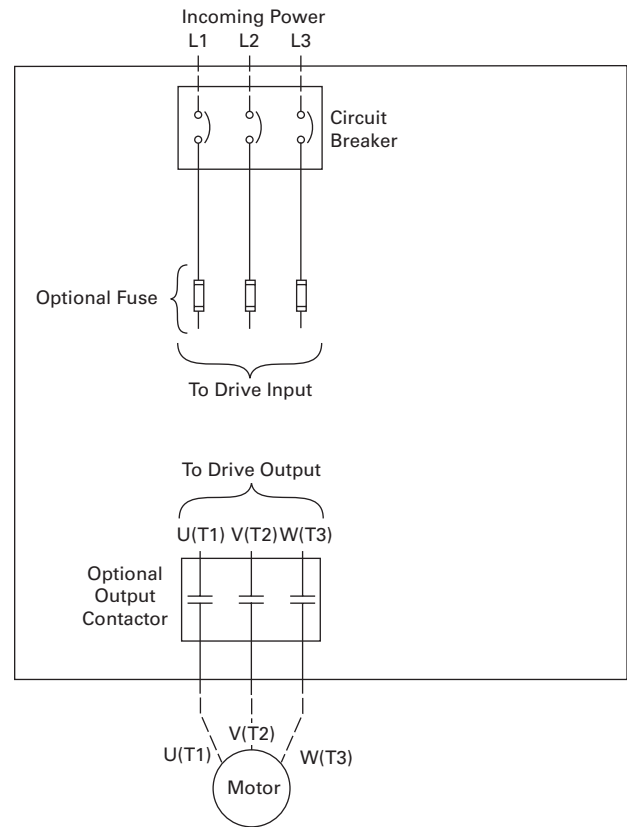

2.9


Adjustable Frequency Drives

H-Max Series Drives

Dimensions

Approximate Dimensions in Inches (mm)

2 H-Max Series IntelliPass and IntelliDisconnect Drives

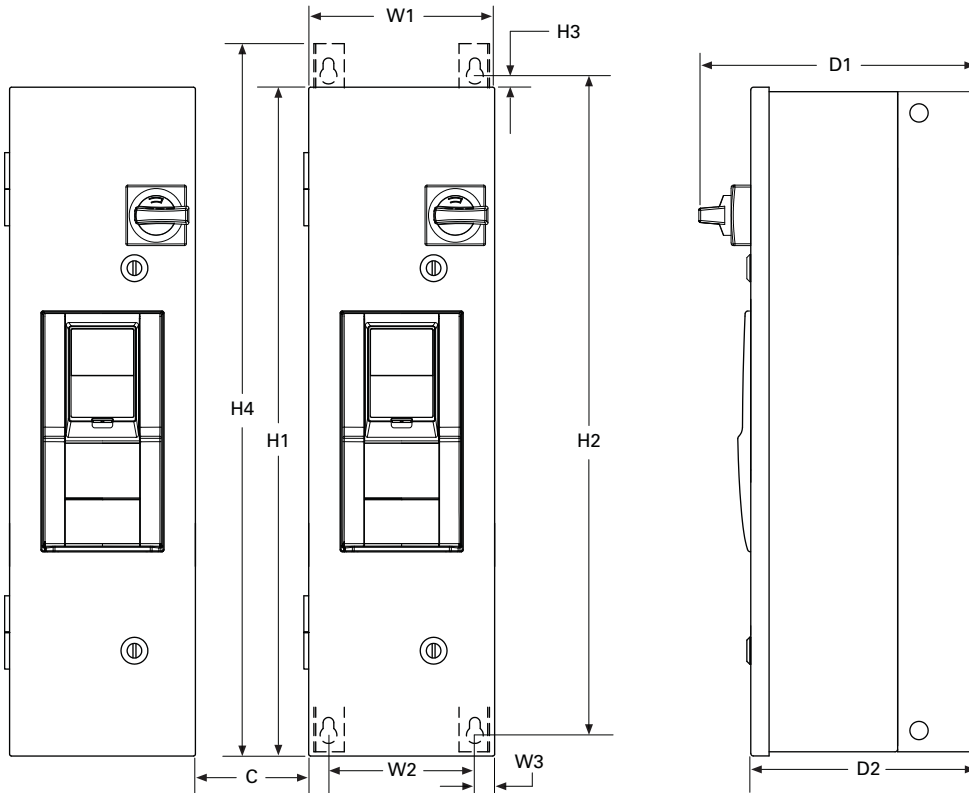

Distance to mount multiple drives.


| | Top | Bottom |
|-----|---------------|--------------|
| FR4 | 4.00 (101.6) | 2.00 (50.8) |
| FR5 | 4.75 (120.7) | 2.50 (63.5) |
| FR6 | 6.50 (165.1) | 3.25 (82.6) |
| FR7 | 10.00 (254.0) | 4.00 (101.6) |

Consult factory or use manual for final dimensions.

| Frame Size | Voltage | Horsepower (I _L) | H1 | H2 | H3 | H4 | C | W1 | W2 | W3 | D1 | D2 | Weight in Lbs (kg) |
|------------|---------|------------------------------|-------------------|-------------------|----------------|-------------------|-----------------|------------------|------------------|----------------|------------------|------------------|--------------------|
| FS4 | 208 | 1–3 | 30.00 (762.0) | 29.41 (747.1) | 0.25 (6.35) | 31.00 (787.4) | 3.00 (76.2) | 7.88 (200.2) | 6.25 (158.8) | 0.75 (19.1) | 12.49 (317.2) | 10.36 (263.1) | 45 (20.41) |
| | 230 | 1–3 | | | | | | | | | | | |
| | 480 | 1–7.5 | | | | | | | | | | | |
| FS5 | 208 | 5–10 | 37.00 (939.8) | 36.72 (932.7) | 0.25 (6.35) | 38.31 (973.0) | 3.00 (76.2) | 9.60 (243.8) | 7.97 (202.4) | 0.75 (19.1) | 15.35 (390.0) | 13.22 (335.8) | 57.5 (26.10) |
| | 230 | 5–10 | | | | | | | | | | | |
| | 480 | 10–20 | | | | | | | | | | | |
| FS6 | 208 | 15–20 | 45.45 (1154.4) | 44.81 (1138.2) | 0.25 (6.35) | 46.4 (1178.6) | 4.00 (101.6) | 11.44 (290.6) | 9.75 (247.6) | 0.75 (19.1) | 15.80 (401.3) | 13.67 (347.2) | 98.0 (44.45) |
| | 230 | 15–20 | | | | | | | | | | | |
| | 480 | 25–40 | | | | | | | | | | | |
| FS7 | 208 | 25–30 | 58.51 (1486.2) | 57.87 (1470.0) | 0.25 (6.35) | 59.46 (1510.3) | 5.00 (127.0) | 14.52 (368.8) | 12.83 (325.9) | 0.75 (19.1) | 15.68 (398.3) | 13.72 (348.5) | 165.0 (74.84) |
| | 230 | 25–30 | | | | | | | | | | | |
| | 480 | 50–75 | | | | | | | | | | | |

Note: C distance is spacing required to mount multiple drives.

Approximate Dimensions in Inches (mm)

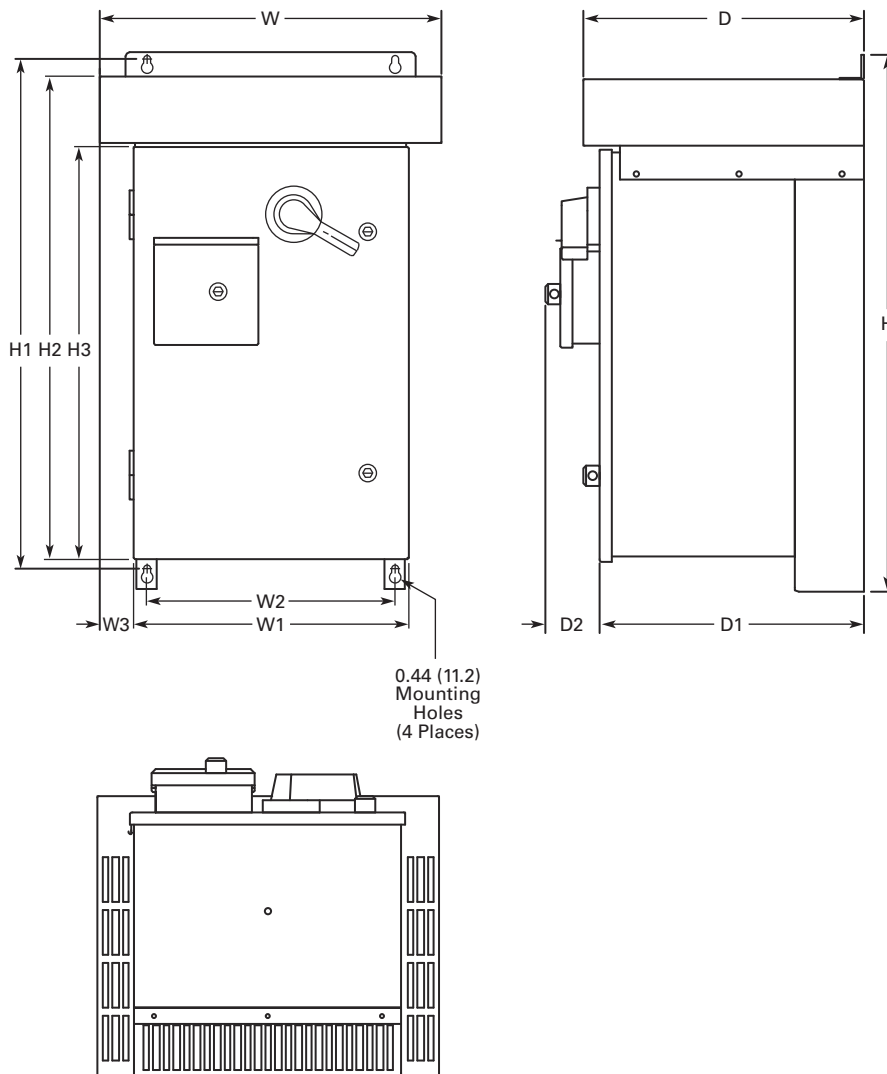Enclosure Box A NEMA Type 3R

| Voltage AC | hp (I _L) | H | H1 | H2 | H3 | W | W1 | W2 | W3 | D | D1 | D2 | Approx. Weight Lbs (kg) | Approx. Shipping Weight Lbs (kg) |
|--------------------|-------------------------|---------|---------|---------|---------|---------|---------|---------|--------|---------|---------|--------|-------------------------------|--|
| Three-Phase | | | | | | | | | | | | | | |
| 208 V | 1-10 | 33.00 | 31.36 | 29.67 | 25.35 | 21.05 | 16.92 | 15.30 | 2.07 | 17.24 | 16.26 | 3.31 | 170 (77) | 215 (98) |
| 230 V | 1-10 | (838.2) | (796.5) | (753.6) | (643.9) | (534.7) | (429.8) | (388.6) | (52.6) | (437.9) | (413.0) | (84.1) | | |
| 480 V | 1-20 | | | | | | | | | | | | | |

2.9



Adjustable Frequency Drives

H-Max Series Drives

Approximate Dimensions in Inches (mm)

Enclosure Box B NEMA Type 3R


2

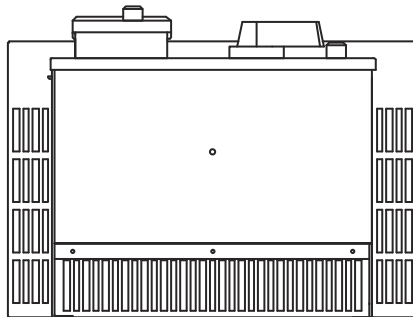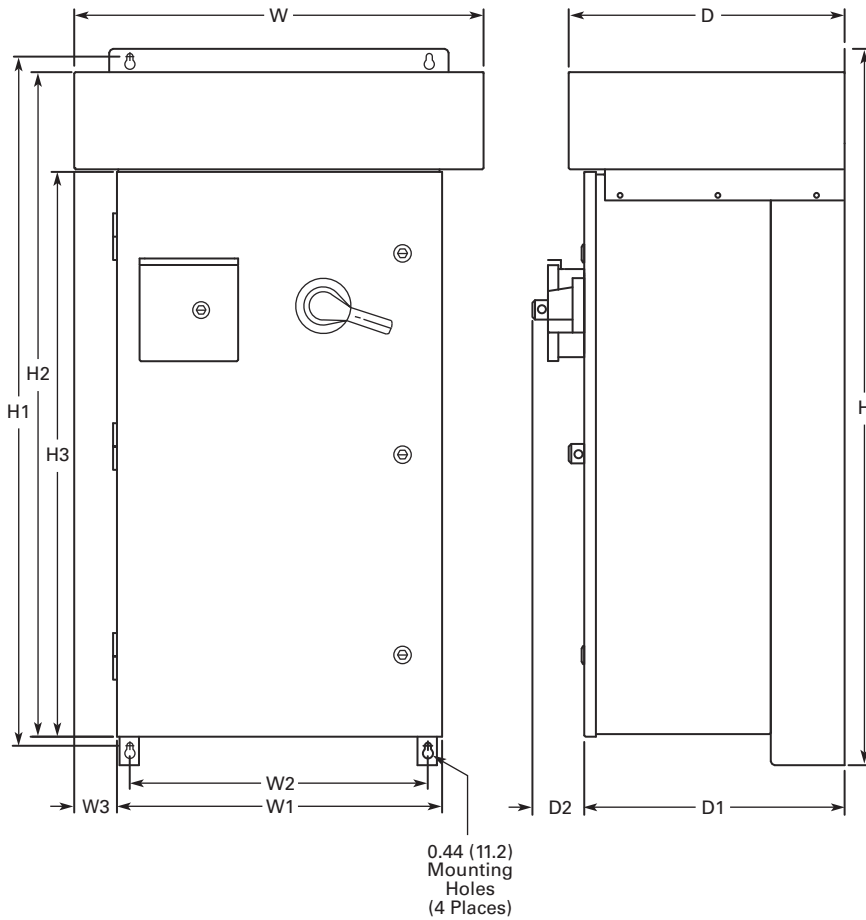

| Voltage AC | hp (I _L) | H | H1 | H2 | H3 | W | W1 | W2 | W3 | D | D1 | D2 | Approx. Weight Lbs (kg) | Approx. Shipping Weight Lbs (kg) |
|--------------------|----------------------|-------------------|-------------------|-------------------|------------------|------------------|------------------|------------------|----------------|------------------|------------------|----------------|-------------------------|----------------------------------|
| Three-Phase | | | | | | | | | | | | | | |
| 208 V | 15 | 46.09 (1170.7) | 44.45 (1129.0) | 42.77 (1086.4) | 36.35 (923.3) | 26.31 (668.3) | 20.92 (531.4) | 19.30 (490.2) | 2.69 (68.3) | 17.74 (450.6) | 16.76 (425.7) | 3.31 (84.1) | 235 (107) | 290 (132) |
| 230 V | 15 | | | | | | | | | | | | | |
| 480 V | 25-40 | | | | | | | | | | | | | |

Approximate Dimensions in Inches (mm)

Enclosure Box C NEMA Type 3R

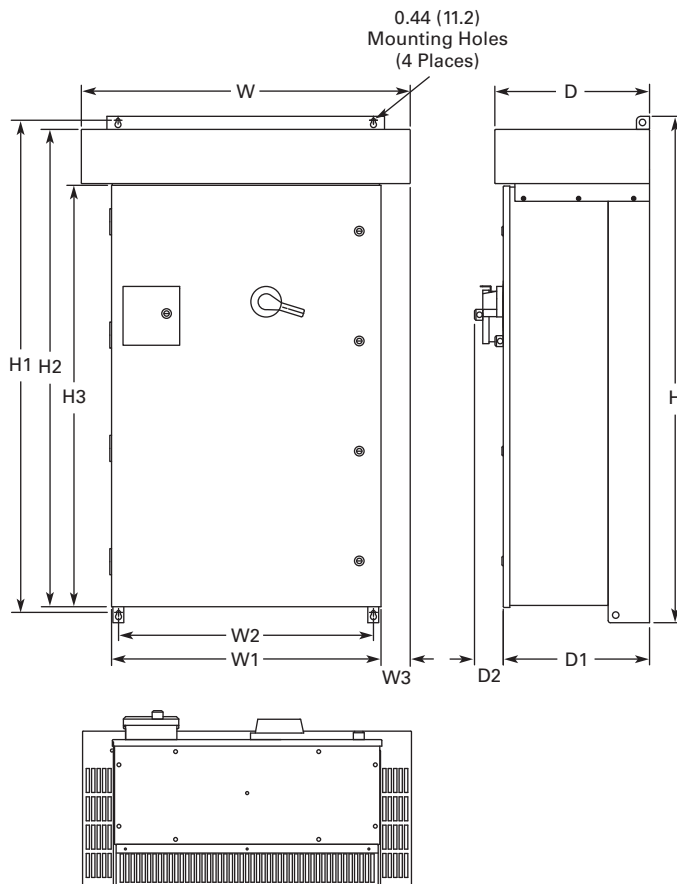

| Voltage AC | hp (I _L) | H | H1 | H2 | H3 | W | W1 | W2 | W3 | D | D1 | D2 | Approx. Weight Lbs (kg) |
|--------------------|----------------------|-------------------|-------------------|-------------------|-------------------|------------------|------------------|------------------|----------------|------------------|------------------|----------------|-------------------------|
| Three-Phase | | | | | | | | | | | | | |
| 208 | 20–30 | 58.09 (1475.5) | 56.45 (1433.8) | 54.77 (1391.2) | 48.35 (1228.1) | 37.73 (958.3) | 30.92 (785.4) | 29.30 (744.2) | 3.34 (84.8) | 17.74 (450.6) | 16.77 (426.0) | 3.31 (84.1) | ① |
| 230 | 20–30 | | | | | | | | | | | | |
| 480 | 50–75 | | | | | | | | | | | | |

Note

① Consult factory.

2.9


Adjustable Frequency Drives

H-Max Series Drives

Approximate Dimensions in Inches (mm)

Enclosure Box D


2

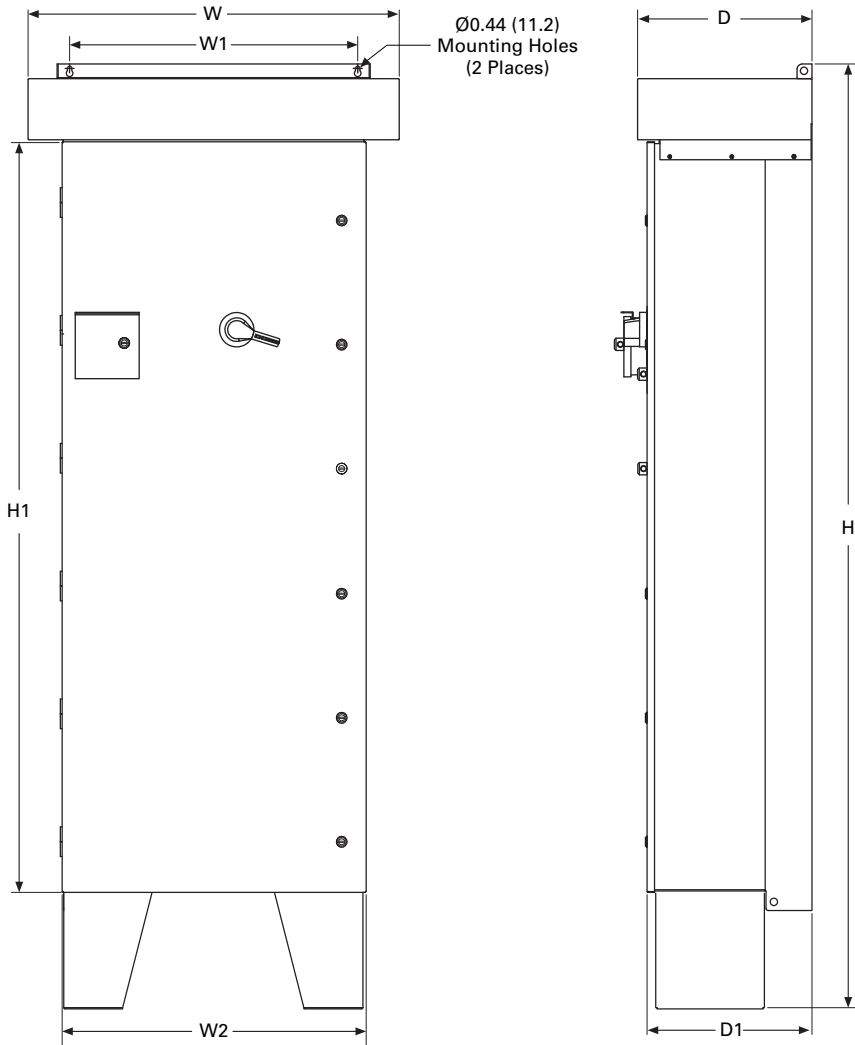

| Voltage AC | hp (I _L) | H | H1 | W | W1 | W2 | D | D1 | Approx. Weight Lbs (kg) |
|---------------------|----------------------|----------|----------|---------|---------|---------|---------|---------|-------------------------|
| NEMA Type 12 | | | | | | | | | |
| 208 | 40–60 | 80.00 | 76.27 | 31.00 | 29.30 | 30.92 | 16.76 | 16.76 | 850 |
| 230 | 40–75 | (2032.0) | (1937.3) | (787.4) | (744.2) | (785.4) | (425.7) | (425.7) | (386) |
| 480 | 100–150 | | | | | | | | |
| NEMA Type 3R | | | | | | | | | |
| 208 | 40–60 | 96.00 | 76.27 | 37.73 | 29.30 | 30.92 | 17.74 | 16.76 | 900 |
| 230 | 40–75 | (2438.4) | (1937.3) | (958.3) | (744.2) | (785.4) | (450.6) | (425.7) | (409) |
| 480 | 100–150 | | | | | | | | |

Approximate Dimensions in Inches (mm)

Enclosure Box 5

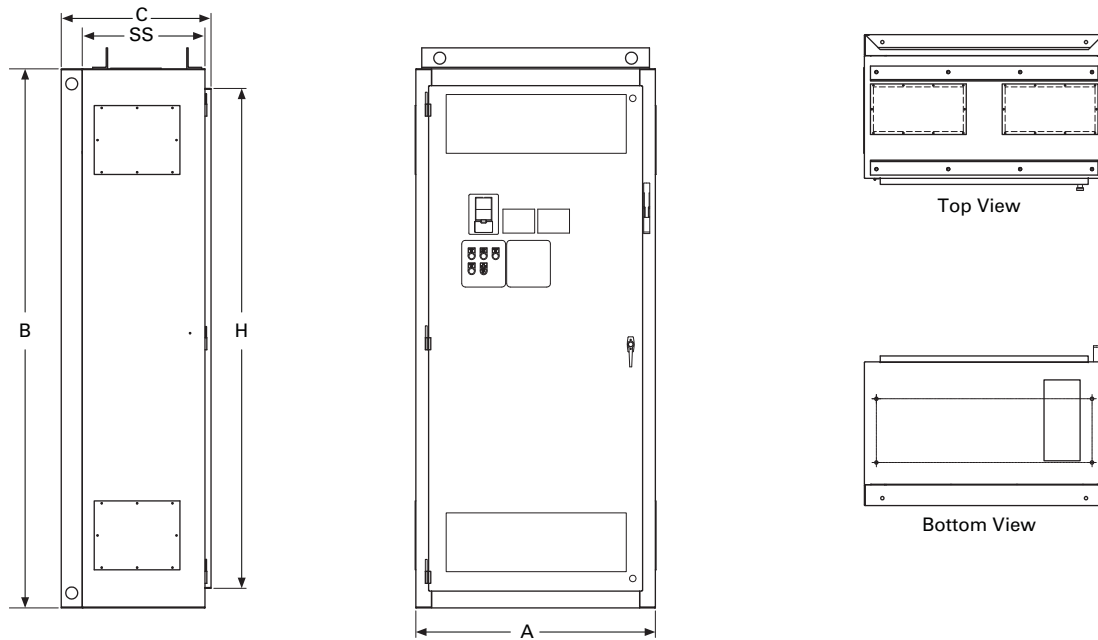

| Voltage AC | hp (I _L) | Wide A | High B | Deep C | SS | Mounting D | D1 | F | G | Door Height (H) | Approx. Weight Lbs (kg) |
|--------------------|----------------------|-------------------|-------------------|------------------|------------------|------------------|----------------|-----------------|------------------|-------------------|-------------------------|
| Three-phase | | | | | | | | | | | |
| 208 | 75-100 | 40.00 (1016.0) | 90.00 (2286.0) | 25.00 (635.0) | 20.50 (520.7) | 36.00 (914.4) | 2.00 (50.8) | 8.00 (203.2) | 10.80 (274.3) | 83.45 (2119.6) | 1275 (578) |
| 230 | 100 | | | | | | | | | | |
| 480 | 200-250 | | | | | | | | | | |

2.9




Adjustable Frequency Drives

H-Max Series Drives

Approximate Dimensions in Inches (mm)

Enclosure Box F

2

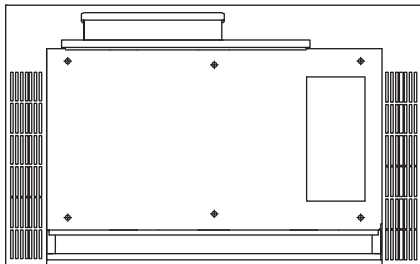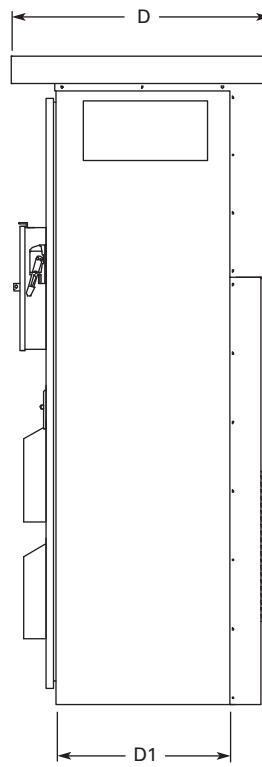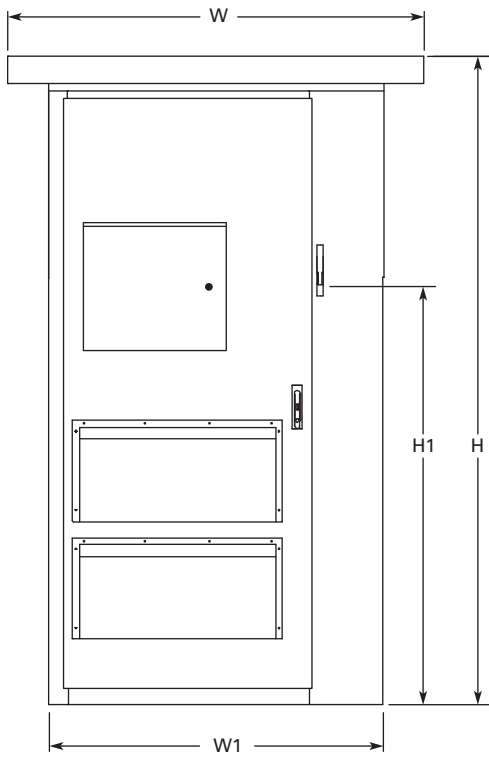

| Voltage AC | hp (I _L) | H | H1 | W | W1 | D | D1 | Approx. Weight Lbs (kg) |
|--------------------|----------------------|-------------------|-------------------|-------------------|-------------------|------------------|------------------|-------------------------|
| Three-Phase | | | | | | | | |
| 208 | 75–100 | 93.58 (2377.0) | 69.51 (1765.5) | 60.00 (1524.0) | 48.00 (1219.2) | 37.50 (952.5) | 26.00 (660.4) | 1700 (772) |
| 230 | 100 | | | | | | | |
| 480 | 200–250 | | | | | | | |

SPX Drives



Product Description

The SPX Series Adjustable Frequency Drives from Eaton's Electrical Sector are specifically designed for high performance applications. Equipped with high processing power, the SPX can use information from an encoder or a resolver in order to provide very precise motor control. Sensorless vector and simple frequency control are also supported. Typical applications requiring high performance are: master-slave drives, positioning applications, winder tension control and synchronization.

The core of the SPX is a fast microprocessor, providing high dynamic performance for applications where good motor handling and reliability are required. It can be used both in open loop applications as well as in applications requiring encoder feedback.

The SPX supports fast drive-to-drive communication. It also offers an integrated data logger functionality for analysis of dynamic events without the need of additional hardware. Simultaneous fast monitoring of several drives can be done by using the 9000Xdrive tool and CAN communication. In applications where reliability and quality are essential for high-performance, the SPX is the logical choice.

Contents

Description

| | <i>Page</i> |
|-----------------------------------|------------------|
| SPX Drives | |
| Features and Benefits | V6-T2-258 |
| Standards and Certifications | V6-T2-258 |
| Catalog Number Selection | V6-T2-259 |
| Product Selection | V6-T2-260 |
| Accessories | V6-T2-265 |
| Options | V6-T2-266 |
| Replacement Parts | V6-T2-273 |
| Technical Data and Specifications | V6-T2-280 |
| Dimensions | V6-T2-281 |

The Eaton family of drives includes DA1, DC1, H-Max, M-Max, SVX and SPX. 9000X Series drive ratings are rated for either high overload (I_H) or low overload (I_L). I_L indicates 110% overload capacity for 1 minute out of 10 minutes. I_H indicates 150% overload capacity for 1 minute out of 10 minutes.

Features and Benefits

- Speed error <0.01 %, depending on the encoder
- Incremental or absolute encoder support
- Encoder voltages of 5 V (RS-422), 15 V or 24 V, depending on the option card
- Full torque control at all speeds, including zero
- Torque accuracy <2%; <5% down to zero speed
- Starting torque >200%, depending on motor and drive sizing
- Integrated datalogger for system analysis
- Fast multiple drive monitoring with PC
- Full capability for master/slave configurations
- High-speed bus (12 Mbit/s) for fast inter-drive communication
- High-speed applications (up to 7200 Hz) possible with special software
- Robust design—proven 500,000 hours MTBF
- Integrated 3% line reactors standard on drives from FR4 through FR9
- Line reactor is included but is separated from chassis
- EMI/RFI Filters H standard up to 200 hp I_H 480 V, 100 hp I_H 230 V
- Simplified operating menu allows for typical programming changes, while programming mode provides control of everything
- Quick Start Wizard built into the programming of the drive ensures a smooth start-up
- Keypad can display up to three monitored parameters simultaneously
- LOCAL/REMOTE operation from keypad
- Copy/paste function allows transfer of parameter settings from one drive to the next
- Standard NEMA Type 12/IP54 keypad on all drives
- Hand-held auxiliary 240 power supply allows programming/monitoring of control module without applying full power to the drive
- The SPX can be flexibly adapted to a variety of needs using our pre-installed “Seven in One” precision application programs consisting of:
 - Basic
 - Standard
 - Local/remote
 - Multi-step speed control
 - PID control
 - Multi-purpose control
 - Pump and fan control with auto change
- Additional I/O and communication cards provide plug and play functionality
- I/O connections with simple quick connection terminals
- Control logic can be powered from an external auxiliary control panel, internal drive functions and fieldbus if necessary
- Brake chopper standard from: 1–30 hp/380–500 V 3/4–15 hp/208–230 V
- NEMA Type 1/IP21 enclosures available Frame Sizes FR4–FR11, NEMA Type 12/IP54 enclosures available Frame Sizes FR4–FR10 (FR10 and FR11 freestanding drives)
- Open chassis FR10 and greater
- Standard option board configuration includes an A9 I/O board and an A2 relay output board installed in slots A and B

Standards and Certifications

Product

- IEC 61800-2

Safety

- UL 508C

EMC (at default settings)


- Immunity: Fulfills all EMC immunity requirements; Emissions: EN 61800-3, LEVEL H

- UL Listed
- CE



Catalog Number Selection

SPX Adjustable Frequency Drives

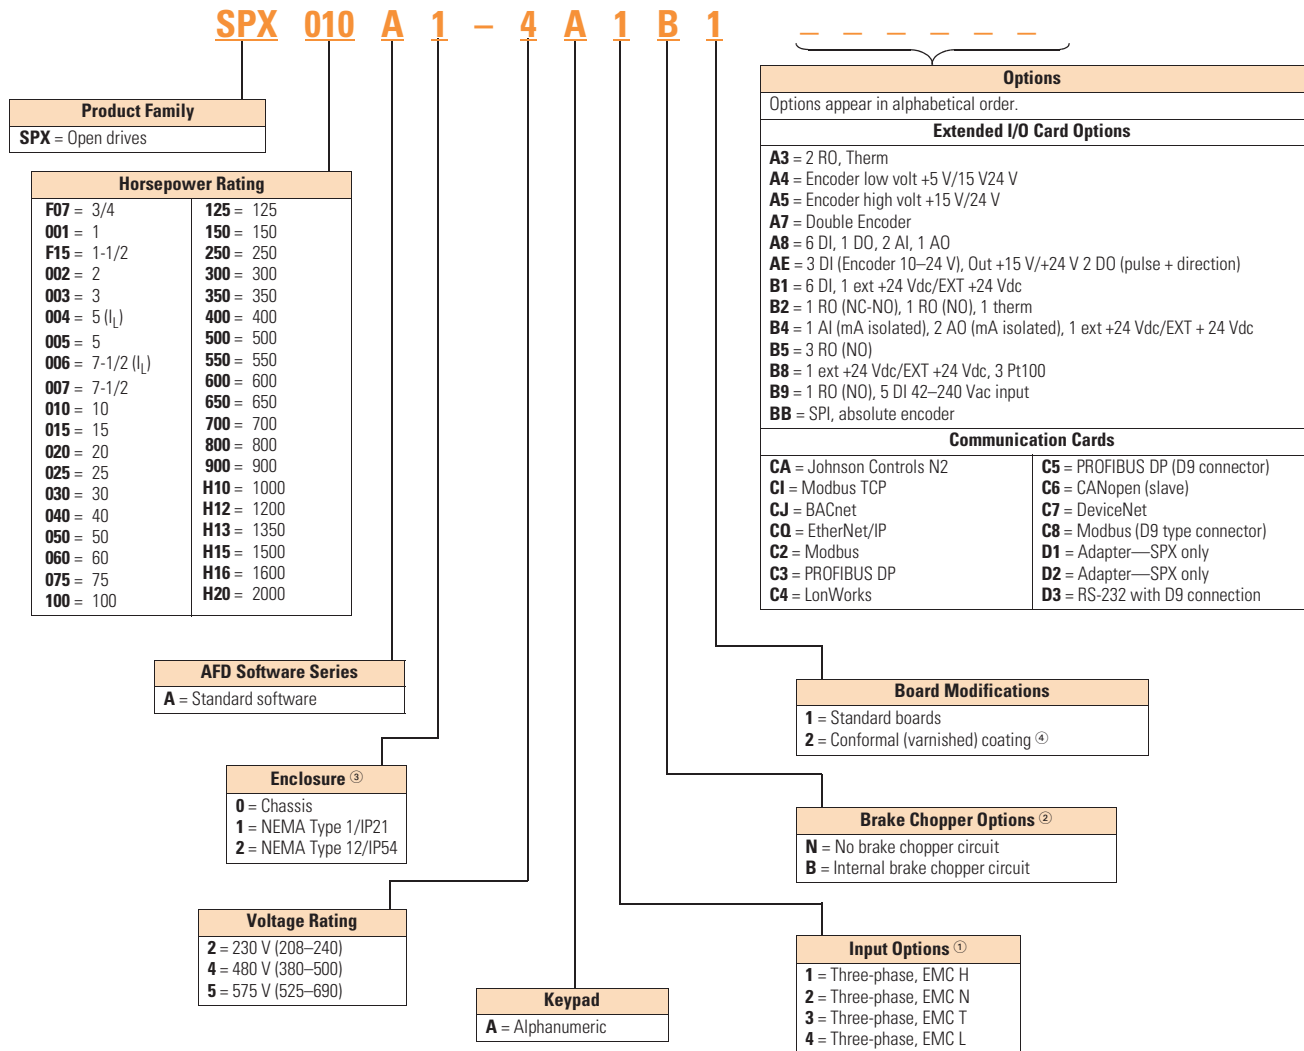

Notes

- ① All 230 V drives and 480 V drives up to 200 hp (I_H) are only available with input option **1** (EMC level H). 480 V drives 250 hp (I_H) or larger are available with input option **2** (EMC level N). 575 V drives 200 hp (I_H) or larger are available with input option **2**. 575 V drives up to 150 hp (I_H) are available with input option **4** (EMC level L). 480 V and 690 V freestanding drives are available with input option **4** (EMC level L).
- ② 480 V drives up to 30 hp (I_H) are only available with brake chopper option **B**. 480 V drives 40 hp (I_H) or larger come standard with brake chopper option **N**. 230 V drives up to 15 hp (I_H) are only available with brake chopper option **B**. 230 V drives 20 hp and larger come standard with brake chopper option **N**. All 575 V drives come standard without brake chopper option (**N**). **N = No** brake chopper.
- ③ 480 V drives 250–350 hp (I_H) and 690 V drives 200–300 hp (I_H) are available with enclosure style **0** (chassis). 480 V and 690 V FR10 freestanding drives are available with **1** (NEMA Type 1/IP21) or **2** (NEMA Type 12/IP54). FR11 freestanding drives are only available with enclosure style **1** (NEMA Type 1/IP21).
- ④ Factory promise delivery. Consult sales office for availability.
- ⑤ For High-Resistance Ground systems, any SVX/SPX drive can be used if the HRG system has ground supervision. If no ground supervision feature is available, use EMC class N or T.

Product Selection

2

230 V Drives

SPX Open Drives



208–240 V, NEMA Type 1/IP21 Drives

| Frame Size | hp (I _H) | Current (I _H) | hp (I _L) | Current (I _L) | Catalog Number |
|------------|----------------------|---------------------------|----------------------|---------------------------|----------------|
| FR4 | 3/4 | 3.7 | 1 | 4.8 | SPXF07A1-2A1B1 |
| | 1 | 4.8 | 1-1/2 | 6.6 | SPX001A1-2A1B1 |
| | 1-1/2 | 6.6 | 2 | 7.8 | SPXF15A1-2A1B1 |
| | 2 | 7.8 | 3 | 11 | SPX002A1-2A1B1 |
| | 3 | 11 | — | 12.5 | SPX003A1-2A1B1 |
| FR5 | — | 12.5 | 5 | 17.5 | SPX004A1-2A1B1 |
| | 5 | 17.5 | 7-1/2 | 25 | SPX005A1-2A1B1 |
| | 7-1/2 | 25 | 10 | 31 | SPX007A1-2A1B1 |
| FR6 | 10 | 31 | 15 | 48 | SPX010A1-2A1B1 |
| | 15 | 48 | 20 | 61 | SPX015A1-2A1B1 |
| FR7 | 20 | 61 | 25 | 75 | SPX020A1-2A1N1 |
| | 25 | 75 | 30 | 88 | SPX025A1-2A1N1 |
| | 30 | 88 | 40 | 114 | SPX030A1-2A1N1 |
| FR8 | 40 | 114 | 50 | 140 | SPX040A1-2A1N1 |
| | 50 | 140 | 60 | 170 | SPX050A1-2A1N1 |
| | 60 | 170 | 75 | 205 | SPX060A1-2A1N1 |
| FR9 | 75 | 205 | 100 | 261 | SPX075A1-2A1N1 |
| | 100 | 261 | — | — | SPX100A1-2A1N1 |

208–240 V, NEMA Type 12/IP54 Drives

| Frame Size | hp (I _H) | Current (I _H) | hp (I _L) | Current (I _L) | Catalog Number |
|------------|----------------------|---------------------------|----------------------|---------------------------|----------------|
| FR4 | 3/4 | 3.7 | 1 | 4.8 | SPXF07A2-2A1B1 |
| | 1 | 4.8 | 1-1/2 | 6.6 | SPX001A2-2A1B1 |
| | 1-1/2 | 6.6 | 2 | 7.8 | SPXF15A2-2A1B1 |
| | 2 | 7.8 | 3 | 11 | SPX002A2-2A1B1 |
| | 3 | 11 | — | 12.5 | SPX003A2-2A1B1 |
| FR5 | — | 12.5 | 5 | 17.5 | SPX004A2-2A1B1 |
| | 5 | 17.5 | 7-1/2 | 25 | SPX005A2-2A1B1 |
| | 7-1/2 | 25 | 10 | 31 | SPX007A2-2A1B1 |
| FR6 | 10 | 31 | 15 | 48 | SPX010A2-2A1B1 |
| | 15 | 48 | 20 | 61 | SPX015A2-2A1B1 |
| FR7 | 20 | 61 | 25 | 75 | SPX020A2-2A1N1 |
| | 25 | 75 | 30 | 88 | SPX025A2-2A1N1 |
| | 30 | 88 | 40 | 114 | SPX030A2-2A1N1 |
| FR8 | 40 | 114 | 50 | 140 | SPX040A2-2A1N1 |
| | 50 | 140 | 60 | 170 | SPX050A2-2A1N1 |
| | 60 | 170 | 75 | 205 | SPX060A2-2A1N1 |
| FR9 | 75 | 205 | 100 | 261 | SPX075A2-2A1N1 |
| | 100 | 261 | — | — | SPX100A2-2A1N1 |

480 V Drives

SPX Open Drives



380–500 V, NEMA Type 1/IP21 Drives

| Frame Size | hp (I _H) | Current (I _H) | hp (I _L) | Current (I _L) | Catalog Number |
|------------|----------------------|---------------------------|----------------------|---------------------------|----------------|
| FR4 | 1 | 2.2 | 1-1/2 | 3.3 | SPX001A1-4A1B1 |
| | 1-1/2 | 3.3 | 2 | 4.3 | SPXF15A1-4A1B1 |
| | 2 | 4.3 | 3 | 5.6 | SPX002A1-4A1B1 |
| | 3 | 5.6 | 5 | 7.6 | SPX003A1-4A1B1 |
| | 5 | 7.6 | — | 9 | SPX005A1-4A1B1 |
| | — | 9 | 7-1/2 | 12 | SPX006A1-4A1B1 |
| FR5 | 7-1/2 | 12 | 10 | 16 | SPX007A1-4A1B1 |
| | 10 | 16 | 15 | 23 | SPX010A1-4A1B1 |
| | 15 | 23 | 20 | 31 | SPX015A1-4A1B1 |
| FR6 | 20 | 31 | 25 | 38 | SPX020A1-4A1B1 |
| | 25 | 38 | 30 | 46 | SPX025A1-4A1B1 |
| | 30 | 46 | 40 | 61 | SPX030A1-4A1B1 |
| FR7 | 40 | 61 | 50 | 72 | SPX040A1-4A1N1 |
| | 50 | 72 | 60 | 87 | SPX050A1-4A1N1 |
| | 60 | 87 | 75 | 105 | SPX060A1-4A1N1 |
| FR8 | 75 | 105 | 100 | 140 | SPX075A1-4A1N1 |
| | 100 | 140 | 125 | 170 | SPX100A1-4A1N1 |
| | 125 | 170 | 150 | 205 | SPX125A1-4A1N1 |
| FR9 | 150 | 205 | 200 | 261 | SPX150A1-4A1N1 |
| | 200 | 245 | 250 | 300 | SPX200A1-4A1N1 |

380–500 V, NEMA Type 1/IP21 Freestanding Drives

| Frame Size | hp (I _H) | Current (I _H) | hp (I _L) | Current (I _L) | Catalog Number |
|------------|----------------------|---------------------------|----------------------|---------------------------|----------------|
| FR10 | 250 | 330 | 300 | 385 | SPX250A1-4A4N1 |
| | 300 | 385 | 350 | 460 | SPX300A1-4A4N1 |
| | 350 | 460 | 400 | 520 | SPX350A1-4A4N1 |
| FR11 | 400 | 520 | 500 | 590 | SPX400A1-4A4N1 |
| | 500 | 590 | 550 | 650 | SPX500A1-4A4N1 |
| | 550 | 650 | 600 | 730 | SPX550A1-4A4N1 |

Note

Integrated fuses as standard. Limited option selection available; 115 V transformer (KB), light kit (L1), HOA (K4), speed potentiometer w/HOA (K2), Disconnect switch (P2). See Freestanding Option selection on **Page V6-T2-272**.

2.10

Adjustable Frequency Drives

SPX Drives

SPX Open Drives

2



380–500 V, NEMA Type 12/IP54 Drives

| Frame Size | hp (I _H) | Current (I _H) | hp (I _L) | Current (I _L) | Catalog Number |
|------------|----------------------|---------------------------|----------------------|---------------------------|----------------|
| FR4 | 1 | 2.2 | 1-1/2 | 3.3 | SPX001A2-4A1B1 |
| | 1-1/2 | 3.3 | 2 | 4.3 | SPXF15A2-4A1B1 |
| | 2 | 4.3 | 3 | 5.6 | SPX002A2-4A1B1 |
| | 3 | 5.6 | 5 | 7.6 | SPX003A2-4A1B1 |
| | 5 | 7.6 | — | 9 | SPX005A2-4A1B1 |
| | — | 9 | 7-1/2 | 12 | SPX006A2-4A1B1 |
| FR5 | 7-1/2 | 12 | 10 | 16 | SPX007A2-4A1B1 |
| | 10 | 16 | 15 | 23 | SPX010A2-4A1B1 |
| | 15 | 23 | 20 | 31 | SPX015A2-4A1B1 |
| FR6 | 20 | 31 | 25 | 38 | SPX020A2-4A1B1 |
| | 25 | 38 | 30 | 46 | SPX025A2-4A1B1 |
| | 30 | 46 | 40 | 61 | SPX030A2-4A1B1 |
| FR7 | 40 | 61 | 50 | 72 | SPX040A2-4A1N1 |
| | 50 | 72 | 60 | 87 | SPX050A2-4A1N1 |
| | 60 | 87 | 75 | 105 | SPX060A2-4A1N1 |
| FR8 | 75 | 105 | 100 | 140 | SPX075A2-4A2N1 |
| | 100 | 140 | 125 | 170 | SPX100A2-4A1N1 |
| | 125 | 170 | 150 | 205 | SPX125A2-4A1N1 |
| FR9 | 150 | 205 | 200 | 261 | SPX150A2-4A1N1 |
| | 200 | 245 | 250 | 300 | SPX200A2-4A1N1 |

380–500 V, NEMA Type 12/IP54 Freestanding Drives

| Frame Size | hp (I _H) | Current (I _H) | hp (I _L) | Current (I _L) | Catalog Number |
|------------|----------------------|---------------------------|----------------------|---------------------------|----------------|
| FR10 | 250 | 330 | 300 | 385 | SPX250A2-4A4N1 |
| | 300 | 385 | 350 | 460 | SPX300A2-4A4N1 |
| | 350 | 460 | 400 | 520 | SPX350A2-4A4N1 |

380–500 V, Open Chassis Drives

| Frame Size | hp (I _H) | Current (I _H) | hp (I _L) | Current (I _L) | Catalog Number |
|------------|----------------------|---------------------------|----------------------|---------------------------|----------------|
| FR10 | 250 | 330 | 300 | 385 | SPX250A0-4A2N1 |
| | 300 | 385 | — | 460 | SPX300A0-4A2N1 |
| | 350 | 460 | 400 | 520 | SPX350A0-4A2N1 |
| FR11 | 400 | 520 | 500 | 590 | SPX400A0-4A2N1 |
| | 500 | 590 | — | 650 | SPX500A0-4A2N1 |
| | — | 650 | 600 | 730 | SPX550A0-4A2N1 |
| FR12 | 600 | 730 | — | 820 | SPX600A0-4A2N1 |
| | — | 820 | 700 | 920 | SPX650A0-4A2N1 |
| | 700 | 920 | 800 | 1030 | SPX700A0-4A2N1 |
| FR13 | 800 | 1030 | 900 | 1150 | SPX800A0-4A2N1 |
| | 900 | 1150 | 1000 | 1300 | SPX900A0-4A2N1 |
| | 1000 | 1300 | 1200 | 1450 | SPXH10A0-4A2N1 |
| FR14 | 1200 | 1600 | 1500 | 1770 | SPXH12A0-4A2N1 |
| | 1600 | 1940 | 1800 | 2150 | SPXH16A0-4A2N1 |

Notes

Integrated fuses as standard. Limited option selection available; 115 V transformer (KB), light kit (L1), HOA (K4), speed potentiometer w/HOA (K2), disconnect switch (P2). See Freestanding Option selection on [Page V6-T2-272](#).

① FR10–FR14 includes 3% line reactor, but it is not integral to chassis.

575 V Drives

SPX Open Drives



525–690 V, NEMA Type 1/IP21 Drives

| Frame Size | hp (I _H) | Current (I _H) | hp (I _L) | Current (I _L) | Catalog Number |
|------------|----------------------|---------------------------|----------------------|---------------------------|----------------|
| FR6 | 2 | 3.3 | 3 | 4.5 | SPX002A1-5A4N1 |
| | 3 | 4.5 | — | 5.5 | SPX003A1-5A4N1 |
| | — | 5.5 | 5 | 7.5 | SPX004A1-5A4N1 |
| | 5 | 7.5 | 7-1/2 | 10 | SPX005A1-5A4N1 |
| | 7-1/2 | 10 | 10 | 13.5 | SPX007A1-5A4N1 |
| | 10 | 13.5 | 15 | 18 | SPX010A1-5A4N1 |
| | 15 | 18 | 20 | 22 | SPX015A1-5A4N1 |
| | 20 | 22 | 25 | 27 | SPX020A1-5A4N1 |
| | 25 | 27 | 30 | 34 | SPX025A1-5A4N1 |
| FR7 | 30 | 34 | 40 | 41 | SPX030A1-5A4N1 |
| | 40 | 41 | 50 | 52 | SPX040A1-5A4N1 |
| FR8 | 50 | 52 | 60 | 62 | SPX050A1-5A4N1 |
| | 60 | 62 | 75 | 80 | SPX060A1-5A4N1 |
| | 75 | 80 | 100 | 100 | SPX075A1-5A4N1 |
| FR9 | 100 | 100 | 125 | 125 | SPX100A1-5A4N1 |
| | 125 | 125 | 150 | 144 | SPX125A1-5A4N1 |
| | 150 | 144 | — | 170 | SPX150A1-5A4N1 |
| | — | 170 | 200 | 208 | SPX175A1-5A4N1 |

525–690 V, NEMA Type 1/IP21 Freestanding Drives

| Frame Size | hp (I _H) | Current (I _H) | hp (I _L) | Current (I _L) | Catalog Number |
|------------|----------------------|---------------------------|----------------------|---------------------------|----------------|
| FR10 | 200 | 208 | 250 | 261 | SPX200A1-5A4N1 |
| | 250 | 261 | 300 | 325 | SPX250A1-5A4N1 |
| | 300 | 325 | 400 | 385 | SPX300A1-5A4N1 |
| FR11 | 400 | 385 | 450 | 460 | SPX400A1-5A4N1 |
| | 450 | 460 | 500 | 502 | SPX450A1-5A4N1 |
| | 500 | 502 | 550 | 590 | SPX500A1-5A4N1 |

Note

Integrated fuses as standard. Limited option selection available; 115 V transformer (KB), light kit (L1), HOA (K4), speed potentiometer w/HOA (K2), disconnect switch (P2). See Freestanding Option selection on **Page V6-T2-272**.

SPX Open Drives

2



525–690 V, NEMA Type 12/IP54 Drives

| Frame Size | hp (I _H) | Current (I _H) | hp (I _L) | Current (I _L) | Catalog Number |
|------------|----------------------|---------------------------|----------------------|---------------------------|----------------|
| FR6 | 2 | 3.3 | 3 | 4.5 | SPX002A2-5A4N1 |
| | 3 | 4.5 | — | 5.5 | SPX003A2-5A4N1 |
| | — | 5.5 | 5 | 7.5 | SPX004A2-5A4N1 |
| | 5 | 7.5 | 7-1/2 | 10 | SPX005A2-5A4N1 |
| | 7-1/2 | 10 | 10 | 13.5 | SPX007A2-5A4N1 |
| | 10 | 13.5 | 15 | 18 | SPX010A2-5A4N1 |
| | 15 | 18 | 20 | 22 | SPX015A2-5A4N1 |
| | 20 | 22 | 25 | 27 | SPX020A2-5A4N1 |
| FR7 | 25 | 27 | 30 | 34 | SPX025A2-5A4N1 |
| | 30 | 34 | 40 | 41 | SPX030A2-5A4N1 |
| FR8 | 40 | 41 | 50 | 52 | SPX040A2-5A4N1 |
| | 50 | 52 | 60 | 62 | SPX050A2-5A4N1 |
| FR9 | 60 | 62 | 75 | 80 | SPX060A2-5A4N1 |
| | 75 | 80 | 100 | 100 | SPX075A2-5A4N1 |
| | 100 | 100 | 125 | 125 | SPX100A2-5A4N1 |
| FR10 | 125 | 125 | 150 | 144 | SPX125A2-5A4N1 |
| | 150 | 144 | — | 170 | SPX150A2-5A4N1 |
| | — | 170 | 200 | 208 | SPX175A2-5A4N1 |

525–690 V, NEMA Type 12/IP54 Freestanding Drives

| Frame Size | hp (I _H) | Current (I _H) | hp (I _L) | Current (I _L) | Catalog Number |
|------------|----------------------|---------------------------|----------------------|---------------------------|----------------|
| FR10 | 200 | 208 | 250 | 261 | SPX200A2-5A4N1 |
| | 250 | 261 | 300 | 325 | SPX250A2-5A4N1 |
| | 300 | 325 | 400 | 385 | SPX300A2-5A4N1 |

525–690 V, Open Chassis Drives

| Frame Size | hp (I _H) | Current (I _H) | hp (I _L) | Current (I _L) | Catalog Number |
|------------|----------------------|---------------------------|----------------------|---------------------------|----------------|
| FR10 | 200 | 208 | 250 | 261 | SPX200A0-5A2N1 |
| | 250 | 261 | 300 | 325 | SPX250A0-5A2N1 |
| | 300 | 325 | 400 | 385 | SPX300A0-5A2N1 |
| FR11 | 400 | 385 | 450 | 460 | SPX400A0-5A2N1 |
| | 450 | 460 | 500 | 502 | SPX450A0-5A2N1 |
| | 500 | 502 | — | 590 | SPX500A0-5A2N1 |
| FR12 | — | 590 | 600 | 650 | SPX550A0-5A2N1 |
| | 600 | 650 | 700 | 750 | SPX600A0-5A2N1 |
| | 700 | 750 | 800 | 820 | SPX700A0-5A2N1 |
| FR13 | 800 | 820 | 900 | 920 | SPX800A0-5A2N1 |
| | 900 | 920 | 1000 | 1030 | SPX900A0-5A2N1 |
| | 1000 | 1030 | 1250 | 1180 | SPXH10A0-5A2N1 |
| FR14 | 1350 | 1300 | 1500 | 1500 | SPXH13A0-5A2N1 |
| | 1500 | 1500 | 2000 | 1900 | SPXH15A0-5A2N1 |
| | 2000 | 1900 | 2300 | 2250 | SPXH20A0-5A2N1 |

Notes

Integrated fuses as standard. Limited option selection available; 115 V transformer (KB), light kit (L1), HOA (K4), speed potentiometer w/HOA (K2), disconnect switch (P2). See Freestanding Option selection on [Page V6-T2-272](#).

Ⓞ FR10–FR14 includes 3% line reactor, but it is not integral to chassis.

Accessories

Demo Drive and Power Supply

Demo Drive and Power Supply

| Description | Catalog Number |
|------------------|----------------|
| 9000X demo drive | 9000XDEMO |

9000X Series—SVX/SPX Conversion and Flange Kits

The Type 12/IP54 option kit is used to convert a Type 1/IP21 to a Type 12/IP54 drive. The kit includes:

NEMA Type 12 / IP54 Conversion Kits

| Frame Size | Catalog Number |
|--------------------------|----------------|
| Frame 4 Type 12/IP54 kit | OPTN12FR4 |
| Frame 5 Type 12/IP54 kit | OPTN12FR5 |
| Frame 6 Type 12/IP54 kit | OPTN12FR6 |

Flange Kits

The flange kit is used when the power section heat sink is mounted through the back panel of an enclosure. The kit includes hardware and supporting steel plates.

NEMA Type 12 / IP54 Conversion Kits

Kit

| Frame Size | Catalog Number |
|---------------------------------|----------------|
| Frame 4 flange kit Type 12/IP54 | OPTTHR4 |
| Frame 5 flange kit Type 12/IP54 | OPTTHR5 |
| Frame 6 flange kit Type 12/IP54 | OPTTHR6 |
| Frame 7 flange kit Type 12/IP54 | OPTTHR7 |
| Frame 8 flange kit Type 12/IP54 | OPTTHR8 |
| Frame 9 flange kit Type 12/IP54 | OPTTHR9 |

2.10

Adjustable Frequency Drives

SPX Drives

Options


9000X Series Option Board Kits

2

The 9000X Series drives can accommodate a wide selection of expander and adapter option boards to customize the drive for your application needs. The drive's control unit is designed to accept a total of five option boards.

The 9000X Series factory installed standard board configuration includes an A9 I/O board and an A2 relay output board, which are installed in slots A and B.

Option Boards



Option Board Kits

| Option Kit Description ^① | Allowed Slot Locations ^② | Field Installed Catalog Number | Factory Installed Option Designator | SVX Ready Programs | | | | | | |
|--|-------------------------------------|--------------------------------|-------------------------------------|--------------------|--------------|----------|-----|-----|----------|-----|
| | | | | Basic | Local/Remote | Standard | MSS | PID | Multi-P. | PFC |
| Standard I/O Cards | | | | | | | | | | |
| 6 DI, 1 DO, 2 AI, 1 AO, 1 +10 Vdc ref, 2 ext +24 Vdc/EXT +24 Vdc | A | OPTA9 | — | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| 2 RO (NC-NO) | B | OPTA2 | — | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Extended I/O Cards | | | | | | | | | | |
| 2 RO, therm | B | OPTA3 | A3 | — | ■ | ■ | ■ | ■ | ■ | ■ |
| Encoder low volt +5 V/15 V/24 V | C | OPTA4 | A4 | — | ■ | ■ | ■ | ■ | ■ | ■ |
| Encoder high volt +15 V/24 V | C | OPTA5 | A5 | — | ■ | ■ | ■ | ■ | ■ | ■ |
| Double encoder—SPX only | C | OPTA7 | A7 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| 6 DI, 1 DO, 2 AI, 1 AO | A | OPTA8 | A8 | — | ■ | ■ | ■ | ■ | ■ | ■ |
| 6 DI, 1 DO, 2 AI, 1 AO, 1 +10 Vdc ref, 2 ext +24 Vdc/EXT +24 Vdc | A | OPTA1 | — | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| 3 DI (encoder 10–24 V), out +15 V/+24 V, 2 DO (pulse+direction)—SPX only | C | OPTAE | AE | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| 6 DI, 1 DO, 2 AI, 1 AO, 1 +10 Vdc ref, 2 ext +24 Vdc/EXT +24 Vdc | A | OPTAFA1 | — | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| 6 DI, 1 ext +24 Vdc/EXT +24 Vdc | B, C, D , E | OPTB1 | B1 | — | — | — | — | — | ■ | ■ |
| 1 RO (NC-NO), 1 RO (NO), 1 therm | B, C, D , E | OPTB2 | B2 | — | — | — | — | — | ■ | ■ |
| 1 AI (mA isolated), 2 AO (mA isolated), 1 ext +24 Vdc/EXT +24 Vdc | B, C, D , E | OPTB4 | B4 | — | ■ | ■ | ■ | ■ | ■ | ■ |
| 3 RO (NO) | B, C, D , E | OPTB5 | B5 | — | — | — | — | — | ■ | ■ |
| 1 ext +24 Vdc/EXT +24 Vdc, 3 Pt100 | B, C, D , E | OPTB8 | B8 | — | — | — | — | — | — | — |
| 1 RO (NO), 5 DI 42–240 Vac input | B, C, D , E | OPTB9 | B9 | — | — | — | — | — | ■ | ■ |
| SPI, absolute encoder | C | OPTBB | BB | — | — | — | — | — | — | — |
| Communication Cards | | | | | | | | | | |
| Modbus RTU | D, E | OPTC2 | C2 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Modbus RTU (D9 connector) | D, E | OPTC8 | C8 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| PROFIBUS DP | D, E | OPTC3 | C3 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| PROFIBUS DP (D9 connector) | D, E | OPTC5 | C5 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Johnson Controls N2 | D, E | OPTC2 | CA | — | — | — | — | — | — | — |
| BACnet MSTP | D, E | OPTCJ | CJ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| LonWorks | D, E | OPTC4 | C4 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| CANopen (slave) | D, E | OPTC6 | C6 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| DeviceNet | D, E | OPTC7 | C7 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Modbus TCP | D, E | OPTCI | CI | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| EtherNet/IP | D, E | OPTCQ | CQ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| PROFINET, Modbus TCP, EtherNet/IP (dual-port) ^④ | D, E | OPTC9 | E9 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| EtherCAT (dual-port) ^④ | D, E | OPTCQ | EC | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| SPX adapter | D, E | OPTD1 | D1 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| SPX adapter | D, E | OPTD2 | D2 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| RS-232 adapter | D, E | OPTD3 | D3 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |

Notes

- ① AI = Analog Input; AO = Analog Output, DI = Digital Input, DO = Digital Output, RO = Relay Output
- ② Option card must be installed in one of the slots listed for that card. Slot indicated in bold is the preferred location.
- ③ OPTC2 is a multi-protocol option card.

Modbus RTU Network Communications

The Modbus Network Card OPTC2 is used for connecting the SVX Drive as a slave on a Modbus network. The interface is connected by a 9-pin DSUB connector (female) and the baud rate ranges from 300 to 19,200 baud. Other communication parameters include an address range from 1 to 247; a parity of None, Odd or Even; and the stop bit is 1.

PROFIBUS Network Communications

The PROFIBUS Network Card OPTC3 is used for connecting the SVX Drive as a slave on a PROFIBUS-DP network. The interface is connected by a 9-pin DSUB connector (female). The baud rates range from 9.6 Kbaud to 12 Mbaud, and the addresses range from 1 to 127.

LonWorks Network Communications

The LonWorks Network Card OPTC4 is used for connecting the SVX Drive on a LonWorks network. This interface uses Standard Network Variable Types (SNVT) as data types. The channel connection is achieved using a FTT-10 A Free Topology transceiver via a single twisted transfer cable. The communication speed with LonWorks is 78 kBits/s.

CANopen (Slave) Communications

The CANopen (Slave) Network Card OPTC6 is used for connecting the SVX Drive to a host system. According to ISO11898 standard cables to be chosen for CANbus should have a nominal impedance of 120 ohms, and specific line delay of nominal 5 nS/m. 120 ohms line termination resistors required for installation.

DeviceNet Network Communications

The DeviceNet Network Card OPTC7 is used for connecting the SVX Drive on a DeviceNet Network. It includes a 5.08 mm pluggable connector. Transfer method is via CAN using a two-wire twisted shielded cable with two-wire bus power cable and drain. The baud rates used for communication include 125 Kbaud, 250 Kbaud and 500 Kbaud.

Johnson Controls Metasys N2 Network Communications

The OPTC2 fieldbus board provides communication between the SVX Drive and a Johnson Controls Metasys™ N2 network. With this connection, the drive can be controlled, monitored and programmed from the Metasys system. The N2 fieldbus is available as a factory installed option and as a field installable kit.

Modbus/TCP Network Communications

The Modbus/TCP Network Card OPTCI is used for connecting the SVX Drive to Ethernet networks utilizing Modbus protocol. It includes an RJ-45 pluggable connector. This interface provides a selection of standard and custom register values to communicate drive parameters. The board supports 10 Mbps and 100 Mbps communication speeds. The IP address of the board is configurable over Ethernet using a supplied software tool.

BACnet Network Communications

The BACnet Network Card OPTCJ is used for connecting the SVX Drive to BACnet networks. It includes a 5.08 mm pluggable connector. Data transfer is Master-Slave/Token Passing (MS/TP) RS-485. This interface uses a collection of 30 Binary Value Objects (BVOs) and 35 Analog Value Objects (AVOs) to communicate drive parameters. The card supports 9.6, 19.2 and 38.4 Kbaud communication speeds and supports network addresses 1–127.

EtherNet/IP Network Communications

The OPTCQ is used for connecting the SVX Drive to Ethernet/Industrial Protocol networks. It includes an RJ-45 pluggable connector. The interface uses CIP objects to communicate drive parameters (CIP is “Common Industrial Protocol”, the same protocol used by DeviceNet). The board supports 10 Mbps and 100 Mbps communication speeds. The IP address of the board is configurable by Static, BOOTP and DHCP methods.

2.10

Adjustable Frequency Drives

SPX Drives

Control Panel Options

Factory Options

2

| Description | Factory Installed Option Code | Field Installed NEMA Type 1/IP21 Catalog Number |
|--|----------------------------------|---|
| Local/Remote Keypad SVX Control Panel —This option is standard on all drives and consists of an RS-232 connection, backlit alphanumeric LCD display with nine indicators for the RUN status and two indicators for the control source. The nine pushbuttons on the panel are used for panel programming and monitoring of all SVX parameters. The panel is detachable and isolated from the input line potential. Include LOC/REM key to choose control location. | A | KEYPAD-LOC/REM |
| Keypad Remote Mounting Kit —This option is used to remote mount the SVX keypad. The footprint is compatible to the SV9000 remote mount kit. Includes 10 ft cable, keypad holder and mounting hardware. | — | OPTRMT-KIT-9000X |
| Keypad Blank —9000X Series select keypad for use with special and custom applications. | — | KEYPAD-BLANK |

Miscellaneous Options

| Description | Catalog Number |
|---|---------------------------|
| 9000XDrive —A PC-based tool for controlling and monitoring of the SVX. Features include: loading parameters that can be saved to a file or printed, setting references, starting and stopping the motor, monitoring signals in graphical or text form, and real-time display. To avoid damage to the drive or computer, SVDrivecable must be used. | 9000XDRIVE |
| SVDrivecable —6 ft (1.8 m) RS-232 cable (22 gauge) with a 7-pin connector on each end. Should be used in conjunction with the 9000XDrive option to avoid damage to the SVX or computer. The same cable can be used for downloading specialized applications to the drive. | SVDRIVECABLE |
| External Dynamic Braking Resistors —Used with the dynamic braking chopper circuit to absorb motor regenerative energy for stopping the load and to dissipate the energy flowing back into the drive. Resistors are separated into standard duty and heavy-duty. Standard duty is defined as 20% duty or less with 100% braking torque, while heavy-duty is defined as 50% duty or less with 150% braking torque. | See Page V6-T2-269 |

SPX Drive Options

Brake Chopper Options

The brake chopper circuit option is used for applications that require dynamic braking. Dynamic braking resistors are not included with drive purchase. Consult the factory for additional dynamic braking resistor selections that are supplied separately. A list of common resistors are listed below and are complete indoor assemblies, include a pre-wired terminal block and a thermal switch, and are not UL Listed.


Duty Cycle

The duty cycle rating is based on a 60-second period. For example, the 20% duty cycle resistor can carry 100% current for 12 seconds out of every 60 seconds, while the 50% duty cycle resistor can carry 150% current for 30 seconds out of every 60 seconds.

Torque

If the braking torque required is less than 15%, dynamic braking is not required because the regenerated energy will be dissipated in the drive and motor losses.

Dynamic Brake Resistor—Catalog Number Selection

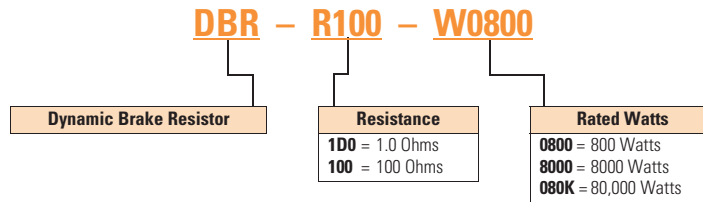

230 V Brake Resistors

| Drive hp (CT/I _H) | Minimum Ohms | 20% Duty Cycle, 100% Torque | | 50% Duty Cycle, 150% Torque | |
|----------------------------------|-----------------|-----------------------------|---------------------|-----------------------------|---------------------|
| | | Catalog Number | Dimensions (Inches) | Catalog Number | Dimensions (Inches) |
| 0.75 | 30.0 | DBR-R100-W0400 | 12W x 5D x 5H | DBR-R100-W0800 | 12W x 7D x 5H |
| 1 | 30.0 | DBR-R100-W0400 | 12W x 5D x 5H | DBR-R100-W0800 | 12W x 7D x 5H |
| 1.5 | 30.0 | DBR-R100-W0400 | 12W x 5D x 5H | DBR-R036-W1200 | 12W x 10D x 5H |
| 2 | 30.0 | DBR-R100-W0400 | 12W x 5D x 5H | DBR-R036-W1200 | 12W x 10D x 5H |
| 3 | 30.0 | DBR-R036-W0800 | 12W x 7D x 5H | DBR-R036-W2000 | 12W x 16D x 5H |
| 4 | 30.0 | DBR-R036-W0800 | 12W x 7D x 5H | DBR-R030-W2400 | 19W x 10D x 5H |
| 5 | 30.0 | DBR-R036-W0800 | 12W x 7D x 5H | DBR-R030-W2800 | 19W x 13D x 5H |
| 7.5 | 20.0 | DBR-R020-W1200 | 12W x 10D x 5H | DBR-R020-W4800 | 26.5W x 13D x 5H |
| 10 | 10.0 | DBR-R015-W1600 | 12W x 13D x 5H | DBR-R112-W6000 | 26.5W x 13D x 5H |
| 15 | 10.0 | DBR-R012-W2400 | 19W x 10D x 5H | DBR-R010-W9000 | 28W x 10D x 10H |
| 20 | 3.3 | DBR-R9D3-W3200 | 19W x 10D x 5H | DBR-R3D4-W012K | 28W x 10D x 10H |
| 25 | 3.3 | DBR-R5D5-W4000 | 26.5W x 10D x 5H | DBR-R5D1-W015K | 28W x 16D x 10H |
| 30 | 3.3 | DBR-R4D8-W4800 | 26.5W x 10D x 5H | DBR-R4D1-W020K | 28W x 16D x 10H |
| 40 | 1.4 | DBR-R004-W6000 | 26.5W x 13D x 5H | DBR-R3D4-W025K | 30W x 18D x 16H |
| 50 | 1.4 | DBR-R3D1-W7500 | 26.5W x 16D x 5H | DBR-R2D1-W030K | 30W x 18D x 24H |
| 60 | 1.4 | DBR-R2D8-W9000 | 26.5W x 16D x 5H | DBR-R002-W036K | 30W x 18D x 24H |
| 75 | 1.4 | DBR-R2D6-W012K | 28W x 10D x 10H | DBR-R1D5-W045K | 30W x 18D x 32H |
| 100 | 1.4 | DBR-R002-W015K | 28W x 16D x 10H | DBR-R1D4-W060K | 30W x 18D x 40H |

2.10

Adjustable Frequency Drives

SPX Drives

2

480 V Brake Resistors

| Drive hp (CT/l _H) | Minimum Ohms | 20% Duty Cycle, 100% Torque | | 50% Duty Cycle, 150% Torque | |
|----------------------------------|-----------------|-----------------------------|---------------------|-----------------------------|---------------------|
| | | Catalog Number | Dimensions (Inches) | Catalog Number | Dimensions (Inches) |
| 1 | 63.0 | DBR-R100-W0400 | 12W x 5D x 5H | DBR-R100-W0800 | 12W x 7D x 5H |
| 1.5 | 63.0 | DBR-R100-W0400 | 12W x 5D x 5H | DBR-R100-W1200 | 12W x 10D x 5H |
| 2 | 63.0 | DBR-R100-W0400 | 12W x 5D x 5H | DBR-R100-W1200 | 12W x 10D x 5H |
| 3 | 63.0 | DBR-R100-W0800 | 12W x 7D x 5H | DBR-R100-W2000 | 12W x 16D x 5H |
| 5 | 63.0 | DBR-R100-W0800 | 12W x 7D x 5H | DBR-R100-W2800 | 19W x 13D x 5H |
| 6 | 63.0 | DBR-R100-W1200 | 12W x 10D x 5H | DBR-R070-W4000 | 19W x 16D x 5H |
| 7.5 | 63.0 | DBR-R100-W1200 | 12W x 10D x 5H | DBR-R063-W4800 | 26.5W x 13D x 5H |
| 10 | 63.0 | DBR-R063-W1600 | 12W x 13D x 5H | DBR-R063-W6000 | 26.5W x 16D x 5H |
| 15 | 42.0 | DBR-R042-W2400 | 19W x 10D x 5H | DBR-R042-W9000 | 28W x 10D x 10H |
| 20 | 21.0 | DBR-R030-W3200 | 19W x 13D x 5H | DBR-R023-W012K | 28W x 13D x 10H |
| 25 | 21.0 | DBR-R030-W4000 | 19W x 16D x 5H | DBR-R021-W015K | 28W x 13D x 10H |
| 30 | 14.0 | DBR-R020-W4800 | 26.5W x 13D x 5H | DBR-R014-W020K | 30W x 18D x 24H |
| 40 | 6.5 | DBR-R112-W6000 | 26.5W x 13D x 5H | DBR-R007-W025K | 30W x 18D x 16H |
| 50 | 6.5 | DBR-R013-W7500 | 26.5W x 16D x 5H | DBR-R8D5-W030K | 30W x 18D x 24H |
| 60 | 6.5 | DBR-R010-W9000 | 28W x 10D x 10H | DBR-R7D3-W036K | 30W x 18D x 24H |
| 75 | 3.3 | DBR-R009-W012K | 28W x 13D x 10H | DBR-R3D3-W045K | 30W x 18D x 32H |
| 100 | 3.3 | DBR-R5D1-W015K | 28W x 16D x 10H | DBR-R004-W060K | 30W x 18D x 40H |
| 125 | 3.3 | DBR-R4D1-W020K | 28W x 16D x 10H | DBR-R004-W070K | 30W x 18D x 48H |
| 150 | 3.3 | DBR-R3D4-W025K | 30W x 18D x 16H | DBR-R3D5-W085K | 30W x 18D x 56H |
| 200 | 3.3 | DBR-R3D3-W030K | 30W x 18D x 24H | DBR-R3D3-W110K | 30W x 18D x 72H |
| 250 | 1.4 | DBR-R2D5-W036K | 30W x 18D x 24H | Ⓢ | — |
| 300 | 1.4 | DBR-R1D5-W045K | 30W x 18D x 32H | Ⓢ | — |
| 350 | 1.4 | DBR-R1D4-W060K | 30W x 18D x 40H | Ⓢ | — |
| 400 | 0.9 | DBR-R1D4-W060K | 30W x 18D x 40H | Ⓢ | — |
| 500 | 0.9 | DBR-R0D9-W080K | 30W x 18D x 48H | Ⓢ | — |
| 550 | 0.9 | DBR-R001-W085K | 30W x 18D x 56H | Ⓢ | — |

Note

Ⓢ Consult factory.

575 V Brake Resistors

| Drive hp (CT/l _H) | Minimum Ohms | 20% Duty Cycle, 100% Torque | | 50% Duty Cycle, 150% Torque | |
|----------------------------------|-----------------|-----------------------------|---------------------|-----------------------------|---------------------|
| | | Catalog Number | Dimensions (Inches) | Catalog Number | Dimensions (Inches) |
| 2 | 100.0 | DBR-R100-W0400 | 12W x 5D x 5H | DBR-R100-W1200 | 12W x 10D x 5H |
| 3 | 100.0 | DBR-R100-W0800 | 12W x 7D x 5H | DBR-R100-W2000 | 12W x 16D x 5H |
| 4 | 100.0 | DBR-R100-W0800 | 12W x 7D x 5H | DBR-R100-W2400 | 19W x 10D x 5H |
| 5 | 100.0 | DBR-R100-W0800 | 12W x 7D x 5H | DBR-R100-W2800 | 19W x 13D x 5H |
| 7.5 | 100.0 | DBR-R100-W1200 | 12W x 10D x 5H | DBR-R100-W4800 | 26.5W x 13D x 5H |
| 10 | 30.0 | DBR-R063-W1600 | 12W x 13D x 5H | DBR-R063-W6000 | 26.5W x 16D x 5H |
| 15 | 30.0 | DBR-R042-W2400 | 19W x 10D x 5H | DBR-R042-W9000 | 28W x 10D x 10H |
| 20 | 30.0 | DBR-R030-W3200 | 19W x 13D x 5H | DBR-R030-W012K | 28W x 13D x 10H |
| 25 | 30.0 | DBR-R030-W4000 | 19W x 16D x 5H | DBR-R030-W015K | 28W x 16D x 10H |
| 30 | 18.0 | DBR-R020-W4800 | 26.5W x 13D x 5H | DBR-R020-W020K | 30W x 18D x 16H |
| 40 | 18.0 | DBR-R030-W6000 | 26.5W x 16D x 5H | DBR-R184-W025K | 30W x 18D x 16H |
| 50 | 9.0 | DBR-R013-W7500 | 26.5W x 16D x 5H | DBR-R012-W030K | 30W x 18D x 24H |
| 60 | 9.0 | DBR-R010-W9000 | 28W x 10D x 10H | DBR-R010-W036K | 30W x 18D x 24H |
| 75 | 9.0 | DBR-R009-W012K | 28W x 13D x 10H | DBR-R009-W045K | 30W x 18D x 24H |
| 100 | 7.0 | DBR-R013-W015K | 28W x 16D x 10H | DBR-R8D4-W060K | 30W x 18D x 40H |
| 125 | 7.0 | DBR-R8D2-W020K | 30W x 18D x 10H | DBR-R007-W070K | 30W x 18D x 40H |
| 150 | 7.0 | DBR-R007-W025K | 30W x 18D x 16H | DBR-R006-W085K | 30W x 18D x 56H |
| 175 | 7.0 | DBR-R007-W030K | 30W x 18D x 24H | DBR-R007-W100K | 30W x 18D x 72H |
| 200 | 2.5 | DBR-R3D3-W030K | 30W x 18D x 24H | DBR-R2D6-W110K | 30W x 18D x 64H |
| 250 | 2.5 | DBR-R2D5-W036K | 30W x 18D x 24H | DBR-R003-W140K | 30W x 18D x 72H |
| 300 | 2.5 | DBR-R3D3-W045K | 30W x 18D x 32H | Ⓢ | — |
| 400 | 1.7 | DBR-R002-W060K | 30W x 18D x 48H | Ⓢ | — |
| 450 | 1.7 | DBR-R1D8-W070K | 30W x 18D x 48H | Ⓢ | — |
| 500 | 1.7 | DBR-R002-W080K | 30W x 18D x 56H | Ⓢ | — |

Note

Ⓢ Consult factory.

2.10

Adjustable Frequency Drives

SPX Drives

Control/Communication Options

Available Control/Communications Options

2

| Option | Description | Option Type |
|--------|---|-------------|
| K2 | Door-Mounted Speed Potentiometer with HOA Selector Switch —Provides the SPX with the ability to start/stop and adjust the speed reference from door-mounted control devices or remotely from customer supplied inputs. In HAND position, the drive will start and the speed is controlled by the door-mounted speed potentiometer. The drive will be disabled in the OFF position. When AUTO is selected, the drive run and speed control commands are via user-supplied dry contact and 4–20 mA signal. | Control |
| K4 | HAND/OFF/AUTO Switch for Non-Bypass Configurations —Provides a three-position selector switch that allows the user to select either a HAND or AUTO mode of operation. HAND mode is defaulted to keypad operation, and AUTO mode is defaulted to control from an external terminal source. These modes of operation can be configured via programming to allow for alternate combinations of start and speed sources. Start and speed sources include keypad, I/O and fieldbus. | Control |
| KB | 115 V Control Transformer, 550 VA —Provides a fused control power transformer with additional 550 VA at 115 V for customer use. | Control |
| L1 | Power On and Fault Pilot Lights —Provide a white power on light that indicates power to the enclosed cabinet and a red fault light that indicates a drive fault has occurred. | Light |
| P2 | Disconnect Switch —Disconnect switch option is applicable only with NEMA Type 1/IP21 and NEMA Type 12/IP54 Freestanding drives. Allows a convenient means of disconnecting the SPX from the line, and the operating mechanism can be padlocked in the OFF position. This is factory-mounted in the enclosure. | Input |

SPX Freestanding Options

480 V and 690 V Control Options, 200–550 hp ^①

| Description | Catalog Number Suffix |
|---|-----------------------|
| Door-mounted speed potentiometer with HOA selector switch | K2 |
| HAND/OFF/AUTO switch (22 mm) | K4 |
| 115 volt control transformer 550 VA | KB |

480 V and 690 V Light Options, 200–550 hp ^①

| Description | Catalog Number Suffix |
|-----------------------------|-----------------------|
| Power on/fault pilot lights | L1 |

Input Options, 200–550 hp ^①

| Description | Catalog Number Suffix |
|-------------------|-----------------------|
| Disconnect switch | P2 ^② |

Notes

^① Consult factory for adder information.

^② Applicable with FR10 and FR11 freestanding designs only.

Replacement Parts

FR4 Spare Parts

| Category | Description | Quantity/ Drive | 230 V Catalog Number | 480 V Catalog Number | 575 V Catalog Number |
|-----------------------------|--|--------------------|-------------------------|-------------------------|-------------------------|
| Control fan | NEMA Type 12 control fan ^① | 1 | PP01086 | PP01086 | — |
| Control module ^② | SPX control module | 1 | CPBS0000000000 | CPBS0000000000 | — |
| | Standard slot A I/O card | 1 | OPTA9 | OPTA9 | — |
| | Standard slot B I/O card | 1 | OPTA2 | OPTA2 | — |
| Keypad ^② | SVX/SPX keypad | 1 | KEYPAD-LOC/REM | KEYPAD-LOC/REM | — |
| Main fan ^② | DC fan (main) | 1 | PP01060 | PP01060 | — |
| Other | Mounting kit, fixing kit | 1 | FR00040 | FR00040 | — |
| | Mounting kit, fixing kit, N12 ^① | 1 | FR00079 | FR00079 | — |
| | Control cover, plastic, N1 | 1 | FR00006 | FR00006 | — |

FR5 Spare Parts

| Category | Description | Quantity/ Drive | 230 V Catalog Number | 480 V Catalog Number | 575 V Catalog Number |
|-----------------------------|--|--------------------|-------------------------|-------------------------|-------------------------|
| Control fan | NEMA Type 12 control fan ^① | 1 | PP01088 | PP01088 | — |
| Control module ^② | SPX control module | 1 | CPBS0000000000 | CPBS0000000000 | — |
| | Standard slot A I/O card | 1 | OPTA9 | OPTA9 | — |
| | Standard slot B I/O card | 1 | OPTA2 | OPTA2 | — |
| Keypad ^② | SVX/SPX keypad | 1 | KEYPAD-LOC/REM | KEYPAD-LOC/REM | — |
| Main fan ^② | DC fan (main) | 1 | PP01061 | PP01061 | — |
| Other | Mounting kit, fixing kit | 1 | FR00050 | FR00050 | — |
| | Mounting kit, fixing kit, N12 ^① | 1 | FR00081 | FR00081 | — |
| | Control cover, plastic, N1 | 1 | FR05011 | FR05011 | — |

FR6 Spare Parts

| Category | Description | Quantity/ Drive | 230 V Catalog Number | 480 V Catalog Number | 575 V Catalog Number |
|-----------------------------|--|--------------------|-------------------------|-------------------------|-------------------------|
| Control fan | NEMA Type 12 control fan ^① | 1 | PP01049 | PP01049 | — |
| Control module ^② | SPX control module | 1 | CPBS0000000000 | CPBS0000000000 | CPBS0000000000 |
| | Standard slot A I/O card | 1 | OPTA9 | OPTA9 | OPTA9 |
| | Standard slot B I/O card | 1 | OPTA2 | OPTA2 | OPTA2 |
| Keypad ^② | SVX/SPX keypad | 1 | KEYPAD-LOC/REM | KEYPAD-LOC/REM | KEYPAD-LOC/REM |
| Main fan ^② | DC fan (main) | 1 | PP01062 | PP01062 | — |
| Other | Mounting kit, fixing kit | 1 | FR00060 | FR00060 | FR00060 |
| | Mounting kit, fixing kit, N12 ^① | 1 | FR00082 | FR00082 | FR00082 |
| | Control cover, plastic, N1 | 1 | FR06011 | FR06011 | FR06011 |

FR7 Spare Parts

| Category | Description | Quantity/ Drive | 230 V Catalog Number | 480 V Catalog Number | 575 V Catalog Number |
|-----------------------------|--|--------------------|-------------------------|-------------------------|-------------------------|
| Control fan | NEMA Type 12 control fan ^① | 1 | PP01049 | PP01049 | PP01049 |
| Control module ^② | SPX control module | 1 | CPBS0000000000 | CPBS0000000000 | CPBS0000000000 |
| | Standard slot A I/O card | 1 | OPTA9 | OPTA9 | OPTA9 |
| | Standard slot B I/O card | 1 | OPTA2 | OPTA2 | OPTA2 |
| Keypad ^② | SVX/SPX keypad | 1 | KEYPAD-LOC/REM | KEYPAD-LOC/REM | KEYPAD-LOC/REM |
| Main fan ^② | DC fan (main) | 1 | PP01063 | PP01063 | PP01063 |
| Other | Mounting kit, fixing kit | 1 | FR07071 | FR07071 | FR07071 |
| | Mounting kit, fixing kit, N12 ^① | 1 | FR07072 | FR07072 | FR07072 |
| | Control cover, plastic, N1 | 1 | FR07011 | FR07011 | FR07011 |

Notes

^① Only for NEMA Type 12/IP54 Type drives.

^② Factory recommended spare parts.

2.10

Adjustable Frequency Drives

SPX Drives

2

FR8 Spare Parts

| Category | Description | Quantity/ Drive | 230 V Catalog Number | 480 V Catalog Number | 575 V Catalog Number |
|-----------------------------|---------------------------------------|--------------------|-------------------------|-------------------------|-------------------------|
| Control fan | NEMA Type 12 control fan ^① | 1 | CP01180 | CP01180 | CP01180 |
| Control module ^② | SPX control module | 1 | CPBS0000000000 | CPBS0000000000 | CPBS0000000000 |
| | Standard slot A I/O card | 1 | OPTA9 | OPTA9 | OPTA9 |
| | Standard slot B I/O card | 1 | OPTA2 | OPTA2 | OPTA2 |
| Keypad ^② | SVX/SPX keypad | 1 | KEYPAD-LOC/REM | KEYPAD-LOC/REM | KEYPAD-LOC/REM |
| Main AC fan | Fan AC | 1 | PP01123 | PP01123 | PP01123 |
| | Fan fuse | 2 | PP20202 | PP20202 | PP20202 |
| | Starting cap | 1 | S00734 | S00734 | S00734 |
| | Fan driver board AC | 1 | VB00599 | VB00799 | VB00799 |
| | Isolation transformer (fan) | 1 | S0000113 | S0000113 | S0000113 |
| Main DC fan ^② | DC fan | 1 | PP00071 | PP00071 | PP00071 |
| | DC power supply | 1 | S01016 | S01016 | S01016 |
| Other | Front cover, N12 ^① | 1 | FR08079 | FR08079 | FR08079 |
| | Conduit plate, N12 | 1 | FR08082 | FR08082 | FR08082 |
| | Front cover, N1 | 1 | FR08106 | FR08106 | FR08106 |

FR9 Spare Parts

| Category | Description | Quantity/ Drive | 230 V Catalog Number | 480 V Catalog Number | 575 V Catalog Number |
|-----------------------------|----------------------------|--------------------|-------------------------|-------------------------|-------------------------|
| Control fan | 50 mm fan | 1 | PP09041 | PP09041 | PP09041 |
| | 80 mm fan | 1 | PP01068 | PP01068 | PP01068 |
| Control module ^① | SPX control module | 1 | CPBS0000000000 | CPBS0000000000 | CPBS0000000000 |
| | Standard slot A I/O card | 1 | OPTA9 | OPTA9 | OPTA9 |
| | Standard slot B I/O card | 1 | OPTA2 | OPTA2 | OPTA2 |
| Converter | Power module ^② | 1 | FR09-0261-2-ANV | FR09-0261-4-ANV | FR09-0125-5-ANV |
| | | 1 | FR09-0300-2-ANV | FR09-0300-4-ANV | FR09-0144-5-ANV |
| | | 1 | — | — | FR09-0170-5-ANV |
| | Driver board | 1 | S00583 | S00583 | S00583 |
| | Shunt board ^② | 6 | — | VB00535 | VB00537 |
| | | 6 | — | VB00536 | VB00542 |
| 6 | | — | — | VB00543 | |
| DC section | Balancing resistor | 3 | PP00052 | PP00052 | PP00052 |
| | Bus capacitor | 8 | S00335 | S00335 | PP01041 |
| | DC busbars DC- | 1 | FR09043 | FR09043 | FR09043 |
| | DC busbars DC+ | 1 | FR09044 | FR09044 | FR09044 |
| | DC busbars connection | 1 | FR09045 | FR09045 | FR09045 |
| | DC busbars +/- insulator | 1 | FR09046 | FR09046 | FR09046 |
| | DC busbars -/con insulator | 1 | FR09047 | FR09047 | FR09047 |
| Inverter | Rectifier module | 1 | FR09826 | FR09822 | FR09823 |
| | Diode | 3 | CP01268 | CP01268 | CP01268 |
| | Rectifier board | 1 | — | VB00459 | VB00460 |
| Keypad ^① | SVX/SPX keypad | 1 | KEYPAD-LOC/REM | KEYPAD-LOC/REM | KEYPAD-LOC/REM |
| Main DC fan ^① | DC fan | 1 | PP00072 | PP00072 | PP00072 |
| | DC power supply | 1 | S01017 | S01017 | S01017 |
| Other | Front cover power | 1 | FR09012 | FR09012 | FR09012 |
| | Front cover connection | 1 | FR09013 | FR09013 | FR09013 |
| | Front power conduit | 1 | FR09014 | FR09014 | FR09014 |

Notes

- ① Only for NEMA Type 12/IP54 Type drives.
- ② Factory recommended spare parts.
- ③ Select one part number based on the amperage rating of the drive. Please contact EatonCare at 877-ETN-CARE for assistance.

FR10 Spare Parts

| Category | Description | Quantity/ Drive | 230 V Catalog Number | 480 V Catalog Number | 575 V Catalog Number |
|------------------|--------------------------|--------------------|-------------------------|-------------------------|-------------------------|
| Control | Fiber board | 1 | — | S00451 | S00451 |
| | ASIC board | 1 | — | S00457 | S00457 |
| Control fan | ASIC fan | 1 | — | PP01096 | PP01096 |
| Control module ① | SPX control module | 1 | — | CPBS0000000000 | CPBS0000000000 |
| | Standard slot A I/O card | 1 | — | OPTA9 | OPTA9 |
| | Standard slot B I/O card | 1 | — | OPTA2 | OPTA2 |
| Converter | Power module ② | 1 | — | FR10-0385-4-ANV | FR10-0261-5-ANV |
| | | 1 | — | FR10-0460-4-ANV | FR10-0325-5-ANV |
| | | 1 | — | FR10-0520-4-ANV | FR10-0385-5-ANV |
| | | 1 | — | — | FR10-0416-5-ANV |
| | Driver board | 1 | — | S00450 | S00450 |
| | Driver adapter board | 1 | — | VB00330 | VB00330 |
| | Shunt board ② | 6 | — | VB00497 | VB00510 |
| | | 6 | — | VB00498 | VB00511 |
| | | 6 | — | VB00537 | VB00545 |
| | Covers | Top cover | 1 | — | FR10340 |
| Side cover | | 2 | — | FR10341 | FR10341 |
| DC section | Balancing resistor | 2 | — | PP13027 | PP13028 |
| | DC busbars kit (right) | 1 | — | S0000005 | S0000005 |
| | Bus capacitor | 12 | — | S00335 | S00336 |
| Inverter | Rectifier module | 1 | — | FR10823 | FR10823 |
| | Charging resistor | 1 | — | PP00066 | PP00066 |
| | Diode | 3 | — | PP01177 | PP01177 |
| | Rectifier board | 1 | — | S00591 | S00592 |
| Keypad ① | SVX/SPX keypad | 1 | — | KEYPAD-LOC/REM | KEYPAD-LOC/REM |
| Main DC fan ① | DC fan | 2 | — | PP00072 | PP00072 |
| | DC power supply | 2 | — | S01017 | S01017 |

Notes

① Factory recommended spare parts.

② Select one part number based on the amperage rating of the drive. Please contact EatonCare at 877-ETN-CARE for assistance.

2.10

Adjustable Frequency Drives

SPX Drives

FR11 Spare Parts

2

| Category | Description | Quantity/ Drive | 230 V Catalog Number | 480 V Catalog Number | 575 V Catalog Number |
|------------------|--------------------------|--------------------|-------------------------|-------------------------|-------------------------|
| Control | Fiber board | 1 | — | S00451 | S00451 |
| | ASIC board | 1 | — | S00457 | S00457 |
| Control fan | ASIC fan | 1 | — | PP01096 | PP01096 |
| Control module ① | SPX control module | 1 | — | CPBS0000000000 | CPBS0000000000 |
| | Standard slot A I/O card | 1 | — | OPTA9 | OPTA9 |
| | Standard slot B I/O card | 1 | — | OPTA2 | OPTA2 |
| Converter | Power module ② | 1 | — | FR11-0590-4-ANV | FR11-0460-5-ANV |
| | | 1 | — | FR11-0650-4-ANV | FR11-0502-5-ANV |
| | | 1 | — | FR11-0730-4-ANV | FR11-0590-5-ANV |
| | Driver board | 1 | — | S00452 | S00452 |
| | Driver adapter board | 1 | — | VB00330 | VB00330 |
| | Shunt board ② | 9 | — | VB00513 | VB00512 |
| | | 9 | — | VB00514 | VB00546 |
| | | 9 | — | VB00538 | VB00547 |
| | Covers | Top cover | 1 | — | FR11345 |
| DC section | Balancing resistor | 3 | — | PP13027 | PP13027 |
| | DC busbars kit (right) | 3 | — | S0000005 | S0000005 |
| | Bus capacitor | 18 | — | S00335 | S00335 |
| Inverter | Rectifier module | 1 | — | FR10823 | FR10823 |
| | Diode | 3 | — | PP01177 | PP01177 |
| | Rectifier board | 1 | — | S00591 | S00591 |
| Keypad ① | SVX/SPX keypad | 1 | — | KEYPAD-LOC/REM | KEYPAD-LOC/REM |
| Main DC fan ① | DC fan | 2 | — | PP00072 | PP00072 |
| | DC power supply | 2 | — | S01017 | S01017 |

Notes

① Factory recommended spare parts.

② Select one part number based on the amperage rating of the drive. Please contact EatonCare at 877-ETN-CARE for assistance.

FR12 Spare Parts

| Category | Description | Quantity/ Drive | 230 V Catalog Number | 480 V Catalog Number | 575 V Catalog Number |
|-----------------------------|---------------------------|--------------------|-------------------------|-------------------------|-------------------------|
| Control | Fiber board | 2 | — | S00451 | S00451 |
| | ASIC board | 2 | — | S00457 | S00457 |
| | Star coupler | 1 | — | S00593 | S00593 |
| Control fan | ASIC fan | 2 | — | PP01096 | PP01096 |
| Control module ^① | SPX control module | 1 | — | CPBS0000000000 | CPBS0000000000 |
| | Standard slot A I/O card | 1 | — | OPTA9 | OPTA9 |
| | Standard slot B I/O card | 1 | — | OPTA2 | OPTA2 |
| Converter | Power module ^② | 1 | — | FR12-0820-4-ANV | FR12-0650-5-ANV |
| | | 1 | — | FR12-0920-4-ANV | FR12-0750-5-ANV |
| | | 1 | — | FR12-1030-4-ANV | FR12-0820-5-ANV |
| | Driver board | 2 | — | S00450 | S00450 |
| | Driver adapter board | 2 | — | VB00330 | VB00330 |
| | Shunt board | 12 | — | VB00498 | VB00511 |
| | Covers | Top cover | 2 | — | FR10340 |
| Side cover | | 4 | — | FR10341 | FR10341 |
| DC section | Balancing resistor | 4 | — | PP13027 | PP13027 |
| | DC busbars kit (right) | 2 | — | S0000005 | S0000005 |
| | Bus capacitor | 24 | — | S00335 | S00336 |
| Inverter | Rectifier module | 2 | — | FR10823 | FR10823 |
| | Diode | 3 | — | PP01177 | PP01177 |
| | Rectifier board | 2 | — | S00591 | S00591 |
| Keypad ^① | SVX/SPX keypad | 1 | — | KEYPAD-LOC/REM | KEYPAD-LOC/REM |
| Main DC fan ^① | DC fan | 4 | — | PP00072 | PP00072 |
| | DC power supply | 4 | — | S01017 | S01017 |

Notes

^① Factory recommended spare parts.

^② Select one part number based on the amperage rating of the drive. Please contact EatonCare at 877-ETN-CARE for assistance.

2.10

Adjustable Frequency Drives

SPX Drives

FR13 Spare Parts

2

| Category | Description | Quantity/ Drive | 230 V Catalog Number | 480 V Catalog Number | 575 V Catalog Number |
|-----------------------------|---------------------------|--------------------|-------------------------|-------------------------|-------------------------|
| Control | ASIC board | 1 | — | S00457 | S00457 |
| | ASIC assembly | 1 | — | 60S01030 | 60S01030 |
| Control fan | ASIC fan | 1 | — | PP01096 | PP01096 |
| Control module ^① | SPX control module | 1 | — | CPBS0000000000 | CPBS0000000000 |
| | Standard slot A I/O card | 1 | — | OPTA9 | OPTA9 |
| | Standard slot B I/O card | 1 | — | OPTA2 | OPTA2 |
| Converter | Power module ^② | 3 | — | FI13-1150-4-ANV | FR13-1030-5-ANV |
| | | 3 | — | FI13-1300-4-ANV | FR13-1180-5-ANV |
| | | 3 | — | FI13-1450-4-ANV | FR13-920-5-ANV |
| | Driver board | 3 | — | S00454 | S00454 |
| | Driver adapter board | 2 | — | VB00330 | VB00330 |
| | Shunt board ^② | 18 | — | VB00505 | VB00516 |
| | | 18 | — | VB00514 | VB00517 |
| 18 | | — | VB00541 | VB00547 | |
| Covers | Top cover | 3 | — | FI10001 | FI10001 |
| | Side cover | 3 | — | FI10003 | FI10003 |
| DC section | Balancing resistor | 6 | — | PP13034 | PP13034 |
| | Bus capacitor | 36 | — | S00335 | S00336 |
| | DC busbars kit | 3 | — | FI13329 | FI13329 |
| Inverter | Rectifier module | 2 | — | FR10823 | FR10823 |
| | Diode | 3 | — | PP01177 | PP01177 |
| | Rectifier board | 2 | — | S00591 | S00591 |
| Keypad ^① | SVX/SPX keypad | 1 | — | KEYPAD-LOC/REM | KEYPAD-LOC/REM |
| Main DC fan ^① | DC fan | 4 | — | PP00072 | PP00072 |
| | DC power supply | 4 | — | S01017 | S01017 |

Notes

^① Factory recommended spare parts.

^② Select one part number based on the amperage rating of the drive. Please contact EatonCare at 877-ETN-CARE for assistance.

FR14 Spare Parts

| Category | Description | Quantity/ Drive | 230 V Catalog Number | 480 V Catalog Number | 575 V Catalog Number |
|-----------------------------|---------------------------|--------------------|-------------------------|-------------------------|-------------------------|
| Control | ASIC board | 2 | — | S00457 | S00457 |
| | Star coupler | 1 | — | S00593 | S00593 |
| | ASIC assembly | 2 | — | 60S01030 | 60S01030 |
| | Star coupler kit | 1 | — | FR10860 | FR10860 |
| Control fan | ASIC fan | 2 | — | PP01096 | PP01096 |
| Control module ^① | SPX control module | 1 | — | CPBS0000000000 | CPBS0000000000 |
| | Standard slot A I/O card | 1 | — | OPTA9 | OPTA9 |
| | Standard slot B I/O card | 1 | — | OPTA2 | OPTA2 |
| Converter | Power module ^② | 1 | — | FR14-1770-4-ANV | FR14-1500-5-ANV |
| | | 1 | — | FR14-2150-4-ANV | FR14-1900-5-ANV |
| | | 1 | — | FR14-2700-4-ANV | FR14-2250-5-ANV |
| | Driver board | 6 | — | S00454 | S00454 |
| | Driver adapter board | 2 | — | VB00330 | VB00330 |
| | Shunt board ^② | 36 | — | VB00541 | VB00516 |
| | | 36 | — | — | VB00517 |
| Covers | Top cover | 6 | — | FI10001 | FI10001 |
| | Side cover | 6 | — | FI10003 | FI10003 |
| DC section | Balancing resistor | 6 | — | PP13034 | PP13034 |
| | Bus capacitor | 72 | — | S00335 | S00336 |
| | DC busbars kit | 6 | — | FI13329 | FI13329 |
| Inverter | Rectifier module | 2 | — | FR10823 | FR10823 |
| | Diode | 3 | — | PP01177 | PP01177 |
| | Rectifier board | 2 | — | S00591 | S00591 |
| Keypad ^① | SVX/SPX keypad | 1 | — | KEYPAD-LOC/REM | KEYPAD-LOC/REM |
| Main DC fan ^① | DC fan | 6 | — | PP00072 | PP00072 |
| | DC power supply | 6 | — | S01017 | S01017 |

Notes

^① Factory recommended spare parts.

^② Select one part number based on the amperage rating of the drive. Please contact EatonCare at 877-ETN-CARE for assistance.

Technical Data and Specifications

SPX Drives

2

| Description | Specification |
|----------------------------------|---|
| Input Ratings | |
| Input voltage (V_{in}) | +10%/–15% |
| Input frequency (f_{in}) | 50/60 Hz (variation up to 45–66 Hz) |
| Connection to power | Once per minute or less (typical operation) |
| High withstand rating | 100 kAIC |
| Output Ratings | |
| Output voltage | 0 to V_{in} |
| Continuous output current | I_H rated 100% at 122 °F (50 °C), FR9 and below I_L rated 100% at 104 °F (40 °C), FR9 and below I_H/I_L 100% at 104 °F (40 °C), FR10 and above |
| Overload current (I_H/I_L) | 150% I_H , 110% I_L for 1 min. |
| Output frequency | 0 to 320 Hz |
| Frequency resolution | 0.01 Hz |
| Initial output current (I_H) | 250% for 2 seconds |
| Efficiency | >96% |
| Control Characteristics | |
| Control method | Frequency control (V/f) Open loop: sensorless vector control Closed loop: frequency control Closed loop: vector control |
| Switching frequency | Adjustable with parameter 2.6.9 |
| Frame 4–6 | 1 to 16 kHz; default 10 kHz |
| Frame 7–12 | 1 to 10 kHz; default 3.6 kHz |
| Frequency reference | Analog input: Resolution 0.1% (10-bit), accuracy $\pm 1\%$ V/Hz Panel reference: Resolution 0.01 Hz |
| Field weakening point | 30 to 320 Hz |
| Acceleration time | 0 to 3000 sec. |
| Deceleration time | 0 to 3000 sec. |
| Braking torque | DC brake: 30% $\times T_n$ (without brake option) |
| Ambient Conditions | |
| Ambient operating temperature | 14 °F (–10 °C), no frost to 122 °F (50 °C) I_H (FR4–FR9) 14 °F (–10 °C), no frost to 104 °F (40 °C) I_L (FR10 and up) 14 °F (–10 °C), no frost to 104 °F (40 °C) I_L (all frames) |
| Storage temperature | –40° to 158 °F (–40° to 70 °C) |
| Relative humidity | 0 to 95% RH, noncondensing, non-corrosive, no dripping water |
| Air quality | Chemical vapors: IEC 721-3-3, unit in operation, class 3C2; Mechanical particles: IEC 721-3-3, unit in operation, class 3S2 |
| Altitude | 100% load capacity (no derating) up to 3280 ft (1000 m); 1% derating for each 328 ft (100 m) above 3280 ft (1000 m); max. 9842 ft (3000 m) |
| Vibration | EN 50178, EN 60068-2-6; 5 to 50 Hz, displacement amplitude 1 mm (peak) at 3 to 15.8 Hz, max. acceleration amplitude 1G at 15.8 to 150 Hz |
| Shock | EN 50178, EN 60068-2-27 UPS Drop test (for applicable UPS weights) Storage and shipping: max. 15 g, 11 ms (in package) |
| Enclosure class | NEMA 1/IP21 or NEMA 12/IP54, open chassis/IP20 |


| Description | Specification |
|----------------------------------|---|
| Control Connections | |
| Analog input voltage | 0 to 10 V, $R = 200$ kohms (–10 to 10 V joystick control) resolution 0.1%; accuracy $\pm 1\%$ |
| Analog input current | 0(4) to 20 mA; R_i —250 ohms differential |
| Digital inputs (6) | Positive or negative logic; 18 to 30 Vdc |
| Auxiliary voltage | +24 V $\pm 15\%$, max. 250 mA |
| Output reference voltage | +10 V +3%, max. load 10 mA |
| Analog output | 0(4) to 20 mA; R_L max. 500 ohms; resolution 10 bit; Accuracy $\pm 2\%$ |
| Digital outputs | Open collector output, 50 mA/48V |
| Relay outputs | 2 programmable Form C relay outputs switching capacity: 24 Vdc/8 A, 250 Vac/8 A, 125 Vdc/0.4 A |
| Protections | |
| Overcurrent protection | Trip limit 4.0 $\times I_H$ instantaneously |
| Overvoltage protection | Yes |
| Undervoltage protection | Yes |
| Earth fault protection | In case of earth fault in motor or motor cable, only the frequency converter is protected |
| Input phase supervision | Trips if any of the input phases are missing |
| Motor phase supervision | Trips if any of the output phases are missing |
| Overtemperature protection | Yes |
| Motor overload protection | Yes |
| Motor stall protection | Yes |
| Motor underload protection | Yes |
| Short-circuit protection | Yes (+24 V and +10 V reference voltages) |
| High Performance Features | |
| Speed error | <0.01%, depending on the encoder |
| Encoder support | Incremental or absolute |
| Encoder voltages | 5 V (RS-422), 15 V or 24 V, depending on the option card |
| Torque control | Full torque control at all speeds, including zero |
| Torque accuracy | <2%; <5% down to zero speed |
| Starting torque | >200%, depending on motor and drive sizing |
| Master/slave configurations | Full capability |
| System analysis | Integrated data logger |
| PC communication | Fast multiple drive monitoring with PC |
| Inter-drive communication | High-speed bus (12 Mbits/s) |
| High-speed applications | Up to 7200 Hz (special software required) |

Dimensions

Approximate Dimensions in Inches (mm)

9000X Drives

NEMA Type 1/IP21 and NEMA Type 12/IP54, FR4, FR5 and FR6

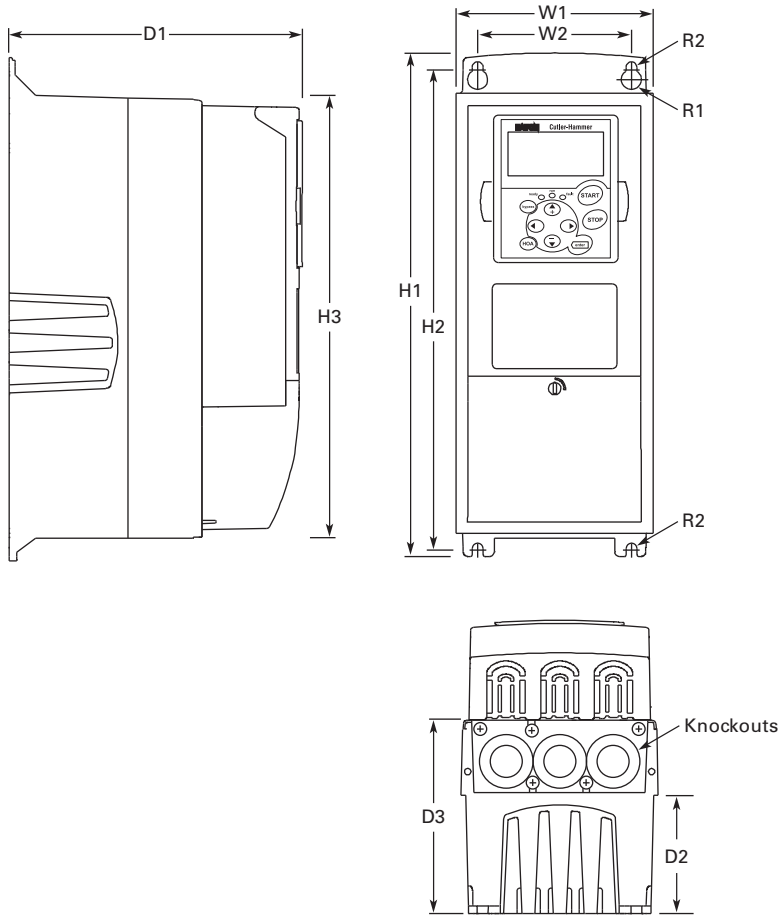

| Voltage | hp (I _H) | H1 | H2 | H3 | D1 | D2 | D3 | W1 | W2 | R1 Dia. | R2 Dia. | Weight Lbs (kg) | Knockouts at Inches (mm) |
|------------|----------------------|-------|-------|-------|-------|-------|-------|-------|-------|---------|---------|--------------------|--------------------------|
| FR4 | | | | | | | | | | | | | |
| 230 V | 3/4–3 | 12.9 | 12.3 | 11.5 | 7.5 | 3.0 | 5.0 | 5.04 | 3.9 | 0.5 | 0.3 | 11.0 (5) | 3 at 10.1 (28) |
| 480 V | 1–5 | (327) | (313) | (292) | (190) | (77) | (126) | (128) | (100) | (13) | (7) | | |
| FR5 | | | | | | | | | | | | | |
| 230 V | 5–7-1/2 | 16.5 | 16.0 | 15.3 | 8.4 | 3.9 | 5.8 | 5.7 | 3.9 | 0.5 | 0.3 | 17.9 (8) | 2 at 1.5 (37) |
| 480 V | 7-1/2–15 | (419) | (406) | (389) | (214) | (100) | (148) | (144) | (100) | (13) | (7) | | 1 at 10.1 (28) |
| FR6 | | | | | | | | | | | | | |
| 230 V | 10–15 | 22.0 | 21.3 | 20.4 | 9.3 | 4.2 | 6.5 | 7.7 | 5.8 | 0.6 | 0.4 | 40.8 (19) | 3 at 1.5 (37) |
| 480 V | 20–30 | (558) | (541) | (519) | (237) | (105) | (165) | (195) | (148) | (15.5) | (9) | | |
| 575 V | 2–25 | | | | | | | | | | | | |


2.10 Adjustable Frequency Drives

SPX Drives

Approximate Dimensions in Inches (mm)

NEMA Type 1/IP21 and NEMA Type 12/IP54 with Flange Kit, FR4, FR5 and FR6

2

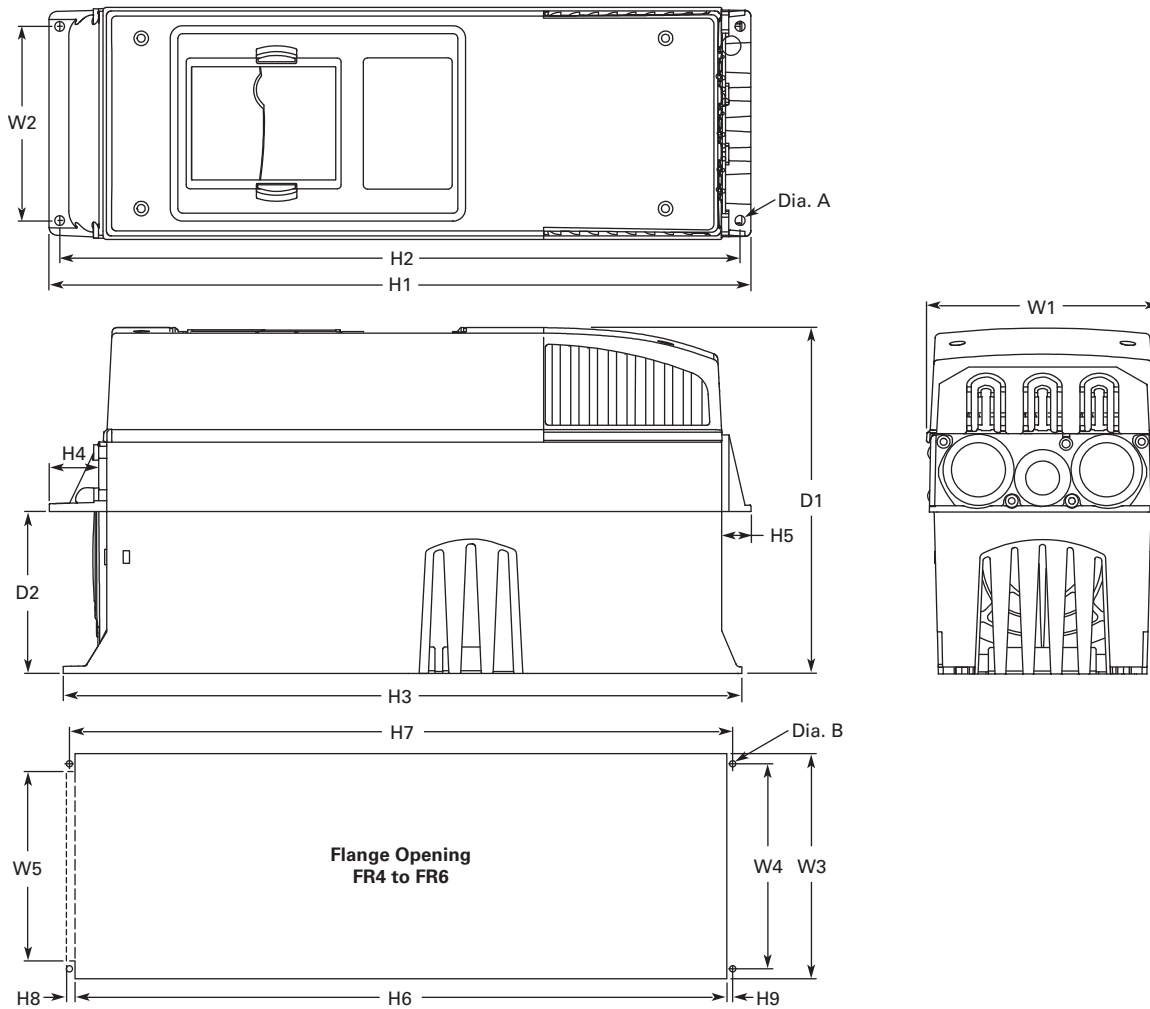

FR4, FR5 and FR6 with Flange Kit


| W1 | W2 | H1 | H2 | H3 | H4 | H5 | D1 | D2 | Dia. A |
|------------|-----------|------------|------------|------------|----------|----------|-----------|-----------|---------|
| FR4 | | | | | | | | | |
| 5.0 (128) | 4.5 (113) | 13.3 (337) | 12.8 (325) | 12.9 (327) | 1.2 (30) | 0.9 (22) | 7.5 (190) | 3.0 (77) | 0.3 (7) |
| FR5 | | | | | | | | | |
| 5.6 (143) | 4.7 (120) | 17.0 (434) | 16.5 (420) | 16.5 (419) | 1.4 (36) | 0.7 (18) | 8.4 (214) | 3.9 (100) | 0.3 (7) |
| FR6 | | | | | | | | | |
| 7.7 (195) | 6.7 (170) | 22.0 (560) | 21.6 (549) | 22.0 (558) | 1.2 (30) | 0.8 (20) | 9.3 (237) | 4.2 (106) | 0.3 (7) |

Flange Opening, FR4 to FR6

| W3 | W4 | W5 | H6 | H7 | H8 | H9 | Dia. B |
|------------|-----------|-----------|------------|------------|---------|---------|---------|
| FR4 | | | | | | | |
| 4.8 (123) | 4.5 (113) | — | 12.4 (315) | 12.8 (325) | — | 0.2 (5) | 0.3 (7) |
| FR5 | | | | | | | |
| 5.3 (135) | 4.7 (120) | — | 16.2 (410) | 16.5 (420) | — | 0.2 (5) | 0.3 (7) |
| FR6 | | | | | | | |
| 7.3 (185) | 6.7 (170) | 6.2 (157) | 21.2 (539) | 21.6 (549) | 0.3 (7) | 0.2 (5) | 0.3 (7) |

Approximate Dimensions in Inches (mm)

NEMA Type 1/IP21 and NEMA Type 12/IP54, FR7

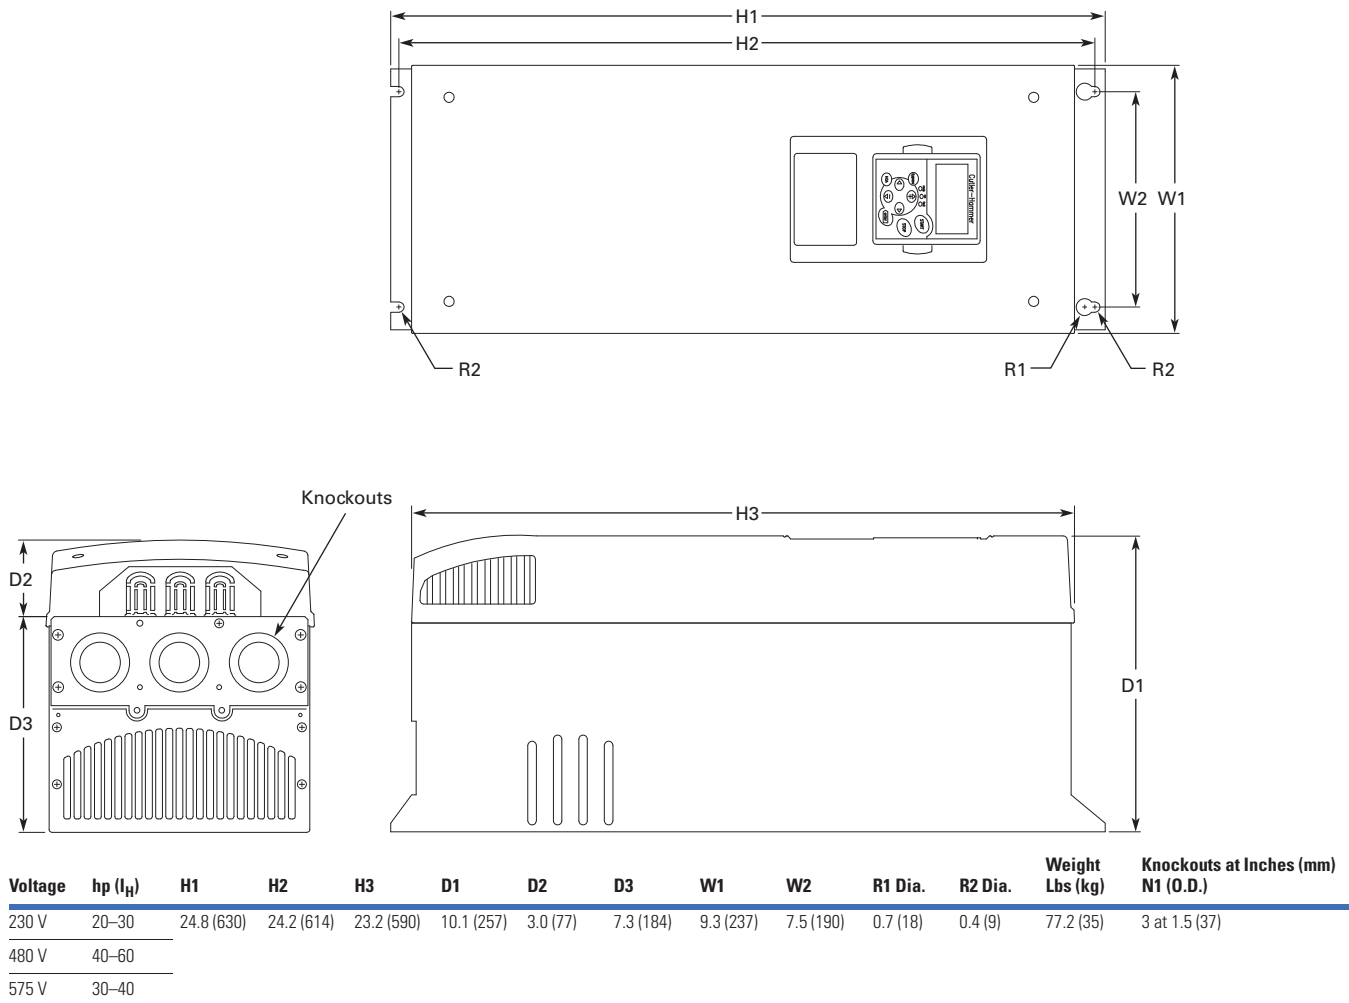


2.10 Adjustable Frequency Drives

SPX Drives

Approximate Dimensions in Inches (mm)

NEMA Type 1/IP21 and NEMA Type 12/IP54, FR8


2

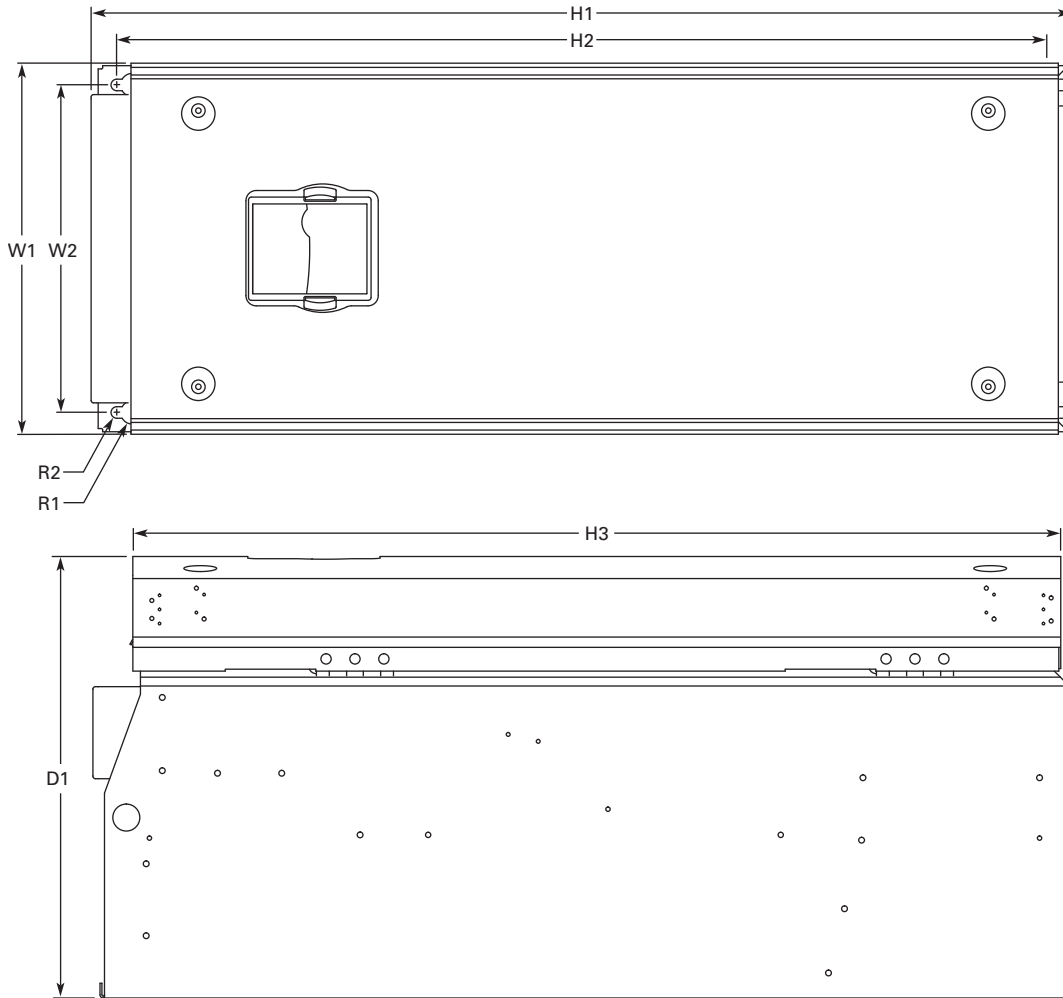

| Voltage | hp (I _H) | D1 | H1 | H2 | H3 | W1 | W2 | R1 Dia. | R2 Dia. | Weight Lbs (kg) |
|---------|----------------------|------------|------------|------------|------------|------------|----------|----------|---------|--------------------|
| 230 V | 40–60 | 13.5 (344) | 30.1 (764) | 28.8 (732) | 28.4 (721) | 11.5 (291) | 10 (255) | 0.7 (18) | 0.4 (9) | 127 (58) |
| 480 V | 75–125 | | | | | | | | | |
| 575 V | 50–75 | | | | | | | | | |

Approximate Dimensions in Inches (mm)

NEMA Type 1/IP21 and NEMA Type 12/IP54, with Flange Kit, FR7 and FR8

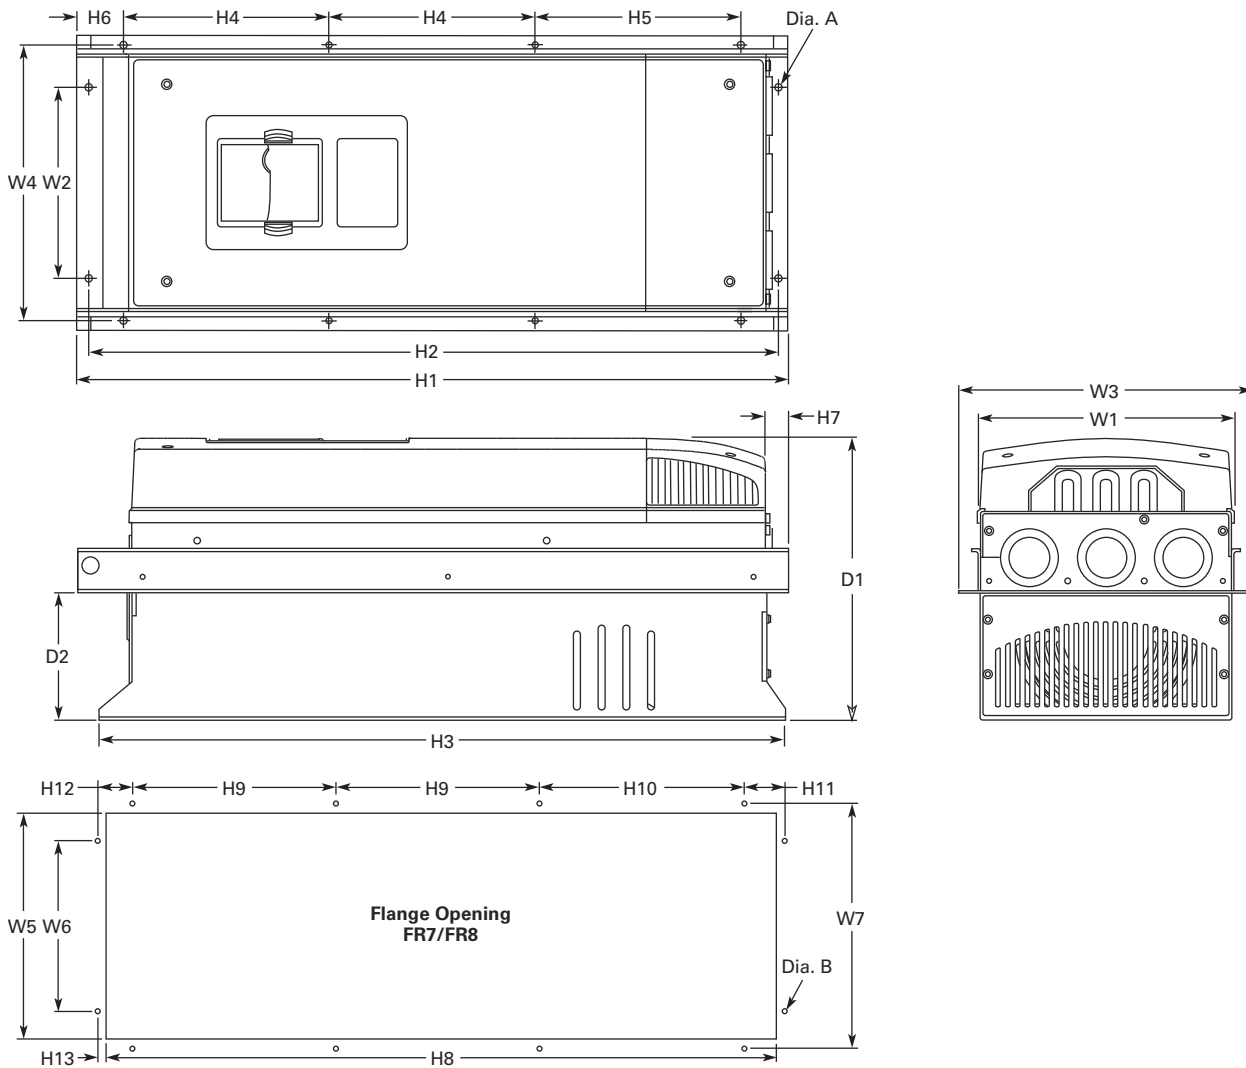

| W1 | W2 | W3 | W4 | H1 | H2 | H3 | H4 | H5 | H6 | H7 | D1 | D2 | Dia. A |
|------------|-----------|------------|------------|------------|------------|------------|------------|------------|----------|----------|------------|-----------|---------|
| FR7 | | | | | | | | | | | | | |
| 9.3 (237) | 6.8 (175) | 10.6 (270) | 10.0 (253) | 25.6 (652) | 24.9 (632) | 24.8 (630) | 7.4 (189) | 7.4 (189) | 0.9 (23) | 0.8 (20) | 10.1 (257) | 4.6 (117) | 0.3 (6) |
| FR8 | | | | | | | | | | | | | |
| 11.2 (285) | — | 14.0 (355) | 13.0 (330) | 32.8 (832) | — | 29.3 (745) | 10.2 (258) | 10.4 (265) | 1.7 (43) | 2.2 (57) | 13.5 (344) | 4.3 (110) | 0.4 (9) |

Flange Opening, FR7 and FR8

| W5 | W6 | W7 | H8 | H9 | H10 | H11 | H12 | H13 | Dia. B |
|------------|-----------|------------|------------|------------|------------|----------|----------|----------|---------|
| FR7 | | | | | | | | | |
| 9.2 (233) | 6.9 (175) | 10.0 (253) | 24.4 (619) | 7.4 (189) | 7.4 (189) | 1.4 (35) | 1.3 (32) | 1.0 (25) | 0.3 (6) |
| FR8 | | | | | | | | | |
| 11.9 (301) | — | 13.0 (330) | 31.9 (810) | 10.2 (258) | 10.4 (265) | — | — | 1.3 (33) | 0.4 (9) |


2.10 Adjustable Frequency Drives

SPX Drives

Approximate Dimensions in Inches (mm)

NEMA Type 1/IP21 and NEMA Type 12/IP54, FR9

2

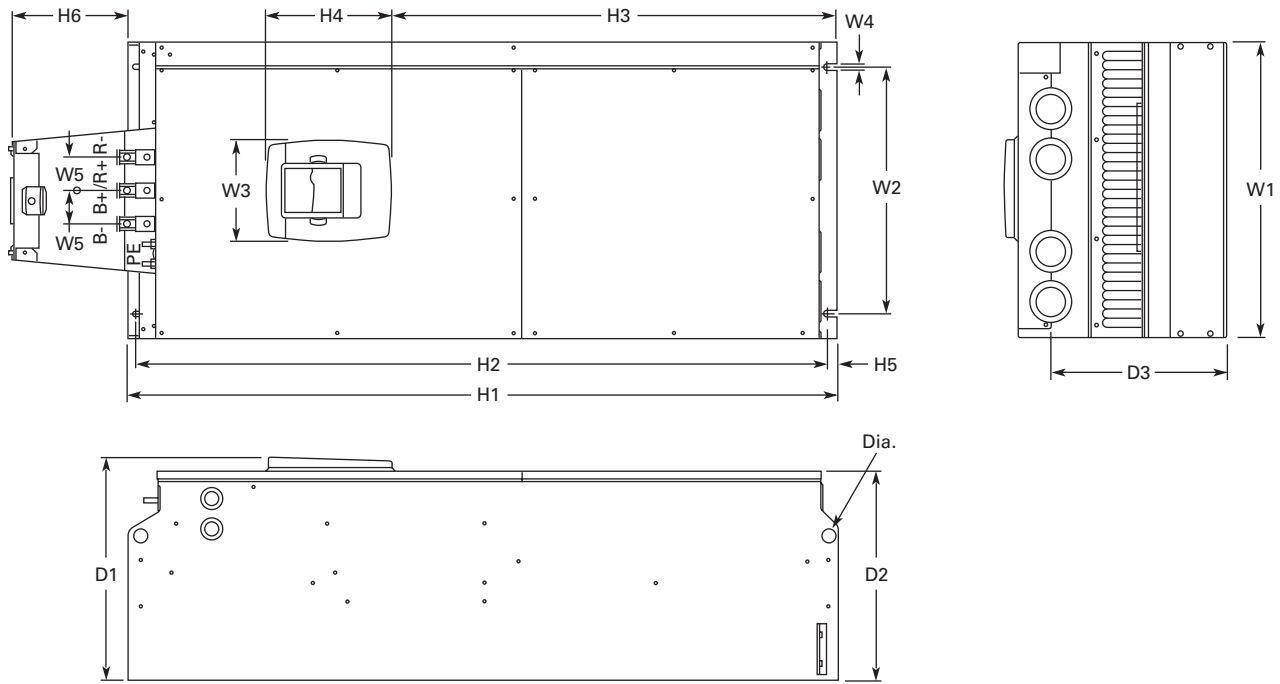




| Voltage | hp (I _H) | W1 | W2 | W3 | W4 | H1 | H2 | H3 | H4 ① | D1 | D2 | D3 | Dia. | Weight Lbs (kg) |
|---------|----------------------|---------------|---------------|------------|-------------|----------------|----------------|-------------|--------------|-----------------|---------------|---------------|-------------|--------------------|
| 230 V | 75–100 | 18.9 (480) | 15.7 (400) | 0.4 (9) | 2.1 (54) | 45.3 (1150) | 44.1 (1120) | 0.6 (16) | 7.4 (188) | 14.2 (361.5) | 13.4 (340) | 11.2 (285) | 0.8 (21) | 321.9 (146) |
| 480 V | 150–200 | | | | | | | | | | | | | |
| 575 V | 100–175 | | | | | | | | | | | | | |

Note

① Brake resistor terminal box (H6) included when brake chopper ordered.

Approximate Dimensions in Inches (mm)

NEMA Type 1/IP21 and NEMA Type 12/IP54, FR9 with Flange Kit

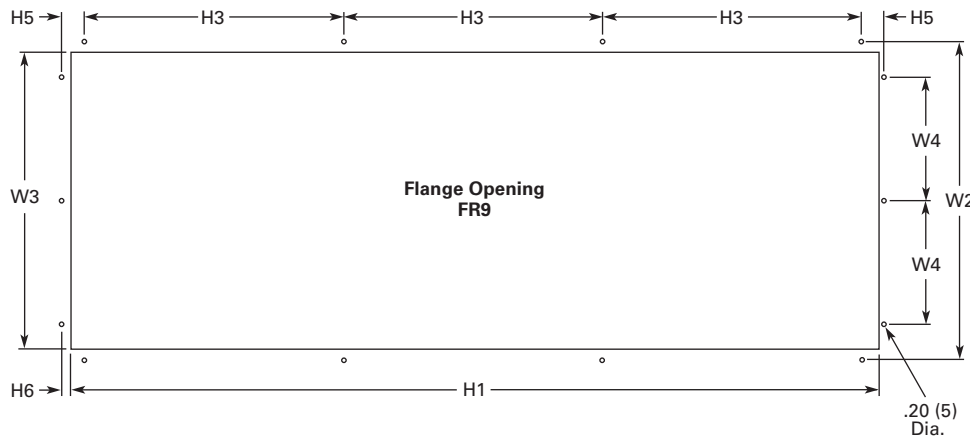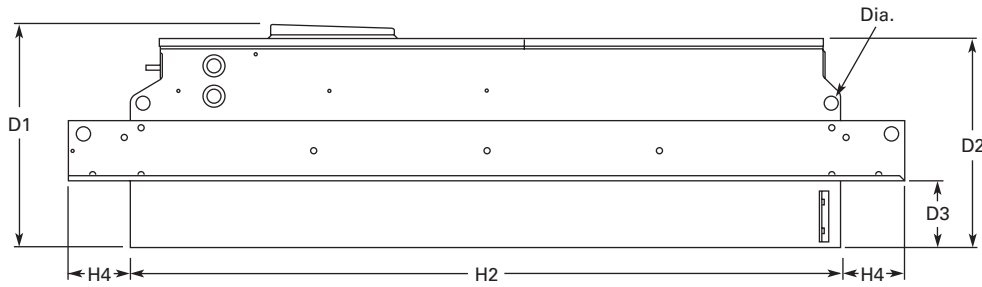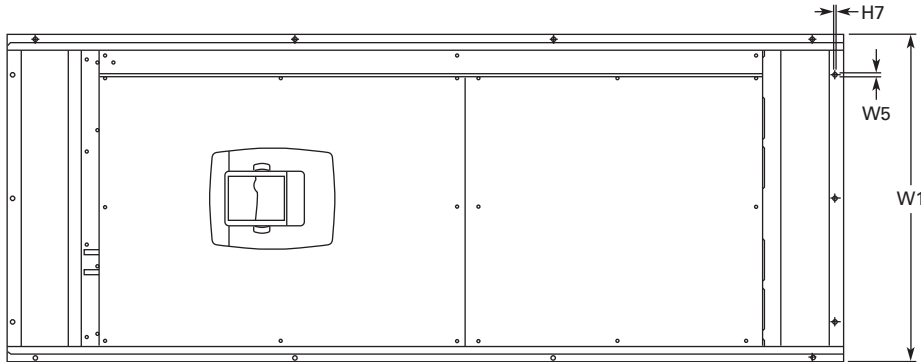

| W1 | W2 | W3 | W4 | W5 | H1 | H2 | H3 | H4 | H5 | H6 | H7 | D1 | D2 | D3 | Dia. |
|------------|------------|------------|-----------|-----------|-------------|-------------|------------|-----------|----------|---------|---------|------------|------------|-----------|----------|
| 20.9 (530) | 20.0 (510) | 19.1 (485) | 7.9 (200) | 0.2 (5.5) | 51.7 (1312) | 45.3 (1150) | 16.5 (420) | 3.9 (100) | 1.4 (35) | 0.4 (9) | 0.1 (2) | 24.9 (362) | 13.4 (340) | 4.3 (109) | 0.8 (21) |





2.10 Adjustable Frequency Drives

SPX Drives

Approximate Dimensions in Inches (mm)

NEMA Type 1/IP21 and NEMA Type 12/IP54, FR10 Freestanding


2

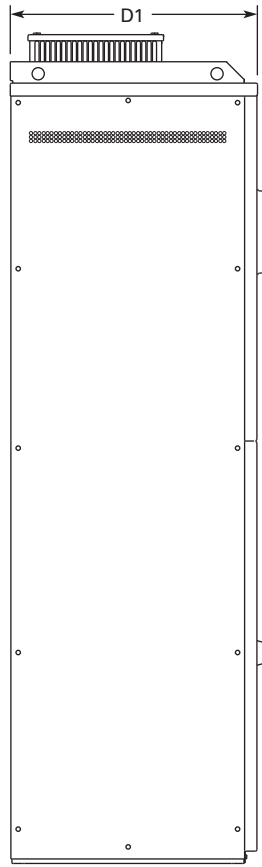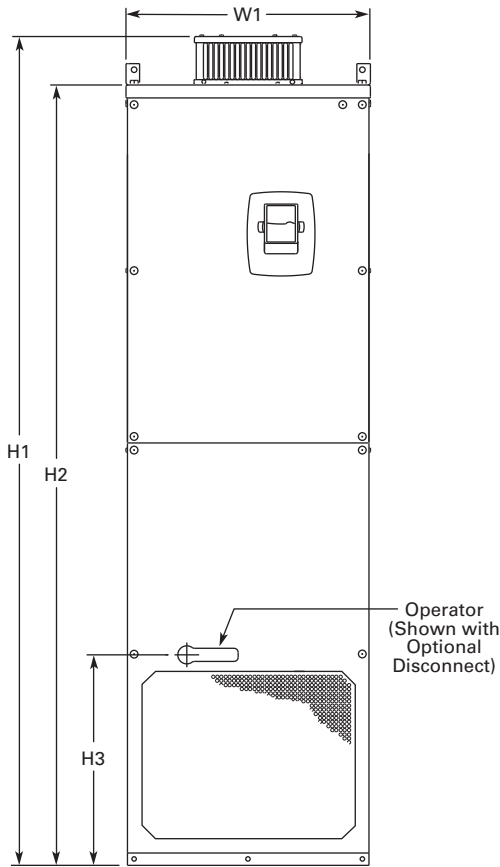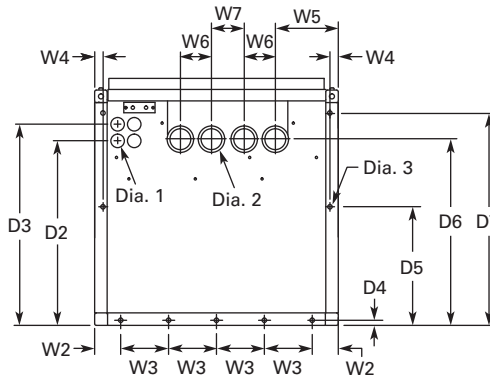

| Volts | hp (I _H) | W1 | W2 | W3 | W4 | W5 | W6 | W7 | H1 | H2 | H3 | D1 | D2 | D3 | D4 | D5 | D6 | D7 | Dia. 1 | Dia. 2 | Dia. 3 | Weight Lbs (kg) |
|-------|-------------------------|-------|--------|-------|------|-------|------|-------|--------|--------|---------|-------|-------|-------|------|-------|-------|-------|--------|--------|--------|--------------------|
| 480 V | 250–350 | 23.43 | 2.46 | 4.53 | 0.79 | 5.95 | 2.95 | 30.11 | 79.45 | 74.80 | 20.18 | 23.70 | 17.44 | 19.02 | 0.47 | 11.22 | 17.60 | 20.08 | 0.83 | 1.89 | 0.43 | 875 (389) |
| 690 V | 200–300 | (595) | (62.5) | (115) | (20) | (151) | (75) | (79) | (2018) | (1900) | (512.5) | (602) | (443) | (483) | (12) | (285) | (447) | (510) | (21) | (48) | (11) | |

Approximate Dimensions in Inches (mm)

FR10 Open Chassis ①

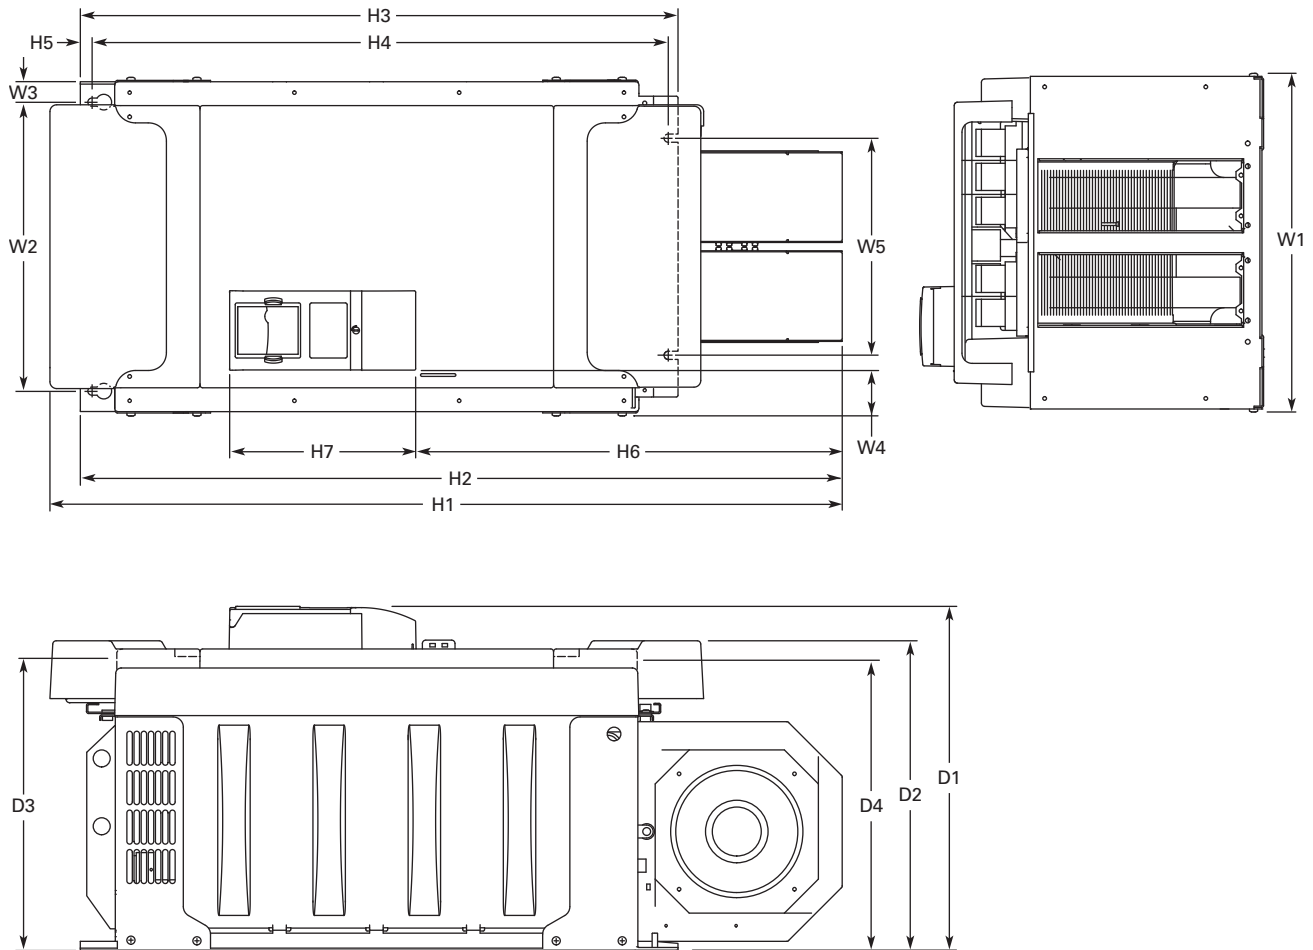

| Voltage | hp (I _H) | W1 | W2 | W3 | W4 | W5 | H1 | H2 | H3 | H4 | H5 | H6 | H7 | D1 | D2 | D3 | D4 | Weight Lbs (kg) |
|---------|----------------------|-------|-------|------|------|-------|--------|--------|-------|-------|------|-------|-------|-------|-------|-------|-------|--------------------|
| 480 V | 250–350 | 19.7 | 16.7 | 1.2 | 2.6 | 12.8 | 45.9 | 44.1 | 34.6 | 33.5 | 0.7 | 24.7 | 10.8 | 19.9 | 17.9 | 16.7 | 16.6 | 518 |
| 575 V | 200–300 | (500) | (425) | (30) | (67) | (325) | (1165) | (1121) | (879) | (850) | (17) | (627) | (275) | (506) | (455) | (423) | (421) | (235) |

Note

① SPXX FR12 is built of two FR10 modules. Please refer to SPX installation manual for mounting instructions.





2.10 Adjustable Frequency Drives

SPX Drives

Approximate Dimensions in Inches (mm)


NEMA Type 1/IP21, FR11 Freestanding Drive

2

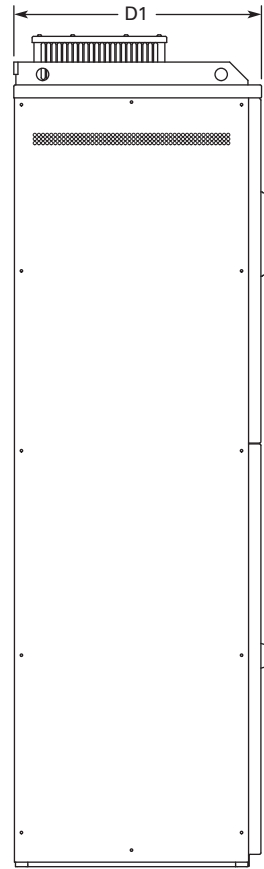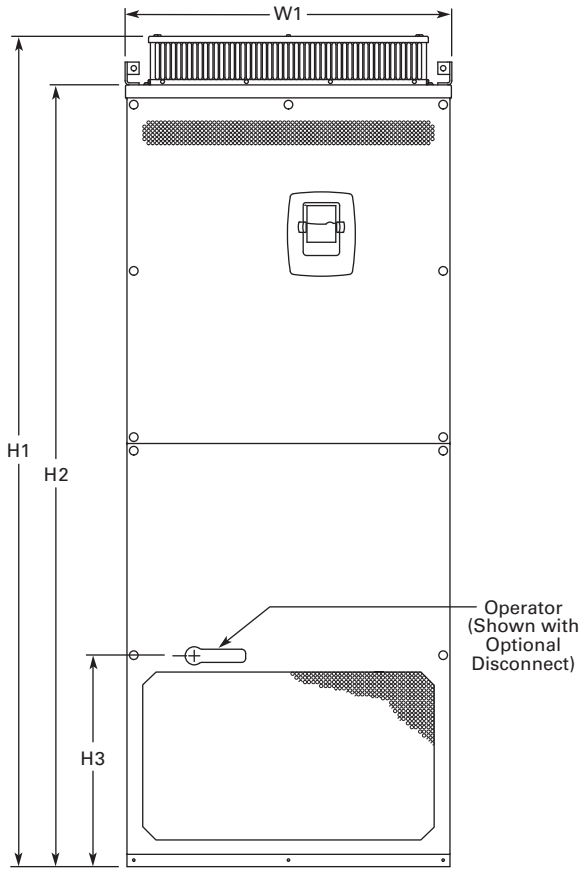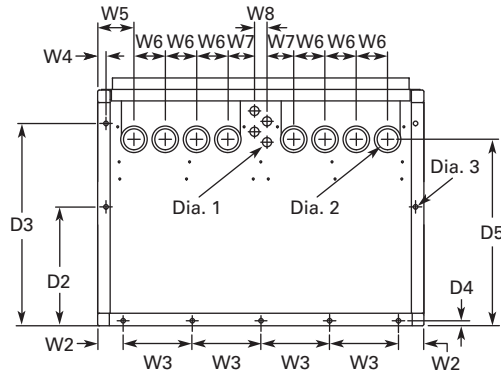

| Voltage | hp (I _H) | W1 | W2 | W3 | W4 | W5 | W6 | W7 | W8 | H1 | H2 | H3 | D1 | D2 | D3 | D4 | D5 | Dia. 1 | Dia. 2 | Dia. 3 | Weight Lbs (kg) |
|---------|-------------------------|----------------|--------------|---------------|--------------|--------------|--------------|--------------|--------------|-----------------|-----------------|------------------|----------------|----------------|----------------|--------------|----------------|--------------|--------------|-------------------------|--------------------|
| 480 V | 400–550 | 31.26 (794) | 2.40 (61) | 6.50 (165) | 0.79 (20) | 3.43 (87) | 2.95 (75) | 2.52 (64) | 1.18 (30) | 79.45 (2018) | 74.80 (1900) | 20.18 (512.5) | 23.70 (602) | 11.22 (285) | 19.09 (485) | 0.47 (12) | 17.60 (447) | 0.83 (21) | 1.89 (48) | 0.35 x 0.43 (9 x 11) | 526 (239) |
| 690 V | 400–500 | | | | | | | | | | | | | | | | | | | | |

Approximate Dimensions in Inches (mm)

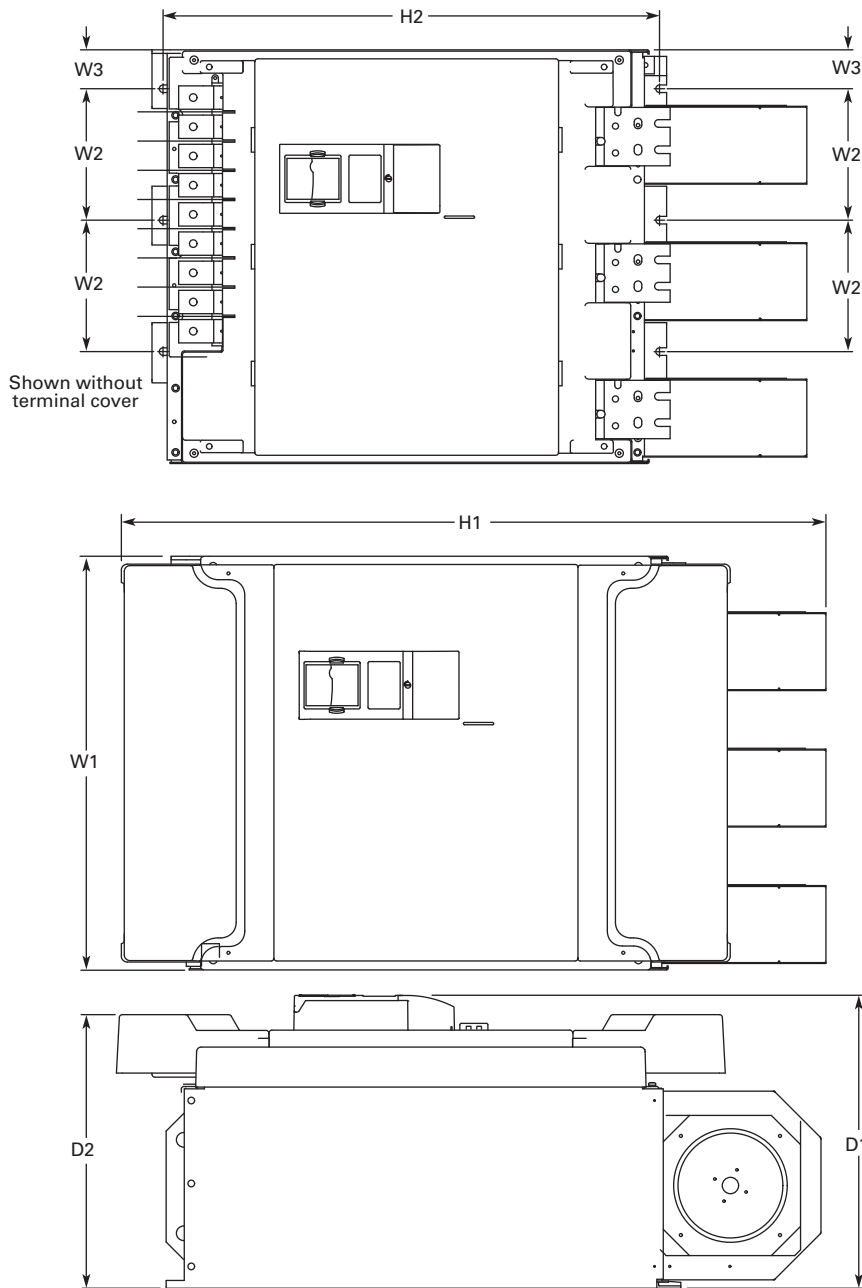FR11 Open Chassis

| Voltage | hp (I _H) | W1 | W2 | W3 | H1 | H2 | D1 | D2 | Weight Lbs (kg) |
|---------|----------------------|------------|-----------|----------|-------------|------------|------------|------------|--------------------|
| 480 V | 400-550 | 27.9 (709) | 8.6 (225) | 2.6 (67) | 45.5 (1155) | 33.5 (850) | 19.8 (503) | 18.4 (468) | 833 (378) |
| 575 V | 400-500 | | | | | | | | |


2.10 Adjustable Frequency Drives

SPX Drives

Approximate Dimensions in Inches (mm)

FR13, Open Chassis Inverter

2

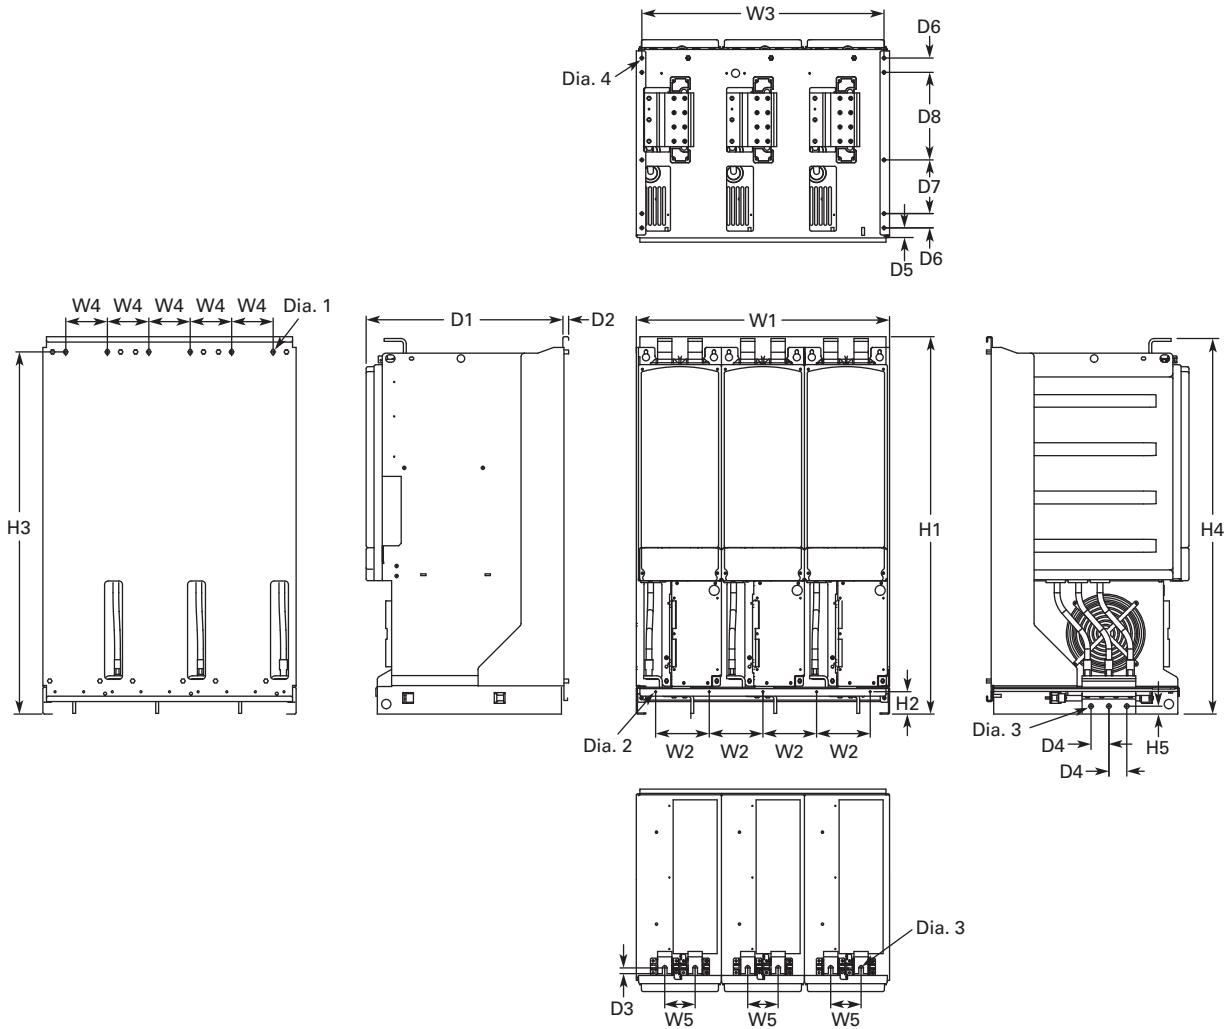

| W1 | W2 | W3 | W4 | W5 | H1 | H2 | H3 | H4 | H5 | D1 | D2 | D3 | D4 | D5 | D6 | D7 | D8 | Dia. 1 | Dia. 2 | Dia. 3 | Dia. 4 | Weight Lbs (kg) |
|-------|-------|-------|-------|------|--------|--------|----------|--------|------|-------|------|------|------|------|------|-------|---------|-----------|--------|--------|--------|-----------------|
| 27.87 | 5.91 | 26.65 | 4.57 | 3.35 | 41.54 | 2.46 | 39.86 | 41.34 | 0.79 | 21.77 | 0.51 | 0.63 | 1.97 | 1.06 | 1.57 | 5.91 | 9.64 | 0.35x0.59 | 0.18 | 0.51 | 0.37 | 683 (310) |
| (708) | (150) | (677) | (116) | (85) | (1055) | (62.5) | (1012.5) | (1050) | (20) | (553) | (13) | (16) | (50) | (27) | (40) | (150) | (244.8) | (9x15) | (4.6) | (13) | (9.5) | |


Notes

9000X FR14 is built of two FR13 modules. Please refer to SPX installation manual for mounting instructions.

FR13 is built from an inverter module and a converter module. Please refer to SPX installation manual for mounting instructions.

Approximate Dimensions in Inches (mm)

FR13, Open Chassis Converter

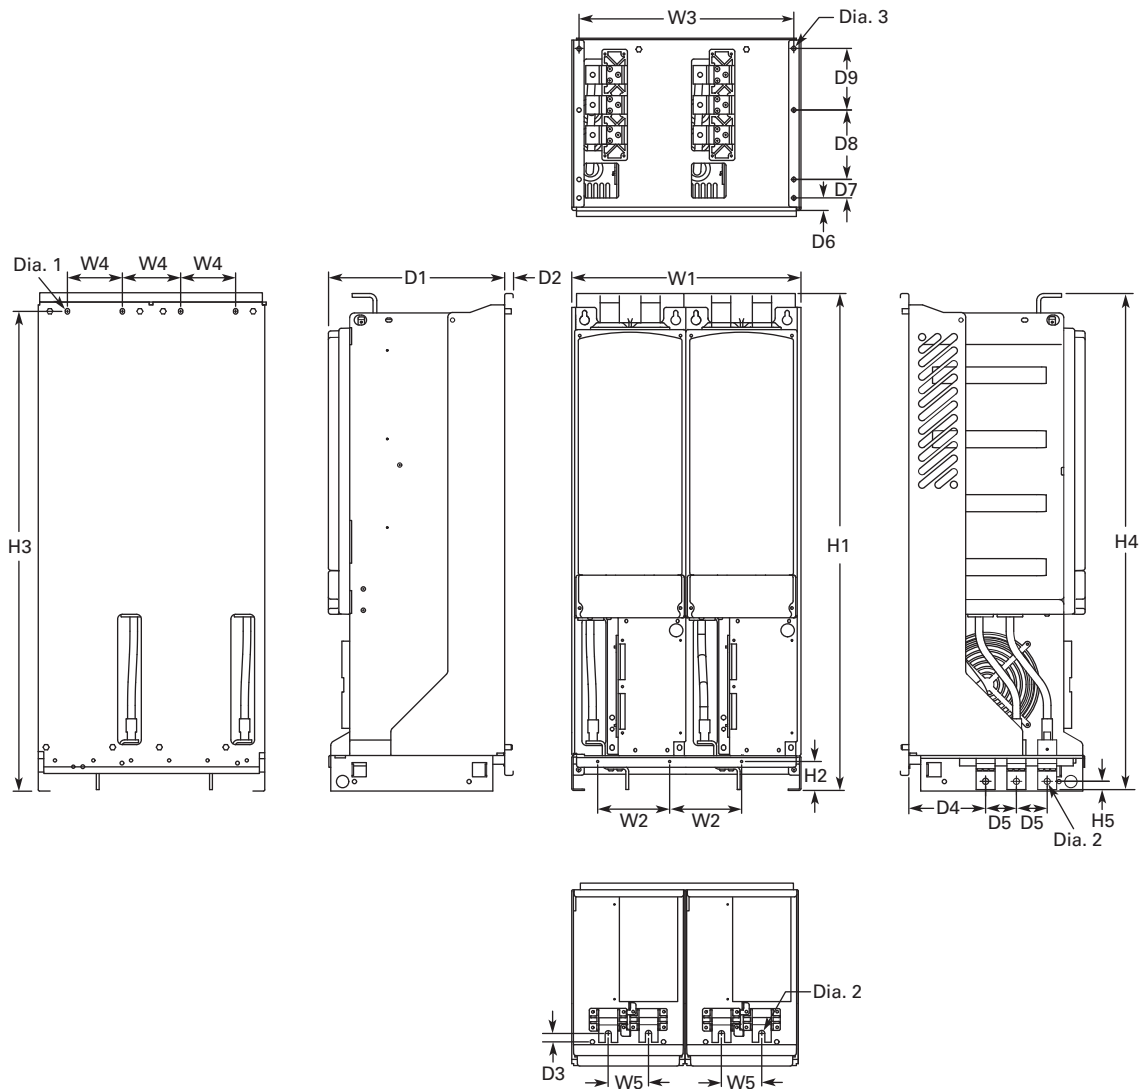

| W1 | W2 | W3 | W4 | W5 | H1 | H2 | H3 | H4 | H5 | D1 | D2 | D3 | D4 | D5 | D6 | D7 | D8 | D9 | Dia. 1 | Dia. 2 | Dia. 3 | Weight Lbs (kg) |
|----------------|---------------|----------------|---------------|--------------|-----------------|----------------|-------------------|-----------------|----------------|----------------|--------------|----------------|---------------|--------------|--------------|--------------|---------------|---------------|---------------------|--------------|---------------|--------------------|
| 18.74 (476) | 5.91 (150) | 17.52 (445) | 4.57 (116) | 3.35 (85) | 41.54 (1055) | 2.46 (62.5) | 39.86 (1012.5) | 41.34 (1050) | 0.69 (17.5) | 14.69 (373) | 0.51 (13) | 0.73 (18.5) | 6.42 (163) | 2.56 (65) | 1.06 (27) | 1.57 (40) | 5.91 (150) | 5.24 (133) | 0.35x0.59 (9x15) | 0.51 (13) | 0.37 (9.5) | 295 (134) |

Number of Input Units

| 480 V Catalog Number | hp | Input Modules |
|-------------------------|-----|------------------|
| SPX800 A0-4 A2N1 | 800 | 2 |

| 690 V Catalog Number | hp | Input Modules |
|-------------------------|------|------------------|
| SPX800 A0-5 A2N1 | 800 | 2 |
| SPX900 A0-5 A2N1 | 900 | 2 |
| SPXH10 A0-5 A2N1 | 1000 | 2 |


2.10 Adjustable Frequency Drives

SPX Drives

Approximate Dimensions in Inches (mm)

FR13, Open Chassis Converter—900/1000 hp 480 V

2

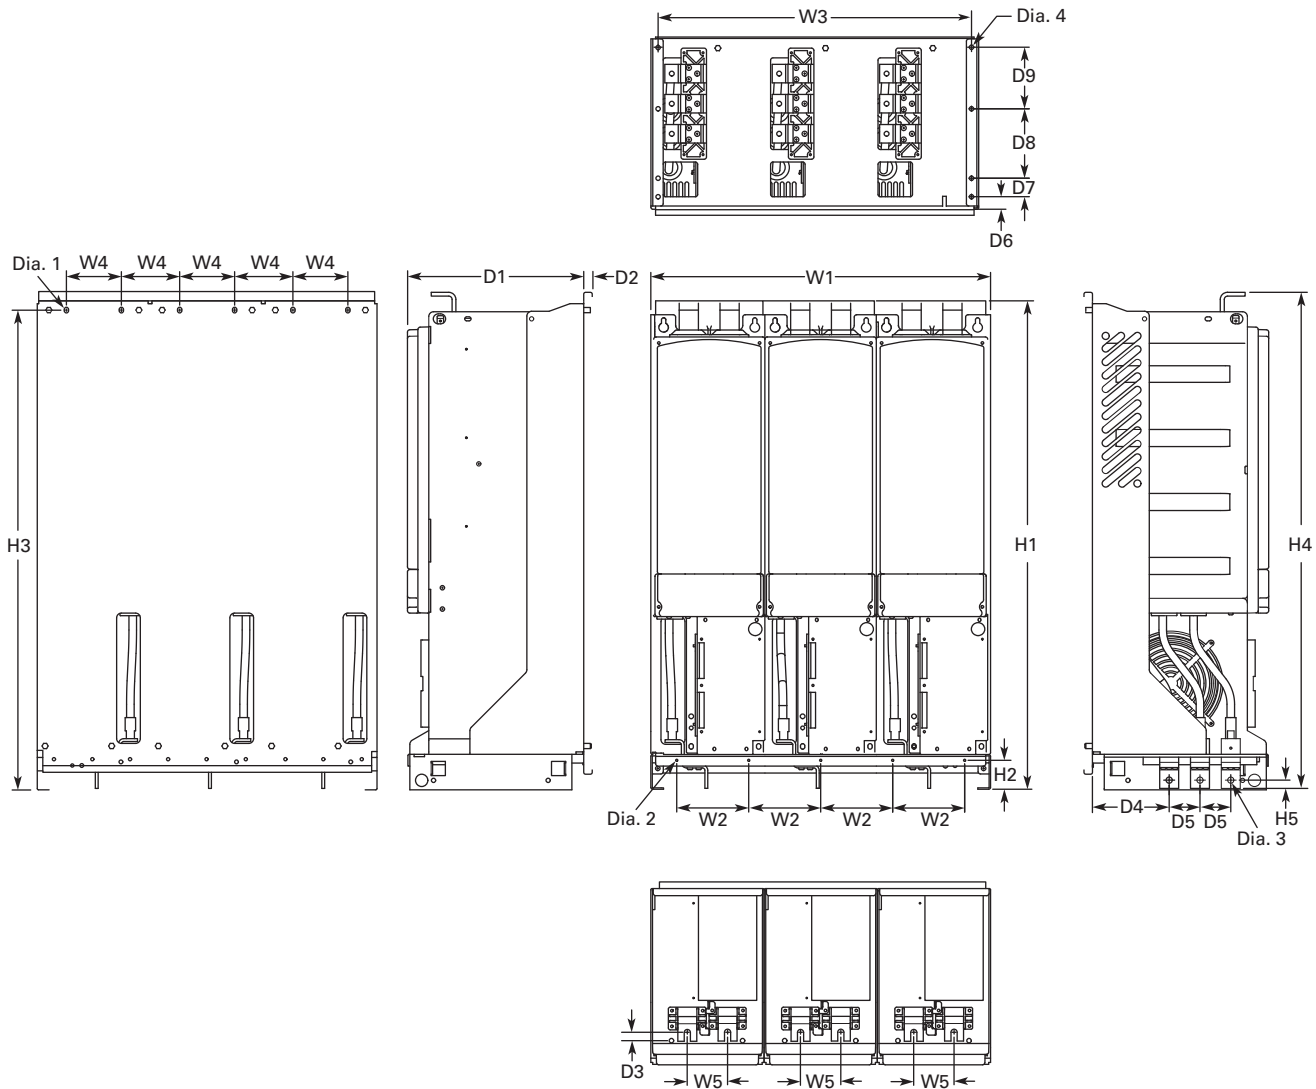

| W1 | W2 | W3 | W4 | W5 | H1 | H2 | H3 | H4 | H5 | D1 | D2 | D3 | D4 | D5 | D6 | D7 | D8 | D9 | Dia. 1 | Dia. 2 | Dia. 3 | Dia. 4 | Weight Lbs (kg) |
|----------------|---------------|----------------|---------------|--------------|-----------------|----------------|-------------------|-----------------|----------------|----------------|--------------|----------------|---------------|--------------|--------------|--------------|---------------|---------------|---------------------|---------------|--------------|---------------|--------------------|
| 27.87 (708) | 5.91 (150) | 26.65 (677) | 4.57 (116) | 3.35 (85) | 41.54 (1055) | 2.46 (62.5) | 39.86 (1012.5) | 41.34 (1050) | 0.69 (17.5) | 14.69 (373) | 0.51 (13) | 0.73 (18.5) | 6.42 (163) | 2.56 (65) | 1.06 (27) | 1.57 (40) | 5.91 (150) | 5.24 (133) | 0.35x0.59 (9x15) | 0.18 (4.6) | 0.51 (13) | 0.37 (9.5) | 443 (201) |

Number of Input Units

| 480 V Catalog Number | hp | Input Modules |
|-------------------------|------|------------------|
| SPX900 A0-4 A2N1 | 900 | 3 |
| SPXH10 A0-4 A2N1 | 1000 | 3 |


Approximate Dimensions in Inches (mm)

AC Choke Dimensions

Choke Types

| Catalog Number | Frame Size | Choke Type ① | Catalog Number | Frame Size | Choke Type ① |
|--------------------------------|------------|--------------|--------------------------------|------------|--------------|
| Voltage Range 380–500 V | | | Voltage Range 525–690 V | | |
| SPX 250 4 | FR10 | CHK0400 | SPX 200 5 | FR10 | CHK0261 |
| SPX 300 4 | | CHK0520 | SPX 250 5 | | CHK0400 |
| SPX 350 4 | | CHK0520 | SPX 300 5 | | CHK0400 |
| SPX 400 4 | FR11 | 2 x CHK0400 | SPX 400 5 | FR11 | CHK0520 |
| SPX 500 4 | | 2 x CHK0400 | SPX 450 5 | | CHK0520 |
| SPX 550 4 | | 2 x CHK0400 | SPX 500 5 | | 2 x CHK0400 |
| SPX 600 4 | FR12 | 2 x CHK0520 | SPX 550 5 | FR12 | 2 x CHK0400 |
| SPX 650 4 | | 2 x CHK0520 | SPX 600 5 | | 2 x CHK0400 |
| SPX 700 4 | | 2 x CHK0520 | SPX 700 5 | | 2 x CHK0400 |
| SPX 800 4 | FR13 | 2 x CHK0400 | SPX 800 5 | FR13 | 2 x CHK0400 |
| SPX 900 4 | | 3 x CHK0520 | SPX 900 5 | | 2 x CHK0400 |
| SPX H10 4 | | 3 x CHK0520 | SPX H10 5 | | 2 x CHK0400 |
| SPX H12 4 | FR14 | 4 x CHK0520 | SPX H13 5 | FR14 | 4 x CHK0400 |
| SPX H16 4 | | 6 x CHK0400 | SPX H15 5 | | 6 x CHK0400 |

CHK0520

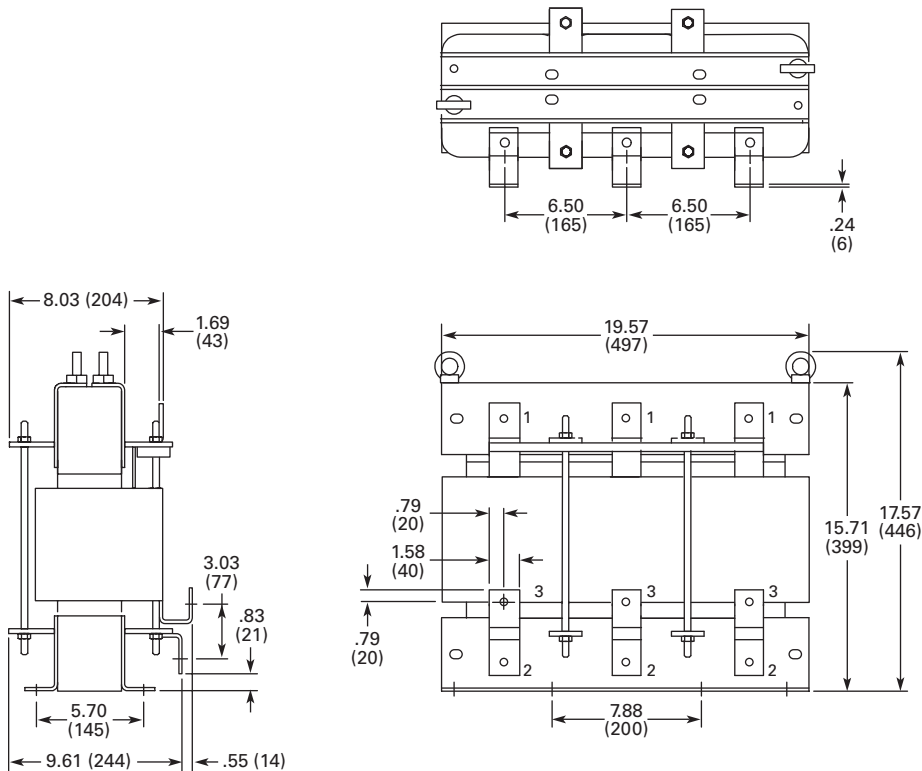

Note

① Chokes are provided with all FR10–FR14 drives.




2.10 Adjustable Frequency Drives

SPX Drives




Approximate Dimensions in Inches (mm)

CHK0400

2

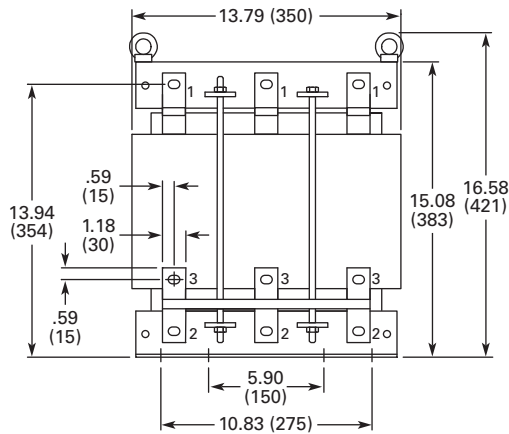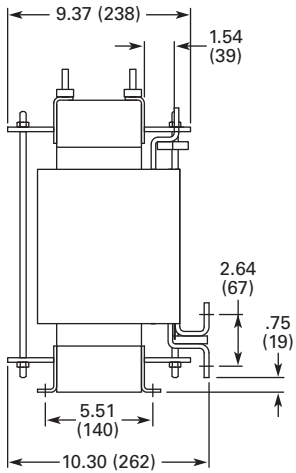

CHK0261

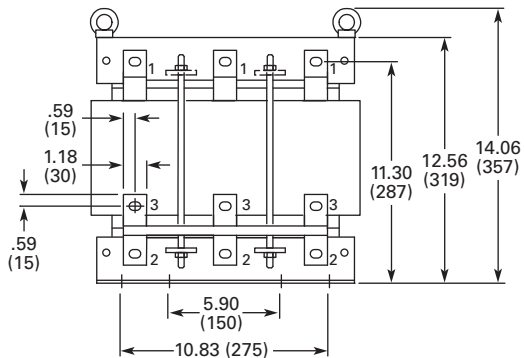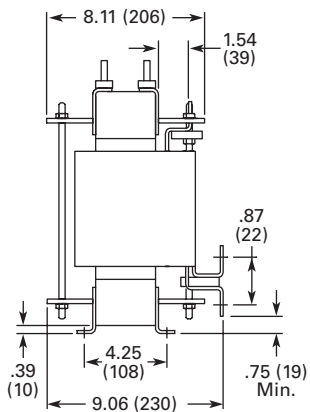

Clean Power Drives



Contents

Description**Page**


| | |
|--|------------------|
| Clean Power Drives Overview | V6-T2-298 |
| Enclosed Passive Filtered Drives | |
| EGF Enclosed Drives | V6-T2-305 |
| CFX Enclosed Drives | V6-T2-325 |
| HCX Enclosed 12-Pulse Drives | V6-T2-351 |
| CPX Enclosed 18-Pulse Drives | V6-T2-355 |
| RGX Enclosed Regenerative Drives | V6-T2-379 |

Clean Power Drives Overview

What Are Harmonics?


Take a perfect wave with a fundamental frequency of 60 Hz, which is close to what is supplied by the power company.

Perfect Wave

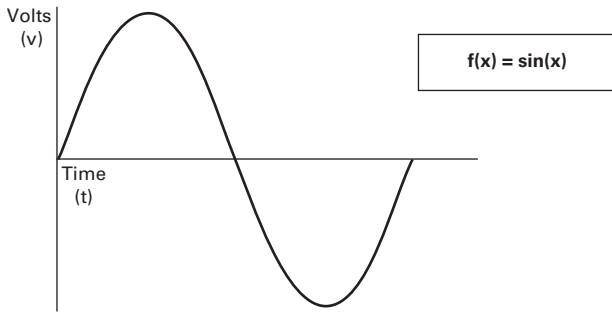


Add a second wave that is five times the fundamental frequency—300 Hz (typical of frequency added to the line by a fluorescent light).

Second Wave

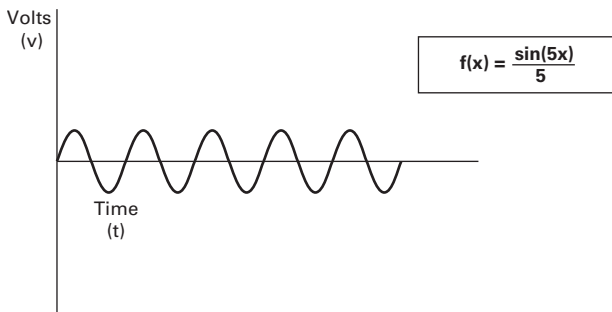

Combine the two waves. The result is a 60 Hz supply rich in fifth harmonics.

Resulting Supply

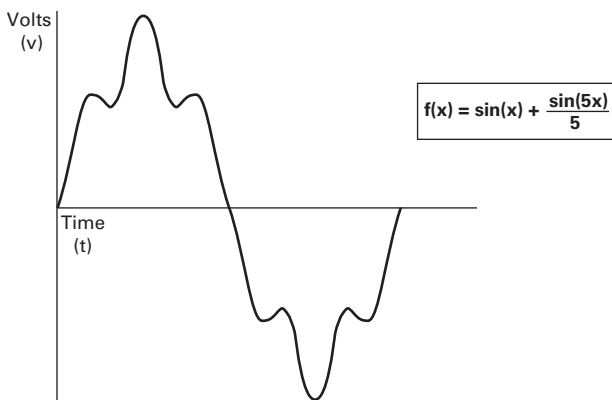

What Causes Harmonics?

Harmonics are the result of nonlinear loads that convert AC line voltage to DC. Examples of equipment that are non-linear loads are listed below:

- AC variable frequency drives
- DC drives
- Fluorescence lighting, computers, UPS systems
- Industrial washing machines, punch presses, welders, etc.

How Can Harmonics Due to VFDs Be Diminished?

By applying drives from the Eaton Clean Power drives family: EGF and CFX passive filtered drives, HCX 12-pulse drives, EGP and CPX 18-pulse drives, and RGX regenerative drives.

What Are Linear Loads?

Linear loads are primarily devices that run across the line and do not add harmonics. Motors are prime examples. The downside to having large motor linear loads is that they draw more energy than a VFD, because of their inability to control motor speed. In most applications there is a turn down valve used with the motor which will reduce the flow of the material, without significantly reducing the load to the motor. While this provides some measure of speed control, it is extremely inefficient.

Why Be Concerned About Harmonics?


1. **Installation and utility costs increase.** Harmonics cause damage to transformers and lower efficiencies due to the voltage drop. These losses can become significant (from 16.6–21.6%) which can have a dramatic effect on the HVAC systems that are controlling the temperatures of the building where the transformer and drive equipment reside.
2. **Downtime and loss of productivity.** Telephones and data transmissions links may not be guaranteed to work on the same power grids polluted with harmonics.
3. **Downtime and nuisance trips of drives and other equipment.** Emergency generators have up to three times the impedance that is found in a conventional utility source. Thus the harmonic voltage can be up to three times as large, causing risk of operation problems.
4. **Larger motors must be used.** Motors running across the line that are connected on polluted power distribution grids can overheat or operate at lower efficiency due to harmonics.
5. **Higher installation costs.** Transformers and power equipment must be oversized to accommodate the loss of efficiencies. This is due to the harmonic currents circulating through the distribution without performing useful work.

How Does a VFD Convert Three-Phase AC to a Variable Output Voltage and Frequency?


The six-pulse VFD: The majority of all conventional drives that are built consist of a six-pulse configuration. The figure below represents a six-diode rectifier design that converts three-phase utility power to DC. The inverter section uses IGBTs to convert DC power to a simulated AC sine wave that can vary in frequency from 0–400 Hz.

The six-pulse VFD drive creates harmonic current distortion. The harmonic current that is created is energy that can not be used by customers and causes external heat and losses to all components including other drives that are on the same power distribution. The figure is a 100 hp drive with 45 A of damaging harmonic current.

100 hp Six-Diode Rectifier Design

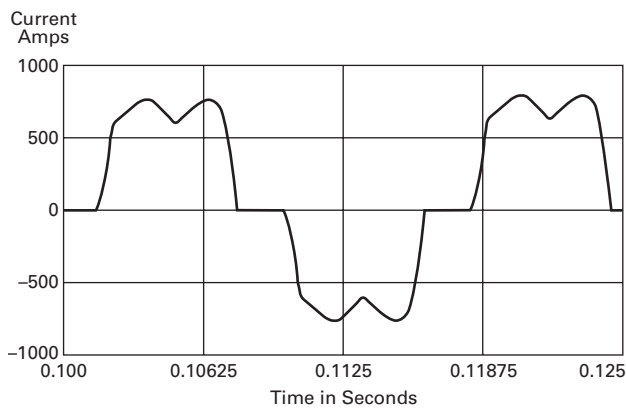

100 hp Six-Pulse Nonproductive Harmonic Current

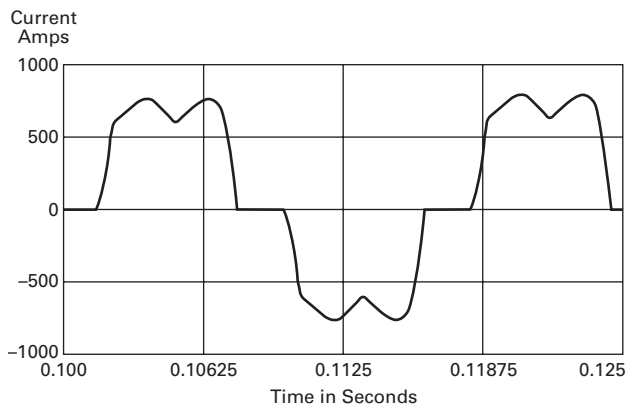

Six-Pulse Nonproductive Harmonic Current

Six-Pulse Circuit

Current harmonics

| | | |
|----------------|-------------------|-------------------|
| $I_1 = 100\%$ | $I_{11} = 6.10\%$ | $I_{19} = 1.77\%$ |
| $I_5 = 22.5\%$ | $I_{13} = 4.06\%$ | $I_{23} = 1.12\%$ |
| $I_7 = 9.38\%$ | $I_{17} = 2.26\%$ | $I_{25} = 0.86\%$ |

Power = 100 hp

Harmonic current = 45 amps

Guidelines of Meeting IEEE Std. 519-2014 Harmonic Distortion Limits

The IEEE 519-2014 Specification is a standard that provides guidelines for commercial and industrial

users that are implementing medium and low voltage equipment.

Current Distortion Limits for Systems Rated 120 V through 69 kV

Maximum Harmonic Current Distortion in percent of I_L

Individual Harmonic Order (Odd Harmonics) ^{①②}

| I_{sc}/I_L | $3 \leq h < 11$ | $11 \leq h < 17$ | $17 \leq h < 23$ | $23 \leq h < 35$ | $35 \leq h \leq 50$ | TDD |
|---------------------|-----------------|------------------|------------------|------------------|---------------------|------|
| < 20 ^③ | 4.0 | 2.0 | 1.5 | 0.6 | 0.3 | 5.0 |
| $20 < 50$ | 7.0 | 3.5 | 2.5 | 1.0 | 0.5 | 8.0 |
| $50 < 100$ | 10.0 | 4.5 | 4.0 | 1.5 | 0.7 | 12.0 |
| $100 < 1000$ | 12.0 | 5.5 | 5.0 | 2.0 | 1.0 | 15.0 |
| > 1000 | 15.0 | 7.0 | 6.0 | 2.5 | 1.4 | 20.0 |

Notes

- ① Even harmonics are limited to 25% of the odd harmonic limits shown in table above.
- ② Current distortions that result in a DC offset, e.g., half-wave converters, are not allowed.
- ③ All power generation equipment is limited to these values of current distortion, regardless of actual I_{sc}/I_L .


where

I_{sc} = maximum short-circuit current at PCC.

I_L = maximum demand load current (fundamental frequency component) at the PCC under normal load operating conditions.

One-Line Diagram for Harmonic Analysis

2

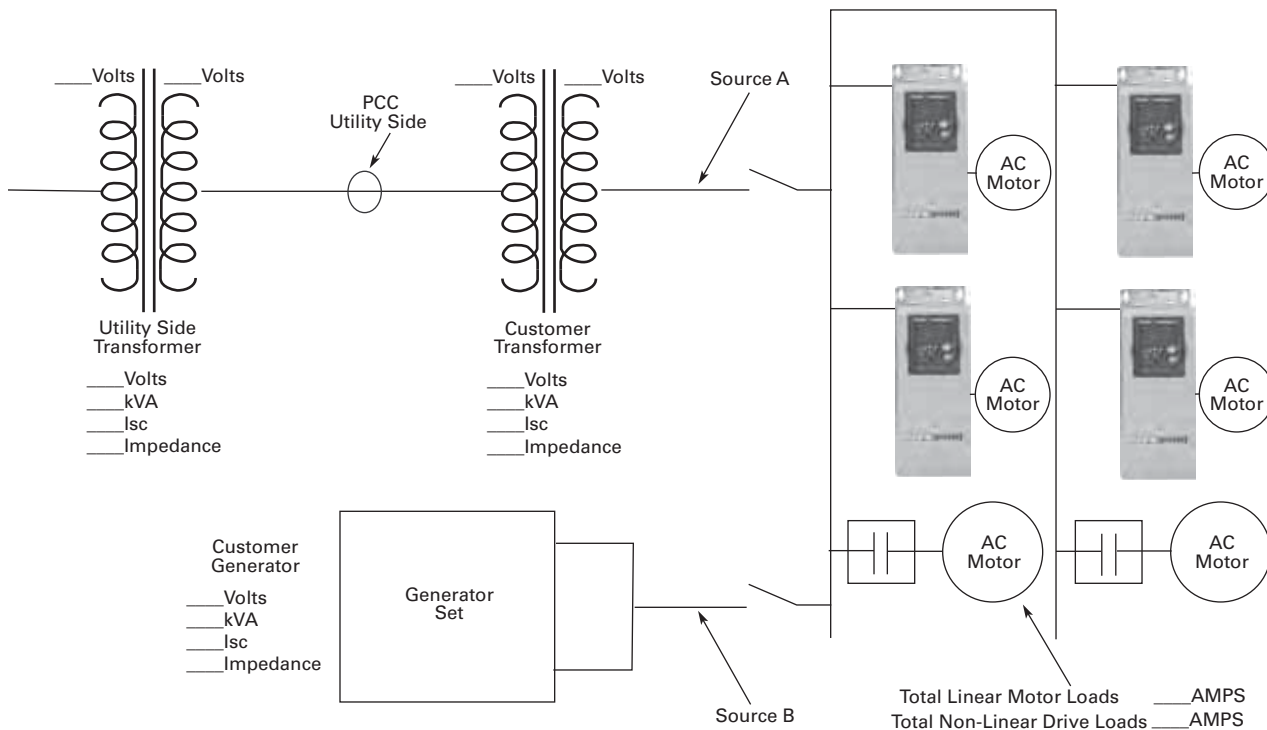

The best way to estimate AFD harmonic contribution to an electrical system is to perform a harmonic analysis based on known system characteristics. The one line in this figure would provide the data to complete the calculations.

Terms

- PCC (Point of Common Coupling) is defined as the electrical connecting point between the utility and multiple customers per the specifications in IEEE 519
- POA (Point of Analysis) is defined as where the harmonic calculations are taken

An oscilloscope can make all measurements at the PCC or POA to do an on-site harmonic evaluation.


Harmonic Reduction Methods to Meet IEEE 519

1. Line Reactor

A line reactor is a three-phase series inductance on the line side of an AFD. If a line reactor is applied on all AFDs, it is possible to meet IEEE guidelines where 10–25% of system loads are AFDs, depending on the stiffness of the line and the value of line reactance. Line reactors are available in various values of percent impedance, most typically 1–1.5%, 3% and 5%.

Note: The SVX/SPX drives come standard with a nominal 3% input impedance.

Line Reactor

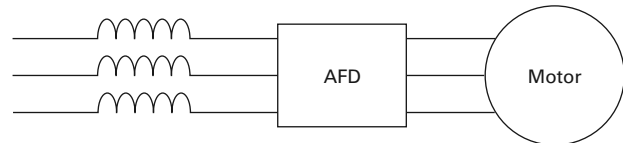

Advantages

- Low cost
- Can provide moderate reduction in voltage and current harmonics
- Available in various values of percent impedance
- Provides increased input protection for AFD and its semiconductors from line transients

Disadvantages


- May not reduce harmonic levels to below IEEE 519-2014 guidelines
- Voltage drop due to IR loss

2. Passive Filters


Tuned harmonic filters involve the series connection of an inductor with the shunt connection of an inductor and capacitor to form a low impedance path to ground for

a specific range of frequencies. This path presents an alternative to the flow of harmonic currents back into the utility source.

Enclosed Drive with Integrated Passive Filter

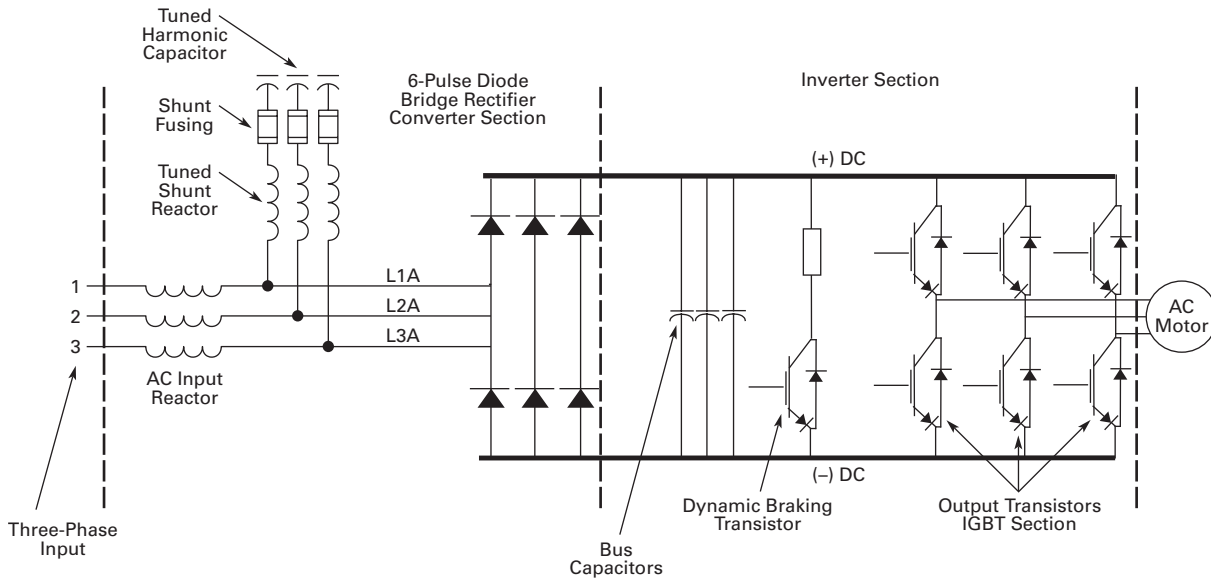

100 hp Enclosed 480 V Drive with Integrated Passive Filter

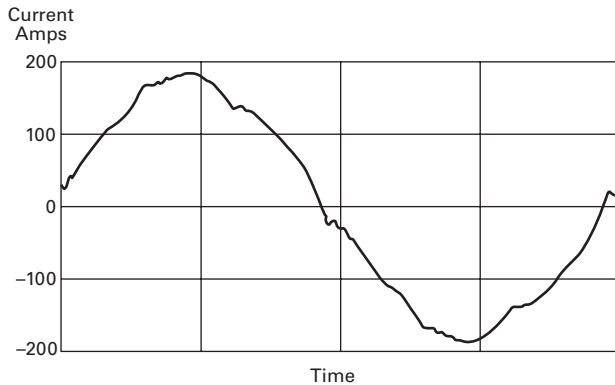

100 hp Enclosed 480 V Drive with Integrated Passive Filter

Passive Filter

Current harmonics

| | | |
|----------------|-------------------|-------------------|
| $I_1 = 100\%$ | $I_{11} = 0.24\%$ | $I_{19} = 0.50\%$ |
| $I_5 = 3.76\%$ | $I_{13} = 1.1\%$ | $I_{23} = 0.55\%$ |
| $I_7 = 1.65\%$ | $I_{17} = 0.80\%$ | $I_{25} = 0.80\%$ |

Power = 100 hp

$H_c = 8.6$ Amps

Advantages

- Low cost for smaller horsepower applications
- More effective harmonic attenuation than 12-pulse drives
- Provides increased input protection for AFD from line transients

Disadvantages

- Capacitors age over time, unlike magnetics
- Not as effective as 18-pulse drives
- Challenging to retrofit with bypass applications

2.11

Adjustable Frequency Drives

Clean Power Drives

2


3. 12-Pulse Converters

A 12-pulse converter incorporates two separate AFD input semiconductor bridges, which are fed from 30° phase shifted power sources with identical impedance. The sources may be two isolation transformers, where one is a delta/wye design (which provides the phase shift) and


the second a delta/delta design (which does not phase shift). The 12-pulse arrangement allows the harmonics from the first converter to cancel the harmonics of the second. Up to approximately 85% reduction of harmonic current and voltage distortion may be achieved (over standard

six-pulse converter). This permits a facility to use a larger percentage of AFD loads under IEEE 519-2014 guidelines than allowable using line reactors or DC chokes. A harmonic analysis is required to guarantee compliance with guidelines.

Basic 12-Pulse Rectifier with "Phase Shifting" Transformer

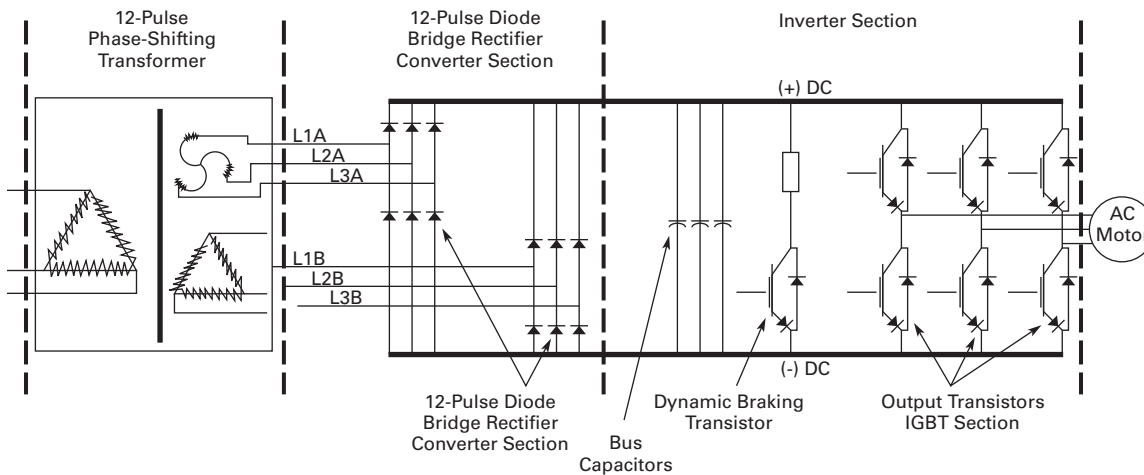

100 hp 480 V Drive with 12-Pulse Rectifier

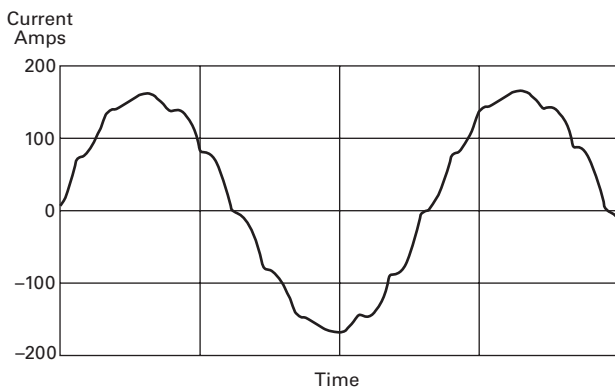

100 hp 480 V Drive with 12-Pulse Rectifier

12-Pulse Circuit

Current harmonics

| | | |
|----------------|-------------------|-------------------|
| $I_1 = 100\%$ | $I_{11} = 4.19\%$ | $I_{19} = 0.06\%$ |
| $I_5 = 1.25\%$ | $I_{13} = 2.95\%$ | $I_{23} = 0.87\%$ |
| $I_7 = 0.48\%$ | $I_{17} = 0.21\%$ | $I_{25} = 0.73\%$ |

Power = 100 hp

$H_c = 20$ Amps

Advantages

- Reasonable cost, although significantly more than reactors or chokes
- Substantial reduction (up to approx. 85%) in voltage and current harmonics
- Provides increased input protection for AFD and its semiconductors from line transients

Disadvantages

- Impedance matching of phase shifted sources is critical to performance
- Transformers often require separate mounting or larger AFD enclosures
- May not reduce distribution harmonic levels to below IEEE 519-2014 guidelines
- Cannot retrofit for most AFDs

4. 18-Pulse Converters


When the total load is comprised of non-linear load such as drives, and the ratio is I_{SC}/I_L , the greatest harmonic mitigation is required. Under these conditions, the currents drawn from the supply need to be sinusoidal and “clean” such that system interference and additional

losses are negligible. Eaton’s enclosed 18-pulse drive uses a phase-shifting auto-transformer with delta-connected winding that carries only the ampere-turns caused by the difference in load currents. This results in nine separate phases. In this type of configuration, the


total kVA rating of the transformer magnetic system was only 48% that of the motor load. A traditional isolated transformer system, with multipulse windings, would require the full kVA rating to be supported, which is more common in an MV step-down transformer.

The integrated 18-pulse drive, with near sine wave input current and low harmonics will meet the requirements of IEEE 519-2014 under all practical operating conditions. The comparisons with six-pulse passive filter and 12-pulse systems are shown on **Pages V6-T2-299, V6-T2-301** and below.

Basic 18-Pulse Rectifier with Phase-Shifting Auto-Transformer

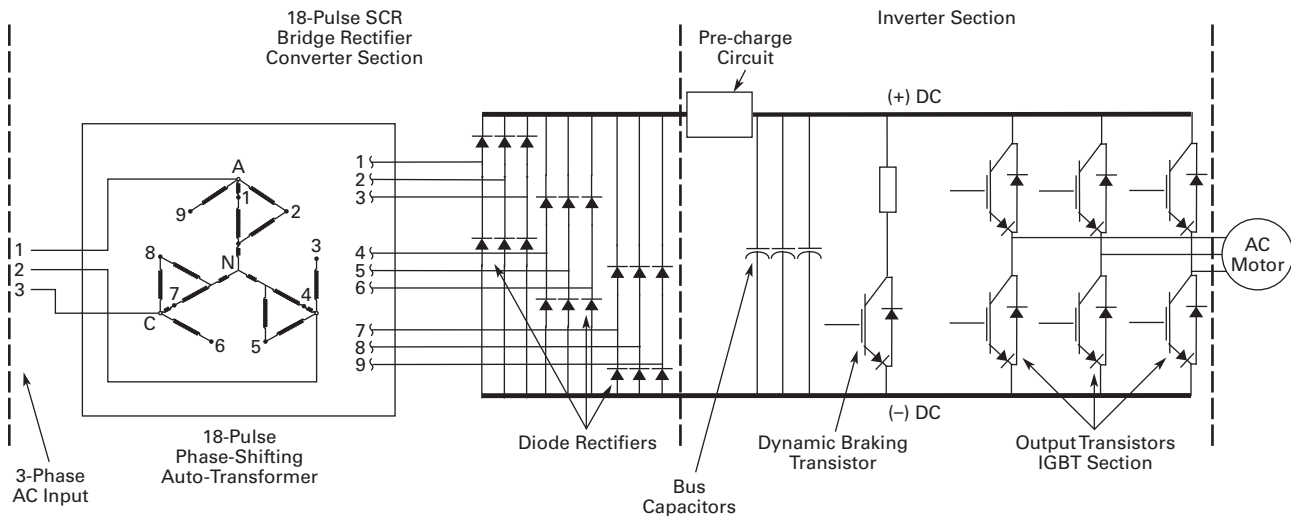

100 hp 480 V Drive with 18-Pulse Rectifiers

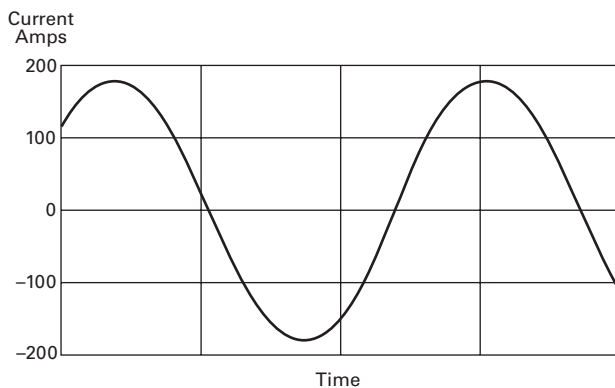

100 hp 480 V Drive with 18-Pulse Rectifiers

18-Pulse Clean Power

Current harmonics

| | | |
|----------------|-------------------|-------------------|
| $I_1 = 100\%$ | $I_{11} = 0.24\%$ | $I_{19} = 1.00\%$ |
| $I_5 = 0.16\%$ | $I_{13} = 0.10\%$ | $I_{23} = 0.01\%$ |
| $I_7 = 0.03\%$ | $I_{17} = 0.86\%$ | $I_{25} = 0.01\%$ |

Power = 100 hp

$H_c = 5.9$ Amps

Advantages

- Effectively guarantees compliance with IEEE 519-2014
- Provides increased input protection for AFD and its semiconductors from line transients
- Up to 4 times the harmonic reduction of 12-pulse methods
- Smaller transformer than isolation transformer used in 12-pulse converter
- Minimizes ripple current in capacitors, doubling expected capacitor life

Disadvantages

- Not as cost effective as some other methods at small (<50) horsepower

2.11

Adjustable Frequency Drives

Clean Power Drives

Enclosed Passive Filtered Drives

2



Contents

Description

Page

| | |
|------------------------------------|------------------|
| Clean Power Drives Overview | V6-T2-298 |
| Enclosed Passive Filtered Drives | |
| EGX Enclosed Drives | V6-T2-305 |
| CFX Enclosed Drives | V6-T2-325 |
| Enclosed 12-Pulse Drives | V6-T2-351 |
| Enclosed 18-Pulse Drives | V6-T2-355 |
| Enclosed Regenerative Drives | V6-T2-379 |

EGF Enclosed Drives



EGF Enclosed Drives

Product Description

Eaton's Enclosed EGF Drives combine harmonic distortion reduction and true power factor performance with the latest in Eaton adjustable frequency drive technology to deliver an industry-leading solution. This pre-engineered passive filtered solution prevents transformer overheating and overloading of breakers and feeders, which enables the application of adjustable frequency drives on generators and other high impedance power systems.

Features and Benefits

- Tuned passive filter
- Delivers 5–8% THD
- Generator compatible
- Uses the same DG1, SVX or SPX drive that is stocked in the warehouse
- Simple to retrofit
- Provides a low-impedance path to ground for the harmonic frequencies
- Meets IEEE 519-2014
- Excellent cost for performance
- Small footprint, compact enclosure design
- Insensitive to voltage imbalance
- Customizable cover control options
- Padlockable disconnect
- The PowerXL DG1 comes standard with the following communication protocols:
 - EtherNet/IP
 - Modbus/TCP
 - Modbus RTU
 - BACnet MS/TP

Standards and Certifications

- UL 508C



Contents

Description

Page

| | |
|---|-----------|
| Clean Power Drives Overview | V6-T2-298 |
| Enclosed Passive Filtered Drives | |
| EGF Enclosed Drives | |
| Product Identification | V6-T2-326 |
| Catalog Number Selection | V6-T2-306 |
| Production Selection | V6-T2-308 |
| Enclosure Selection | V6-T2-309 |
| Options | V6-T2-310 |
| Technical Data and Specifications | V6-T2-311 |
| Wiring Diagram | V6-T2-313 |
| Dimensions | V6-T2-314 |
| CFX Enclosed Drives | V6-T2-325 |
| Enclosed 12-Pulse Drives | V6-T2-351 |
| Enclosed 18-Pulse Drives | V6-T2-355 |
| Enclosed Regenerative Drives | V6-T2-379 |

Communication Options

- PROFIBUS-DP
- LonWorks
- CANopen
- DeviceNet

Enclosure Ratings

- NEMA Type 1
- NEMA Type 12
- NEMA Type 3R

Mounting

- Wall mount
- Floor mount: 12-inch legs
- Floor mount: 22-inch legs

Product Range

- 480 V: 1–250 hp

2.11

Adjustable Frequency Drives


Clean Power Drives

Catalog Number Selection

Catalog Number Selection is for reference only. Not all option combinations may be available.

2

EGF Enclosed—Base Catalog Number

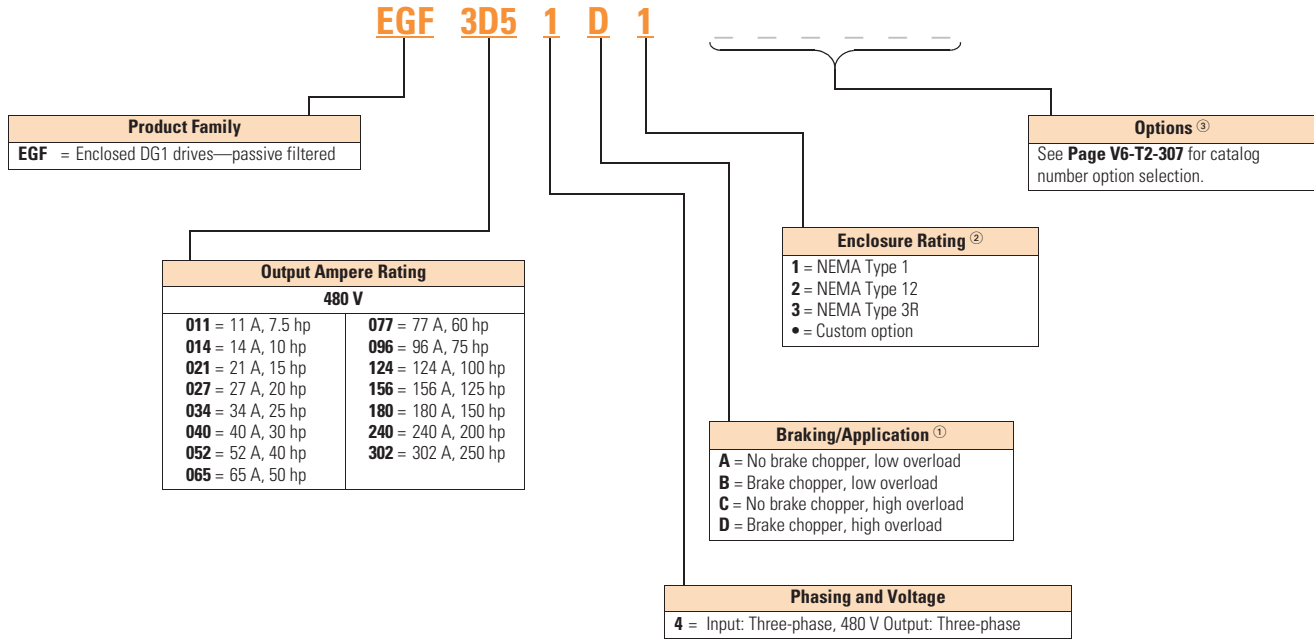

Notes

- ① Brake chopper is a factory-installed option only. Braking resistors sold separately. See DG1 drives starting on **Page V6-T2-59** for selection.
- ② Additional enclosure options including NEMA 4 and 4X are available. Please contact the factory for configuration and pricing.
- ③ Part number configuration continued on the following page.

Catalog Number Selection is for reference only. Not all option combinations may be available.

EGF Enclosed—Catalog Number Options

EGF 3D5 1 D 1

Base Catalog Number Example

See **Page V6-T2-306** for base catalog number selection.

Power Disconnect Options

- 0 = None
- 1 = MCP disconnect ^①
- 2 = Circuit breaker
- 3 = Circuit breaker/isolation fusing
- 5 = Circuit breaker/isolation fusing/SPD
- 8 = Circuit breaker/SPD
- A = Fused disconnect
- B = Fused disconnect/SPD
- E = Isolation fuses
- G = Isolation fuses/SPD
- = Custom option ^②

Bypass Options ^③

- 0 = None
- 1 = Manual HOA bypass
- 2 = Manual HOA bypass/isolation fusing
- 4 = Manual HOA bypass/isolation fusing/SPD
- 7 = Manual HOA bypass/SPD
- H = Manual HOA RVSS bypass
- J = Manual HOA RVSS bypass/isolation fusing
- L = Manual HOA RVSS bypass/isolation fusing/SPD
- P = Manual HOA RVSS bypass/SPD
- = Custom option ^②

Output Power Options ^④

- 0 = None
- A = Output contactor
- B = 3% Output reactor
- D = dV/dt filter
- E = 3% Output Reactor/output contactor
- G = dV/dt/output contactor
- = Custom option ^②

Control Options ^⑤

- 0 = None
- 1 = Speed pot
- 2 = Start-stop pushbutton
- 3 = Start-stop pushbutton with speed pot
- A = HOA switch
- B = Start-stop pushbutton with speed pot & HOA switch
- C = Start-stop pushbutton with HOA switch
- D = HOA switch with speed pot
- = Custom option ^②

Option Boards 2

Same options and codes as Option Boards 1

Option Boards 1

- 0 = No option
- 1 = 3 x DI, 3 x DO, 1 Thermistor, 24 Vdc/EXT
- 2 = 1 x AI, 2 x AO (isolated to control board)
- 3 = 3 x relay dry contact (2NO + 1NO/NC)
- 4 = 3 x PT100 RTD thermistor input
- 5 = 6 DI 240 Vac input
- = Custom option ^②

Communication Options

- 0 = No option
- 1 = PROFIBUS-DP
- 3 = CANopen (slave)
- 4 = DeviceNet
- 5 = PROFIBUS-DP (D9 connector)
- D = SmartWire-DT
- = Custom option ^②

Enclosure Options

- 0 = None
- 1 = Floor stand—12 inches
- 2 = Floor stand—22 inches
- A = Space heater
- B = Space heater & 12-inch floor stands
- C = Space heater & 22-inch floor stands
- = Custom option ^②

Light Options ^⑤

- 0 = None
- 1 = Non-bypass light kit—Power On, Run, Fault
- 2 = Bypass light kit—On, VFD Run, Fault, Bypass Run
- = Custom option ^②

Notes

- ① HMCP disconnect option required and only available when bypass is selected.
- ② More options are available as Engineered to Order through the Bid Manager tool.
- ③ All bypass options include third contactor for drive isolation when in bypass mode.
- ④ Output contactor not available with bypass. Bypass comes standard with output contactor.
- ⑤ Pilot devices are 22 mm standard. 30 mm options are available as engineered to order through the Bid Manager tool.

Production Selection

2

EGF Enclosed Drive



480 V Drives—Constant Torque (CT)/High Overload (IH) Enclosed Drives

| hp | Current (A) | Drive Frame Size | NEMA Type 1 Base Catalog Number ^① | NEMA Type 12 Base Catalog Number ^① | NEMA Type 3R Base Catalog Number ^① |
|------------------|-------------|------------------|--|---|---|
| 7.5 | 11 | 2 | EGF0114D1 | EGF0114D2 | EGF0114D3 |
| 10 | 14 | 2 | EGF0144D1 | EGF0144D2 | EGF0144D3 |
| 15 | 21 | 2 | EGF0214D1 | EGF0214D2 | EGF0214D3 |
| 20 | 27 | 3 | EGF0274D1 | EGF0274D2 | EGF0274D3 |
| 25 | 34 | 3 | EGF0344D1 | EGF0344D2 | EGF0344D3 |
| 30 | 40 | 3 | EGF0404D1 | EGF0404D2 | EGF0404D3 |
| 40 | 52 | 4 | EGF0524C1 | EGF0524C2 | EGF0524C3 |
| 50 | 65 | 4 | EGF0654C1 | EGF0654C2 | EGF0654C3 |
| 60 | 77 | 4 | EGF0774C1 | EGF0774C2 | EGF0774C3 |
| 75 | 96 | 5 | EGF0964C1 | EGF0964C2 | EGF0964C3 |
| 100 | 124 | 5 | EGF1244C1 | EGF1244C2 | EGF1244C3 |
| 125 | 156 | 5 | EGF1564C1 | EGF1564C2 | EGF1564C3 |
| 150 ^② | 180 | 6 | EGF1804C1 ^② | EGF1804C2 ^② | EGF1804C3 ^② |
| 200 ^② | 240 | 6 | EGF2404C1 ^② | EGF2404C2 ^② | EGF2404C3 ^② |

EGF Enclosed Drive



480 V Drives—Variable Torque (VT)/Low Overload (L) Enclosed Drives

| hp | Current (A) | Drive Frame Size | NEMA Type 1 Base Catalog Number ^① | NEMA Type 12 Base Catalog Number ^① | NEMA Type 3R Base Catalog Number ^① |
|------------------|-------------|------------------|--|---|---|
| 7.5 | 11 | 1 | EGF0114B1 | EGF0114B2 | EGF0114B3 |
| 10 | 14 | 2 | EGF0144B1 | EGF0144B2 | EGF0144B3 |
| 15 | 21 | 2 | EGF0214B1 | EGF0214B2 | EGF0214B3 |
| 20 | 27 | 2 | EGF0274B1 | EGF0274B2 | EGF0274B3 |
| 25 | 34 | 3 | EGF0344B1 | EGF0344B2 | EGF0344B3 |
| 30 | 40 | 3 | EGF0404B1 | EGF0404B2 | EGF0404B3 |
| 40 | 52 | 3 | EGF0524B1 | EGF0524B2 | EGF0524B3 |
| 50 | 65 | 4 | EGF0654A1 | EGF0654A2 | EGF0654A3 |
| 60 | 77 | 4 | EGF0774A1 | EGF0774A2 | EGF0774A3 |
| 75 | 96 | 4 | EGF0964A1 | EGF0964A2 | EGF0964A3 |
| 100 | 124 | 5 | EGF1244A1 | EGF1244A2 | EGF1244A3 |
| 125 | 156 | 5 | EGF1564A1 | EGF1564A2 | EGF1564A3 |
| 150 | 180 | 5 | EGF1804A1 | EGF1804A2 | EGF1804A3 |
| 200 ^② | 240 | 6 | EGF2404A1 ^② | EGF2404A2 ^② | EGF2404A3 ^② |
| 250 ^② | 302 | 6 | EGF3024A1 ^② | EGF3024A2 ^② | EGF3024A3 ^② |

Notes

- ^① Table is for base catalog number reference only. For complete catalog number selection, see **Page V6-T2-306**.
- ^② Available in 2017.

Enclosure Selection

EGF Enclosed Drives

Enclosure selection charts are based on physical space limitations only and only to be used as a reference. For actual enclosure sizing, refer to Bid Manager.

Note: Filtered enclosure sizing includes dedicated space for passive filter, input fuses, circuit breaker or fusible disconnect, CPT, SPD, heater/thermostat, control relay and terminal blocks.

Filtered Enclosure X-Space

| Enclosure Size | Frame 1 | Frame 2 | Frame 3 | Frame 4 | Frame 5 |
|----------------|---------|---------|---------|---------|---------|
| AX | — | — | — | — | — |
| BX | 0 | 0 | — | — | — |
| CX | 3 | 3 | 2 | 2 | — |
| DX | 14 | 14 | 13 | 13 | 10 |

Filtered Power Options X-Space

| Power Options | Frame 1 | Frame 2 | Frame 3 | Frame 4 | Frame 5 |
|-------------------|---------|---------|---------|---------|---------|
| 3% Output reactor | 1 | 1 | 3 | 5 | 6 |
| dV/dt filter | 3 | 3 | 3 | 5 | 6 |
| Output contactor | 1 | 1 | 1 | 1 | 1 |

Accessories

The PowerXL Series—DG1 drives can accommodate a wide selection of expander and adapter option boards to customize the drive for your application needs. The drive's control unit is designed to accept a total of two additional option boards.

The PowerXL Series—DG1 drives come with a factory-installed standard board configuration including the following:

- Standard I/O:
 - 8DI, 1DO
 - 2AI, 2AO
 - 2FC, 1FA relays
- Standard communications:
 - EtherNet/IP, Modbus TCP
 - RS-485: Modbus RTU, BACnet MS/TP

Note: Filtered bypass enclosure sizing includes dedicated space for a passive filter, input fuses, MCP, CPT, input contactor, output bypass contactors, overload relay, SPD, heater/thermostat, control relay and terminal blocks.

Filtered Bypass Enclosure X-Space

| Enclosure Size | Frame 1 | Frame 2 | Frame 3 | Frame 4 | Frame 5 |
|----------------|---------|---------|---------|---------|---------|
| AX | — | — | — | — | — |
| BX | — | — | — | — | — |
| CX | 2 | 1 | 0 | — | — |
| DX | 13 | 12 | 11 | 10 | 6 |

Filtered Bypass Power Options X-Space

| Power Options | Frame 1 | Frame 2 | Frame 3 | Frame 4 | Frame 5 |
|-------------------|---------|---------|---------|---------|---------|
| RVSS Bypass | 1 | 1 | 3 | 5 | 6 |
| 3% Output reactor | 2 | 2 | 2 | 3 | 4 |
| dV/dt filter | 3 | 3 | 3 | 5 | 6 |

PowerXL Series—DG1 I/O Card Kits

| Description | Catalog Number |
|--|------------------|
| 3 x DI, 3 x DO, 1 x thermistor, 24 Vdc/EXT option card | DXG-EXT-3DI3DO1T |
| 1 x AI, 2 x AO (isolated to control board) option card | DXG-EXT-1AI2AO |
| 3 x relay dry contact (2NO + 1NO/NC) option card | DXG-EXT-3RO |
| 3 x PT100 RTD thermistor input option card | DXG-EXT-THER1 |
| 6 x DI 240 Vac input option card | DXG-EXT-6DI |

PowerXL Series—DG1 Communication Card Kits

| Description | Catalog Number |
|---|--------------------------|
| PROFIBUS-DP communication card | DXG-NET-PROFB |
| CANopen communication card | DXG-NET-CANOPEN |
| DeviceNet communication card | DXG-NET-DEVICENET |
| PROFIBUS DB9 to 5-pin adapter card | DXG-NET-PROAD |
| SmartWire communication card and module | DXG-NET-SWD ^① |

Note

^① Available January 2017.

Options

2

Input Power Options

| Option | Description |
|------------------|---|
| HMCP Disconnect | The HMCP motor protection circuit breaker uses an electronic trip unit to provide typical motor overload relay functionality and short-circuit protection against potential phase-to-phase or phase-to-ground faults. |
| Circuit Breaker | Utilizes a circuit breaker to provide a means of short-circuit protection for the power cables between it and the drive, and protection from high-level ground faults on the power cable. Allows a convenient means of disconnecting the drive from the line, and the operating mechanism can be padlocked in the OFF position. This is factory mounted in the enclosure. |
| Isolation Fusing | Provides high-level fault protection of the drive input power circuit from the load side of the fuses to the input side of the power transistors. This option consists of three 200 kA fuses that are factory mounted in the enclosure. |
| 3% Input Reactor | The input reactor is a three-phase series inductance on the line side of an AFD. It is used to provide a reduction in voltage and current harmonics. It also provides increased input protection for AFD and its semiconductors from line transients. |
| SPD | Provides a UL 1449 surge protection device (SPD) rated for 40 kA/ph that is connected to the line side terminals. |
| Fused Disconnect | Utilizes fusing to provide a means of short-circuit protection for the power cables between it and the drive, and protection from high-level ground faults on the power cable. Allows a convenient means of disconnecting the drive from the line, and the operating mechanism can be padlocked in the OFF position. This is factory mounted in the enclosure. |

Bypass Options

| Option | Description |
|------------------------|---|
| Manual HOA Bypass | Provides a three-position selector switch that allows the user to select either a HAND or AUTO mode of operation. HAND mode is defaulted keypad operation, and AUTO mode is defaulted to control from an external terminal source. These modes of operation can be configured via programming to allow for alternate combinations of start and speed sources. Start and speed sources include keypad, I/O and fieldbus. |
| Manual HOA RVSS Bypass | This option adds a reduced voltage soft starter to bypass assembly for soft starting in bypass mode. |

Output Power Options

| Option | Description |
|-------------------|--|
| Output Contactor | Provides a means for positive disconnection of the drive output from the motor terminals. The contactor coil is controlled by the drive's run or permissive logic. NC and NO auxiliary contacts rated at 10 A, 600 Vac are provided for customer use. This option includes a low VA 115 Vac fused control power transformer and is factory mounted in the enclosure. |
| 3% Output Reactor | The output reactor is a three-phase series inductance on the load side of a VFD. It is used to reduce transient voltage (dv/dt) and peak voltages at the motor terminals. A 3% output filter is recommended for motor cable lengths up to 300 ft (10 m). |
| dV/dt Filter | Used to reduce the transient voltage (dV/dt) at the motor terminals. Recommended for motor cable lengths over 300 ft (10 m) and up to 1000 ft (304.8 m). This option is mounted in the enclosure. |

Control Options

| Option | Description |
|-----------------------|--|
| Speed Pot | Provides the ability to adjust the frequency reference using a door-mounted potentiometer. This option uses the 10 Vdc reference to generate a 0–10 V signal at the analog voltage input signal terminal. When the HOA bypass option is added, the speed is controlled when the HOA switch is in the HAND position. Without the HOA bypass option, a two-position switch (labeled local/remote) is provided on the keypad to select speed reference from the speed potentiometer or a remote speed signal. |
| HOA Switch | Provides a three-position selector switch that allows the user to select either a HAND or AUTO mode of operation. HAND mode is defaulted to keypad operation, and AUTO mode is defaulted to control from an external terminal source. These modes of operation can be configured via drive programming to allow for alternate combinations of start and speed sources. Start and speed sources include Keypad, I/O and fieldbus. |
| Start-Stop Pushbutton | Provides door-mounted START and STOP pushbuttons for either bypass or non-bypass configurations. |

Light Options

| Option | Description |
|---|--|
| Non-Bypass Light Kit—Power On, Run, Fault | Provides a white POWER ON light that indicates power to the enclosed cabinet, a green RUN light that indicates the drive is running and a red FAULT light that indicates a drive fault has occurred. |
| Bypass Light Kit—On, VFD Run, Fault, Bypass Run | Provides a white POWER ON light that indicates power to the enclosed cabinet, a green RUN light that indicates the drive is running, a red FAULT light that indicates a drive fault has occurred and an amber light that indicates when the motor is running in Bypass mode. |

Enclosure Options

| Option | Description |
|-------------------|---|
| Floor Stand 12 in | Converts a normally wall-mounted enclosure to a floor-standing enclosure with a height of 12 in (304.8 mm). |
| Floor Stand 22 in | Converts a normally wall-mounted enclosure to a floor-standing enclosure with a height of 22 in (558.8 mm). |

Technical Data and Specifications

PowerXL Series—DG1 Technical Data and Specifications

| Attribute | Description | Specification | |
|---|--------------------------------|--|--|
| Input ratings | Input voltage U_{in} | 208 V, 230 V, 480 V, 575 V, –15 to 10% | |
| | Input frequency | 50 Hz to 60 Hz (variation up to 45 Hz to 66 Hz) | |
| | Connection to power | Once per minute or less | |
| | Starting delay | 3 s (FR1 to FR2), 4 s (FR3), 5 s (FR4), 6 s (FR5 and FR6) | |
| | Short-circuit withstand rating | 100 kAIC (fuses and circuit breakers) | |
| Output ratings | Output voltage | 0 to U_{in} | |
| | Output current | I_L : ambient temperature maximum 40 °C, up to 60 °C with derating, overload 1.1 x I_L (1 min./10 min.) I_H : ambient temperature maximum 50 °C, up to 60 °C with derating, overload 1.5 x I_H (1 min./10 min.) | |
| | Initial output current | 200% (2 s / 20 s) | |
| | Output frequency | 0–400 Hz (standard) | |
| | Frequency resolution | 0.01 Hz | |
| Control characteristics | Control methods | Frequency control Speed control Open-loop speed control Open-loop torque control | |
| | Switching frequency | 230 V / 480 V range: FR1–3: 1 kHz to 12 kHz FR4–6: 1 kHz to 10 kHz 230 V / 480 V defaults: FR1–3: 4 kHz FR4–5: 3.6 kHz FR6: 2 kHz 575 V range: FR1–6: 1 kHz to 6 kHz 575 V defaults: FR1–4: 3 kHz FR5–6: 2 kHz Automatic switching frequency derating in case of overload. | |
| | Frequency reference | Analog input: resolution 0.1% (10-bit), accuracy +1% Analog output: resolution 0.1% (10-bit), accuracy +1% Panel reference: resolution 0.01 Hz | |
| | Field weakening point | 20 Hz to 400 Hz | |
| | Acceleration time | 0.1 s to 3000 s | |
| | Deceleration time | 0.1 s to 3000 s | |
| | Braking torque | DC brake: 30% x Motor Rated Torque (T_n) (without brake chopper) Dynamic braking (with optional brake chopper using an external brake resistor): 100% continuous maximum rating | |
| | Ambient conditions | Ambient operating temperature | –10 °C (no frost) to +40 °C |
| | | Storage temperature | –40 °C to +70 °C |
| | | Relative humidity | 0–95% RH, noncondensing, non-corrosive |
| Air quality: • Chemical vapors • Mechanical particles | | Tested according to IEC 60068-2-60 Test Key: Flowing mixed gas corrosion test, Method 1 (H ₂ S [hydrogen sulfide] and SO ₂ [sulfur dioxide]) Designed according to: IEC 60721-3-3, unit in operation, class 3C2 IEC 60721-3-3, unit in operation, class 3S2 | |
| Altitude | | 100% load capacity (no derating) up to 3280 ft (1000 m); 1% derating for each 328 ft (100 m) above 3280 ft (1000 m); max. 9842 ft (3000 m) (2000 m for corner grounded earth main systems) For 575 V product, maximum altitude is 6561 ft (2000 m) regardless of main system | |

PowerXL Series—DG1 Technical Data and Specifications, continued


| Attribute | Description | Specification |
|---------------------------------|---|--|
| 2 Ambient conditions, continued | Overvoltage | Overvoltage Category III |
| | Pollution degree | Pollution Degree 2 |
| | Enclosure class | NEMA Type 1, 12, 3R |
| | Immunity | Fulfills EN 61800-3 (2004), first and second environment |
| Standards | Safety | UL 508C, EN 61800-5-1 |
| | Approvals | UL and cUL |
| Fieldbus connections | | Onboard: EtherNet/IP, Modbus® TCP, Modbus RTU, BACnet |
| Safety/protections | Overvoltage protection | Yes |
| | Overvoltage trip limit | 230 V drives: 456 V 480 V drives: 911 V 575 V drives: 1100 V |
| | Undervoltage protection | Yes |
| | Undervoltage trip limit | 230 V drives: 211 V 480 V drives: 370 V 575 V drives: 550 V |
| | Earth fault protection | Yes Default: 15% motor FLA Minimum: 0% motor FLA Maximum: 30% motor FLA |
| | Input phase supervision | Yes |
| | Motor phase supervision | Yes |
| | Overcurrent protection | Yes |
| | Unit overtemperature protection | Yes |
| | Motor overload protection | Yes |
| | Motor stall protection | Yes |
| | Motor underload protection | Yes |
| | DC bus overvoltage control | Yes |
| | Short-circuit protection of 24 V reference voltages | Yes |
| | Surge protection | Yes (differential mode 2 kV; common mode 4 kV 230 V drives: 275 Vac, 10,000 A 480 V drives: 320 Vac, 8000 A 575 V drives: 385 Vac, 10,000 A |
| | Common coated boards | Yes (prevents corrosion) |
| Efficiency | Drive efficiency ratings ① | 480 V: FR1 = 97.7% FR2 = 97.9% FR3 = 97.7% FR4 = 98.0% FR5 = 98.2% |
| | | 230 V: FR1 = 96.7% FR2 = 97.4% FR3 = 97.2% FR4 = 97.4% FR5 = 97.7% |

Note

① Based on DG1 efficiency ratings in an enclosure with no options.

Wiring Diagram

PowerXL Series—DG1 Control Wiring Diagram

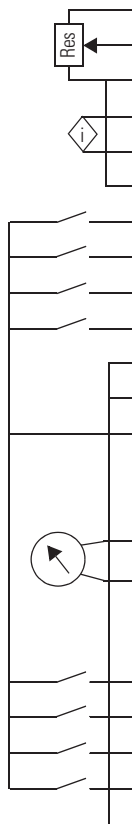

| Pin | Signal Name | Signal | Default Setting | Description |
|-----|-------------|-------------------------|----------------------|---|
| 1 | +10 V | Ref. Output Voltage | — | 10 Vdc Supply Source |
| 2 | AI1+ | Analog Input 1 | 0–10 V | Voltage Speed Reference (Programmable to 4 mA to 20 mA) |
| 3 | AI1– | Analog Input 1 Ground | — | Analog Input 1 Common (Ground) |
| 4 | AI2+ | Analog Input 2 | 4 mA to 20 mA | Current Speed Reference (Programmable to 0–10 V) |
| 5 | AI2– | Analog Input 2 Ground | — | Analog Input 2 Common (Ground) |
| 6 | GND | I/O Signal Ground | — | I/O Ground for Reference and Control |
| 7 | DIN5 | Digital Input 5 | Preset Speed B0 | Sets frequency output to Preset Speed 1 |
| 8 | DIN6 | Digital Input 6 | Preset Speed B1 | Sets frequency output to Preset Speed 2 |
| 9 | DIN7 | Digital Input 7 | Emergency Stop (TI–) | Input forces VFD output to shut off |
| 10 | DIN8 | Digital Input 8 | Force Remote (TI+) | Input takes VFD from Local to Remote |
| 11 | CMB | DI5 to DI8 Common | Grounded | Allows source input |
| 12 | GND | I/O Signal Ground | — | I/O Ground for Reference and Control |
| 13 | 24 V | +24 Vdc Output | — | Control voltage output (100 mA max.) |
| 14 | DO1 | Digital Output 1 | Ready | Shows the drive is ready to run |
| 15 | 24 Vo | +24 Vdc Output | — | Control voltage output (100 mA max.) |
| 16 | GND | I/O Signal Ground | — | I/O Ground for Reference and Control |
| 17 | AO1+ | Analog Output 1 | Output Frequency | Shows Output frequency to motor 0–60 Hz (4 mA to 20 mA) |
| 18 | AO2+ | Analog Output 2 | Motor Current | Shows Motor current of motor 0–FLA (4 mA to 20 mA) |
| 19 | 24 Vi | +24 Vdc Input | — | External control voltage input |
| 20 | DIN1 | Digital Input 1 | Run Forward | Input starts drive in forward direction (start enable) |
| 21 | DIN2 | Digital Input 2 | Run Reverse | Input starts drive in reverse direction (start enable) |
| 22 | DIN3 | Digital Input 3 | External Fault | Input causes drive to fault |
| 23 | DIN4 | Digital Input 4 | Fault Reset | Input resets active faults |
| 24 | CMA | DI1 to DI4 Common | Grounded | Allows source input |
| 25 | A | RS-485 Signal A | — | Fieldbus Communication (Modbus, BACnet) |
| 26 | B | RS-485 Signal B | — | Fieldbus Communication (Modbus, BACnet) |
| 27 | R3NO | Relay 3 Normally Open | At Speed | Relay output 3 shows VFD is at Ref. Frequency |
| 28 | R1NC | Relay 1 Normally Closed | Run | Relay output 1 shows VFD is in a run state |
| 29 | R1CM | Relay 1 Common | | |
| 30 | R1NO | Relay 1 Normally Open | | |
| 31 | R3CM | Relay 3 Common | At Speed | Relay output 3 shows VFD is at Ref. Frequency |
| 32 | R2NC | Relay 2 Normally Closed | Fault | Relay output 2 shows VFD is in a fault state |
| 33 | R2CM | Relay 2 Common | | |
| 34 | R2NO | Relay 2 Normally Open | | |

2.11

Adjustable Frequency Drives


Clean Power Drives

Dimensions


Approximate Dimensions in Inches (mm)

2

BX Box Type 1

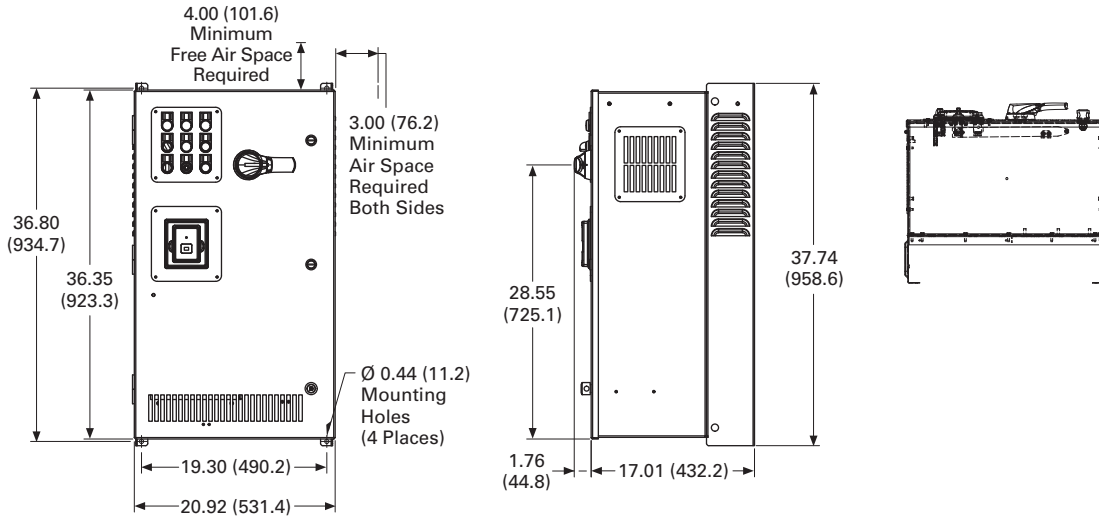


BX Box Type 1—12 Inch Floor Stands

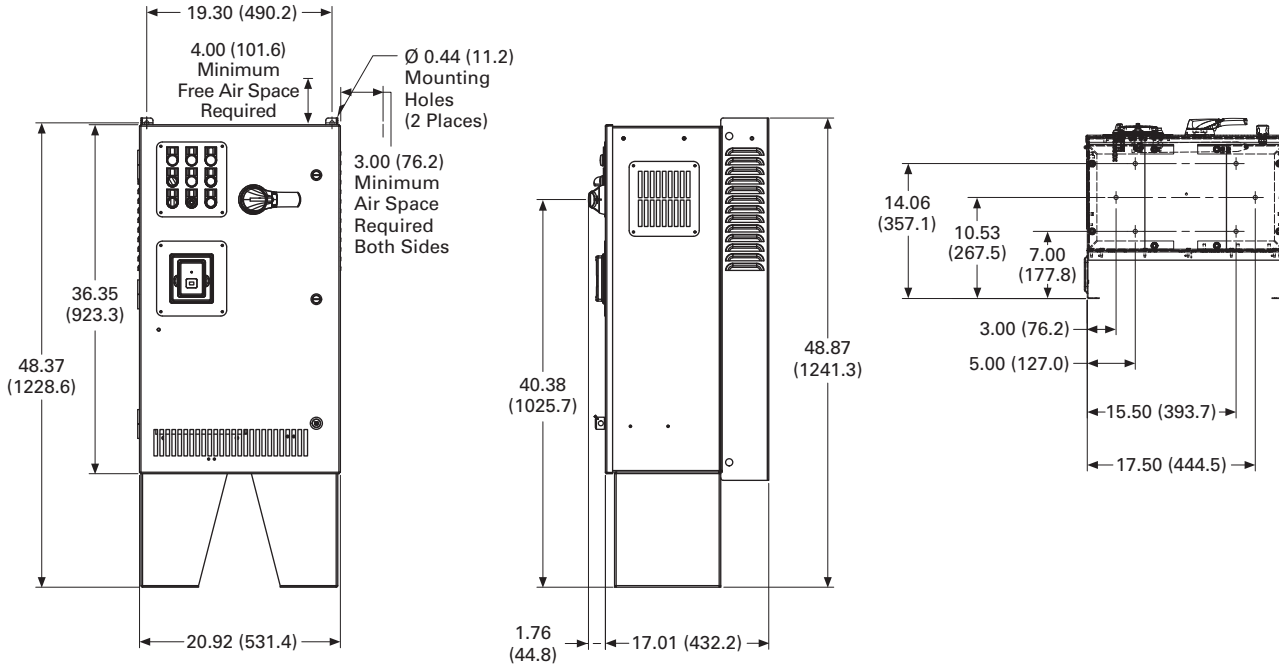


Approximate Dimensions in Inches (mm)

BX Box Type 1—22 Inch Floor Stands

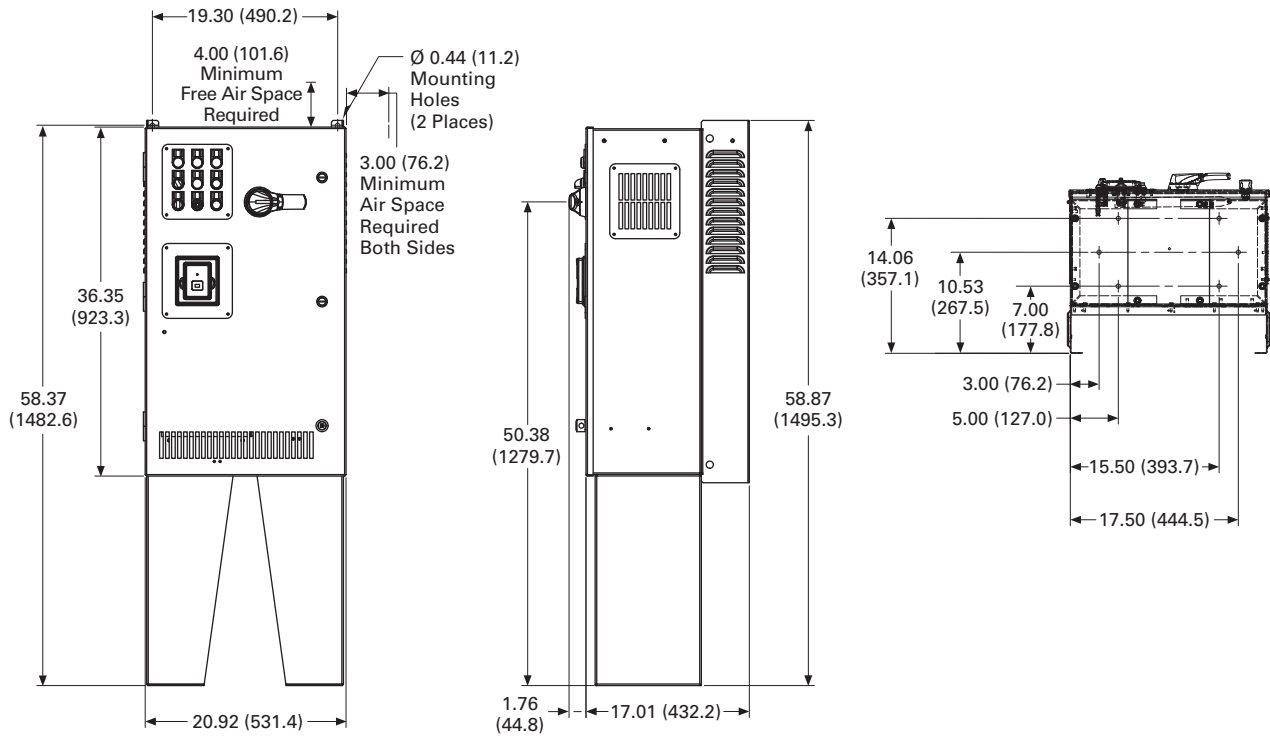

BX Box Type 12

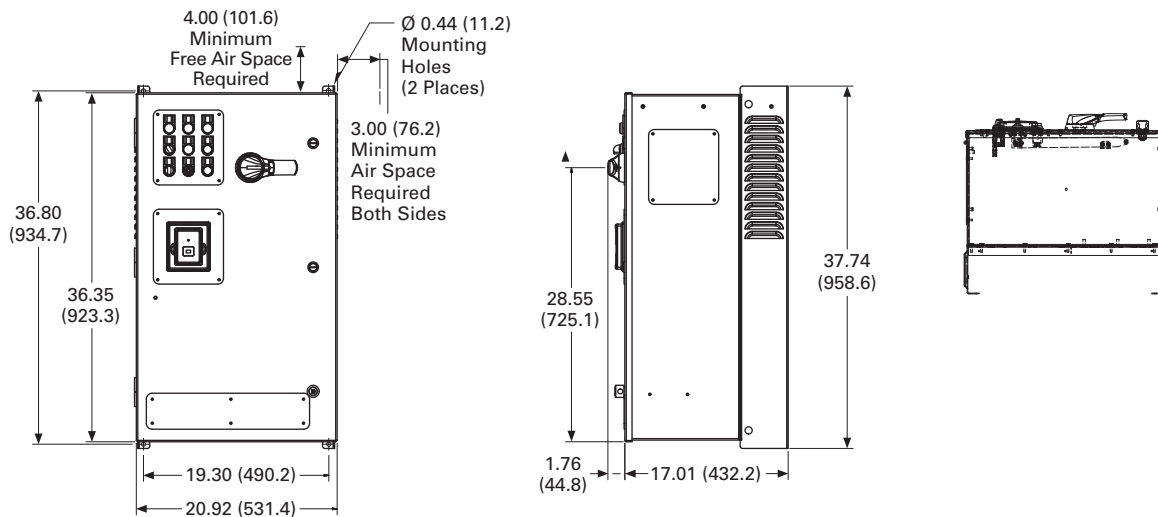

2.11


Adjustable Frequency Drives

Clean Power Drives


Approximate Dimensions in Inches (mm)

BX Box Type 12—12 Inch Floor Stands



2

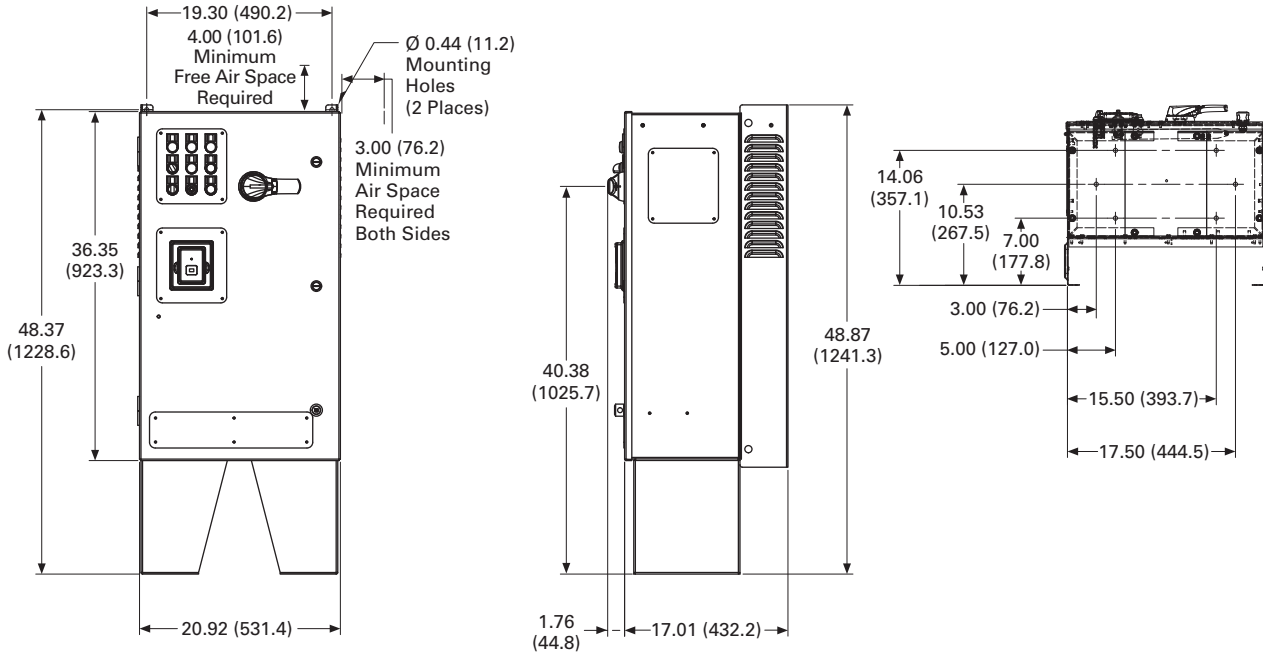

BX Box Type 12—22 Inch Floor Stands

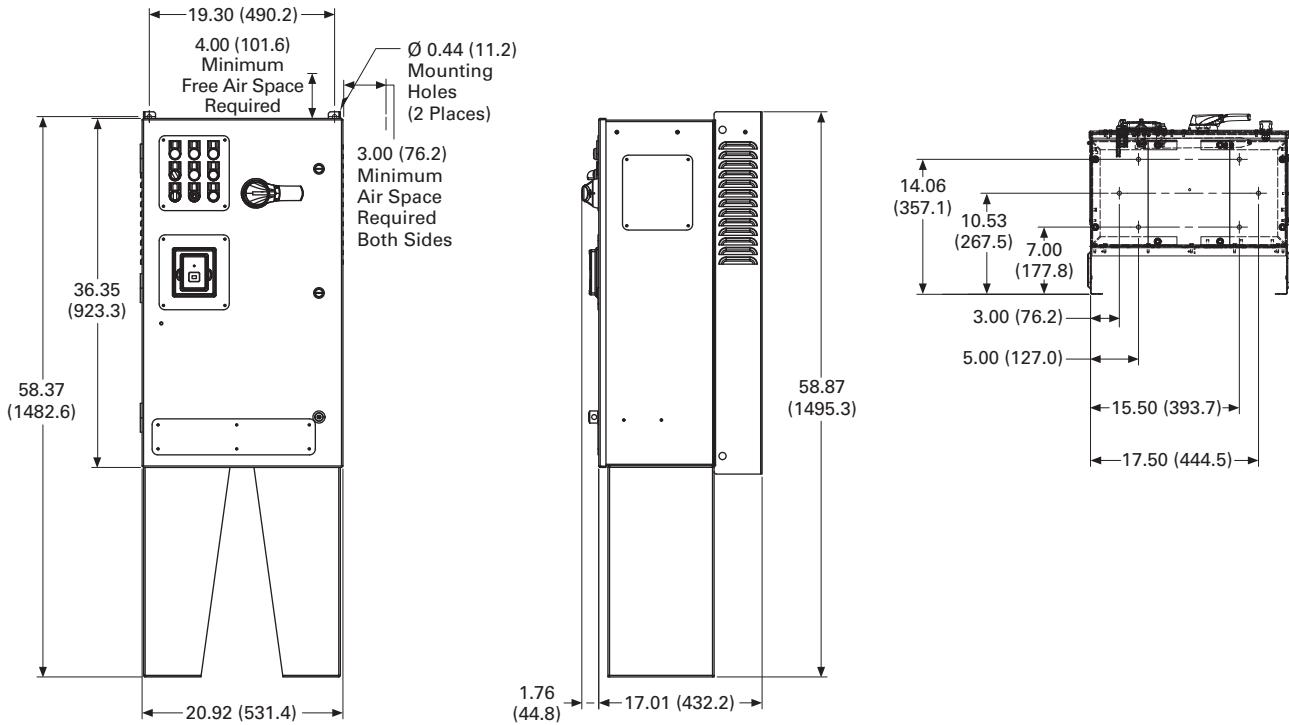

Approximate Dimensions in Inches (mm)

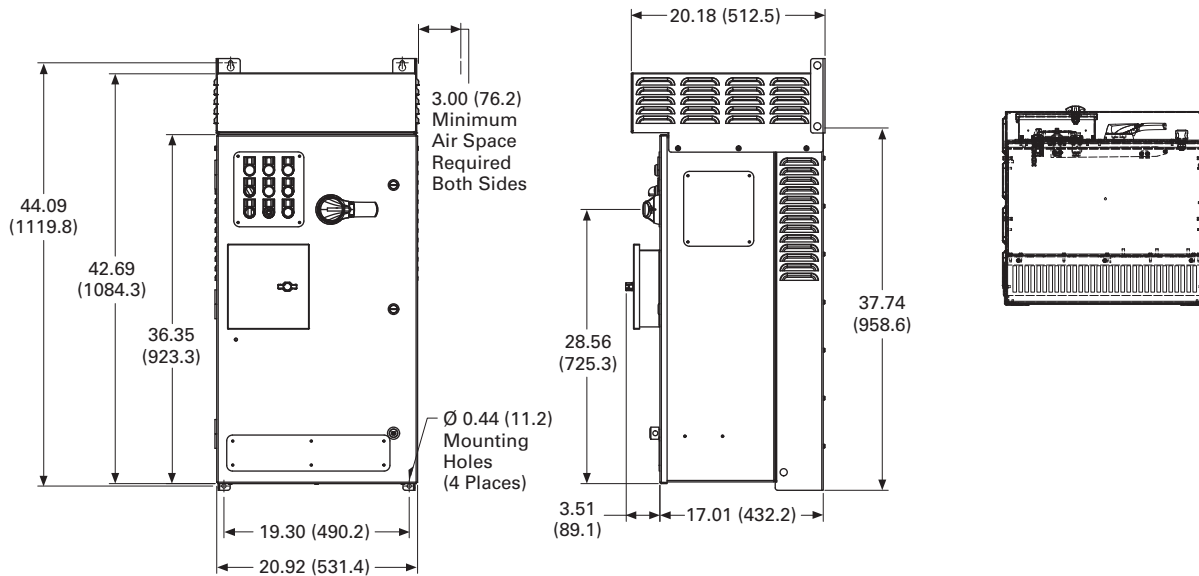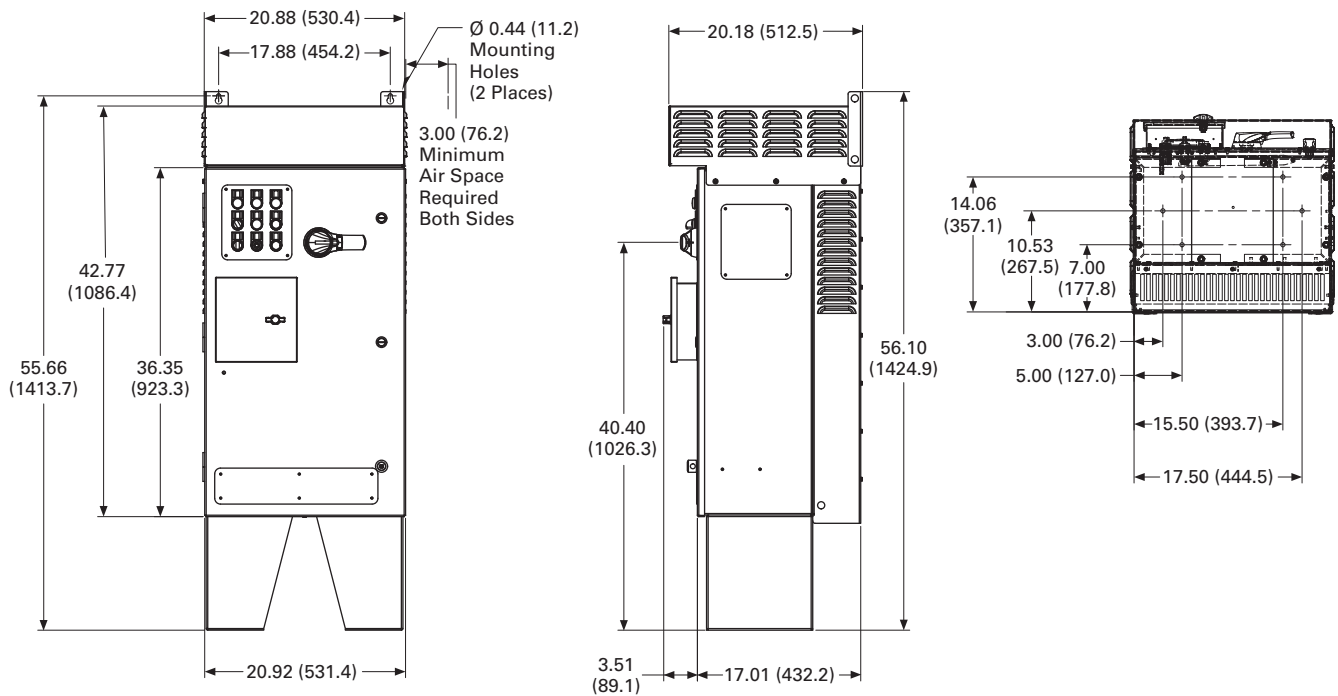BX Box Type 3R**BX Box Type 3R—12 Inch Floor Stands**

2.11


Adjustable Frequency Drives

Clean Power Drives


Approximate Dimensions in Inches (mm)

BX Box Type 3R—22 Inch Floor Stands

2

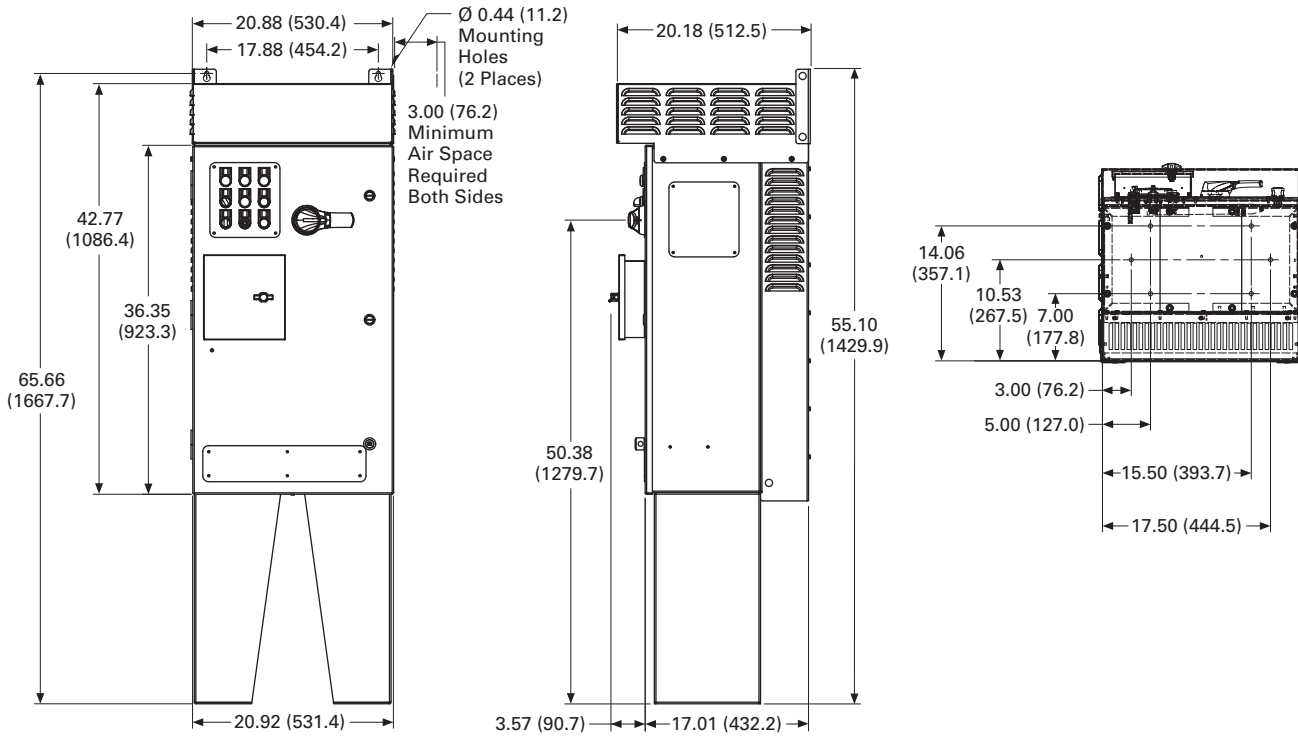


CX Box Type 1

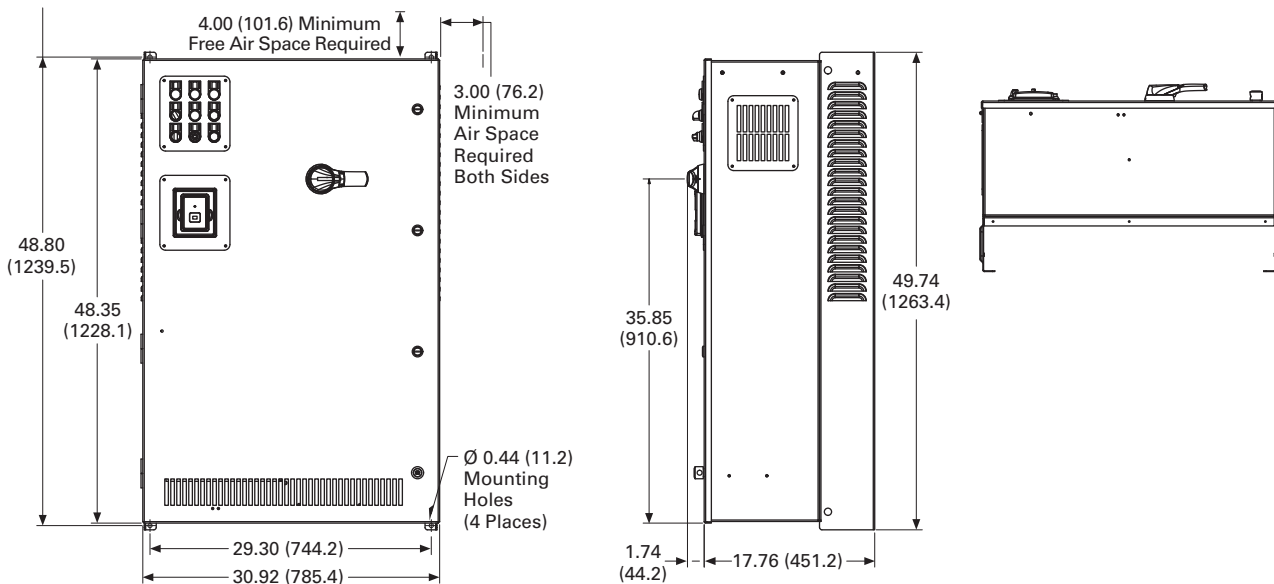


Approximate Dimensions in Inches (mm)

CX Box Type 1—12 Inch Floor Stands

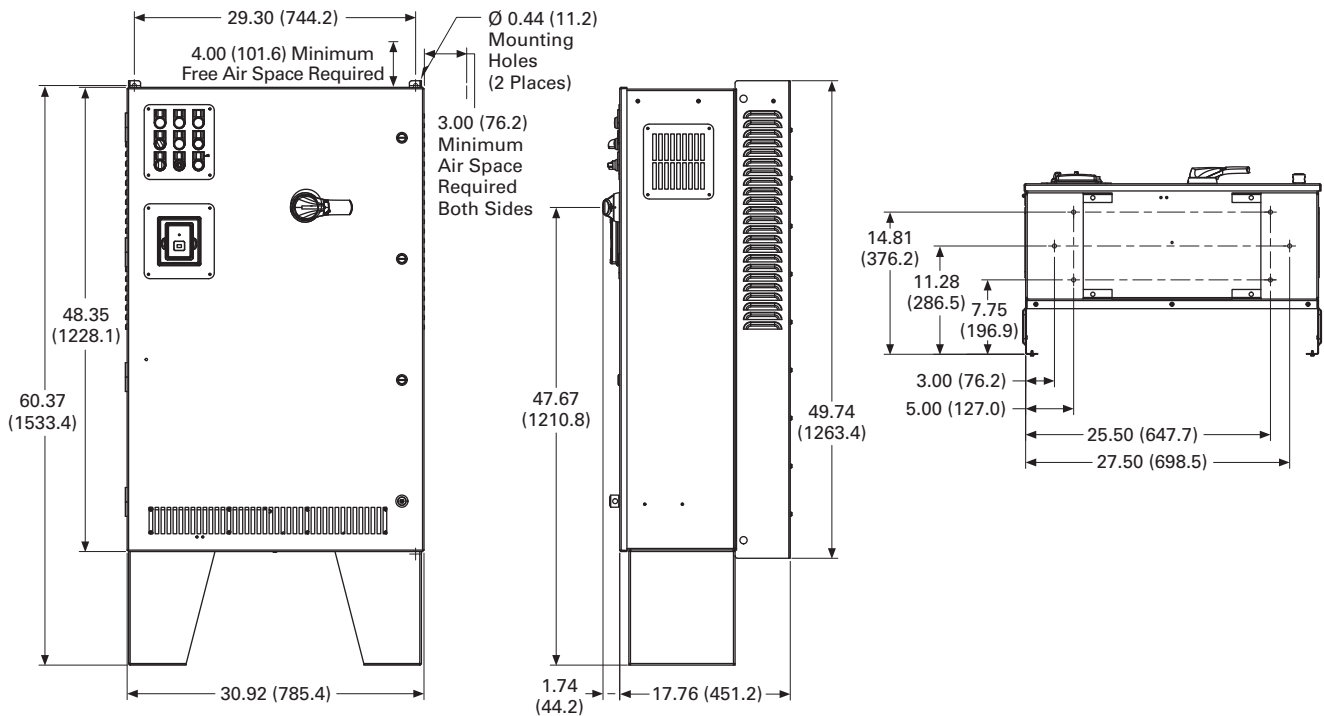

CX Box Type 1—22 Inch Floor Stands

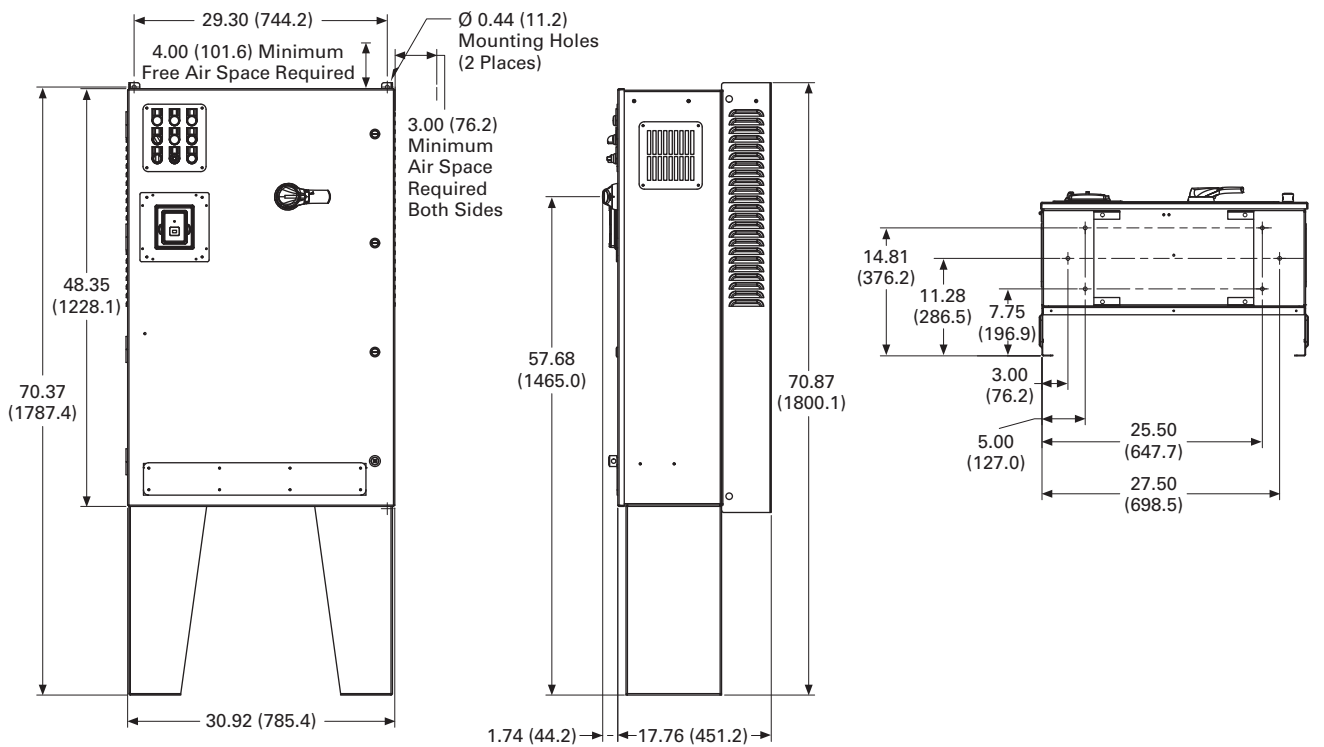

2.11


Adjustable Frequency Drives

Clean Power Drives


Approximate Dimensions in Inches (mm)

2

CX Box Type 12

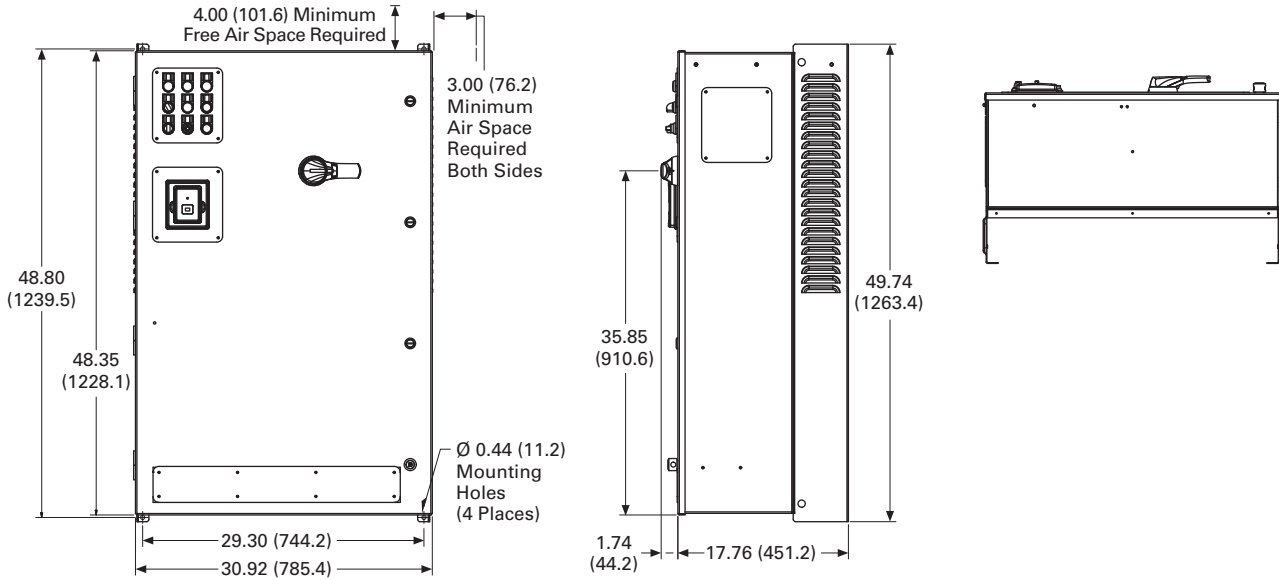


CX Box Type 12—12 Inch Floor Stands

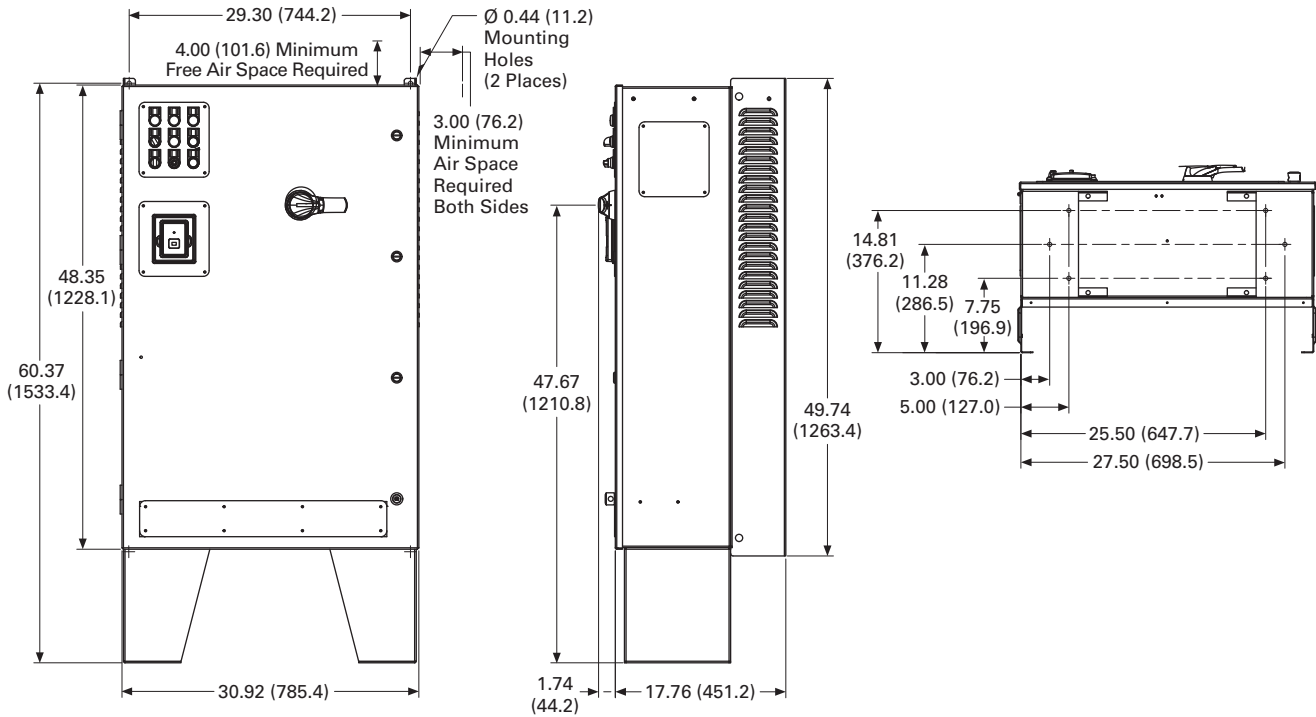


Approximate Dimensions in Inches (mm)

CX Box Type 12–22 Inch Floor Stands

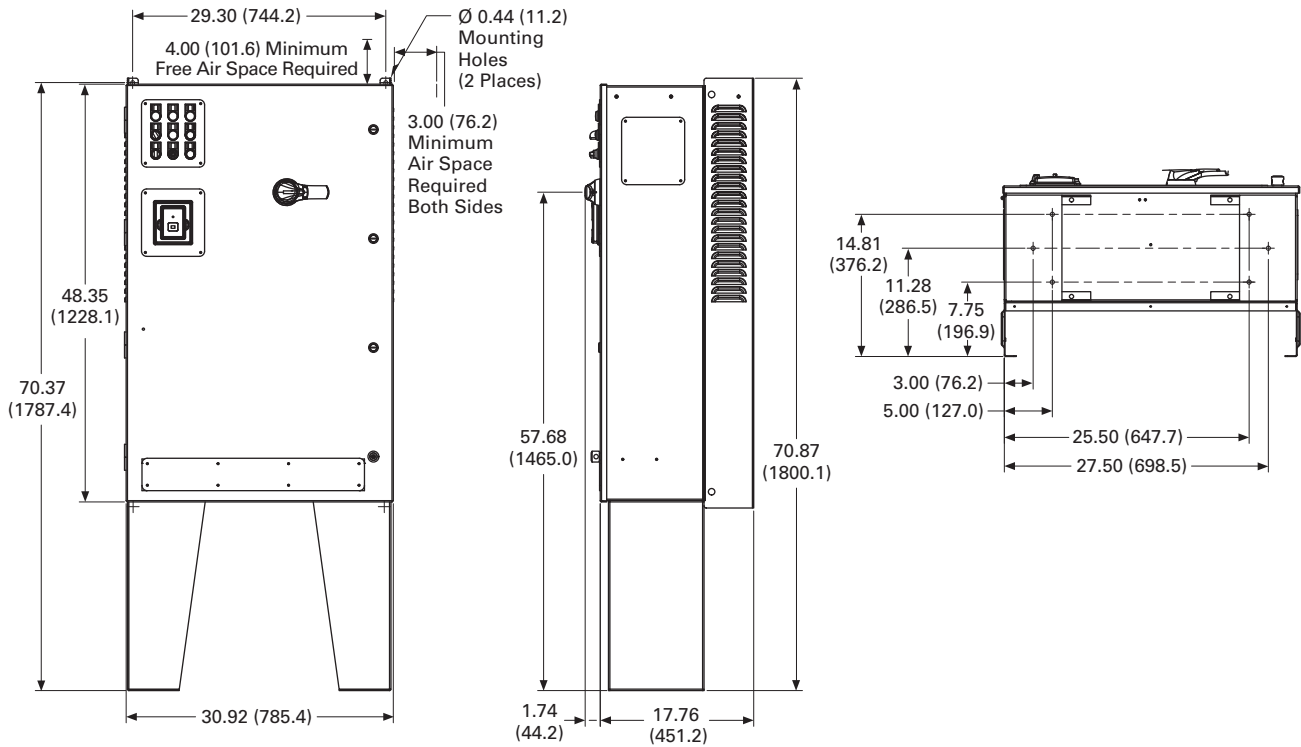

CX Box Type 3R

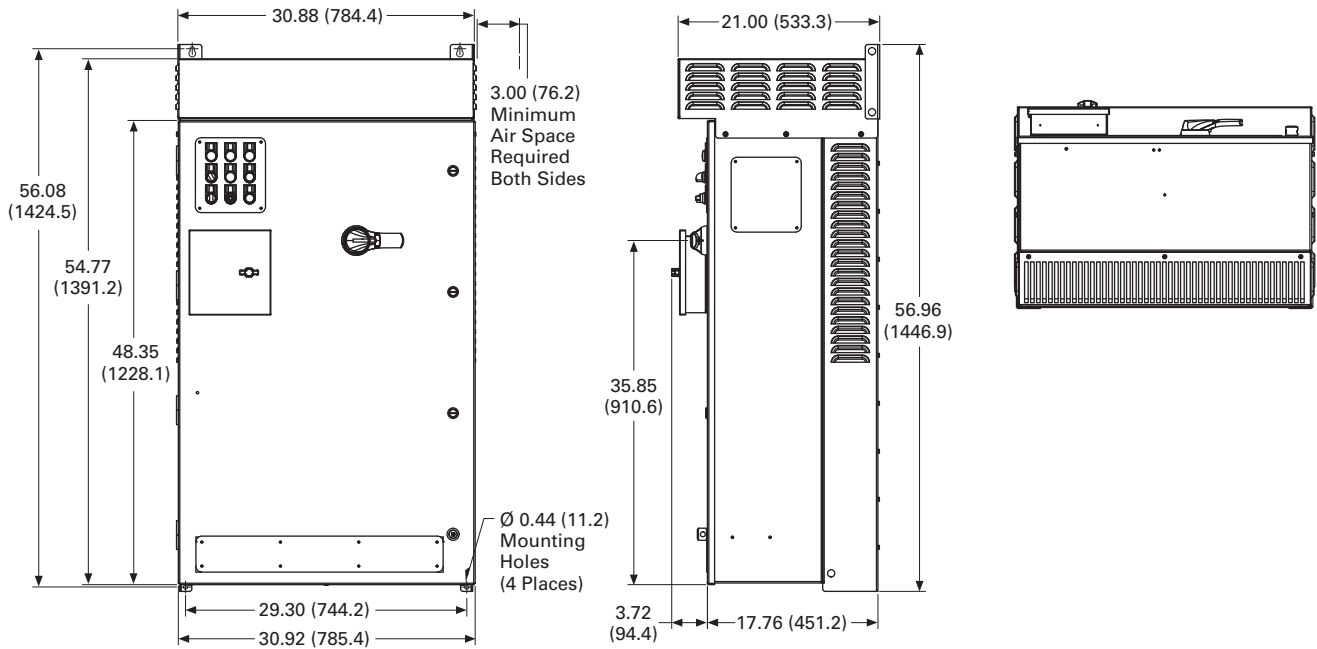

2.11


Adjustable Frequency Drives

Clean Power Drives


Approximate Dimensions in Inches (mm)

2

CX Box Type 3R—12 Inch Floor Stands

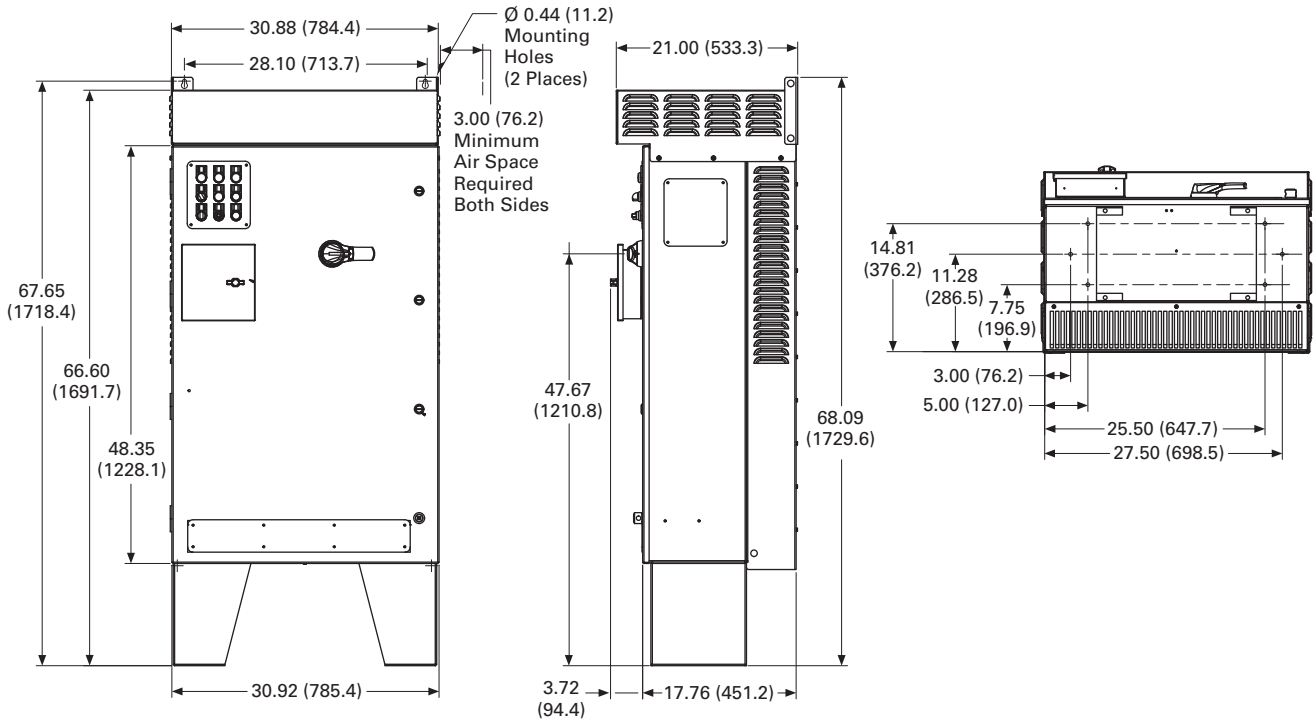


CX Box Type 3R—22 Inch Floor Stands

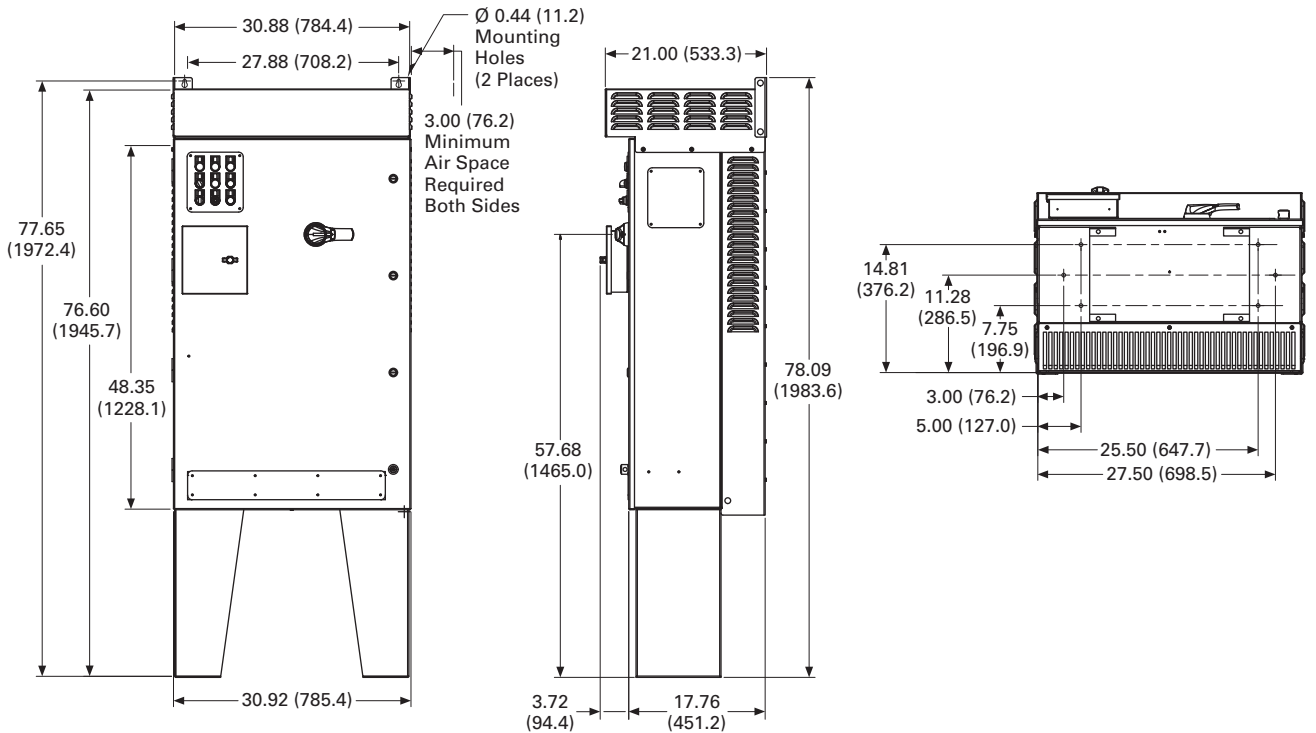


Approximate Dimensions in Inches (mm)

DX Box Type 1

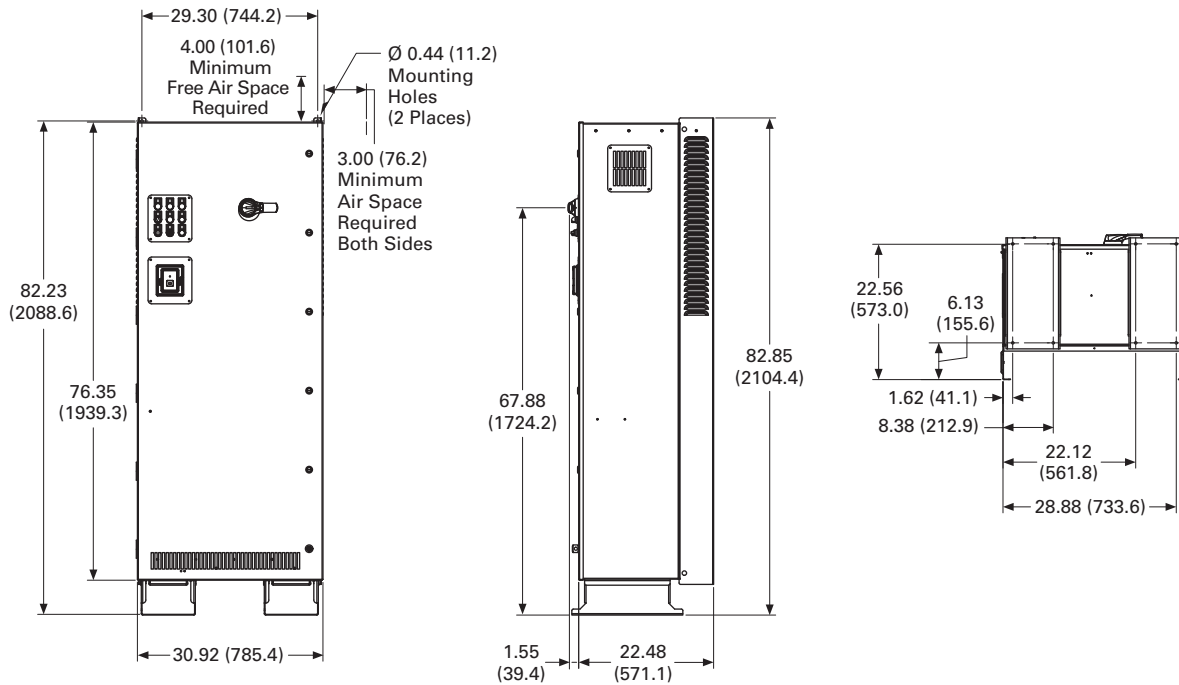

DX Box Type 12

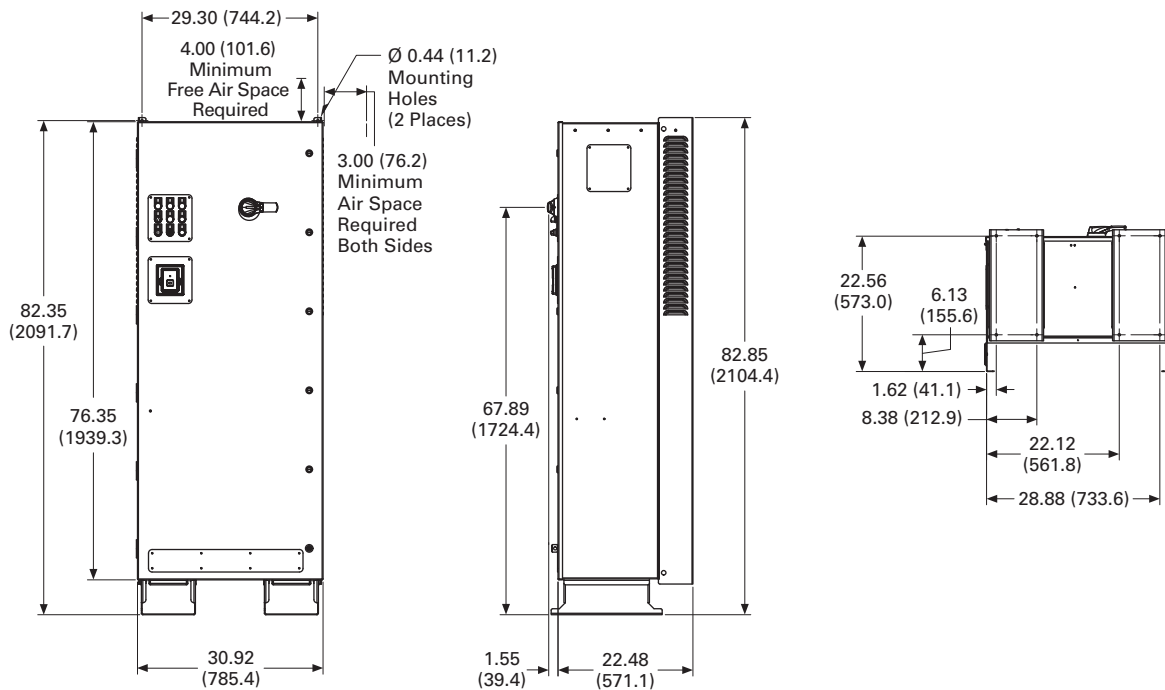

2.11


Adjustable Frequency Drives

Clean Power Drives

Approximate Dimensions in Inches (mm)

2

DX Box Type 3R

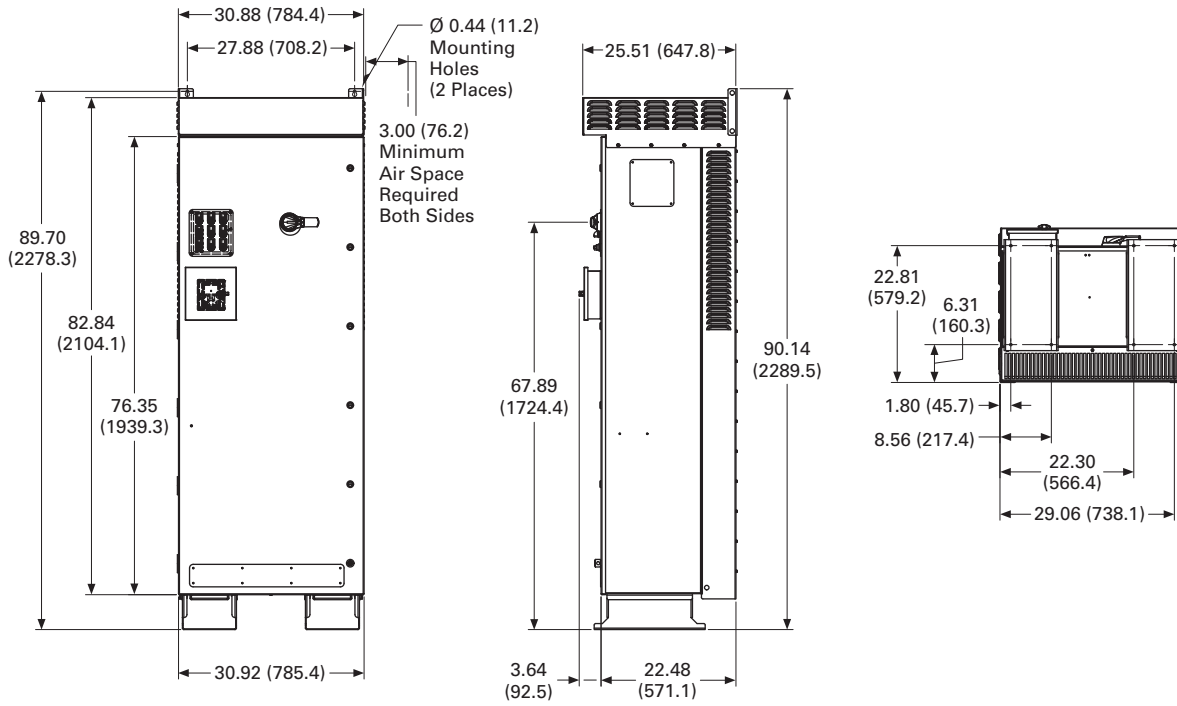

CFX Enclosed Drives**Contents**

| Description | Page |
|---|------------------|
| Clean Power Drives Overview | V6-T2-298 |
| Enclosed Passive Filtered Drives | |
| EGF Enclosed Drives | V6-T2-305 |
| CFX Enclosed Drives | |
| Product Identification | V6-T2-326 |
| Catalog Number Selection | V6-T2-327 |
| Product Selection | V6-T2-329 |
| Enclosure Selection | V6-T2-332 |
| Options | V6-T2-333 |
| Technical Data and Specifications | V6-T2-334 |
| Wiring Diagram | V6-T2-336 |
| Dimensions | V6-T2-337 |
| Enclosed 12-Pulse Drives | V6-T2-351 |
| Enclosed 18-Pulse Drives | V6-T2-355 |
| Enclosed Regenerative Drives | V6-T2-379 |

CFX Enclosed Drives**Product Description**

The enclosed passive filtered drive also delivers True Power Factor—in addition to reducing harmonic distortion, the enclosed passive filtered drive prevents transformer overheating and overloading of breakers and feeders, which enables the application of adjustable frequency drives on generators and other high impedance power systems.

Features and Benefits

The CFX passive filtered drive features include (at 480 V):

- UL Type 1, UL Type 12, UL Type 3R and NEMA 1 with gaskets and filters
- Input voltage: 480 V
- Complete range of control, network and power options
- Horsepower range:
 - 480 V, 7-1/2–400 hp I_L
- Single enclosure for both drive and filter reduces field wiring and enables convenient bypass installation
- Packaged solution ensures optimal coordination of drive and filter

Standards and Certifications

- UL
- cUL
- 508C



2.11


Adjustable Frequency Drives

Clean Power Drives

Product Identification

2


Enclosed Passive Filtered Drive—UL Type 12, 40 hp

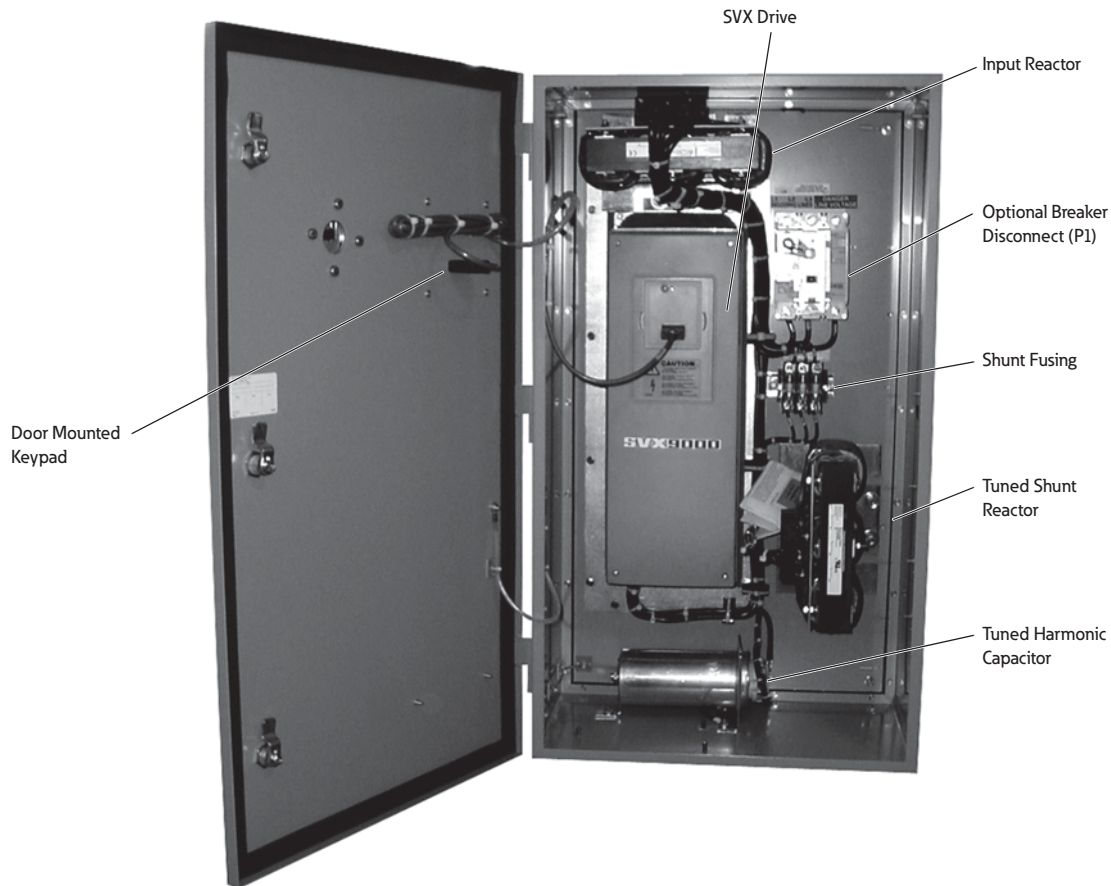

Catalog Number Selection

Catalog Number Selection is for reference only. Not all option combinations may be available.

CFX Enclosed—Base Catalog Number

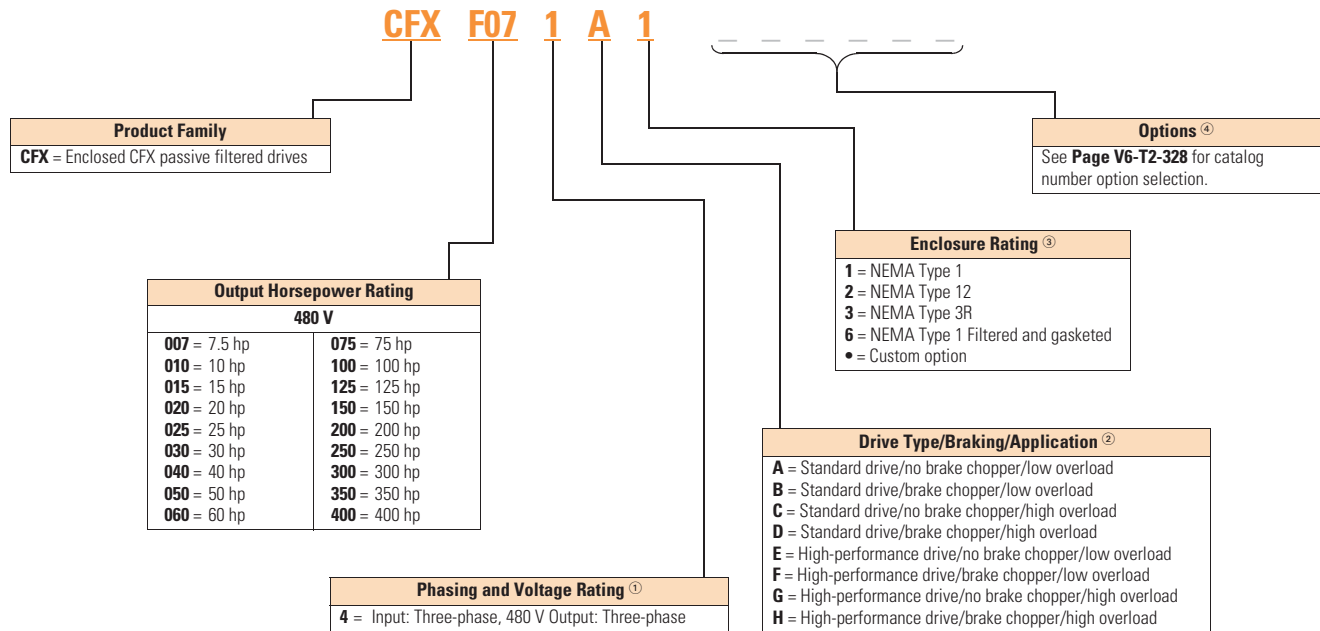

Notes

- ① Single-phase voltage refers to the supply voltage. Output voltage will be three-phase and equal to the magnitude of the input voltage.
- ② Brake chopper is a factory-installed option only. Braking resistors sold separately. See SVX catalog section for selection.
- ③ Additional enclosure options including NEMA 4 and 4X are available. Please contact the factory for configuration and pricing.
- ④ Part number configuration continued on the following page.

2.11

Adjustable Frequency Drives

Clean Power Drives

Catalog Number Selection is for reference only. Not all option combinations may be available.

CFX Enclosed—Catalog Number Options

2

CFX F07 1 A 1

2 0 0 B 1 0 0 0 0

Base Catalog Number Example
See **Page V6-T2-327** for base catalog number selection.

Power Disconnect Options

- 0 = None
- 1 = MCP disconnect ①
- 2 = Circuit breaker
- 3 = Circuit breaker/isolation fusing
- 5 = Circuit breaker/isolation fusing/SPD
- 8 = Circuit breaker/SPD
- E = Isolation fuses
- G = Isolation fuses/SPD
- = Custom option ②

Bypass Options ③

- 0 = None
- 1 = Manual HOA bypass
- 2 = Manual HOA bypass/isolation fusing
- 4 = Manual HOA bypass/isolation fusing/SPD
- 7 = Manual HOA bypass/SPD
- H = Manual HOA RVSS bypass
- J = Manual HOA RVSS bypass/isolation fusing
- L = Manual HOA RVSS bypass/isolation fusing/SPD
- P = Manual HOA RVSS bypass/SPD
- = Custom option ②

Output Power Options ④

- 0 = None
- A = Output contactor
- B = 3% Output reactor
- D = dV/dt filter
- E = 3% Output Reactor/output contactor
- G = dV/dt/output contactor
- = Custom option ②

Control Options ⑤

- 0 = None
- 1 = Speed pot
- 2 = Start-stop pushbutton
- 3 = Start-stop pushbutton with speed pot
- A = HOA switch
- B = Start-stop pushbutton with speed pot & HOA switch
- C = Start-stop pushbutton with HOA switch
- D = HOA switch with speed pot
- = Custom option ②

Option Boards 2
Same options and codes as Option Boards 1

Option Boards 1

- 0 = No option
- 6 = 6 DI, 1 ext +24 Vdc/EXT +24 Vdc
- 7 = 1 RO (NC-NO), 1 RO (NO), 1 therm
- 8 = 1 AI (mA isolated), 2 AO (mA isolated), 1 ext +24 Vdc/EXT +24 Vdc
- 9 = 3 RO (NO)
- A = 1 ext +24 Vdc/EXT +24 Vdc, 3 Pt100
- B = 1 RO (NO), 5 DI 42–240 Vac input
- C = Encoder low volt +5 V / 15 V / 24 V (high-performance drive only)
- D = Encoder high volt +15 V / 24 V (high-performance drive only)
- E = Double encoder (high-performance drive only)
- = Custom option ②

Communication Options

- 0 = No option
- 1 = PROFIBUS-DP
- 2 = LonWorks
- 3 = CANopen (slave)
- 4 = DeviceNet
- 5 = PROFIBUS-DP (D9 connector)
- 6 = Modbus
- 7 = Modbus (D9 connector)
- 8 = Johnson Controls N2
- 9 = Modbus TCP
- A = BACnet
- B = EtherNet/IP
- C = RS-232 with D9 connector
- = Custom option ②

Enclosure Options

- 0 = None
- 1 = Floor stand—12 inches
- 2 = Floor stand—22 inches
- A = Space heater
- B = Space heater & 12-inch floor stands
- C = Space heater & 22-inch floor stands
- = Custom option ②

Light Options ⑥

- 0 = None
- 1 = Non-bypass light kit—Power On, Run, Fault
- 2 = Bypass light kit—On, VFD Run, Fault, Bypass Run
- = Custom option ②

Notes

- ① HMCP disconnect option required and only available when bypass is selected.
- ② More options are available as Engineered to Order through the Bid Manager tool.
- ③ All bypass options include third contactor for drive isolation when in bypass mode.
- ④ Output contactor not available with bypass. Bypass comes standard with output contactor.
- ⑤ Pilot devices are 22 mm standard. 30 mm options are available as engineered to order through the Bid Manager tool.

Product Selection

480 V Drives

CFX Enclosed Drives



480 V Drives—Constant Torque (CT)/High Overload (H) Enclosed Drives

| hp | Current (A) | Drive Frame Size | NEMA Type 1 | NEMA Type 12 | NEMA Type 3R |
|-----|-------------|------------------|-----------------------|-----------------------|-----------------------|
| | | | Base Catalog Number ① | Base Catalog Number ① | Base Catalog Number ① |
| 7.5 | 11 | 5 | CFX0074D1 | CFX0074D2 | CFX0074D3 |
| 10 | 14 | 5 | CFX0104D1 | CFX0104D2 | CFX0104D3 |
| 15 | 21 | 5 | CFX0154D1 | CFX0154D2 | CFX0154D3 |
| 20 | 27 | 6 | CFX0204D1 | CFX0204D2 | CFX0204D3 |
| 25 | 34 | 6 | CFX0254D1 | CFX0254D2 | CFX0254D3 |
| 30 | 40 | 6 | CFX0304D1 | CFX0304D2 | CFX0304D3 |
| 40 | 52 | 7 | CFX0404C1 | CFX0404C2 | CFX0404C3 |
| 50 | 65 | 7 | CFX0504C1 | CFX0504C2 | CFX0504C3 |
| 60 | 77 | 7 | CFX0604C1 | CFX0604C2 | CFX0604C3 |
| 75 | 96 | 8 | CFX0754C1 | CFX0754C2 | CFX0754C3 |
| 100 | 124 | 8 | CFX1004C1 | CFX1004C2 | CFX1004C3 |
| 125 | 156 | 8 | CFX1254C1 | CFX1254C2 | CFX1254C3 |
| 150 | 180 | 9 | CFX1504C1 | CFX1504C2 | CFX1504C3 |
| 200 | 240 | 9 | CFX2004C1 | CFX2004C2 | CFX2004C3 |
| 250 | 302 | 10 | CFX2504G1 | CFX2504G2 | CFX2504G3 |
| 300 | 361 | 10 | CFX3004G1 | CFX3004G2 | CFX3004G3 |
| 350 | 414 | 10 | CFX3504G1 | CFX3504G2 | CFX3504G3 |

CFX Enclosed Drives



480 V Drives—Variable Torque (VT)/Low Overload (L) Enclosed Drives

| hp | Current (A) | Drive Frame Size | NEMA Type 1 | NEMA Type 12 | NEMA Type 3R |
|-----|-------------|------------------|-----------------------|-----------------------|-----------------------|
| | | | Base Catalog Number ① | Base Catalog Number ① | Base Catalog Number ① |
| 7.5 | 11 | 4 | CFX0074B1 | CFX0074B2 | CFX0074B3 |
| 10 | 14 | 5 | CFX0104B1 | CFX0104B2 | CFX0104B3 |
| 15 | 21 | 5 | CFX0154B1 | CFX0154B2 | CFX0154B3 |
| 20 | 27 | 5 | CFX0204B1 | CFX0204B2 | CFX0204B3 |
| 25 | 34 | 6 | CFX0254B1 | CFX0254B2 | CFX0254B3 |
| 30 | 40 | 6 | CFX0304B1 | CFX0304B2 | CFX0304B3 |
| 40 | 52 | 6 | CFX0404B1 | CFX0404B2 | CFX0404B3 |
| 50 | 65 | 7 | CFX0504A1 | CFX0504A2 | CFX0504A3 |
| 60 | 77 | 7 | CFX0604A1 | CFX0604A2 | CFX0604A3 |
| 75 | 96 | 7 | CFX0754A1 | CFX0754A2 | CFX0754A3 |
| 100 | 124 | 8 | CFX1004A1 | CFX1004A2 | CFX1004A3 |
| 125 | 156 | 8 | CFX1254A1 | CFX1254A2 | CFX1254A3 |
| 150 | 180 | 8 | CFX1504A1 | CFX1504A2 | CFX1504A3 |
| 200 | 240 | 9 | CFX2004A1 | CFX2004A2 | CFX2004A3 |
| 250 | 302 | 10 | CFX2504E1 | CFX2504E2 | CFX2504E3 |
| 300 | 361 | 10 | CFX3004E1 | CFX3004E2 | CFX3004E3 |
| 350 | 414 | 10 | CFX3504E1 | CFX3504E2 | CFX3504E3 |
| 400 | 477 | 10 | CFX4004E1 | CFX4004E2 | CFX4004E3 |

Note


① Table is for base catalog number reference only. For complete catalog number selection, see Page V6-T2-327.

Enclosed Passive Filtered Drive Option Board Kits

The enclosed passive filtered drive series can accommodate a wide selection of expander and adapter option boards to customize the drive for your application needs. The drive's control unit is designed to accept a total of five option boards.

The enclosed passive filtered drive series factory-installed standard board configuration includes an A9 I/O board and an A2 relay output board, which are installed in slots A and B.

Option Boards



Option Board Kits

| Option Kit Description ^① | Allowed Slot Locations ^② | Field Installed Catalog Number | Factory Installed Option Designator | SVX Ready Programs | | | | | | |
|--|-------------------------------------|--------------------------------|-------------------------------------|--------------------|--------------|----------|-----|-----|----------|-----|
| | | | | Basic | Local/Remote | Standard | MSS | PID | Multi-P. | PFC |
| Standard I/O Cards | | | | | | | | | | |
| 2 RO (NC/NO) | B | OPTA2 | — | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| 6 DI, 1 DO, 2 AI, 1 AO, 1 +10 Vdc ref, 2 ext +24 Vdc/ext +24 Vdc | A | OPTA9 | — | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Extended I/O Cards | | | | | | | | | | |
| 6 DI | B, C, D , E | OPTB1 | B1 | — | — | — | — | — | ■ | ■ |
| 1 RO (NC/NO), 1 RO (NO), 1 therm | B, C, D , E | OPTB2 | B2 | — | — | — | — | — | ■ | ■ |
| 1 AI (mA isolated), 2 AO (mA isolated) | B, C, D , E | OPTB4 | B4 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| 3 RO (NO) | B, C, D , E | OPTB5 | B5 | — | — | — | — | — | ■ | ■ |
| 3 Pt100 RTD board | B, C, D , E | OPTB8 | B8 | — | — | — | — | — | ■ | — |
| 1 RO (NO), 5 DI 42–240 Vac input | B, C, D , E | OPTB9 | B9 | — | — | — | — | — | ■ | ■ |
| Communication Cards ^③ | | | | | | | | | | |
| Modbus | D, E | OPTC2 | C2 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Modbus TCP | D, E | OPTC1 | C1 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| BACnet | D, E | OPTCJ | CJ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| EtherNet/IP | D, E | OPTCQ | CQ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Johnson Controls N2 | D, E | OPTC2 | CA | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| PROFIBUS DP | D, E | OPTC3 | C3 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| LonWorks | D, E | OPTC4 | C4 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| PROFIBUS DP (D9 connector) | D, E | OPTC5 | C5 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| CANopen (slave) | D, E | OPTC6 | C6 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| DeviceNet | D, E | OPTC7 | C7 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Modbus (D9 type connector) | D, E | OPTC8 | C8 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| RS-232 with D9 connection | D, E | OPTD3 | D3 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |

Notes

- ① AI = Analog Input; AO = Analog Output; DI = Digital Input; DO = Digital Output; RO = Relay Output
- ② Option card must be installed in one of the slots listed for that card. Slot indicated in bold is the preferred location.
- ③ OPTC2 is a multi-protocol option card.

Modbus RTU Network Communications

The Modbus Network Card OPTC2 is used for connecting the SVX Drive as a slave on a Modbus network. The interface is connected by a 9-pin DSUB connector (female) and the baud rate ranges from 300 to 19,200 baud. Other communication parameters include an address range from 1 to 247; a parity of None, Odd or Even; and the stop bit is 1.

PROFIBUS Network Communications

The PROFIBUS Network Card OPTC3 is used for connecting the SVX Drive as a slave on a PROFIBUS-DP network. The interface is connected by a 9-pin DSUB connector (female). The baud rates range from 9.6 Kbaud to 12 Mbaud, and the addresses range from 1 to 127.

LonWorks Network Communications

The LonWorks Network Card OPTC4 is used for connecting the SVX Drive on a LonWorks network. This interface uses Standard Network Variable Types (SNVT) as data types. The channel connection is achieved using a FTT-10 A Free Topology transceiver via a single twisted transfer cable. The communication speed with LonWorks is 78 kBits/s.

CANopen (Slave) Communications

The CANopen (Slave) Network Card OPTC6 is used for connecting the SVX Drive to a host system. According to ISO11898 standard cables to be chosen for CANbus should have a nominal impedance of 120 ohms, and specific line delay of nominal 5 as/m. 120 ohm line termination resistors required for installation.

DeviceNet Network Communications

The DeviceNet Network Card OPTC7 is used for connecting the SVX Drive on a DeviceNet Network. It includes a 5.08 mm pluggable connector. Transfer method is via CAN using a two-wire twisted shielded cable with two-wire bus power cable and drain. The baud rates used for communication include 125 Kbaud, 250 Kbaud and 500 Kbaud.

Johnson Controls Metasys N2 Network Communications

The OPTC2 fieldbus board provides communication between the SVX Drive and a Johnson Controls Metasys™ N2 network. With this connection, the drive can be controlled, monitored and programmed from the Metasys system. The N2 fieldbus is available as a factory-installed option and as a field-installable kit.

Modbus/TCP Network Communications

The Modbus/TCP Network Card OPTC1 is used for connecting the SVX Drive to Ethernet networks using Modbus protocol. It includes an RJ-45 pluggable connector. This interface provides a selection of standard and custom register values to communicate drive parameters. The board supports 10 Mbps and 100 Mbps communication speeds. The IP address of the board is configurable over Ethernet using a supplied software tool.

BACnet Network Communications

The BACnet Network Card OPTCJ is used for connecting the SVX Drive to BACnet networks. It includes a 5.08 mm pluggable connector. Data transfer is Master-Slave/Token Passing (MS/TP) RS-485. This interface uses a collection of 30 Binary Value Objects (BVOs) and 35 Analog Value Objects (AVOs) to communicate drive parameters. The card supports 9.6, 19.2 and 38.4 Kbaud communication speeds and supports network addresses 1 to 127.

EtherNet/IP Network Communications

The EtherNet/IP Network Card OPTCK is used for connecting the SVX Drive to Ethernet/Industrial Protocol networks. It includes an RJ-45 pluggable connector. The interface uses CIP objects to communicate drive parameters (CIP is "Common Industrial Protocol," the same protocol used by DeviceNet). The board supports 10 Mbps and 100 Mbps communication speeds. The IP address of the board is configurable by Static, BOOTP and DHCP methods.

2.11

Adjustable Frequency Drives

Clean Power Drives

Enclosure Selection

2

CFX Drives

Enclosure selection charts are based on physical space limitations only and only to be used as a reference. For actual enclosure sizing, refer to Bid Manager.

Note: Filtered enclosure sizing includes dedicated space for passive filter, input fuses, circuit breaker or fusible disconnect, CPT, SPD, heater/thermostat, control relay and terminal blocks.

Filtered Enclosure X-Space

| Enclosure Size | Frame 4 | Frame 5 | Frame 6 | Frame 7 | Frame 8 |
|----------------|---------|---------|---------|---------|---------|
| AX | — | — | — | — | — |
| BX | 0 | 0 | — | — | — |
| CX | 3 | 3 | 2 | 2 | — |
| DX | 14 | 14 | 13 | 13 | 10 |

Filtered Power Options X-Space

| Power Options | Frame 4 | Frame 5 | Frame 6 | Frame 7 | Frame 8 |
|-------------------|---------|---------|---------|---------|---------|
| 3% Output reactor | 1 | 1 | 3 | 5 | 6 |
| dV/dt filter | 3 | 3 | 3 | 5 | 6 |
| Output contactor | 1 | 1 | 1 | 1 | 1 |

Larger Frame Enclosure Sizes

| Frame Size | Type 1 | Type 12 | Type 1 Filtered and Gasketed | Type 3R |
|------------|--------|---------|------------------------------|---------|
| Frame 9 | Size 8 | — | Size 8 | Size F |
| Frame 10 | Size 9 | Size 9 | — | ① |

Note: Filtered bypass enclosure sizing includes dedicated space for a passive filter, input fuses, MCP, CPT, input contactor, output bypass contactors, overload relay, SPD, heater/thermostat, control relay and terminal blocks.

Filtered Bypass Enclosure X-Space

| Enclosure Size | Frame 4 | Frame 5 | Frame 6 | Frame 7 | Frame 8 |
|----------------|---------|---------|---------|---------|---------|
| AX | — | — | — | — | — |
| BX | — | — | — | — | — |
| CX | 2 | 1 | 0 | — | — |
| DX | 13 | 12 | 11 | 10 | 6 |

Filtered Bypass Power Options X-Space

| Power Options | Frame 4 | Frame 5 | Frame 6 | Frame 7 | Frame 8 |
|-------------------|---------|---------|---------|---------|---------|
| RVSS Bypass | 1 | 1 | 3 | 5 | 6 |
| 3% Output reactor | 2 | 2 | 2 | 3 | 4 |
| dV/dt filter | 3 | 3 | 3 | 5 | 6 |

Larger Frame Enclosure Sizes

| Frame Size | Type 1 | Type 12 | Type 1 Filtered and Gasketed | Type 3R |
|------------|--------|---------|------------------------------|---------|
| Frame 9 | Size 8 | — | Size 8 | Size F |
| Frame 10 | Size 9 | Size 9 | — | ① |

Note

① Consult factory.

Options

Input Power Options

| Option | Description |
|------------------|---|
| HMCP Disconnect | The HMCP motor protection circuit breaker uses an electronic trip unit to provide typical motor overload relay functionality and short-circuit protection against potential phase-to-phase or phase-to-ground faults. |
| Circuit Breaker | Utilizes a circuit breaker to provide a means of short-circuit protection for the power cables between it and the drive, and protection from high-level ground faults on the power cable. Allows a convenient means of disconnecting the drive from the line, and the operating mechanism can be padlocked in the OFF position. This is factory mounted in the enclosure. |
| Isolation Fusing | Provides high-level fault protection of the drive input power circuit from the load side of the fuses to the input side of the power transistors. This option consists of three 200 kA fuses that are factory mounted in the enclosure. |
| 3% Input Reactor | The input reactor is a three-phase series inductance on the line side of an AFD. It is used to provide a reduction in voltage and current harmonics. It also provides increased input protection for AFD and its semiconductors from line transients. |
| SPD | Provides a UL 1449 surge protection device (SPD) rated for 40 kA/ph that is connected to the line side terminals. |
| Fused Disconnect | Utilizes fusing to provide a means of short-circuit protection for the power cables between it and the drive, and protection from high-level ground faults on the power cable. Allows a convenient means of disconnecting the drive from the line, and the operating mechanism can be padlocked in the OFF position. This is factory mounted in the enclosure. |

Bypass Options

| Option | Description |
|------------------------|---|
| Manual HOA Bypass | Provides a three-position selector switch that allows the user to select either a HAND or AUTO mode of operation. HAND mode is defaulted keypad operation, and AUTO mode is defaulted to control from an external terminal source. These modes of operation can be configured via programming to allow for alternate combinations of start and speed sources. Start and speed sources include keypad, I/O and fieldbus. |
| Manual HOA RVSS Bypass | This option adds a reduced voltage soft starter to bypass assembly for soft starting in bypass mode. |

Output Power Options

| Option | Description |
|-------------------|--|
| Output Contactor | Provides a means for positive disconnection of the drive output from the motor terminals. The contactor coil is controlled by the drive's run or permissive logic. NC and NO auxiliary contacts rated at 10 A, 600 Vac are provided for customer use. This option includes a low VA 115 Vac fused control power transformer and is factory mounted in the enclosure. |
| 3% Output Reactor | The output reactor is a three-phase series inductance on the load side of a VFD. It is used to reduce transient voltage (dv/dt) and peak voltages at the motor terminals. A 3% output filter is recommended for motor cable lengths up to 300 ft (10 m). |
| dV/dt Filter | Used to reduce the transient voltage (dV/dt) at the motor terminals. Recommended for motor cable lengths over 300 ft (10 m) and up to 1000 ft (304.8 m). This option is mounted in the enclosure. |

Control Options

| Option | Description |
|-----------------------|--|
| Speed Pot | Provides the ability to adjust the frequency reference using a door-mounted potentiometer. This option uses the 10 Vdc reference to generate a 0–10 V signal at the analog voltage input signal terminal. When the HOA bypass option is added, the speed is controlled when the HOA switch is in the HAND position. Without the HOA bypass option, a two-position switch (labeled local/remote) is provided on the keypad to select speed reference from the speed potentiometer or a remote speed signal. |
| HOA Switch | Provides a three-position selector switch that allows the user to select either a HAND or AUTO mode of operation. HAND mode is defaulted to keypad operation, and AUTO mode is defaulted to control from an external terminal source. These modes of operation can be configured via drive programming to allow for alternate combinations of start and speed sources. Start and speed sources include Keypad, I/O and fieldbus. |
| Start-Stop Pushbutton | Provides door-mounted START and STOP pushbuttons for either bypass or non-bypass configurations. |

Light Options

| Option | Description |
|---|--|
| Non-Bypass Light Kit—Power On, Run, Fault | Provides a white POWER ON light that indicates power to the enclosed cabinet, a green RUN light that indicates the drive is running and a red FAULT light that indicates a drive fault has occurred. |
| Bypass Light Kit—On, VFD Run, Fault, Bypass Run | Provides a white POWER ON light that indicates power to the enclosed cabinet, a green RUN light that indicates the drive is running, a red FAULT light that indicates a drive fault has occurred and an amber light that indicates when the motor is running in Bypass mode. |

Enclosure Options

| Option | Description |
|-------------------|---|
| Floor Stand 12 in | Converts a normally wall-mounted enclosure to a floor-standing enclosure with a height of 12 in (304.8 mm). |
| Floor Stand 22 in | Converts a normally wall-mounted enclosure to a floor-standing enclosure with a height of 22 in (558.8 mm). |

Technical Data and Specifications

2

Enclosed Passive Filtered Drives

| Description | Specification |
|-----------------------------------|------------------------------------|
| Primary Design Features | |
| 45–66 Hz input frequency | Standard |
| Output: AC volts maximum | Input Voltage Base |
| Output frequency range | 0–320 Hz |
| Initial output current (I_H) | 250% for 2 seconds |
| Overload (1 minute [I_H/I_L]) | 150%/110% |
| Enclosure space heater | Optional |
| Oversize enclosure | Standard |
| Output contactor | Optional |
| Bypass motor starter | Optional |
| Listings | UL, cUL, 508C |
| Protection Features | |
| Incoming line fuses | Optional |
| AC input circuit disconnect | Optional |
| Phase rotation insensitive | Standard |
| EMI filter | Standard—FR6 thru FR9 ^① |
| Input phase loss protection | Standard |
| Input overvoltage protection | Standard |
| Line surge protection | Standard |
| Output short-circuit protection | Standard |
| Output ground fault protection | Standard |
| Output phase protection | Standard |
| Overtemperature protection | Standard |
| DC overvoltage protection | Standard |
| Drive overload protection | Standard |
| Motor overload protection | Standard |
| Programmer software | Optional |
| Local/remote keypad | Standard |
| Keypad lockout | Standard |
| Fault alarm output | Standard |
| Built-in diagnostics | Standard |
| Surge protective device | Optional |

| Description | Specification |
|--|------------------------|
| Input/Output Interface Features | |
| Setup adjustment provisions | |
| Remote keypad/display | Standard |
| Personal computer | Standard |
| Operator control provisions | |
| Drive mounted keypad/display | Standard |
| Remote keypad/display | Standard |
| Conventional control elements | Standard |
| Serial communications | Optional |
| 115 Vac control circuit | Optional |
| Speed setting inputs | |
| Keypad | Standard |
| 0–10 Vdc potentiometer/voltage signal | Standard |
| 4–20 mA isolated | Configurable |
| 4–20 mA differential | Configurable |
| 3–15 psig | Optional |
| Analog outputs | |
| Speed/frequency | Standard |
| Torque/load/current | Programmable |
| Motor voltage | Programmable |
| Kilowatts | Programmable |
| 0–10 Vdc signals | Configurable w/jumpers |
| 4–20 mA DC signals | Standard |
| Isolated signals | Optional |
| Discrete outputs | |
| Fault alarm | Standard |
| Drive running | Standard |
| Drive at set speed | Programmable |
| Optional parameters | 14 |
| Dry contacts | 2 relays Form C |
| Open collector outputs | 1 |
| Additional discrete outputs | Optional |
| Communications | |
| RS-232 | Standard |
| RS-422/485 | Optional |
| DeviceNet™ | Optional |
| Modbus RTU | Optional |
| CANopen (slave) | Optional |
| PROFIBUS-DP | Optional |
| Lonworks® | Optional |
| Johnson Controls Metasys™ N2 | Optional |
| EtherNet/IP/Modbus TCP | Optional |
| BACnet | Optional |

Note

^① The EMI filter is optional in FR10.

Enclosed Passive Filtered Drives, continued

| Description | Specification |
|--|---|
| Performance Features | |
| Sensorless vector control | Standard |
| Volts/hertz control | Standard |
| IR and slip compensation | Standard |
| Electronic reversing | Standard |
| Dynamic braking | Optional |
| DC braking | Standard |
| PID setpoint controller | Programmable |
| Critical speed lockout | Standard |
| Current (torque) limit | Standard |
| Adjustable acceleration/deceleration | Standard |
| Linear or S curve accel/decel | Standard |
| Jog at preset speed | Standard |
| Thread/preset speeds | 7 |
| Automatic restart | Selectable |
| Coasting motor start | Standard |
| Coast or ramp stop selection | Standard |
| Elapsed time meter | Optional |
| Standard Conditions for Application and Service | |
| Maximum operating ambient temperature | 0 to 40 °C |
| Storage temperature | -40 to 60 °C |
| Humidity (maximum), non-condensing | 95% |
| Altitude | 100% load capacity (no derating) up to 3280 ft (1000 m); 1% derating for each 328 ft (100 m) above 3280 ft (1000 m); max. 9842 ft (3000 m) |
| Line voltage variation | +10/-15% |
| Line frequency variation | 45-66 Hz |
| Efficiency | >96% |
| Power factor (displacement) | 0.99 |

Standard I/O Specifications

| Description | Specification |
|--|---|
| Six-digital input programmable | 24 V: "0" ≤10 V, "1" ≥18V, R _i >5 kohms |
| Two-analog input configurable w/ jumpers | Voltage: 0-±10 V, R _i >200 kohms Current: 0 (4)-20 mA, R _i = 250 kohms |
| Two-digital output programmable | Form C relays 250 Vac or 30 Vdc 2 Amp resistive |
| One-digital output programmable | Open collector 48 Vdc 50 mA |
| One-analog output programmable configurable w/jumper | 0-20 mA, R _L max. 500 ohms 10 bits ±2% |

I/O Specifications for Control/Communication Options

| Description | Specification |
|-------------------------------------|---|
| Analog voltage, input | 0-±10 V, R _i ≥200 kilohms |
| Analog current, input | 0 (4)-20 mA, R _i = 250 ohms |
| Digital input | 24 V: "0" ≤10 V, "1" ≥18V, R _i >5 kohms |
| Auxiliary voltage | 24 V (±20%), max. 50 mA |
| Reference voltage | 10 V ±3%, max. 10 mA |
| Analog current, output | 0 (4)-20 mA, R _L = 500 kilohms, resolution 10 bit, accuracy ≤±2% |
| Analog voltage, output | 0 (2)-10 V, R _L ≥1 kohm, resolution 10 bit, accuracy ≤±2% |
| Relay output max. switching voltage | 300 Vdc, 250 Vac |
| Relay output max. switching load | 3 A/24 Vdc, 300 Vdc, 250 Vac ② |
| Relay output max. continuous load | 2 A rms |
| Thermistor input | R _{trip} = 4.7 kohms |

Notes

- ① Units FR10 rated 40 °C.
② For applications above 3 A consult instruction manual.

2.11

Adjustable Frequency Drives

Clean Power Drives

Wiring Diagram

Control Input/Output

2

Reference potentiometer
1–10 kohms

Remote reference
0(4)–20 mA

READY



RUN

Basic Application Default I/O Configuration

| Terminal | Signal | Description | | | |
|--------------|----------------------|--------------------------------------|--|-------------|-----------------------|
| OPTA9 | | | | | |
| 1 | +10 V _{ref} | Reference output | Voltage for potentiometer, etc. | | |
| 2 | AI1+ | Analog input, voltage range 0–10 Vdc | Voltage input frequency reference | | |
| 3 | AI1– | I/O Ground | Ground for reference and controls | | |
| 4 | AI2+ | Analog input, current range 0–20 mA | Current input frequency reference | | |
| 5 | AI2– | | | | |
| 6 | +24 V | Control voltage output | Voltage for switches, etc. max 0.1 A | | |
| 7 | GND | I/O ground | Ground for reference and controls | | |
| 8 | DIN1 | Start forward | Contact closed = start forward | | |
| 9 | DIN2 | Start reverse | Contact closed = start reverse | | |
| 10 | DIN3 | External fault input (programmable) | Contact open = no fault Contact closed = fault | | |
| 11 | CMA | Common for DIN 1–DIN 3 | Connect to GND or +24 V | | |
| 12 | +24 V | Control voltage output | Voltage for switches (see terminal 6) | | |
| 13 | GND | I/O ground | Ground for reference and controls | | |
| 14 | DIN4 | Multi-step speed select 1 | DIN4 | DIN5 | Frequency Ref. |
| 15 | DIN5 | Multi-step speed select 2 | Open | Open | Ref. V _{in} |
| | | | Closed | Open | Multi-step ref. 1 |
| | | | Open | Closed | Multi-step ref. 2 |
| | | | Closed | Closed | Ref _{Max} |
| 16 | DIN6 | Fault reset | Contact open = no action Contact closed = fault reset | | |
| 17 | CMB | Common for DIN4–DIN6 | Connect to GND or +24 V | | |
| 18 | A01+ | Output frequency | Programmable | | |
| 19 | A01– | Analog output | Range 0–20 mA, R _L max. 500 ohms | | |
| 20 | D01 | Digital output READY | Programmable Open collector, I ≤ 50 mA, V ≤ 48 Vdc | | |
| OPTA2 | | | | | |
| 21 | R01 | | Relay output 1 | | |
| 22 | R01 | | RUN | | |
| 23 | R01 | | | | |
| 24 | R02 | | Relay output 2 | | |
| 25 | R02 | | FAULT | | |
| 26 | R02 | | | | |

Dimensions

Approximate Dimensions in Inches (mm)

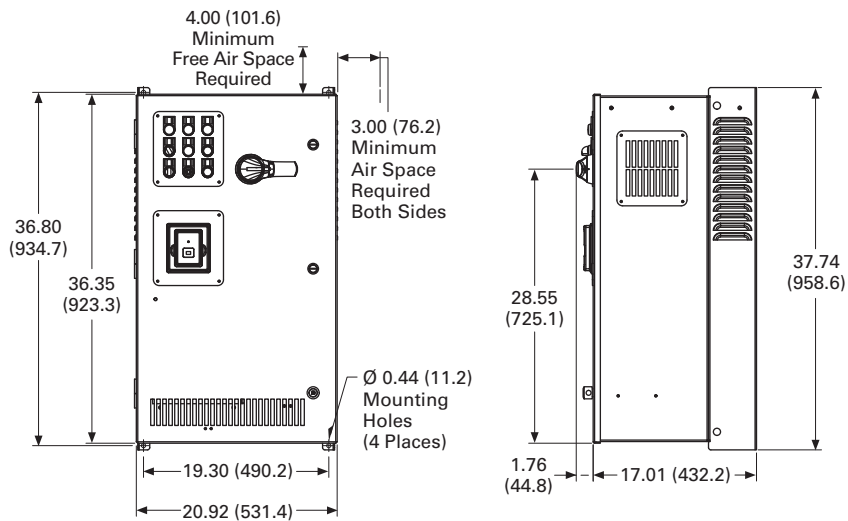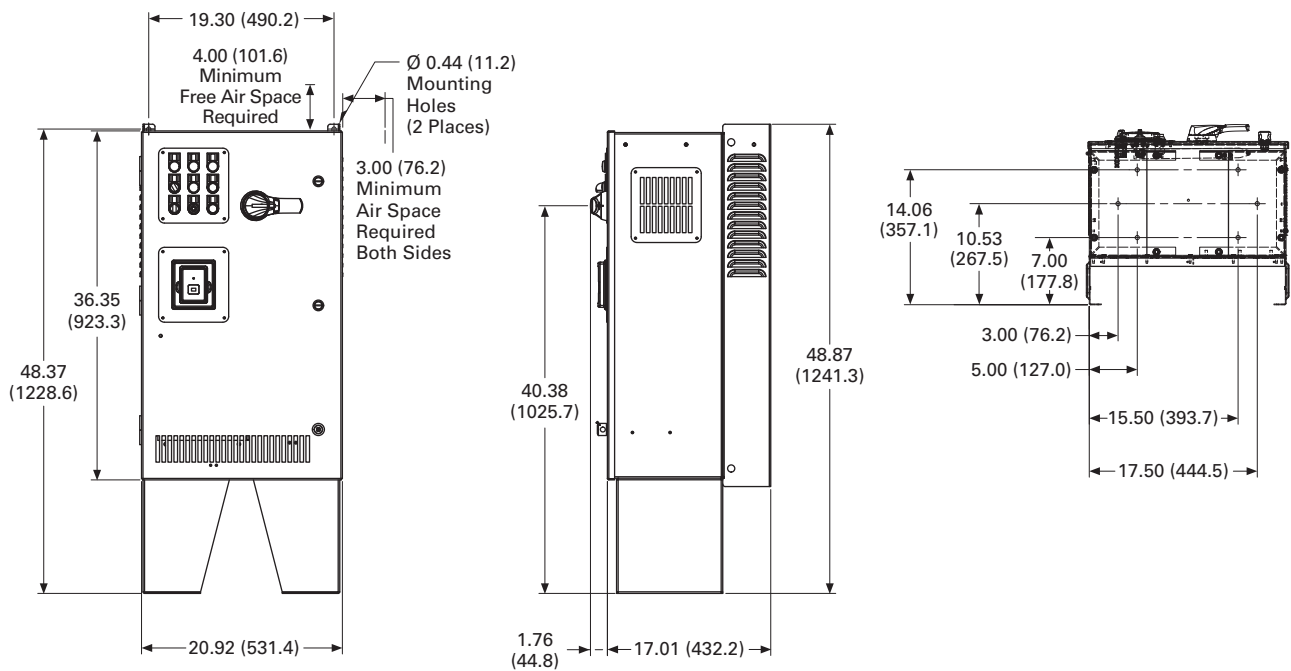BX Box Type 1**BX Box Type 1—12 Inch Floor Stands**

2.11


Adjustable Frequency Drives

Clean Power Drives


Approximate Dimensions in Inches (mm)

BX Box Type 1—22 Inch Floor Stands

2

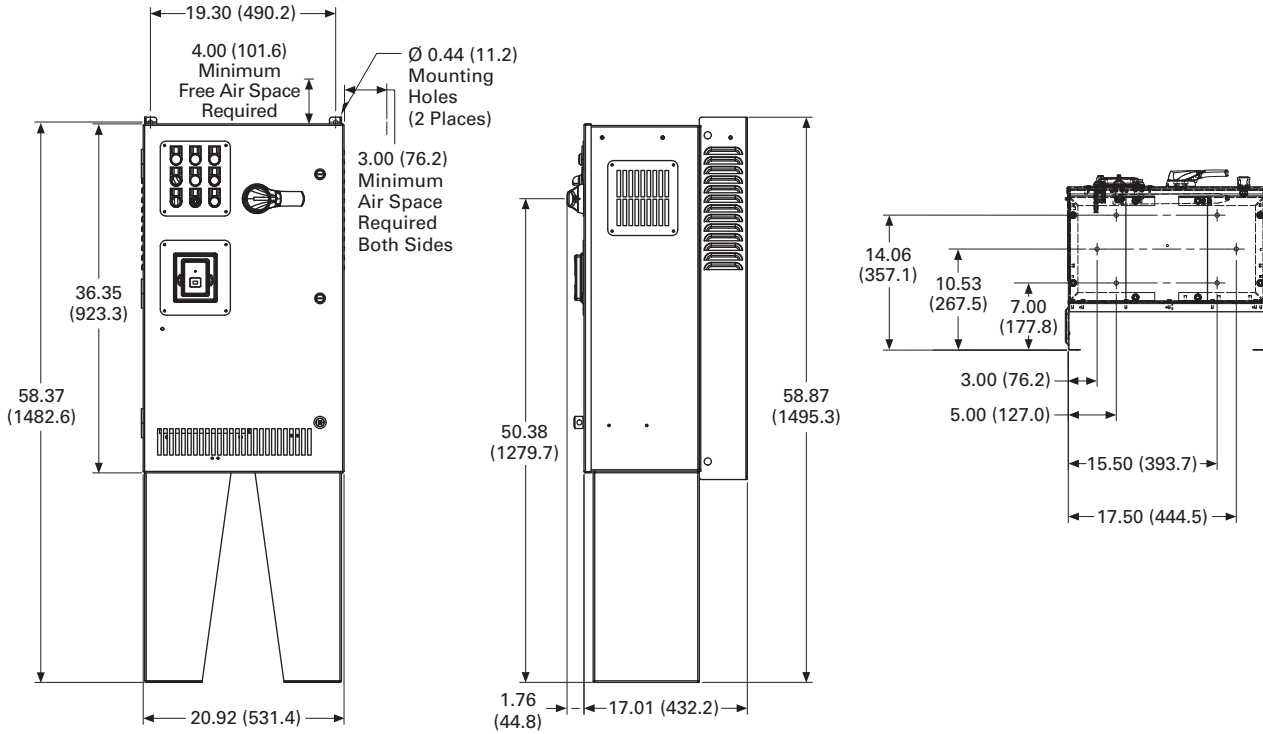


BX Box Type 12

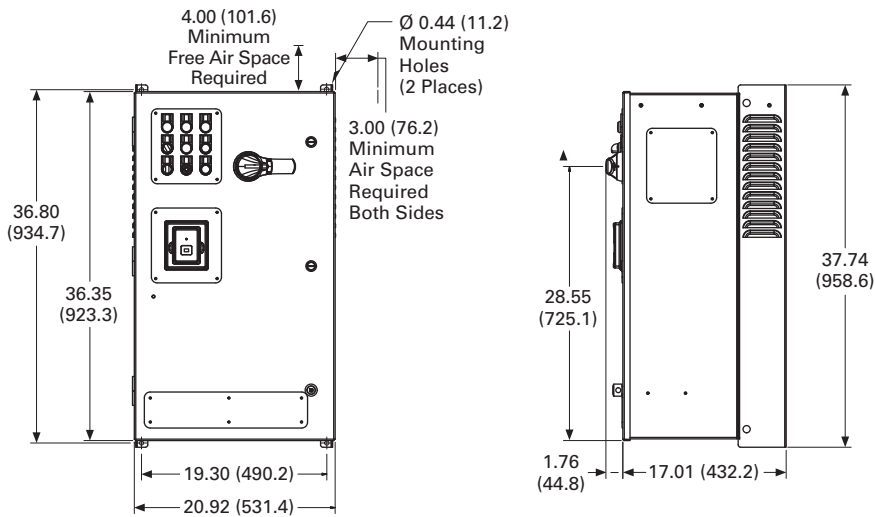


Approximate Dimensions in Inches (mm)

BX Box Type 12—12 Inch Floor Stands

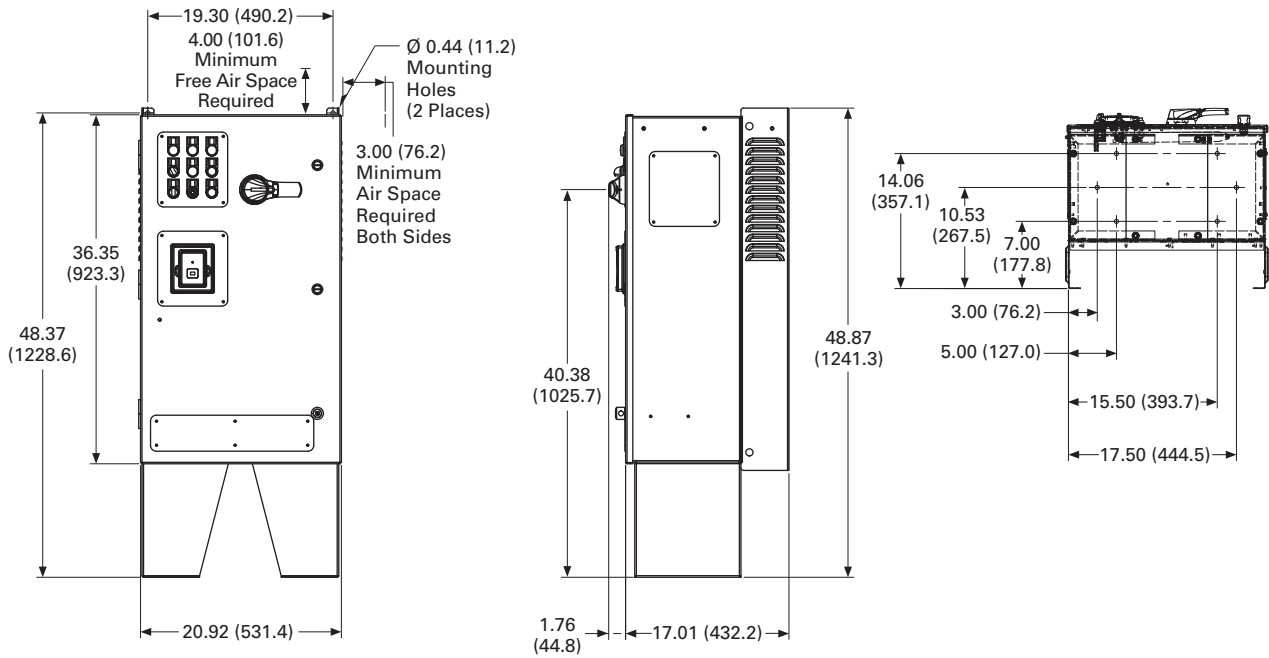

BX Box Type 12—22 Inch Floor Stands

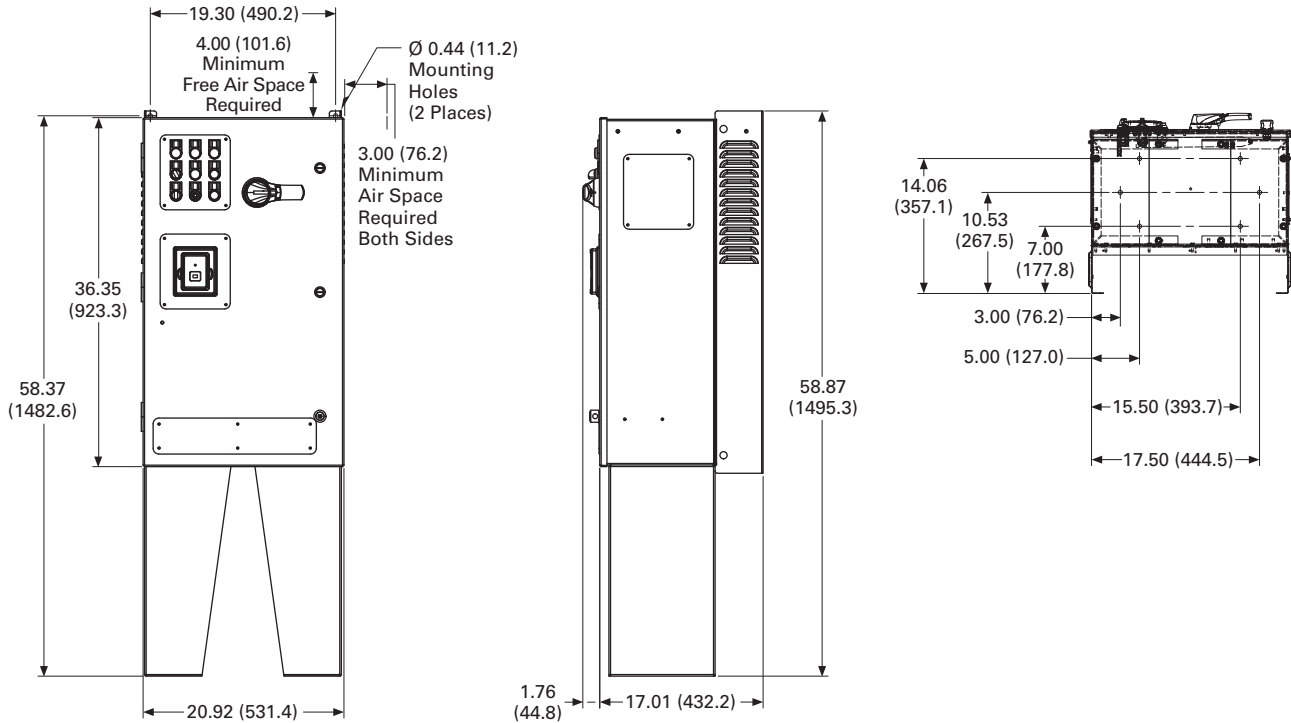

2.11


Adjustable Frequency Drives

Clean Power Drives


Approximate Dimensions in Inches (mm)

BX Box Type 3R

2

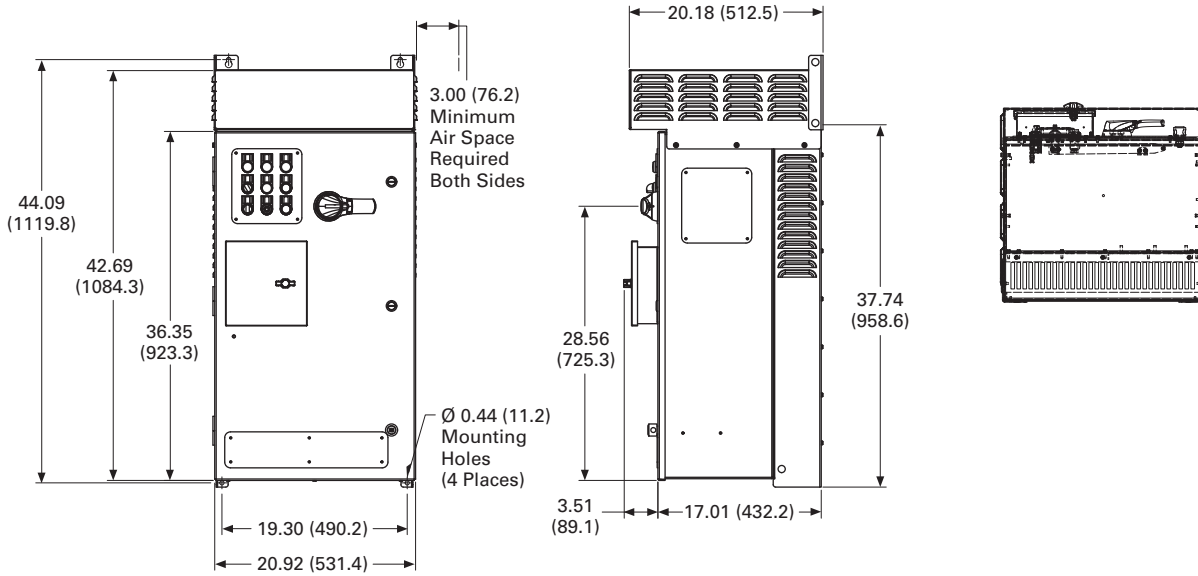


BX Box Type 3R—12 Inch Floor Stands

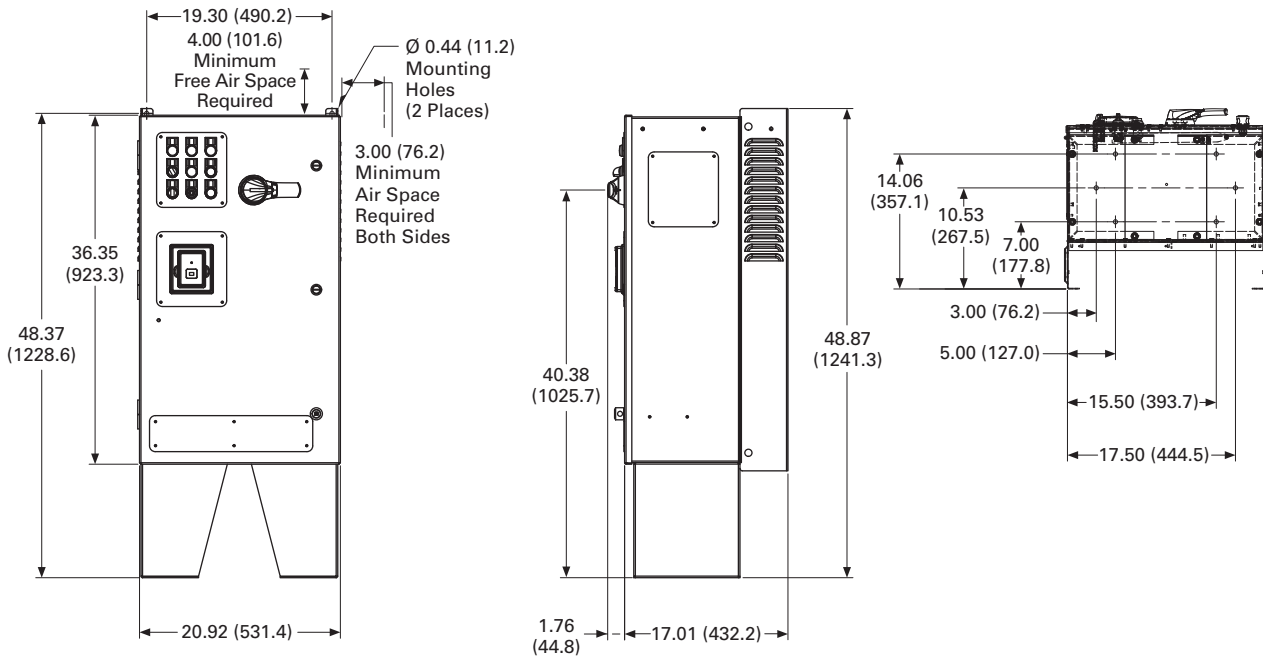


Approximate Dimensions in Inches (mm)

BX Box Type 3R—22 Inch Floor Stands

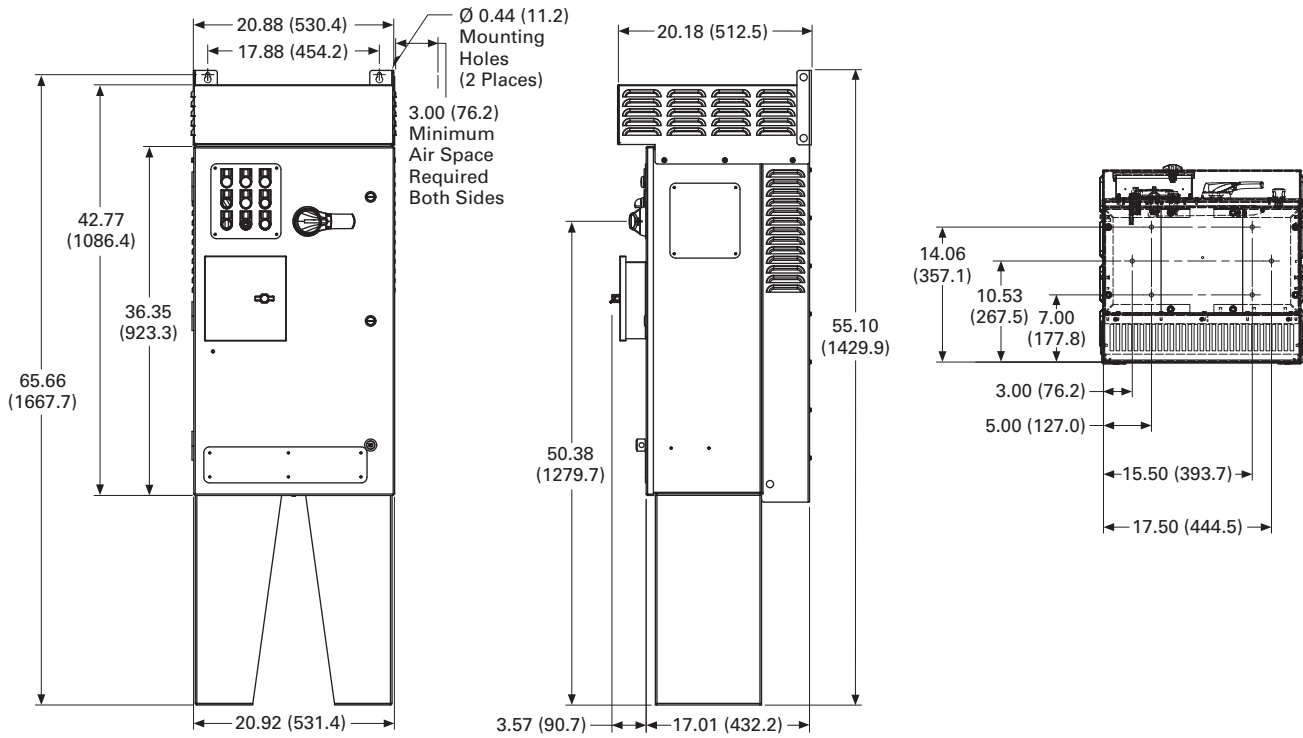

CX Box Type 1

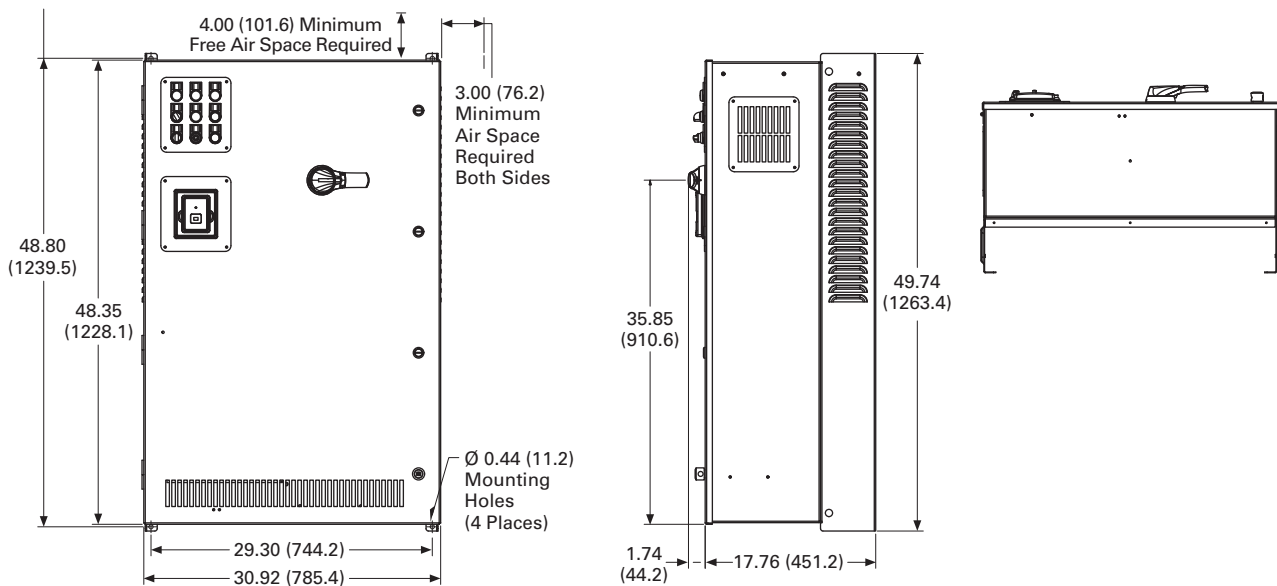

2.11


Adjustable Frequency Drives

Clean Power Drives


Approximate Dimensions in Inches (mm)

2

CX Box Type 1—12 Inch Floor Stands

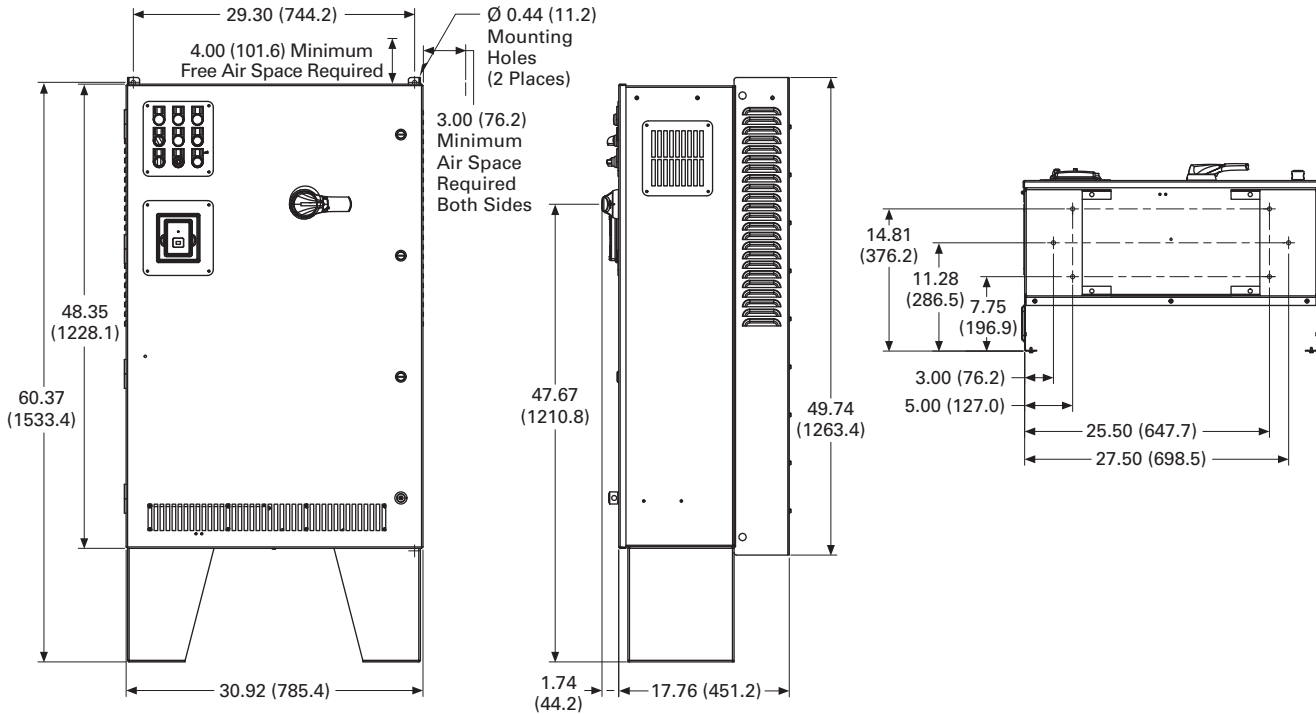


CX Box Type 1—22 Inch Floor Stands

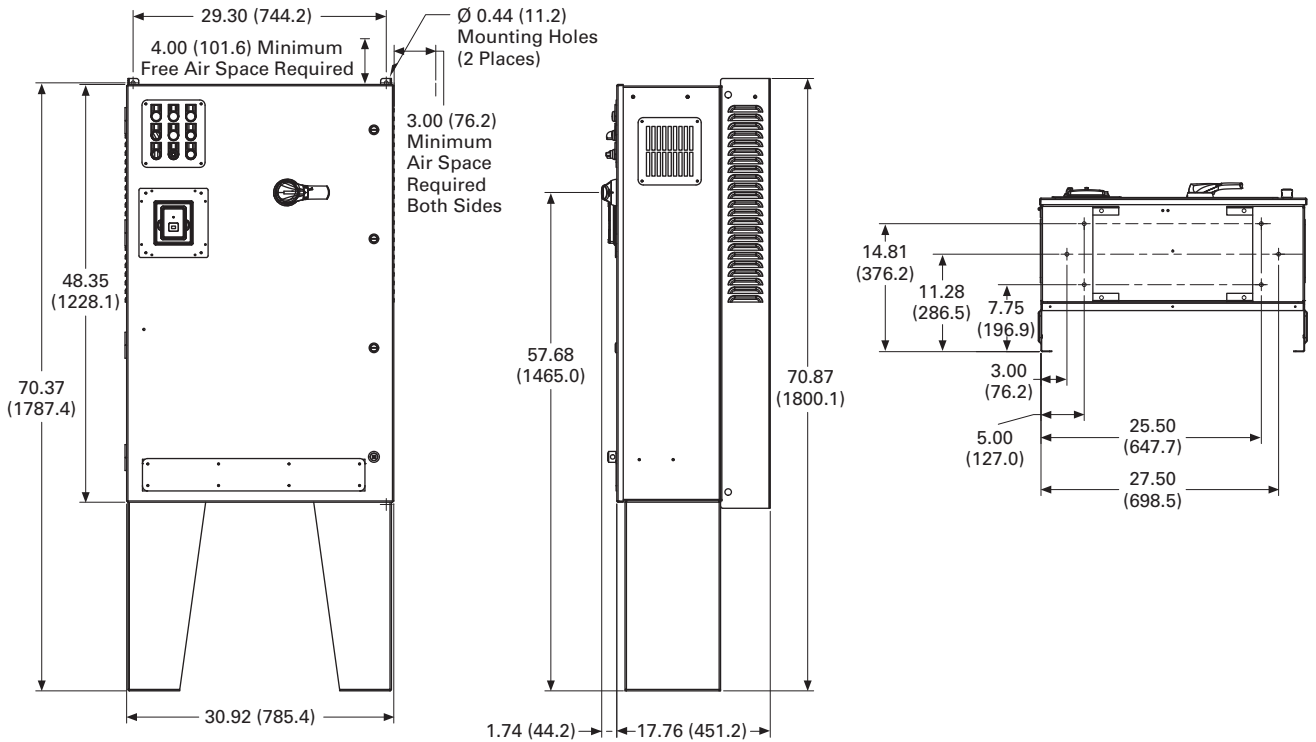


Approximate Dimensions in Inches (mm)

CX Box Type 12

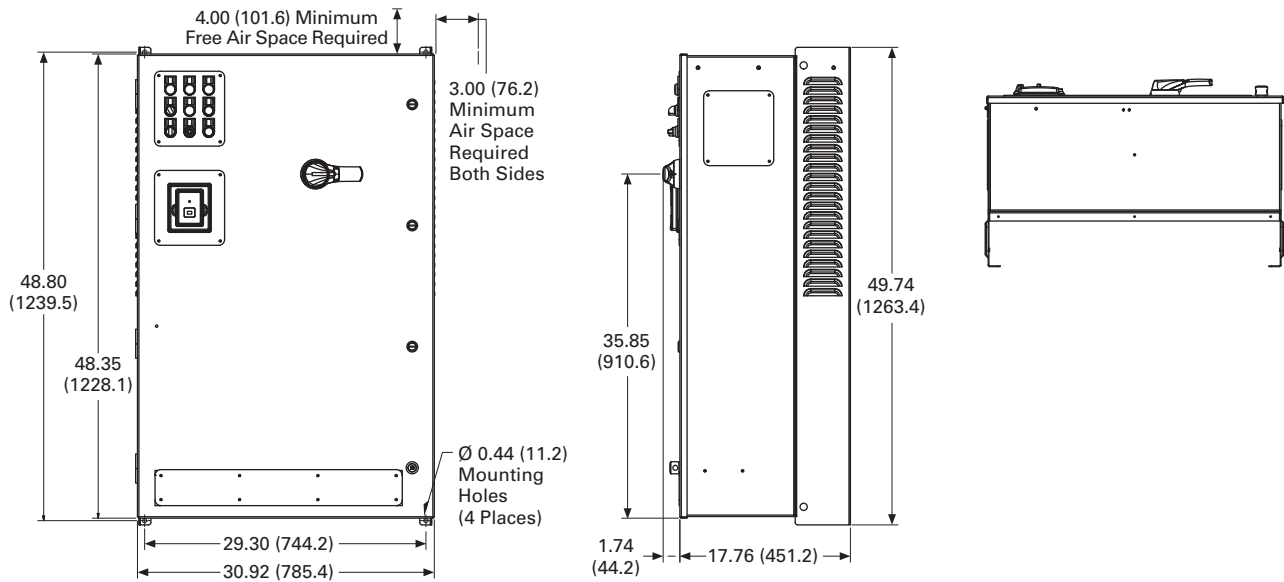

CX Box Type 12—12 Inch Floor Stands

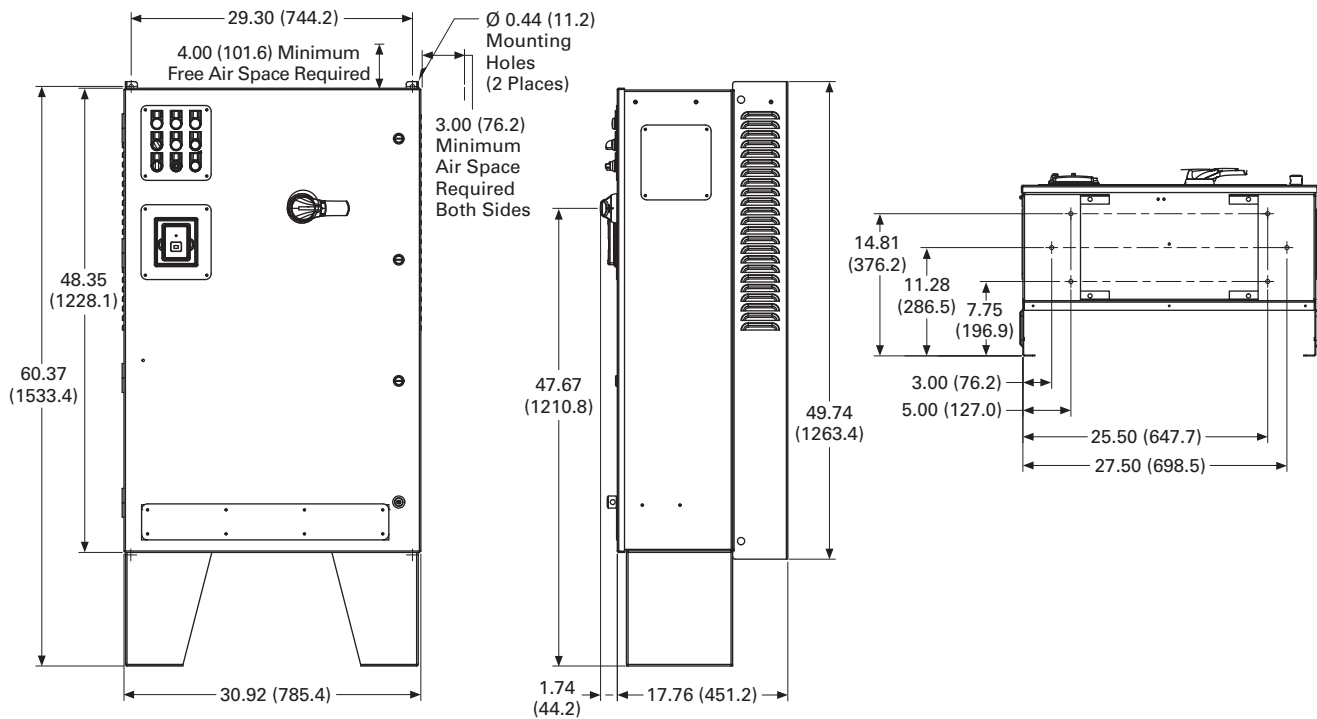

2.11


Adjustable Frequency Drives

Clean Power Drives


Approximate Dimensions in Inches (mm)

CX Box Type 12–22 Inch Floor Stands

2

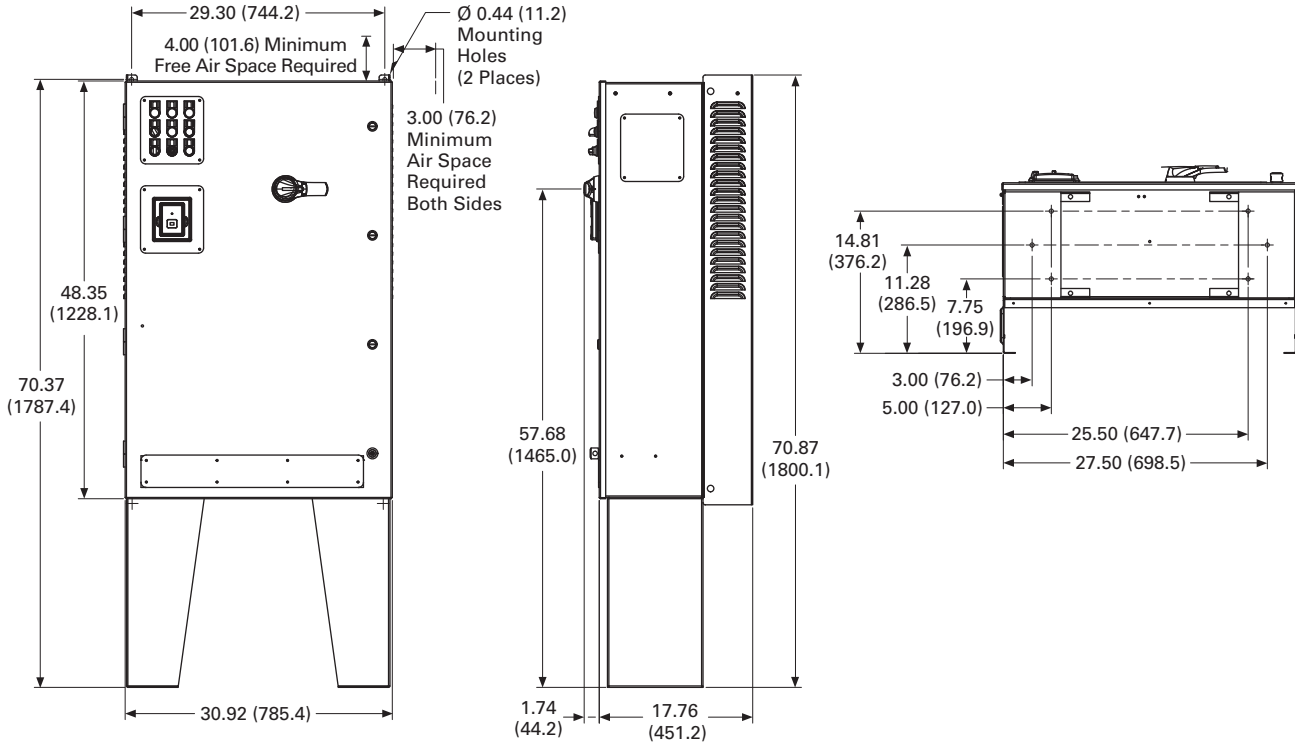


CX Box Type 3R

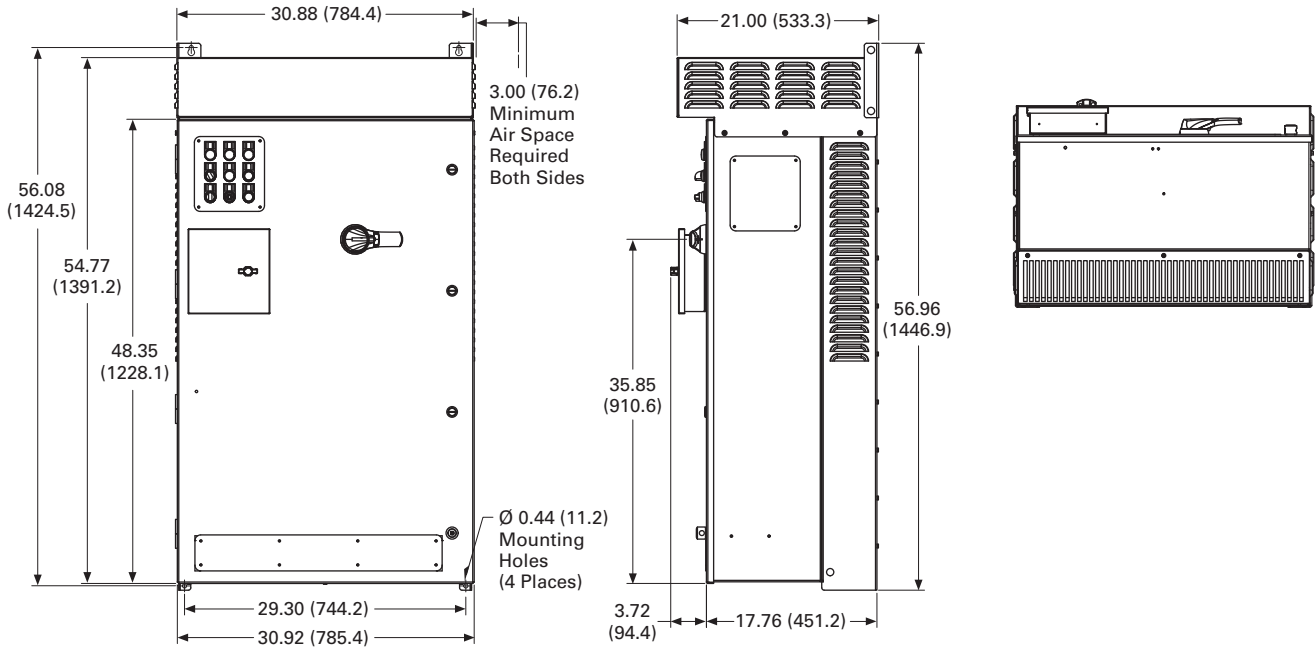


Approximate Dimensions in Inches (mm)

CX Box Type 3R—12 Inch Floor Stands

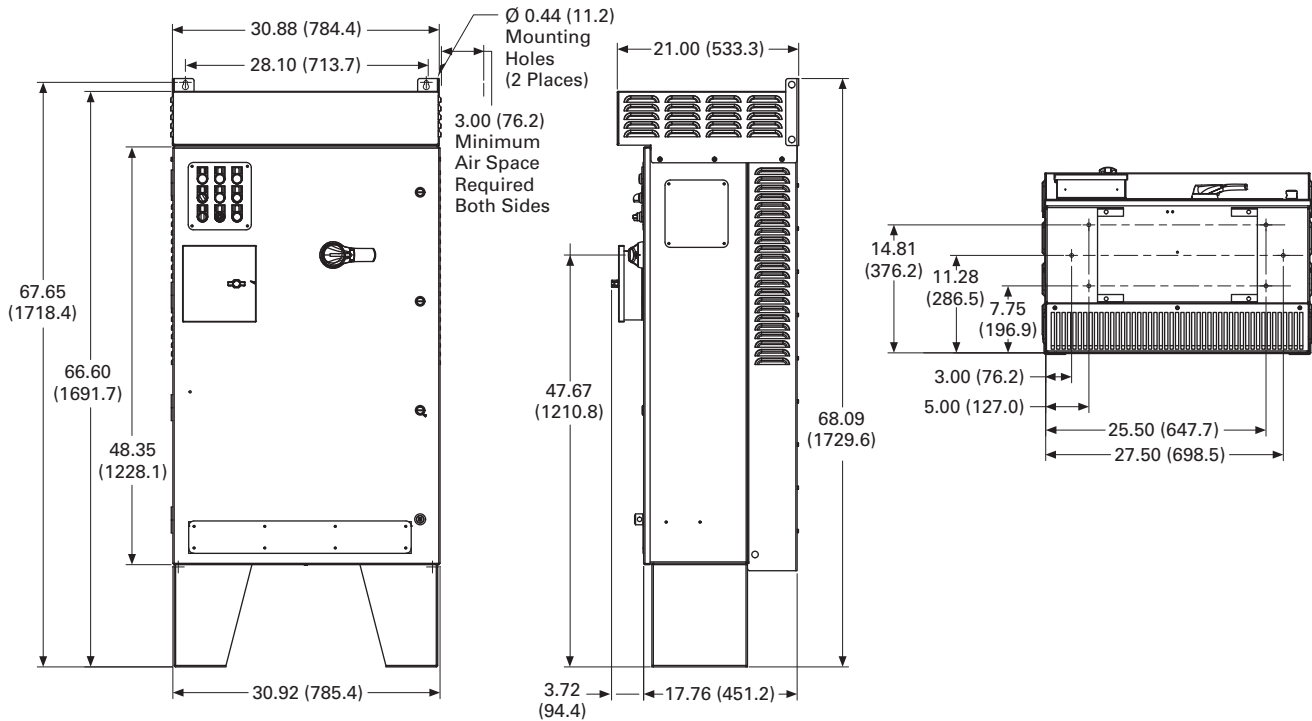

CX Box Type 3R—22 Inch Floor Stands

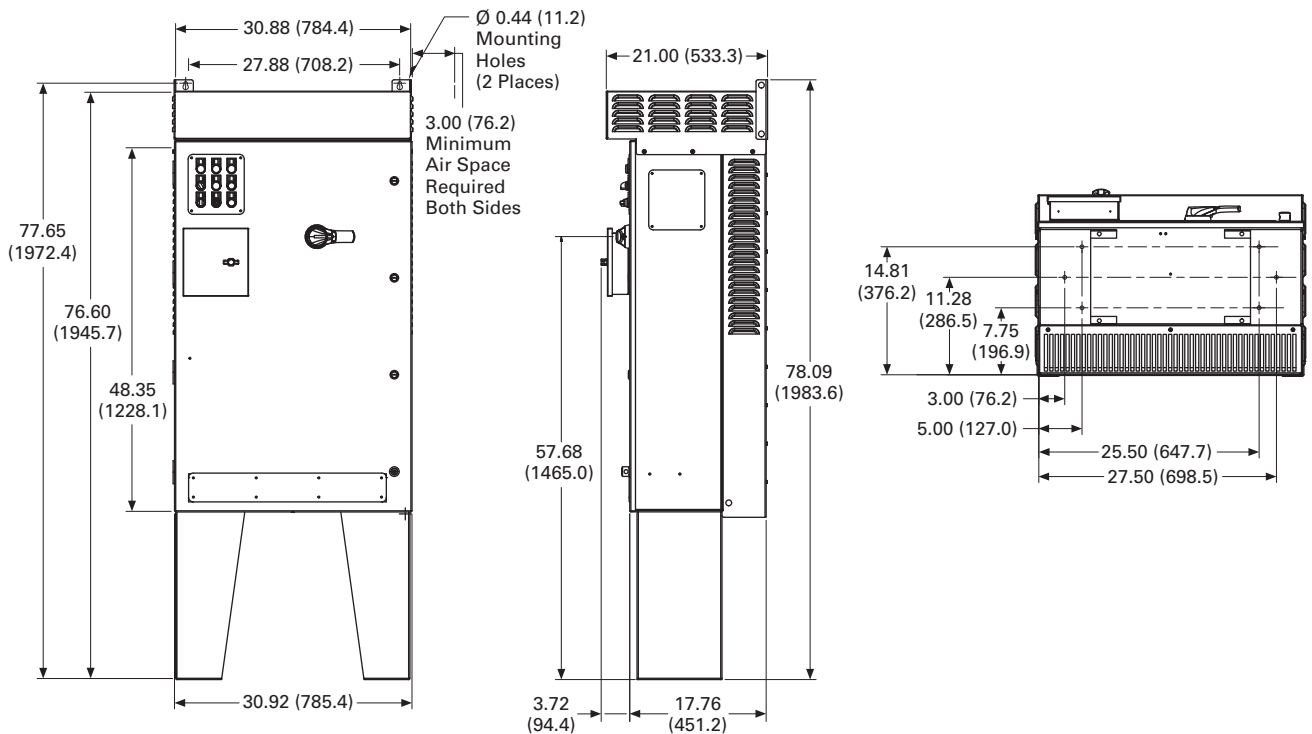

2.11


Adjustable Frequency Drives

Clean Power Drives


Approximate Dimensions in Inches (mm)

DX Box Type 1

2

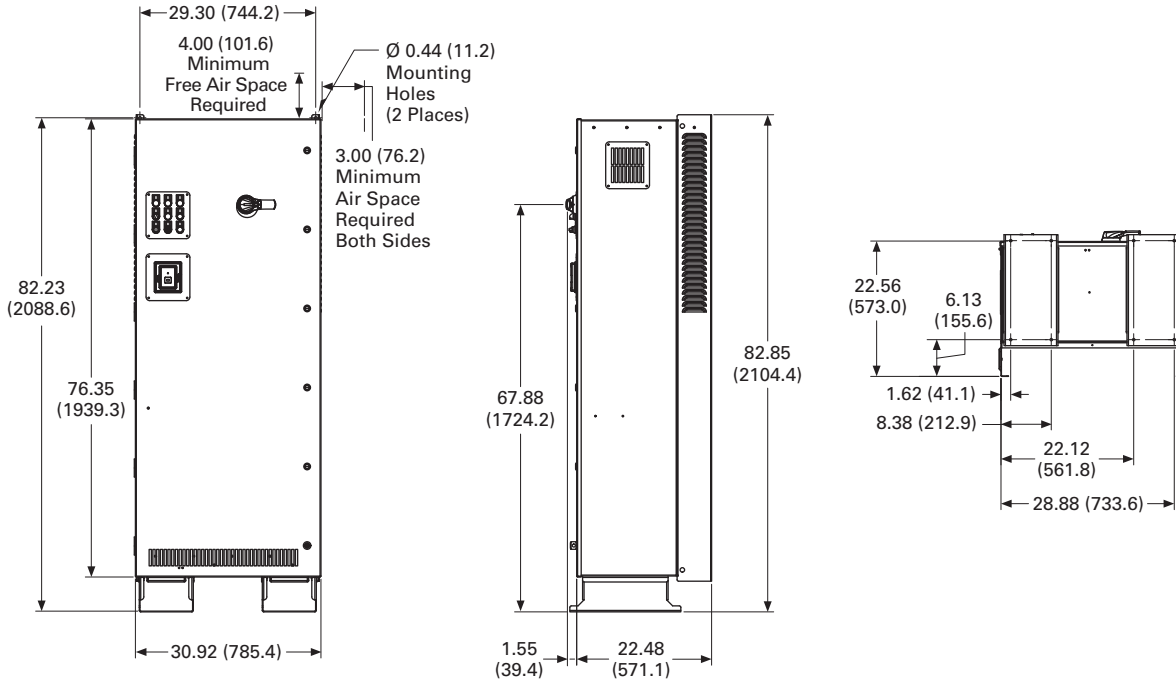


DX Box Type 12

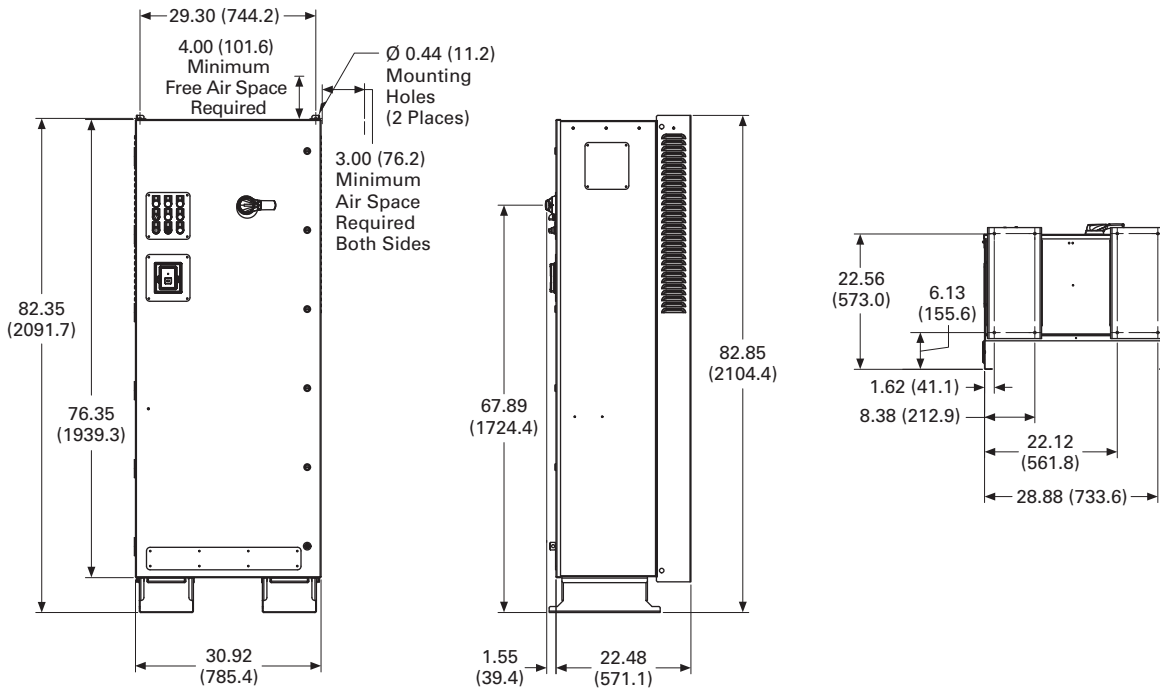

Approximate Dimensions in Inches (mm)

DX Box Type 3R

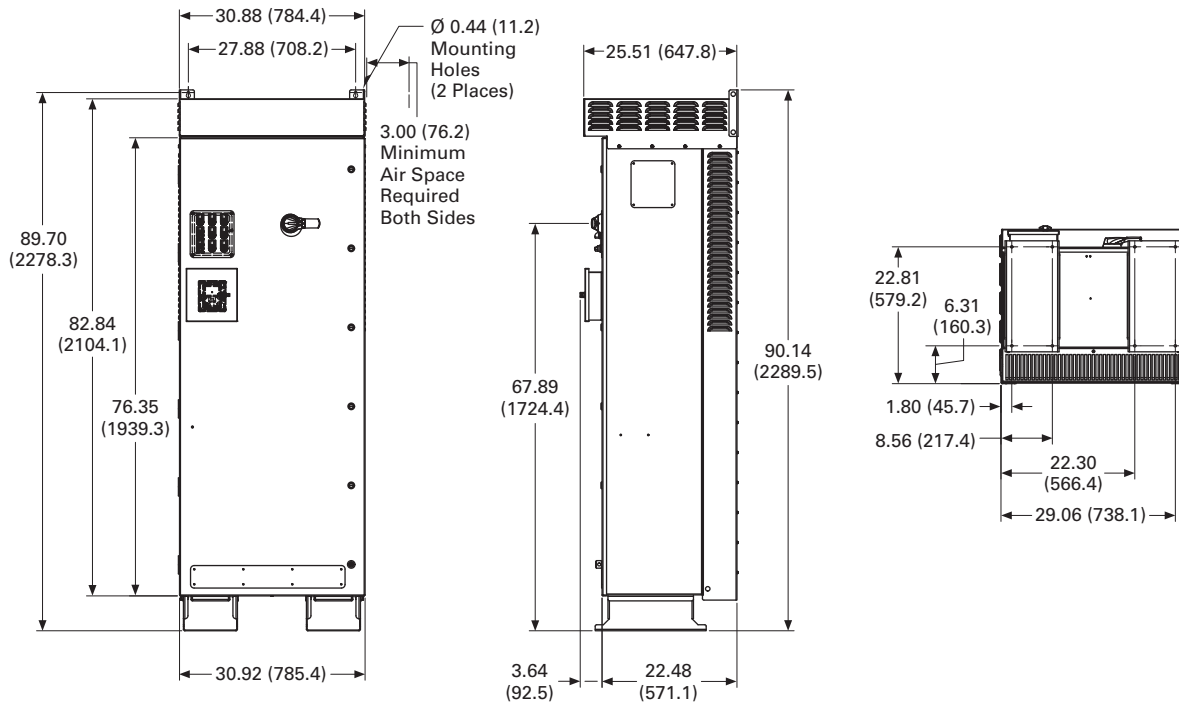

2.11


Adjustable Frequency Drives

Clean Power Drives

Approximate Dimensions in Inches (mm)

Size 8

2

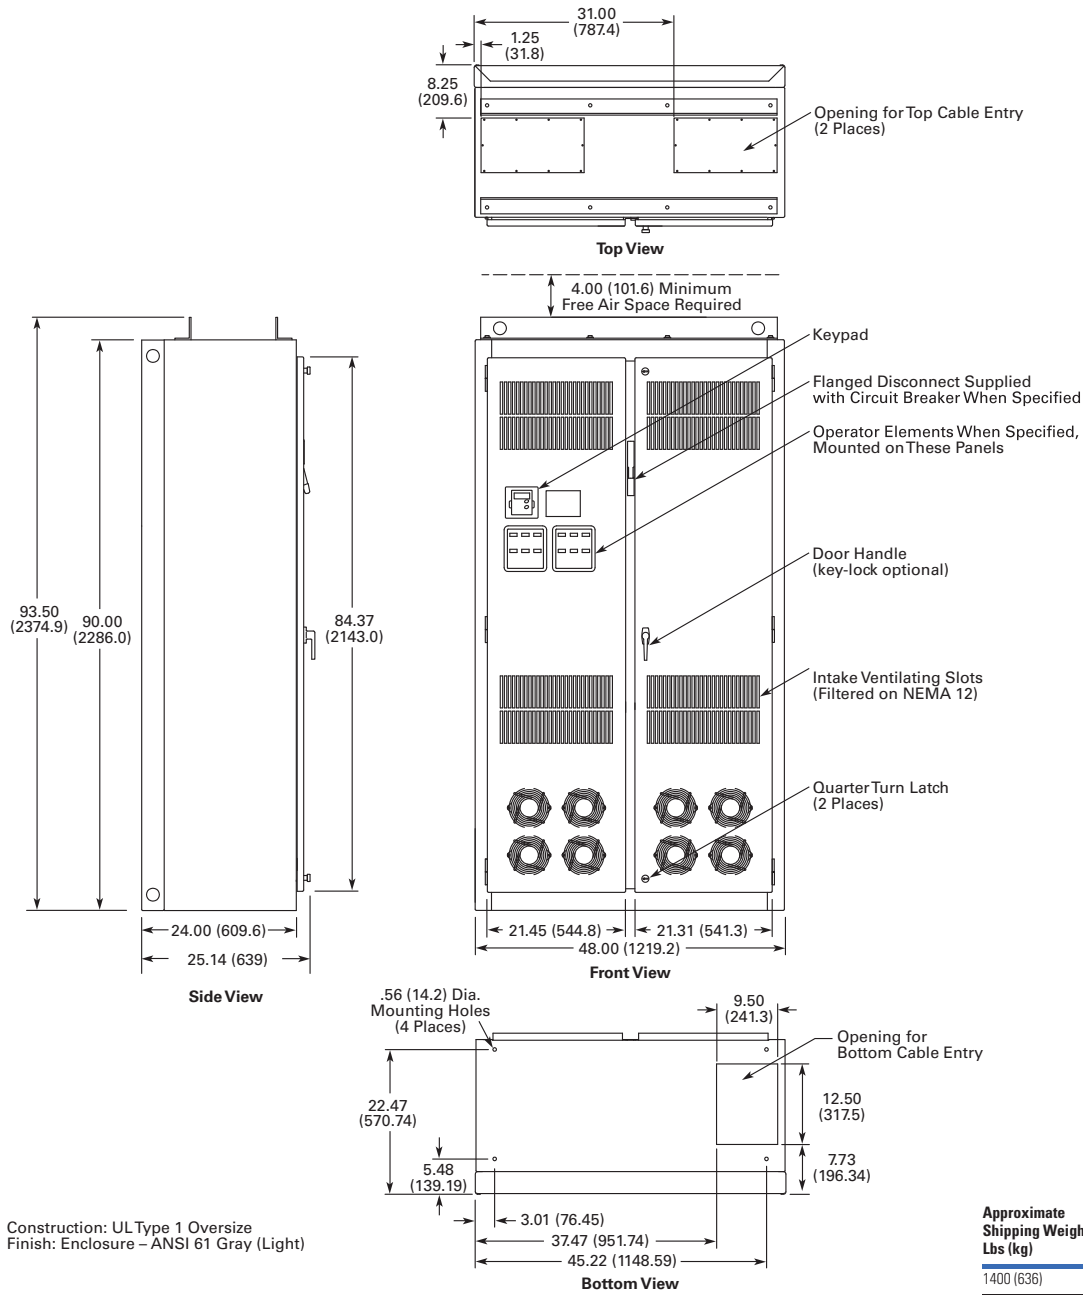

Construction: UL Type 1 Oversize
Finish: Enclosure - ANSI 61 Gray (Light)


For reference only, dimensions are subject to change. See **Page V6-T2-329**, notes 3 and 5 for enclosure and option selection.

| Wide A | High B | Deep C | Mounting D | D1 | E | E1 | F | G | G1 | Door Height H | Min. Air Space J | K |
|-------------|-------------|------------|---------------|----------|---|----|---|-----------|----|------------------|---------------------|---|
| 48.0 (1219) | 90.0 (2286) | 24.0 (610) | 42.2 (1072) | 3.0 (77) | — | — | — | 5.5 (139) | — | 84.4 (2143) | 4.0 (102) | — |

| Cable Entry | | | | | | | | | | | | | | | Max. Approx. Shipping Weight Lbs (kg) |
|--------------|---------------|---------------|--------------|--------------|-------------|---------------|---------------|---------------|---|----------------|----|----|----|----|--|
| L | M | N | P | R | S | T | U | V | W | RR | SS | TT | UU | VV | |
| 9.5 (241) | 37.5 (952) | 12.5 (318) | 7.7 (196) | 8.3 (210) | 1.3 (32) | 31.0 (787) | 21.5 (545) | 21.3 (541) | — | 93.5 (2375) | — | — | — | — | 2000 (908) |

Approximate Dimensions in Inches (mm)

Size 9

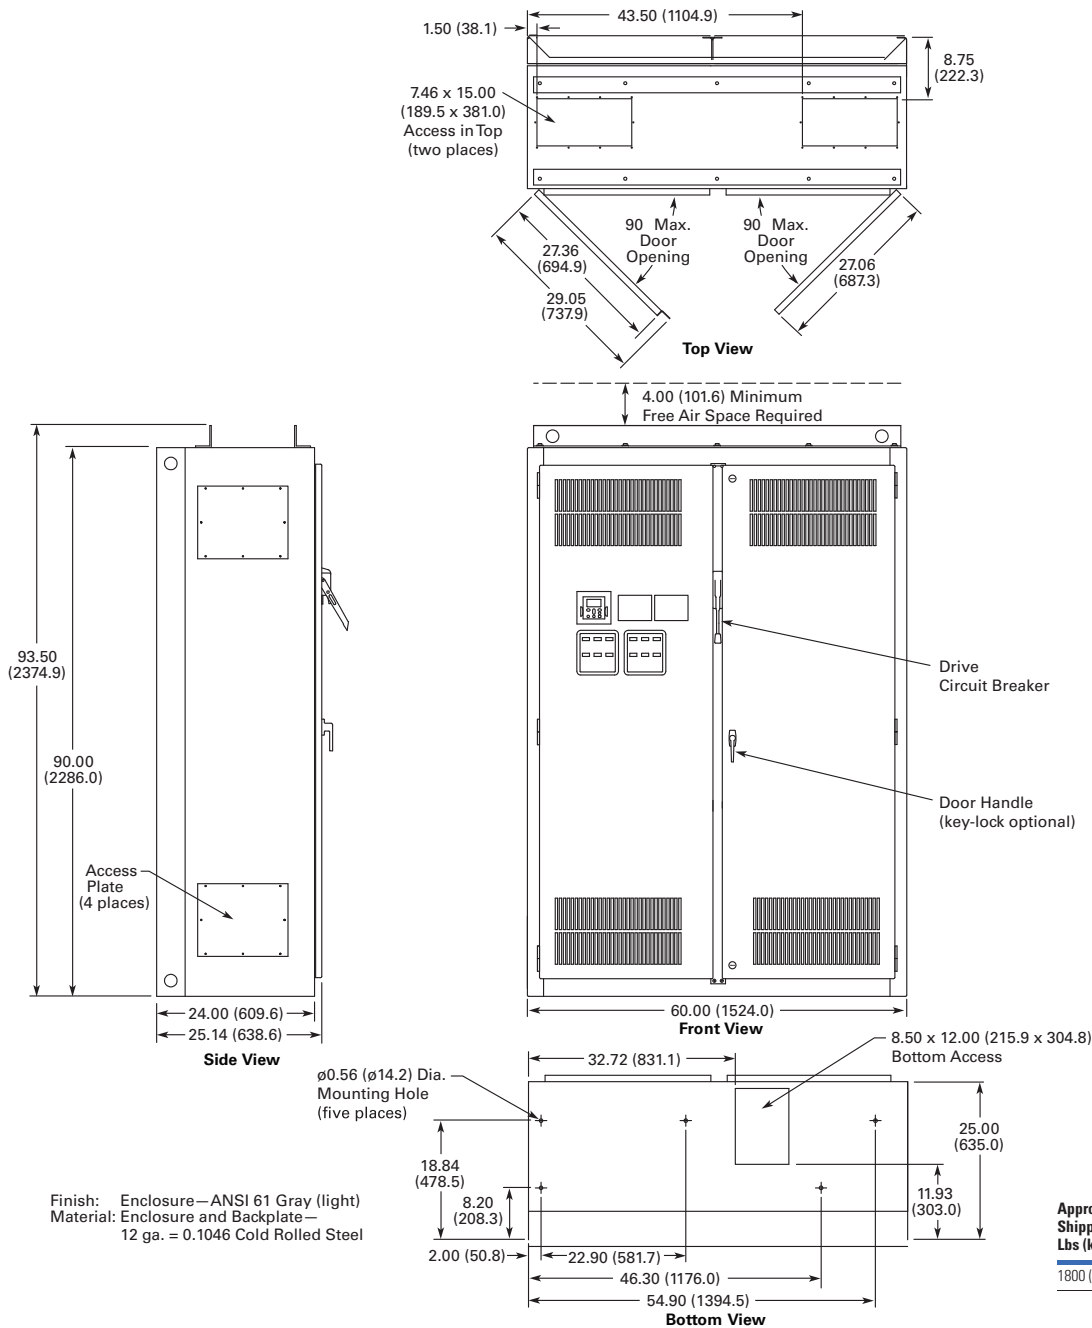

For reference only, dimensions are subject to change. See **Page V6-T2-329**, notes 3 and 5 for enclosure and option selection.

| Wide A | High B | Deep C | Mounting D | | E | E1 | F | G | G1 | Door Height H | Min. Air Space J | K |
|-------------|-------------|-------------|---------------|----------|------------|-------------|------------|------------|-----------|------------------|---------------------|---|
| 60.0 (1524) | 90.0 (2286) | 260.1 (664) | 22.9 (582) | 2.0 (51) | 30.0 (762) | 44.3 (1125) | 10.6 (270) | 10.6 (270) | 8.2 (208) | — | 4.0 (102) | — |

| Cable Entry | | | | | | | | | | | | | | | Max. Approx. Shipping Weight Lbs (kg) |
|--------------|---------------|---------------|---------------|--------------|-------------|----------------|---------------|--------------|---------------|----------------|---------------|----------------|----------------|----|--|
| L | M | N | P | R | S | T | U | V | W | RR | SS | TT | UU | VV | |
| 8.5 (216) | 32.7 (831) | 12.0 (305) | 11.9 (303) | 9.8 (249) | 1.5 (38) | 43.5 (1105) | 15.0 (381) | 7.5 (191) | 25.0 (635) | 93.5 (2375) | 27.4 (696) | 290.1 (738) | 270.1 (687) | — | 2500 (1135) |

2.11




Adjustable Frequency Drives

Clean Power Drives

Approximate Dimensions in Inches (mm)

Enclosure Size F

2

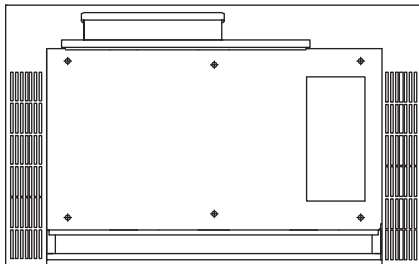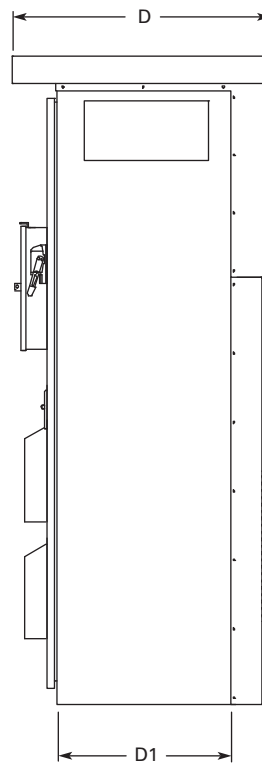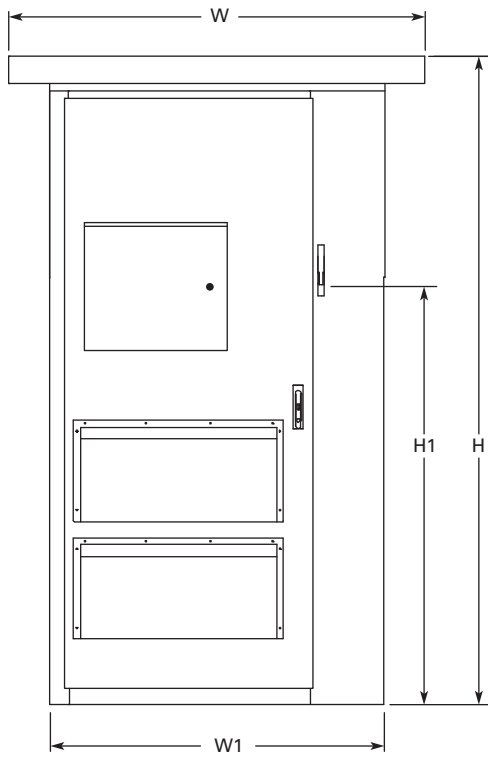

| H | H1 | W | W1 | D | D1 | Approximate Weight Lbs (kg) | Approximate Shipping Weight Lbs (kg) |
|-------------------|--------------------|-------------------|-------------------|------------------|------------------|--------------------------------|---|
| 93.58 (2376.9) | 69.51 (1765.60) | 60.00 (1524.0) | 48.00 (1219.2) | 37.50 (952.5) | 26.00 (660.4) | 1700 (771) | 1850 (839) |

Enclosed 12-Pulse Drives**Contents**

| Description | Page |
|------------------------------------|------------------|
| Clean Power Drives Overview | V6-T2-298 |
| Enclosed Passive Filtered Drives | |
| EGF Enclosed Drives | V6-T2-305 |
| CFX Enclosed Drives | V6-T2-325 |
| Enclosed 12-Pulse Drives | |
| Catalog Number Selection | V6-T2-352 |
| Product Selection | V6-T2-353 |
| Dimensions | V6-T2-354 |
| Enclosed 18-Pulse Drives | V6-T2-355 |
| Enclosed Regenerative Drives | V6-T2-379 |

HCX Enclosed 12-Pulse Drives**Product Description**

The Enclosed HCX Drives is specifically tailored for HVAC applications where clean power is necessary. The Enclosed HCX Drive uses Eaton's SVX drive with a 12-pulse phase shifting transformer to deliver a substantial reduction in voltage and current harmonics.

Standards and Certifications

- UL 508C



2.11


Adjustable Frequency Drives

Clean Power Drives

Catalog Number Selection

2

HCX Enclosed 12-Pulse Drives

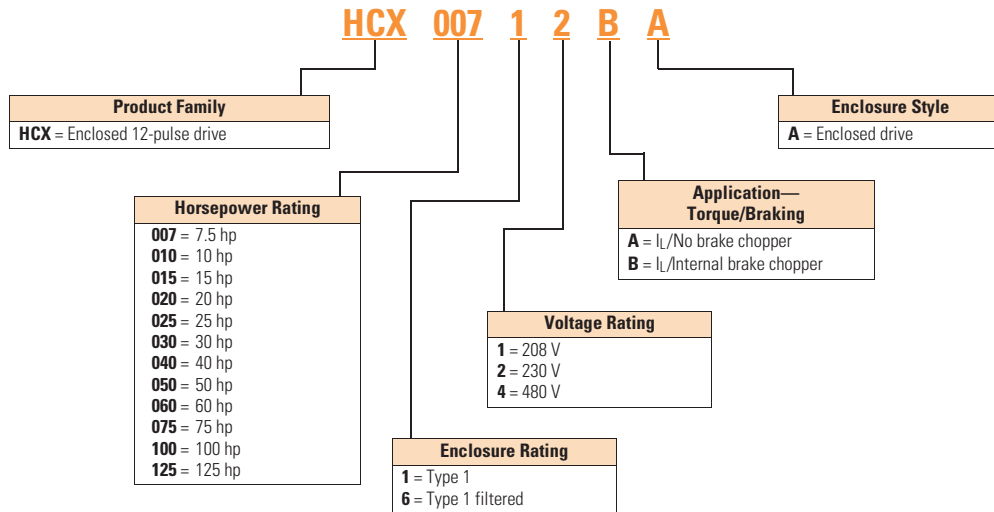

Product Selection

208 V Drives

HCX Enclosed Drives



208 V Drives—Variable Torque (VT)/Low Overload (L) Enclosed Drives

| hp | Current (A) | Drive Frame Size | NEMA Type 1 Base Catalog Number ① | NEMA Type 1 Filtered Base Catalog Number ① |
|-----|-------------|------------------|-----------------------------------|--|
| 7.5 | 24.2 | 5 | HCX00711BA | HCX00761BA |
| 10 | 30.8 | 5 | HCX01011BA | HCX01061BA |
| 15 | 46.2 | 6 | HCX01511BA | HCX01561BA |
| 20 | 59.4 | 6 | HCX02011BA | HCX02061BA |
| 25 | 74.8 | 7 | HCX02511AA | HCX02561AA |
| 30 | 88 | 7 | HCX03011AA | HCX03061AA |
| 40 | 114 | 7 | HCX04011AA | HCX04061AA |
| 50 | 143 | 8 | HCX05011AA | HCX05061AA |
| 60 | 169 | 8 | HCX06011AA | HCX06061AA |

230 V Drives

HCX Enclosed Drives



230 V Drives—Variable Torque (VT)/Low Overload (L) Enclosed Drives

| hp | Current (A) | Drive Frame Size | NEMA Type 1 Base Catalog Number ① | NEMA Type 1 Filtered Base Catalog Number ① |
|-----|-------------|------------------|-----------------------------------|--|
| 7.5 | 22 | 5 | HCX00712BA | HCX00762BA |
| 10 | 28 | 5 | HCX01012BA | HCX01062BA |
| 15 | 42 | 6 | HCX01512BA | HCX01562BA |
| 20 | 54 | 6 | HCX02012BA | HCX02062BA |
| 25 | 68 | 7 | HCX02512AA | HCX02562AA |
| 30 | 80 | 7 | HCX03012AA | HCX03062AA |
| 40 | 104 | 7 | HCX04012AA | HCX04062AA |
| 50 | 130 | 8 | HCX05012AA | HCX05062AA |
| 60 | 154 | 8 | HCX06012AA | HCX06062AA |

480 V Drives

HCX Enclosed Drives



480 V Drives—Variable Torque (VT)/Low Overload (L) Enclosed Drives

| hp | Current (A) | Drive Frame Size | NEMA Type 1 Base Catalog Number ① | NEMA Type 1 Filtered Base Catalog Number ① |
|-----|-------------|------------------|-----------------------------------|--|
| 25 | 34 | 6 | HCX02514BA | HCX02564BA |
| 30 | 40 | 6 | HCX03014BA | HCX03064BA |
| 40 | 52 | 6 | HCX04014BA | HCX04064BA |
| 50 | 65 | 7 | HCX05014AA | HCX05064AA |
| 60 | 77 | 7 | HCX06014AA | HCX06064AA |
| 75 | 96 | 7 | HCX07514AA | HCX07564AA |
| 100 | 124 | 8 | HCX10014AA | HCX10064AA |
| 125 | 156 | 8 | HCX12514AA | HCX12564AA |

Note

① Table is for base catalog number reference only. For complete catalog number selection, see [Page V6-T2-352](#).

2.11

Adjustable Frequency Drives

Clean Power Drives


Dimensions

Approximate Dimensions in Inches (mm)

2

Enclosure Size 7

25–150 hp I_L and 25–125 hp I_H 480 V—25–100 hp I_L and 25–75 hp I_H 575 V

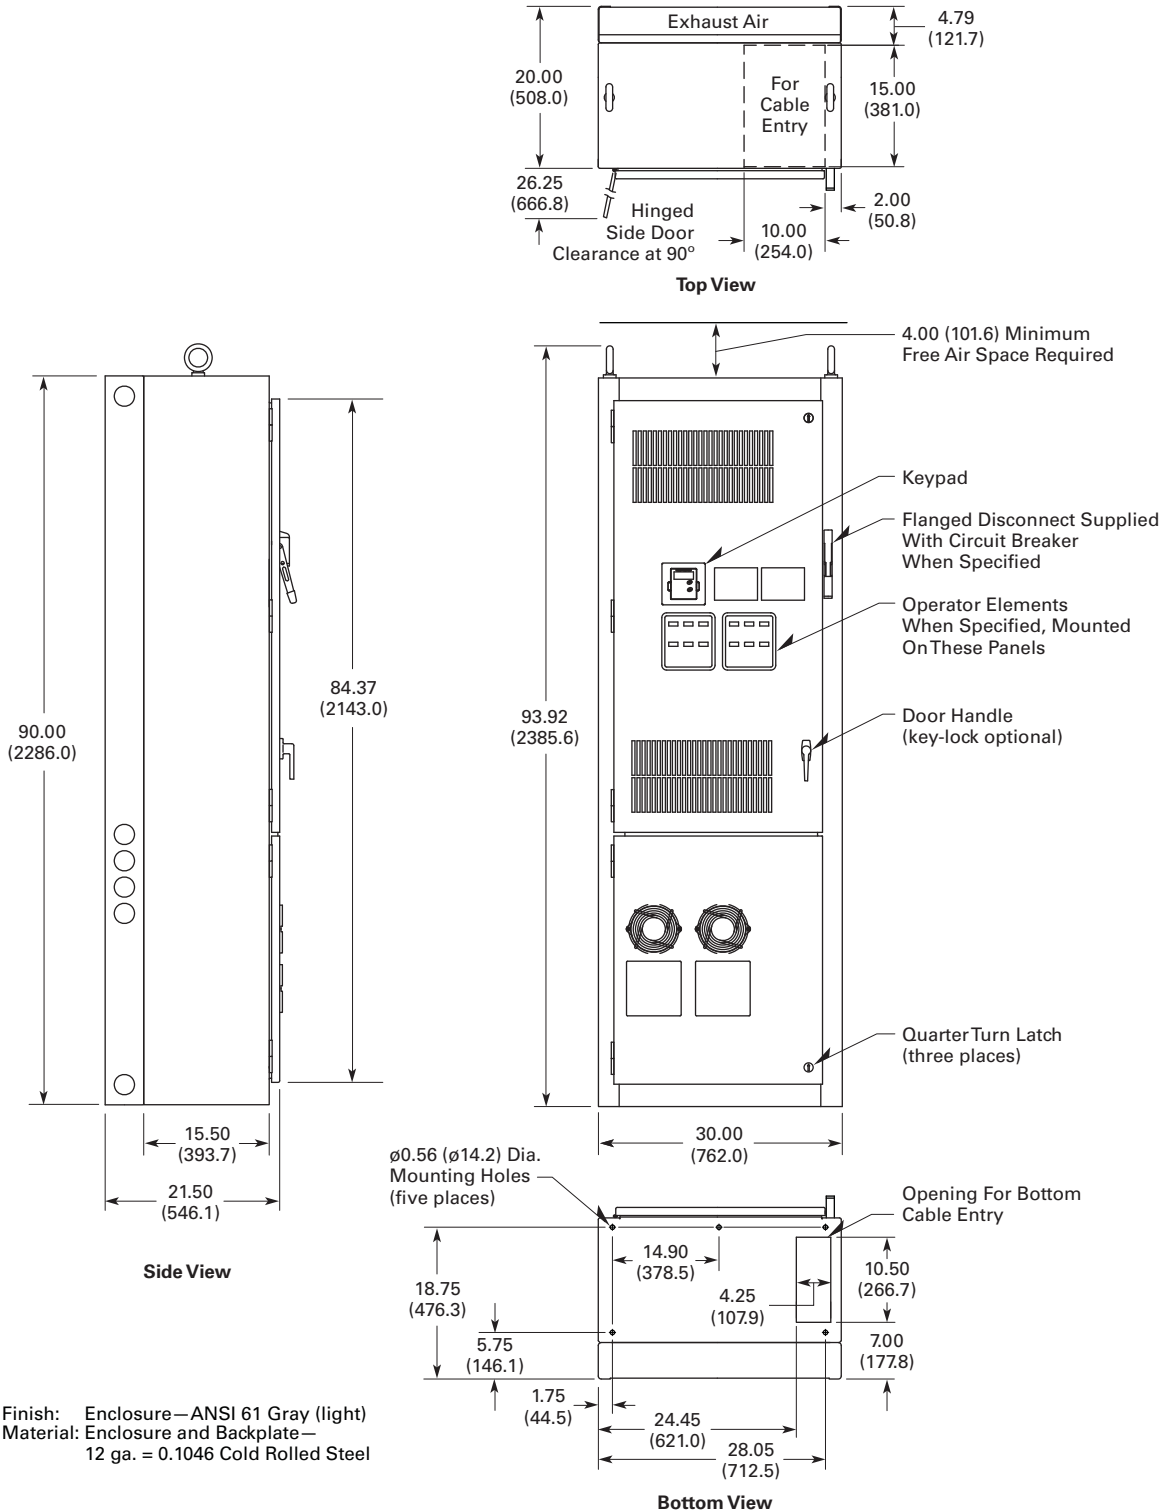

Enclosed 18-Pulse Drives**Contents**

| Description | Page |
|---|-------------|
| Enclosed Passive Filtered Drives | V6-T2-304 |
| Enclosed 18-Pulse Drives | |
| Catalog Number Selection | V6-T2-357 |
| Product Selection | V6-T2-358 |
| Options | V6-T2-366 |
| Technical Data and Specifications | V6-T2-371 |
| Wiring Diagrams | V6-T2-373 |
| Dimensions | V6-T2-374 |

CPX Enclosed 18-Pulse Drives**Product Description**

Eaton's enclosed 18-pulse drives use advanced 18-pulse technology that significantly reduces line harmonics at the drive input terminals, resulting in one of the purest sinusoidal waveforms available.

The enclosed 18-pulse drive also delivers True Power Factor—in addition to reducing harmonic distortion, the enclosed 18-pulse drive prevents upstream transformer overheating and overloading of breakers and feeders, enabling the application of adjustable frequency drives on generators and other high impedance power systems.

Features and Benefits

Enclosed 18-pulse drive features include:

- Space optimized enclosure
- Simple layout for power options
- NEMA Type 1, Type 1 filtered and gasketed, Type 3R
- Input voltage: 480 V, 208 V, 575 V
- Complete range of control, network and power options
- Horsepower range:
 - 480 V, 25–800 hp (consult factory for larger sizes)
 - 208/230 V, 25–200 hp
 - 575 V, 25–800 hp (consult factory for larger sizes)
- Over 15 years of 18-pulse clean power experience
- 65 kAIC Standard at 480 V and 208 V
- 100 kAIC optional

Standards and Certifications

UL 508C



2.11


Adjustable Frequency Drives

Clean Power Drives

Product Identification

2


Type 1, 25–150 hp (30 x 90 x 21.50)

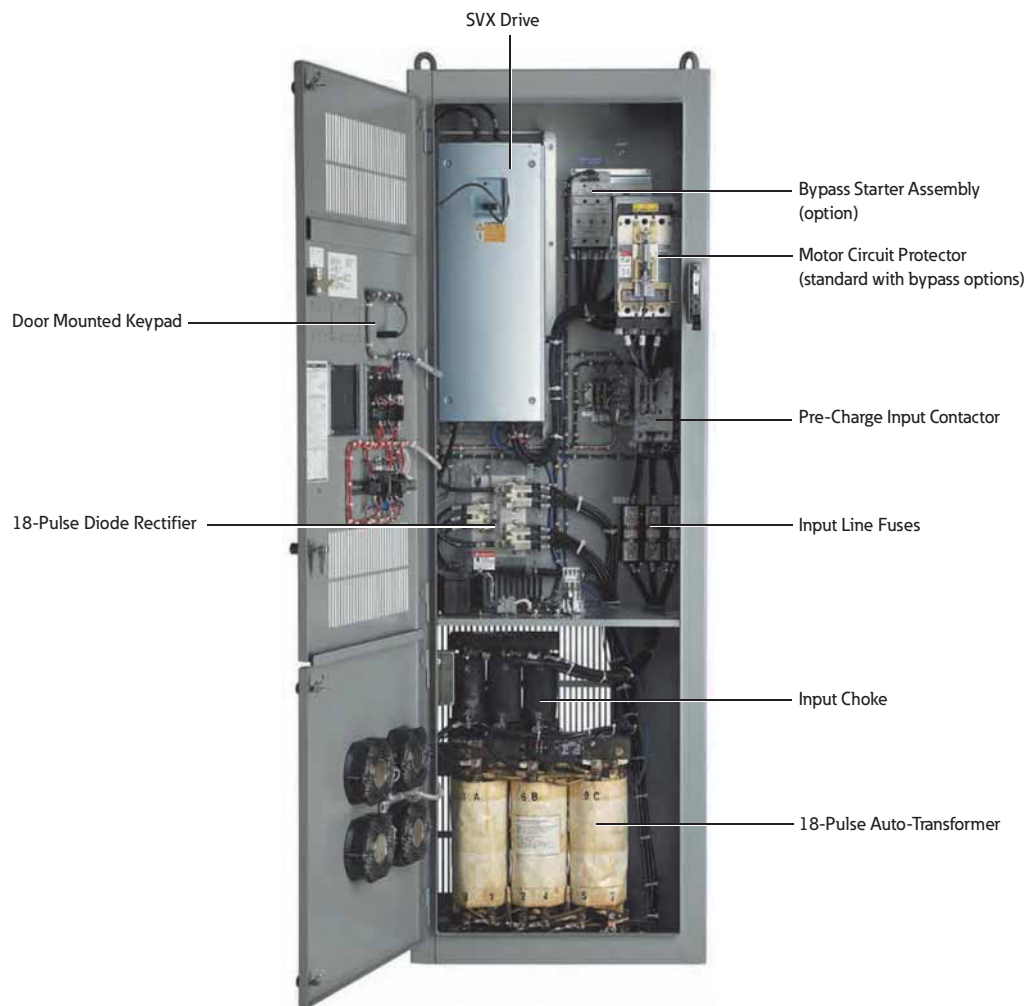

Catalog Number Selection

Enclosed 18-Pulse Drive

CPX 100 1 4 A A

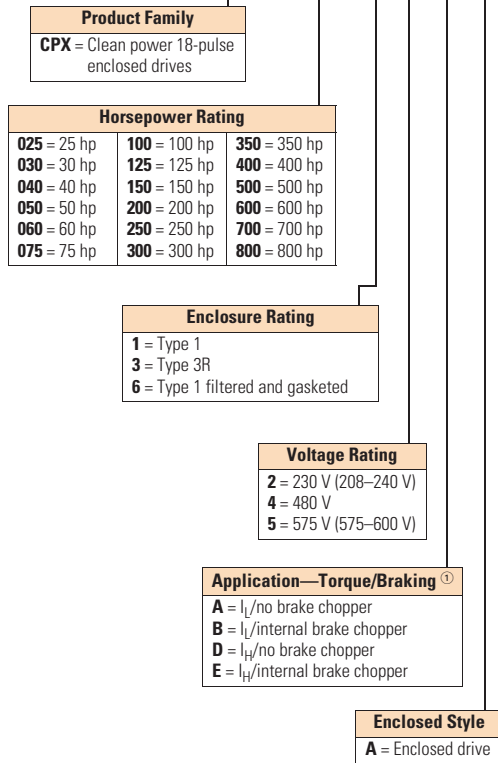

Build options alphabetically and numerically.

| Enclosed Options ^{②③④} | | Type |
|---------------------------------|--|--------------|
| K1 | Door-mounted speed potentiometer ^⑤ | Control |
| K2 | Door-mounted speed potentiometer with HOA selector switch ^⑤ | Control |
| K4 | HAND/OFF/AUTO switch 0.87-inch (22 mm) | Control |
| K5 | MANUAL/AUTO reference switch 0.87-inch (22 mm) | Control |
| K6 | START/STOP pushbuttons 0.87-inch (22 mm) | Control |
| KF | Bypass test switch for RA | Addl. bypass |
| K0 | Standard elapsed time meter | Control |
| L1 | Power, RUN and fault pilot lights | Light |
| L2 | Bypass pilot lights for RA, RB, bypass options | Addl. bypass |
| LE | Red RUN light | Light |
| P1 | Input disconnect | Input |
| P8 | Surge protective device | Input |
| PE | Output contactor | Output |
| PF | Output filter | Output |
| PG | MotoRx (up to 600 ft [182.9 m]) 1000 V/ μ S dV/dt filter | Output |
| PH | Single overload relay | Output |
| PI | Dual overload relays | Output |
| PN | Dual overloads for bypass | Addl. bypass |
| RA | Manual HOA bypass controller | Bypass |
| RC | Auto transfer HOA bypass controller | Bypass |
| RG | Reduced voltage starter for bypass | Bypass |
| S7 | 10.00-inch (254.0 mm) expansion | Enclosure |
| S8 | 20.00-inch (508.0 mm) expansion | Enclosure |
| S9 | Space heater | Enclosure |

| Communication Options ^⑥ | |
|--|---------------------------------------|
| C2 = Modbus [®] | CA = Johnson Controls N2 |
| C3 = PROFIBUS [®] DP | CI = Modbus TCP |
| C4 = LonWorks [®] | CJ = BACnet |
| C5 = PROFIBUS DP (D9 connector) | CO = EtherNet/IP |
| C6 = CANopen (slave) | D3 = RS-232 with D9 connection |
| C7 = DeviceNet [™] | |
| C8 = Modbus (D9 Type connector) | |

| Control Options |
|---|
| B1 = 6 DI, 1 ext +24 Vdc/ext +24 Vdc |
| B2 = 1 RO (NC/NO), 1 RO (NO), 1 therm |
| B4 = 1 AI (mA isolated), 2 AO (mA isolated), 1 ext +24 Vdc/EXT +24 Vdc |
| B5 = 3 RO (NO) |
| B8 = 1 ext +24 Vdc/ext +24 Vdc, 3 Pt100 |
| B9 = 1 RO (NO), 5 DI 42–240 Vac input |

| Engineered Options |
|------------------------------|
| VB Varnished boards |

Notes

- ① Brake chopper is standard in drives up to 30 hp I_H or 40 hp I_L at 480 V. It is optional in larger drives.
- ② Local/remote keypad is included as the standard control panel.
- ③ Some options are voltage and/or horsepower specific. Consult your Eaton representative for details.
- ④ See **Pages V6-T2-368 and V6-T2-369** for complete descriptions.
- ⑤ Includes local/remote speed reference switch.
- ⑥ See **Pages V6-T2-366 and V6-T2-367** for complete descriptions.

2.11

Adjustable Frequency Drives

Clean Power Drives

Product Selection

When Ordering

2

- Select a base catalog number that meets the application requirements—nominal horsepower, voltage and enclosure rating. (The enclosed drive's continuous output amp rating should be equal to or greater than the motor's full load amp rating.) The base-enclosed package includes a standard drive, door-mounted alphanumeric panel and enclosure.

Ambient Temperature Ratings

| Frame Size | I _H | I _L |
|----------------|----------------|----------------|
| FR4–FR9 | 50 °C | 50 °C |
| FR10 and above | 40 °C | 40 °C |

- If dynamic brake chopper or control/communication option is desired, change the appropriate code in the base catalog number.
- All of the programming is exactly the same as the standard SVX drive.
- Select enclosed options. Add the codes as suffixes to the base catalog number in alphabetical and numeric order.

208 V Drives

Enclosed 18-Pulse Drive



Enclosed 18-Pulse Base Drive Type 1

| Enclosure Size ^① | hp ^② | Current (A) | Chassis Frame | Base Catalog Number ^③ |
|-----------------------------|-----------------|-------------|---------------|----------------------------------|
| Low Overload Drive | | | | |
| 7 | 25 | 75 | FR7 | CPX02512AA |
| | 30 | 88 | FR7 | CPX03012AA |
| | 40 | 114 | FR7 | CPX04012AA |
| | 50 | 143 | FR8 | CPX05012AA |
| | 60 | 169 | FR8 | CPX06012AA |
| | 75 | 211 | FR8 | CPX07512AA |
| 8 | 100 | 273 | FR9 | CPX10012AA |
| 9 | 125 | 343 | FR8T | CPX12512AA |
| | 150 | 396 | FR8T | CPX15012AA |
| 10 | 200 | 480 | FR9T | CPX20012AA |
| High Overload Drive | | | | |
| 7 | 25 | 75 | FR7 | CPX02512DA |
| | 30 | 88 | FR7 | CPX03012DA |
| | 40 | 114 | FR8 | CPX04012DA |
| | 50 | 143 | FR8 | CPX05012DA |
| | 60 | 169 | FR8 | CPX06012DA |
| | 75 | 211 | FR9 | CPX07512DA |
| 8 | 100 | 273 | FR8T | CPX10012DA |
| 9 | 125 | 343 | FR8T | CPX12512DA |
| | 150 | 396 | FR9T | CPX15012DA |
| 10 | 200 | 480 | FR9T | CPX20012DA |

Notes

- ① See enclosure dimensions beginning on **Page V6-T2-374**.
- ② hp ratings are provided as a guideline. Drives should be sized per motor nameplate FLA.
- ③ The 18-pulse clean power assembly includes a standard drive, door-mounted local/remote keypad and enclosure.

Enclosed 18-Pulse Drive



Enclosed 18-Pulse Base Drive NEMA 12 Filtered

| Enclosure Size ^① | hp ^② | Current (A) | Chassis Frame | Base Catalog Number ^③ |
|-----------------------------|-----------------|-------------|---------------|----------------------------------|
| Low Overload Drive | | | | |
| 7 | 25 | 75 | FR7 | CPX02562AA |
| | 30 | 88 | FR7 | CPX03062AA |
| | 40 | 114 | FR7 | CPX04062AA |
| | 50 | 143 | FR8 | CPX05062AA |
| | 60 | 169 | FR8 | CPX06062AA |
| | 75 | 211 | FR8 | CPX07562AA |
| 8 | 100 | 273 | FR9 | CPX10062AA |
| 9 | 125 | 343 | FR8T | CPX12562AA |
| | 150 | 396 | FR8T | CPX15052AA |
| 10 | 200 | 480 | FR9T | CPX20062AA |
| High Overload Drive | | | | |
| 7 | 25 | 75 | FR7 | CPX02562DA |
| | 30 | 88 | FR7 | CPX03062DA |
| | 40 | 114 | FR8 | CPX04062DA |
| | 50 | 143 | FR8 | CPX05062DA |
| | 60 | 169 | FR8 | CPX06062DA |
| | 75 | 211 | FR8 | CPX07562DA |
| 8 | 100 | 273 | FR9 | CPX10062DA |
| 9 | 125 | 343 | FR8T | CPX12562DA |
| | 150 | 396 | FR8T | CPX15062DA |
| 10 | 200 | 480 | FR9T | CPX20062DA |

Enclosed 18-Pulse Base Drive Type 3R ^④

| Enclosure Size ^① | hp ^② | Current (A) | Chassis Frame | Base Catalog Number ^③ |
|-----------------------------|-----------------|-------------|---------------|----------------------------------|
| Low Overload Drive | | | | |
| 7 | 25 | 75 | FR7 | CPX02532AA |
| | 30 | 88 | FR7 | CPX03032AA |
| | 40 | 114 | FR7 | CPX04032AA |
| | 50 | 143 | FR8 | CPX05032AA |
| | 60 | 169 | FR8 | CPX06032AA |
| | 75 | 211 | FR8 | CPX07532AA |
| 8 | 100 | 273 | FR9 | CPX10032AA |
| 9 | 125 | 343 | FR8T | CPX12532AA |
| High Overload Drive | | | | |
| 7 | 25 | 75 | FR7 | CPX02532DA |
| | 30 | 88 | FR7 | CPX03032DA |
| | 40 | 114 | FR8 | CPX04032DA |
| | 50 | 143 | FR8 | CPX05032DA |
| | 60 | 169 | FR8 | CPX06032DA |
| | 75 | 211 | FR8 | CPX07532DA |
| 8 | 100 | 273 | FR9 | CPX10032DA |
| 9 | 125 | 343 | FR8T | CPX12532DA |

Notes

- ① See enclosure dimensions beginning on **Page V6-T2-374**.
- ② hp ratings are provided as a guideline. Drives should be sized per motor nameplate FLA.
- ③ The 18-pulse clean power assembly includes a standard drive, door-mounted local/remote keypad and enclosure.
- ④ All Type 3R drives use the Size F enclosure.

480 V Drives

2

Enclosed 18-Pulse Drive



Enclosed 18-Pulse Base Drive Type 1

| Enclosure Size ^① | hp ^② | Current (A) | Chassis Frame | Base Catalog Number ^③ |
|-----------------------------|-----------------|-------------|---------------|----------------------------------|
| Low Overload Drive | | | | |
| 7 | 25 | 34 | FR6 | CPX02514BA |
| | 30 | 40 | FR6 | CPX03014BA |
| | 40 | 52 | FR6 | CPX04014BA |
| | 50 | 65 | FR7 | CPX05014AA |
| | 60 | 77 | FR7 | CPX06014AA |
| | 75 | 96 | FR7 | CPX07514AA |
| | 100 | 124 | FR8 | CPX10014AA |
| | 125 | 156 | FR8 | CPX12514AA |
| | 150 | 180 | FR8 | CPX15014AA |
| 8 | 200 | 240 | FR9 | CPX20014AA |
| | 250 | 300 | FR9 | CPX25014AA |
| 9 | 300 | 361 | FR10 | CPX30014AA |
| | 350 | 414 | FR10 | CPX35014AA |
| | 400 | 477 | FR10 | CPX40014AA |
| 10 | 500 | 590 | FR11 | CPX50014AA |
| | 550 | 650 | FR11 | CPX55014AA |
| | 600 | 730 | FR11 | CPX60014AA |
| 11 | 650 | 820 | FR12 | CPX65014AA |
| | 700 | 920 | FR12 | CPX70014AA |
| | 800 | 1030 | FR12 | CPX80014AA |
| High Overload Drive | | | | |
| 7 | 25 | 34 | FR6 | CPX02514EA |
| | 30 | 40 | FR6 | CPX03014EA |
| | 40 | 52 | FR7 | CPX04014DA |
| | 50 | 65 | FR7 | CPX05014DA |
| | 60 | 77 | FR7 | CPX06014DA |
| | 75 | 96 | FR8 | CPX07514DA |
| | 100 | 124 | FR8 | CPX10014DA |
| | 125 | 156 | FR8 | CPX12514DA |
| | 150 | 180 | FR9 | CPX15014DA |
| 8 | 200 | 240 | FR9 | CPX20014DA |
| | 250 | 302 | FR10 | CPX25014DA |
| 9 | 300 | 361 | FR10 | CPX30014DA |
| | 350 | 414 | FR10 | CPX35014DA |
| | 400 | 477 | FR11 | CPX40014DA |
| 10 | 500 | 590 | FR11 | CPX50014DA |
| | 550 | 650 | FR11 | CPX55014DA |
| | 600 | 730 | FR12 | CPX60014DA |
| 11 | 650 | 820 | FR12 | CPX65014DA |
| | 700 | 920 | FR12 | CPX70014DA |

Notes

① See enclosure dimensions beginning on [Page V6-T2-374](#).

② hp ratings are provided as a guideline. Drives should be sized per motor nameplate FLA.

③ The 18-pulse clean power assembly includes a standard drive, door-mounted local/remote keypad and enclosure.

Enclosed 18-Pulse Drive



Enclosed 18-Pulse Base Drive NEMA 12 Filtered

| Enclosure Size ^① | hp ^② | Current (A) | Chassis Frame | Base Catalog Number ^③ |
|-----------------------------|-----------------|-------------|---------------|----------------------------------|
| Low Overload Drive | | | | |
| 7 | 25 | 34 | FR6 | CPX02564BA |
| | 30 | 40 | FR6 | CPX03064BA |
| | 40 | 52 | FR6 | CPX04064BA |
| | 50 | 65 | FR7 | CPX05064AA |
| | 60 | 77 | FR7 | CPX06064AA |
| | 75 | 96 | FR7 | CPX07564AA |
| | 100 | 124 | FR8 | CPX10064AA |
| | 125 | 156 | FR8 | CPX12564AA |
| 8 | 150 | 180 | FR8 | CPX15064AA |
| | 200 | 240 | FR9 | CPX20064AA |
| 9 | 250 | 300 | FR9 | CPX25064AA |
| | 300 | 361 | FR10 | CPX30064AA |
| | 350 | 414 | FR10 | CPX35064AA |
| 10 | 400 | 477 | FR10 | CPX40064AA |
| | 500 | 590 | FR11 | CPX50064AA |
| | 550 | 650 | FR11 | CPX55064AA |
| 11 | 600 | 730 | FR11 | CPX60064AA |
| | 650 | 820 | FR11 | CPX65064AA |
| | 700 | 920 | FR12 | CPX70064AA |
| | 800 | 1030 | FR12 | CPX80064AA |
| High Overload Drive | | | | |
| 7 | 25 | 34 | FR6 | CPX02564EA |
| | 30 | 40 | FR6 | CPX03064EA |
| | 40 | 52 | FR7 | CPX04064DA |
| | 50 | 65 | FR7 | CPX05064DA |
| | 60 | 77 | FR7 | CPX06064DA |
| | 75 | 96 | FR8 | CPX07564DA |
| | 100 | 124 | FR8 | CPX10064DA |
| | 125 | 156 | FR8 | CPX12564DA |
| 8 | 150 | 180 | FR9 | CPX15064DA |
| | 200 | 240 | FR9 | CPX20064DA |
| 9 | 250 | 302 | FR10 | CPX25064DA |
| | 300 | 361 | FR10 | CPX30064DA |
| | 350 | 414 | FR10 | CPX35014DA |
| 10 | 400 | 477 | FR11 | CPX40064DA |
| | 500 | 590 | FR11 | CPX50064DA |
| | 550 | 650 | FR11 | CPX55064DA |
| 11 | 600 | 730 | FR12 | CPX60064DA |
| | 650 | 820 | FR12 | CPX65064DA |
| | 700 | 920 | FR12 | CPX70064DA |

Notes

① See enclosure dimensions beginning on **Page V6-T2-374**.

② hp ratings are provided as a guideline. Drives should be sized per motor nameplate FLA.

③ The 18-pulse clean power assembly includes a standard drive, door-mounted local/remote keypad and enclosure.

Enclosed 18-Pulse Drive



Enclosed 18-Pulse Base Drive Type 3R ^①

| Enclosure Size ^② | hp ^③ | Current (A) | Chassis Frame | Base Catalog Number ^④ |
|-----------------------------|-----------------|-------------|---------------|----------------------------------|
| Low Overload Drive | | | | |
| 7 | 25 | 34 | FR6 | CPX02534AA |
| | 30 | 40 | FR6 | CPX03034AA |
| | 40 | 52 | FR6 | CPX04034AA |
| | 50 | 65 | FR7 | CPX05034AA |
| | 60 | 77 | FR7 | CPX06034AA |
| | 75 | 96 | FR7 | CPX07534AA |
| | 100 | 124 | FR8 | CPX10034AA |
| | 125 | 156 | FR8 | CPX12534AA |
| | 150 | 180 | FR8 | CPX15034AA |
| 8 | 200 | 240 | FR9 | CPX20034AA |
| | 250 | 300 | FR9 | CPX25034AA |
| High Overload Drive | | | | |
| 7 | 25 | 34 | FR6 | CPX02534DA |
| | 30 | 40 | FR6 | CPX03034DA |
| | 40 | 52 | FR7 | CPX04034DA |
| | 50 | 65 | FR7 | CPX05034DA |
| | 60 | 77 | FR7 | CPX06034DA |
| | 75 | 96 | FR8 | CPX07534DA |
| | 100 | 124 | FR8 | CPX10034DA |
| | 125 | 156 | FR8 | CPX12534DA |
| | 8 | 150 | 180 | FR9 |
| 200 | | 240 | FR9 | CPX20034DA |

Notes

- ① All Type 3R drives use the Size F enclosure.
- ② See enclosure dimensions beginning on **Page V6-T2-374**.
- ③ hp ratings are provided as a guideline. Drives should be sized per motor nameplate FLA.
- ④ The 18-pulse clean power assembly includes a standard drive, door-mounted local/remote keypad and enclosure.

575 V Drives

Enclosed 18-Pulse Drive



Enclosed 18-Pulse Base Drive Type 1

| Enclosure Size ^① | hp ^② | Current (A) | Chassis Frame | Base Catalog Number ^③ |
|-----------------------------|-----------------|-------------|---------------|----------------------------------|
| Low Overload Drive | | | | |
| 7 | 25 | 27 | FR6 | CPX02515AA |
| | 30 | 32 | FR6 | CPX03015AA |
| | 40 | 41 | FR7 | CPX04015AA |
| | 50 | 52 | FR7 | CPX05015AA |
| | 60 | 62 | FR8 | CPX06015AA |
| | 75 | 77 | FR8 | CPX07515AA |
| | 100 | 99 | FR8 | CPX10015AA |
| 8 | 125 | 125 | FR9 | CPX12515AA |
| | 150 | 144 | FR9 | CPX15015AA |
| | 200 | 192 | FR9 | CPX20015AA |
| 9 | 250 | 242 | FR10 | CPX25015AA |
| | 300 | 289 | FR10 | CPX30015AA |
| | 400 | 382 | FR10 | CPX40015AA |
| 10 | 500 | 472 | FR11 | CPX50015AA |
| | 600 | 730 | FR11 | CPX60015AA |
| 11 | 650 | 820 | FR12 | CPX65015AA |
| | 700 | 920 | FR12 | CPX70015AA |
| | 800 | 1030 | FR12 | CPX80015AA |
| High Overload Drive | | | | |
| 7 | 25 | 27 | FR6 | CPX02515DA |
| | 30 | 32 | FR7 | CPX03015DA |
| | 40 | 41 | FR7 | CPX04015DA |
| | 50 | 52 | FR8 | CPX05015DA |
| | 60 | 62 | FR8 | CPX06015DA |
| | 75 | 77 | FR8 | CPX07515DA |
| 8 | 100 | 99 | FR9 | CPX10015DA |
| | 125 | 125 | FR9 | CPX12515DA |
| | 150 | 144 | FR9 | CPX15015DA |
| 9 | 200 | 192 | FR10 | CPX20015DA |
| | 250 | 242 | FR10 | CPX25015DA |
| | 300 | 289 | FR10 | CPX30015DA |
| 10 | 400 | 382 | FR11 | CPX40015DA |
| | 450 | 472 | FR11 | CPX45015DA |
| | 500 | 730 | FR11 | CPX50015DA |
| 11 | 600 | 820 | FR12 | CPX60015DA |
| | 650 | 920 | FR12 | CPX65015DA |
| | 700 | 1030 | FR12 | CPX70015DA |

Notes

① See enclosure dimensions beginning on **Page V6-T2-374**.

② hp ratings are provided as a guideline. Drives should be sized per motor nameplate FLA.

③ The 18-pulse clean power assembly includes a standard drive, door-mounted local/remote keypad and enclosure.

Enclosed 18-Pulse Drive

2



Enclosed 18-Pulse Base Drive NEMA 12 Filtered

| Enclosure Size ^① | hp ^② | Current (A) | Chassis Frame | Base Catalog Number ^③ |
|-----------------------------|-----------------|-------------|---------------|----------------------------------|
| Low Overload Drive | | | | |
| 7 | 25 | 27 | FR6 | CPX02565AA |
| | 30 | 32 | FR6 | CPX03065AA |
| | 40 | 41 | FR7 | CPX04065AA |
| | 50 | 52 | FR7 | CPX05065AA |
| | 60 | 62 | FR8 | CPX06065AA |
| | 75 | 77 | FR8 | CPX07565AA |
| | 100 | 99 | FR8 | CPX10065AA |
| 8 | 125 | 125 | FR9 | CPX12565AA |
| | 150 | 144 | FR9 | CPX15065AA |
| | 200 | 192 | FR9 | CPX20065AA |
| 9 | 250 | 242 | FR10 | CPX25065AA |
| | 300 | 289 | FR10 | CPX30065AA |
| | 400 | 382 | FR10 | CPX40065AA |
| 10 | 500 | 472 | FR11 | CPX50065AA |
| | 600 | 730 | FR11 | CPX60065AA |
| 11 | 650 | 820 | FR12 | CPX65065AA |
| | 700 | 920 | FR12 | CPX70065AA |
| | 800 | 1030 | FR12 | CPX80065AA |
| High Overload Drive | | | | |
| 7 | 25 | 27 | FR6 | CPX02565DA |
| | 30 | 32 | FR7 | CPX03065DA |
| | 40 | 41 | FR7 | CPX04065DA |
| | 50 | 52 | FR8 | CPX05065DA |
| | 60 | 62 | FR8 | CPX06065DA |
| | 75 | 77 | FR8 | CPX07565DA |
| | 8 | 100 | 99 | FR9 |
| 125 | | 125 | FR9 | CPX12565DA |
| 150 | | 144 | FR9 | CPX15065DA |
| 9 | 200 | 192 | FR10 | CPX20065DA |
| | 250 | 242 | FR10 | CPX25065DA |
| | 300 | 289 | FR10 | CPX30065DA |
| 10 | 400 | 382 | FR11 | CPX40065DA |
| | 450 | 472 | FR11 | CPX45065DA |
| | 500 | 730 | FR11 | CPX50065DA |
| 11 | 600 | 820 | FR12 | CPX60065DA |
| | 650 | 920 | FR12 | CPX65065DA |
| | 700 | 1030 | FR12 | CPX70065DA |

Notes

① See enclosure dimensions beginning on **Page V6-T2-374**.

② hp ratings are provided as a guideline. Drives should be sized per motor nameplate FLA.

③ The 18-pulse clean power assembly includes a standard drive, door-mounted local/remote keypad and enclosure.

Enclosed 18-Pulse Drive

Enclosed 18-Pulse Base Drive Type 3R ^①

| Enclosure Size ^② | hp ^③ | Current (A) | Chassis Frame | Base Catalog Number ^④ |
|-----------------------------|-----------------|-------------|---------------|----------------------------------|
| Low Overload Drive | | | | |
| 7 | 25 | 27 | FR6 | CPX02535AA |
| | 30 | 32 | FR6 | CPX03035AA |
| | 40 | 41 | FR7 | CPX04035AA |
| | 50 | 52 | FR7 | CPX05035AA |
| | 60 | 62 | FR8 | CPX06035AA |
| | 75 | 77 | FR8 | CPX07535AA |
| | 100 | 99 | FR8 | CPX10035AA |
| 8 | 125 | 125 | FR9 | CPX12535AA |
| | 150 | 144 | FR9 | CPX15035AA |
| | 200 | 192 | FR9 | CPX20035AA |
| High Overload Drive | | | | |
| 7 | 25 | 27 | FR6 | CPX02535DA |
| | 30 | 32 | FR7 | CPX03035DA |
| | 40 | 41 | FR7 | CPX04035DA |
| | 50 | 52 | FR8 | CPX05035DA |
| | 60 | 62 | FR8 | CPX06035DA |
| | 75 | 77 | FR8 | CPX07535DA |
| 8 | 100 | 99 | FR9 | CPX10035DA |
| | 125 | 125 | FR9 | CPX12535DA |
| | 150 | 144 | FR9 | CPX15035DA |

Notes

- ① All Type 3R drives use the Size F enclosure.
- ② See enclosure dimensions beginning on **Page V6-T2-374**.
- ③ hp ratings are provided as a guideline. Drives should be sized per motor nameplate FLA.
- ④ The 18-pulse clean power assembly includes a standard drive, door-mounted local/remote keypad and enclosure.

2.11

Adjustable Frequency Drives

Clean Power Drives

Options

2


Enclosed 18-Pulse Drive Option Board Kits

The enclosed 18-pulse drives can accommodate a wide selection of expander and adapter option boards to customize the drive for your application needs. The drive's control unit is designed to accept a total of five option boards (see figure below).

The enclosed 18-pulse drives factory-installed standard board configuration includes an A9 I/O board and an A2 relay output board, which are installed in slots A and B.

SVX Series Option Board Kits

Option Boards



Option Board Kits

| Option Kit Description ^① | Allowed Slot Locations ^② | Field Installed Catalog Number | Factory Installed Option Designator | SVX Ready Programs | | | | | | |
|--|-------------------------------------|--------------------------------|-------------------------------------|--------------------|--------------|----------|-----|-----|----------|-----|
| | | | | Basic | Local/Remote | Standard | MSS | PID | Multi-P. | PFC |
| Standard I/O Cards | | | | | | | | | | |
| 2 RO (NC/NO) | B | OPTA2 | — | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| 6 DI, 1 DO, 2 AI, 1 AO, 1 +10 Vdc ref, 2 ext +24 Vdc/ext +24 Vdc | A | OPTA9 | — | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Extended I/O Cards | | | | | | | | | | |
| 6 DI | B, C, D , E | OPTB1 | B1 | — | — | — | — | — | ■ | ■ |
| 1 RO (NC/NO), 1 RO (NO), 1 therm | B, C, D , E | OPTB2 | B2 | — | — | — | — | — | ■ | ■ |
| 1 AI (mA isolated), 2 AO (mA isolated) | B, C, D , E | OPTB4 | B4 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| 3 RO (NO) | B, C, D , E | OPTB5 | B5 | — | — | — | — | — | ■ | ■ |
| 3 Pt100 RTD board | B, C, D , E | OPTB8 | B8 | — | — | — | — | — | ■ | — |
| 1 RO (NO), 5 DI 42–240 Vac input | B, C, D , E | OPTB9 | B9 | — | — | — | — | — | ■ | ■ |
| Communication Cards ^③ | | | | | | | | | | |
| Modbus | D, E | OPTC2 | C2 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Modbus TCP | D, E | OPTC1 | C1 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| BACnet | D, E | OPTCJ | CJ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| EtherNet/IP | D, E | OPTCQ | CQ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Johnson Controls N2 | D, E | OPTC2 | CA | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| PROFIBUS DP | D, E | OPTC3 | C3 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| LonWorks | D, E | OPTC4 | C4 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| PROFIBUS DP (D9 connector) | D, E | OPTC5 | C5 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| CANopen (slave) | D, E | OPTC6 | C6 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| DeviceNet | D, E | OPTC7 | C7 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Modbus (D9 type connector) | D, E | OPTC8 | C8 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| RS-232 with D9 connection | D, E | OPTD3 | D3 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |

Notes

- ① AI = Analog Input; AO = Analog Output, DI = Digital Input, DO = Digital Output, RO = Relay Output
- ② Option card must be installed in one of the slots listed for that card. Slot indicated in bold is the preferred location.
- ③ OPTC2 is a multi-protocol option card.

Modbus RTU Network Communications

The Modbus Network Card OPTC2 is used for connecting the SVX Drive as a slave on a Modbus network. The interface is connected by a 9-pin DSUB connector (female) and the baud rate ranges from 300 to 19,200 baud. Other communication parameters include an address range from 1 to 247; a parity of None, Odd or Even; and the stop bit is 1.

PROFIBUS Network Communications

The PROFIBUS Network Card OPTC3 is used for connecting the SVX Drive as a slave on a PROFIBUS-DP network. The interface is connected by a 9-pin DSUB connector (female). The baud rates range from 9.6 Kbaud to 12 Mbaud, and the addresses range from 1 to 127.

LonWorks Network Communications

The LonWorks Network Card OPTC4 is used for connecting the SVX Drive on a LonWorks network. This interface uses Standard Network Variable Types (SNVT) as data types. The channel connection is achieved using a FTT-10 A Free Topology transceiver via a single twisted transfer cable. The communication speed with LonWorks is 78 kBits/s.

CANopen (Slave) Communications

The CANopen (Slave) Network Card OPTC6 is used for connecting the SVX Drive to a host system. According to ISO11898 standard cables to be chosen for CANbus should have a nominal impedance of 120 ohms, and specific line delay of nominal 5 nS/m. 120 ohm line termination resistors required for installation.

DeviceNet Network Communications

The DeviceNet Network Card OPTC7 is used for connecting the SVX Drive on a DeviceNet Network. It includes a 5.08 mm pluggable connector. Transfer method is via CAN using a two-wire twisted shielded cable with two-wire bus power cable and drain. The baud rates used for communication include 125 Kbaud, 250 Kbaud and 500 Kbaud.

Johnson Controls Metasys N2 Network Communications

The OPTC2 fieldbus board provides communication between the SVX Drive and a Johnson Controls Metasys™ N2 network. With this connection, the drive can be controlled, monitored and programmed from the Metasys system. The N2 fieldbus is available as a factory-installed option and as a field-installable kit.

Modbus/TCP Network Communications

The Modbus/TCP Network Card OPTC1 is used for connecting the SVX Drive to Ethernet networks using Modbus protocol. It includes an RJ-45 pluggable connector. This interface provides a selection of standard and custom register values to communicate drive parameters. The board supports 10 Mbps and 100 Mbps communication speeds. The IP address of the board is configurable over Ethernet using a supplied software tool.

BACnet Network Communications

The BACnet Network Card OPTCJ is used for connecting the SVX Drive to BACnet networks. It includes a 5.08 mm pluggable connector. Data transfer is Master-Slave/Token Passing (MS/TP) RS-485. This interface uses a collection of 30 Binary Value Objects (BVOs) and 35 Analog Value Objects (AVOs) to communicate drive parameters. The card supports 9.6, 19.2 and 38.4 Kbaud communication speeds and supports network addresses 1 to 127.

EtherNet/IP Network Communications

The EtherNet/IP Network Card OPTCK is used for connecting the SVX Drive to Ethernet/Industrial Protocol networks. It includes an RJ-45 pluggable connector. The interface uses CIP objects to communicate drive parameters (CIP is "Common Industrial Protocol," the same protocol used by DeviceNet). The board supports 10 Mbps and 100 Mbps communication speeds. The IP address of the board is configurable by Static, BOOTP and DHCP methods.

Control/Communication Option Descriptions

For availability, see Product Selection for base drive voltage required.

2

Available Control/Communications Options

| Option | Description | Option Type |
|--------|---|--------------|
| K1 | Door-Mounted Speed Potentiometer —Provides the enclosed 18-pulse drive with the ability to adjust the frequency reference using a door-mounted potentiometer. This option uses the 10 Vdc reference to generate a 0–10 V signal at the analog voltage input signal terminal. When the HOA bypass option is added, the speed is controlled when the HOA switch is in the HAND position. Without the HOA bypass option, a two-position switch (labeled local/remote) is provided on the keypad to select speed reference from the speed potentiometer or a remote speed signal. | Control |
| K2 | Door-Mounted Speed Potentiometer with HOA Selector Switch —Provides the enclosed 18-pulse drive with the ability to start/stop and adjust the speed reference from door-mounted control devices or remotely from customer-supplied inputs. In HAND position, the drive will start and the speed is controlled by the door-mounted speed potentiometer. The drive will be disabled in the OFF position. When AUTO is selected, the drive run and speed control commands are via user-supplied dry contact and 4–20 mA signal. | Control |
| K4 | HAND/OFF/AUTO Switch for Non-Bypass Configurations —Provides a three-position selector switch that allows the user to select either a HAND or AUTO mode of operation. HAND mode is defaulted to keypad operation, and AUTO mode is defaulted to control from an external terminal source. These modes of operation can be configured via drive programming to allow for alternate combinations of start and speed sources. Start and speed sources include Keypad, I/O and fieldbus. | Control |
| K5 | MANUAL/AUTO Speed Reference Switch —Provides door-mounted selector switch for MANUAL/AUTO speed reference. | Control |
| K6 | START/STOP Pushbuttons —Provide door-mounted START and STOP pushbuttons for either bypass or non-bypass configurations. | Control |
| KF | Bypass Test Switch for RA —Allows the user to energize the AF drive for testing while operating the motor on the bypass controller. The Test Switch is mounted on the inside of the enclosure door. | Addl. bypass |
| K0 | Standard Elapsed Time Meter —Provides a door-mounted elapsed run-time meter. | Control |
| L1 | Power On and Fault Power Lights —Provide a white Power On light that indicates power to the enclosed cabinet and a red fault light that indicates a drive fault has occurred. | Light |
| L2 | Bypass Pilot Lights for RA Bypass Options —A green light indicates when the motor is running in Inverter mode and an amber light indicates when the motor is running in Bypass mode. The lights are mounted on the enclosure door, above the switches. | Addl. bypass |
| LE | Red Run Pilot Light 0.87-Inch (22 mm) —Provides a red Run pilot light that indicates the drive is running. | Light |
| P1 | Input Circuit Breaker —High interrupting circuit breaker that provides a means of short-circuit protection for the power cables between it and the enclosed 18-pulse drive, and protection from high-level ground faults on the power cable. Allows a convenient means of disconnecting the enclosed 18-pulse drive from the line, and the operating mechanism can be padlocked in the OFF position. This is factory mounted in the enclosure. Standard rating is 65 kAIC at 208/480 V. 100 kAIC is available as an option. | Input |
| PE | Output Contactor —Provides a means for positive disconnection of the drive output from the motor terminals. The contactor coil is controlled by the drive's run or permissive logic. NC and NO auxiliary contacts rated at 10 A, 600 Vac are provided for customer use. Bypass options RB and RA include an output contactor as standard. This option includes a low VA 115 Vac fused control power transformer and is factory mounted in the enclosure. | Output |
| PF | Output Filter —Used to reduce the transient voltage (dV/dt) at the motor terminals. The output filter is recommended for cable lengths exceeding 100 ft (30.5 m) with a drive of 3 hp and above, for cable lengths of 33 ft (10.1 m) with a drive of 2 hp and below, or for a drive rated at 525–690 V. This option is mounted in the enclosure. | Output |
| PG | MotoRx (300–600 Ft) 1000 V/μS dV/dt Filter —Used to reduce transient voltage (dV/dt) and peak voltages at the motor terminals. This option is comprised of a 0.5% line reactor, followed by capacitive filtering and an energy recovery/clamping circuit. Unlike the output filter (see option PF), the MotoRx recovers most of the energy from the voltage peaks, resulting in a lower voltage drop to the motor, and therefore conserving power. This option is used when the distance between a single motor and the drive is 300–600 ft (91.4–182.9 m). | Output |
| PH | Single Overload Relay —Uses a bimetallic overload relay to provide additional overload current protection to the motor on configurations without bypass options. It is included with the bypass configurations for overload current protection in the bypass mode. The overload relay is mounted within the enclosure, and is manually resettable. Heater pack included. | Output |
| PI | Dual Overload Relays —This option is recommended when a single drive is operating two motors and overload current protection is needed for each of the motors. The standard configuration includes two bimetallic overload relays, each sized to protect a motor with 50% of the drive hp rating. For example, a 100 hp drive would include two overload relays sized to protect two 50 hp motors. The relays are mounted within the enclosure, and are manually resettable. Heater packs not included. | Output |
| PN | Dual Overloads for Bypass —This option is recommended when a single drive is operating two motors in the Bypass mode and overload current protection is needed for each of the motors. The standard configuration includes two bimetallic overload relays, each sized to protect a motor with 50% of the drive hp rating. For example, a 100 hp drive would include two overload relays sized to protect two 50 hp motors. The relays are mounted within the enclosure, and are manually resettable. | Addl. bypass |
| RA | Manual HOA Bypass Controller —The manual HAND/OFF/AUTO (HOA)—three-contactor—bypass option provides a means of bypassing the enclosed 18-pulse drive, allowing the AC motor to be operated at full speed directly from the AC supply line. This option consists of an input HMCP, a fused control power transformer, and a full voltage bypass starter with a door-mounted HOA selector switch and an INVERTER/BYPASS switch. The HOA switch provides the ability to start and stop the drive in the inverter mode. IEC type input, bypass and input contactors are provided. The contactors are mechanically and electrically interlocked (see wiring diagram on Page V6-T2-373). | Bypass |
| RC | Auto Transfer HOA Bypass Controller —The manual HAND/OFF/AUTO (HOA)—three-contactor—bypass option provides a means of bypassing the enclosed 18-pulse drive, allowing the AC motor to be operated at full speed directly from the AC supply line. The circuitry provides an automatic transfer of the load to “across the line” operation after a drive trip. This option consists of an input HMCP, a fused control power transformer, and a full voltage bypass starter with a door-mounted HOA selector switch and an INVERTER/BYPASS switch. The HOA switch provides the ability to start and stop the drive in either mode. IEC type input, bypass and input contactors are provided. The contactors are mechanically and electrically interlocked (see wiring diagram on Page V6-T2-373). Door-mounted pilot lights are provided that indicate bypass or inverter operation. A green light indicates when the motor is running in inverter mode and an amber light indicates when the motor is running in bypass mode. WARNING: The motor may restart when the overcurrent relay is reset when operating in bypass, unless the IOB selector switch is turned to the OFF position. | Bypass |
| RG | Reduced Voltage Starter for Bypass —Used in conjunction with bypass option RA or RC. This option adds reduced voltage soft starter to bypass assembly for soft starting in bypass mode. | Bypass |

For availability, see Product Selection for base drive voltage required.

Available Control/Communications Options, continued

| Option | Description | Option Type |
|--------|--|-------------|
| S7 | 10.00-Inch (254.0 mm) Expansion —Expansion cabinet allows for special components, customer-supplied components or oversized cables. NOTE: Enclosure expansion rated Type 1 only. | Enclosure |
| S8 | 20.00-Inch (508.0 mm) Expansion —Expansion cabinet allows for special components, customer-supplied components or oversized cables. NOTE: Enclosure expansion rated Type 1 only. | Enclosure |
| S9 | Space Heater —Prevents condensation from forming in the enclosure when the drive is inactive or in storage. Includes a thermostat for variable temperature control. The heater requires a customer-supplied 115 V remote supply source. | Enclosure |

Dissipated Watt Losses

| Horsepower | 40 | 50 | 60 | 75 | 100 | 125 | 150 | 200 | 250 | 300 | 350 | 400 | 450 | 500 | 600 | 700 | 800 |
|------------|------|------|------|------|------|------|------|------|------|-------|-------|-------|-------|-------|-------|-------|-------|
| Watts | 1844 | 2170 | 2540 | 3040 | 4011 | 4940 | 5730 | 8020 | 9383 | 11600 | 13600 | 15700 | 16250 | 17976 | 20393 | 27200 | 31400 |

Conformal (Varnished) Coating ^①

| Chassis Frame | Delivery Code | Chassis Frame | Delivery Code |
|---------------|---------------|---------------|---------------|
| FR6 | FP | FR9 | FP |
| FR7 | FP | FR10 | FP |
| FR8 | FP | FR11 | FP |
| — | — | FR12 | FP |

480 V Input Disconnect Selection ^②

| Horsepower | P1 Input Breaker | Bypass Motor Circuit Protector (RA, RB, RC, RD) |
|------------|------------------|---|
| 25 | HFD3050 | HMCP050K2C |
| 30 | HFD3060 | HMCP100R3C |
| 40 | HFD3080 | HMCP100R3C |
| 50 | HFD3100 | HMCP100R3C |
| 60 | HFD3100 | HMCP150T4C |
| 75 | HFD3125 | HMCP150T4C |
| 100 | HFD3150 | HMCP150U4C |
| 125 | HFD3200 | HMCP250W5C |
| 150 | HFD3225 | HMCP250W5C |
| 200 | HKD3300 | HMCP400X5C |
| 250 | HKD3400 | HMCP400X5C |
| 300–400 | HLD3600 | HMCP600L6W |
| 500–600 | NGH308033E | HMCP800X7W |
| 650–800 | NGH312033E | ^③ |

Enclosed Drive Options

Light Options

| Description | Catalog Number Suffix |
|---|-----------------------|
| Power on, run, fault LED lights (22 mm) | L1 |
| Power on, fault LED lights (22 mm) | L3 |
| Green LED run light (22 mm) | LA |
| Green LED stop light (22 mm) | LD |
| Red LED run light (22 mm) | LE |
| Red LED stop light (22 mm) | LF |
| Red LED fault light (22 mm) | LG |
| Power on white LED light (22 mm) | LJ |
| Miscellaneous LED light (22 mm) | LU |

Control Options

| Description | Catalog Number Suffix |
|---|-----------------------|
| Door-mounted speed potentiometer | K1 |
| Door-mounted speed potentiometer with HOA selector switch | K2 |
| HOA selector switch | K4 |
| MANUAL/AUTO reference switch | K5 |
| START-STOP pushbuttons | K6 |
| Type D2 control relay | SD |
| On-delay relay | SE |
| Off-delay relay | SF |
| Additional terminal blocks per 4 points | SD |

Notes

- ^① See catalog number description to order.
- ^② Contact factory for 208 V and 575 V applications.
- ^③ Contact factory.

2.11

Adjustable Frequency Drives

Clean Power Drives

2

Bypass Control Options

| Description | Catalog Number Suffix |
|---------------------------------|-----------------------|
| Bypass test switch used with RA | KF |
| Inverter/bypass pilot lights | L2 |

Meter Options

| Description | Catalog Number Suffix |
|---------------------------------|-----------------------|
| Standard elapsed time meter | K0 |
| Frequency meter | KS |
| MP-3000 relay with URTD | KV |
| MP-3000 relay with URTD and CTs | KU |

Enclosure Options

| Enclosure Size | Catalog Number Suffix |
|--|-----------------------|
| 10.00 Inch (254.0 mm) Expansion | |
| 7 | S7 |
| 8 | S7 |
| 9 | S7 |
| 10 | S7 |
| 11 | S7 |
| 20.00 Inch (508.0 mm) Expansion | |
| 7 | S8 |
| 8 | S8 |
| 9 | S8 |
| 10 | S8 |
| 11 | S8 |
| Space Heater ^① | |
| 7 | S9 |
| 8 | S9 |
| 9 | S9 |
| 10 | S9 |
| 11 | S9 |
| Plastic Nameplate | |
| 7 | SN |
| 8 | SN |
| 9 | SN |
| 10 | SN |
| 11 | SN |

208 and 230 V Power Options, 25–200 hp

| Description | Catalog Number Suffix |
|--------------------------------|-----------------------|
| Input breaker | P1 |
| Output contactor | PE |
| Single overload relay | PH |
| Dual overload relays | PI |
| MOV | P7 |
| 50 kA surge protective device | P8 |
| 100 kA surge protective device | PA |

480 and 575 V Power Options, 25–800 hp

| Description | Catalog Number Suffix |
|----------------------------------|-----------------------|
| Input breaker | P1 |
| Output contactor | PE |
| Output filter | PF |
| MotoRx (300–600 Ft) dV/dt filter | PG |
| Single overload relay | PH |
| Dual overload relays | PI |
| Input MOV | P7 |
| 50 kA surge protective device | P8 |
| 100 kA surge protective device | PA |

208 and 230 V Bypass Options, 25–200 hp

| Description | Catalog Number Suffix |
|-------------------------------------|-----------------------|
| Manual HOA bypass controller | RA |
| Auto transfer HOA bypass controller | RC |
| Reduced voltage starter for bypass | RG |
| Dual overloads for bypass | PN |

480 and 575 V Bypass Options, 25–800 hp

| Description | Catalog Number Suffix |
|-------------------------------------|-----------------------|
| Manual HOA bypass controller | RA |
| Auto transfer HOA bypass controller | RC |
| Reduced voltage starter for bypass | RG |
| Dual overloads for bypass | PN |

Note

^① Requires customer-supplied 115 Vac supply.

Technical Data and Specifications

Enclosed 18-Pulse Drives

| Description | Specification |
|-----------------------------------|------------------------------------|
| Primary Design Features | |
| 45–66 Hz input frequency | Standard |
| Output: AC volts maximum | Input voltage base |
| Output frequency range | 0–320 Hz |
| Initial output current (I_H) | 250% for 2 seconds |
| Overload (1 minute [I_H/I_L]) | 150%/110% |
| Enclosure space heater | Optional |
| Oversize enclosure | Standard |
| Output contactor | Optional |
| Bypass motor starter | Optional |
| Listings | UL, cUL, 508C |
| Protection Features | |
| Incoming line fuses | Standard 200 kAIC rating |
| AC input circuit disconnect | Optional |
| Phase rotation insensitive | Standard |
| EMI filter | Standard FR6 thru FR9 ^① |
| Input phase loss protection | Standard |
| Input overvoltage protection | Standard |
| Line surge protection | Standard |
| Output short-circuit protection | Standard |
| Output ground fault protection | Standard |
| Output phase protection | Standard |
| Overtemperature protection | Standard |
| DC overvoltage protection | Standard |
| Drive overload protection | Standard |
| Motor overload protection | Standard |
| Programmer software | Optional |
| Local/remote keypad | Standard |
| Keypad lockout | Standard |
| Fault alarm output | Standard |
| Built-in diagnostics | Standard |
| Surge protective device | Optional |

| Description | Specification |
|--|-----------------------------|
| Input/Output Interface Features | |
| Setup adjustment provisions | |
| Remote keypad/display | Standard |
| Personal computer | Standard |
| Operator control provisions | |
| Drive mounted keypad/display | Standard |
| Remote keypad/display | Standard |
| Conventional control elements | Standard |
| Serial communications | Optional |
| 115 Vac control circuit | Optional |
| Speed setting inputs | |
| Keypad | Standard |
| 0–10 Vdc potentiometer/voltage signal | Standard |
| 4–20 mA isolated | Configurable |
| 4–20 mA differential | Configurable |
| 3–15 psig | Optional |
| Analog outputs | |
| Speed/frequency | Standard |
| Torque/load/current | Programmable |
| Motor voltage | Programmable |
| Kilowatts | Programmable |
| 0–10 Vdc signals | Configurable w/jumpers |
| 4–20 mA DC signals | Standard |
| Isolated signals | Standard |
| Discrete outputs | |
| Fault alarm | Standard |
| Drive running | Standard |
| Drive at set speed | Programmable |
| Optional parameters | 14 |
| Dry contacts | 2 Form C contacts available |
| Additional discrete outputs | Optional |
| Communications | |
| RS-232 | Standard |
| RS-422/485 | Optional |
| DeviceNet™ | Optional |
| Modbus RTU | Optional |
| CANopen (slave) | Optional |
| PROFIBUS-DP | Optional |
| LonWorks | Optional |
| Johnson Controls Metasys N2 | Optional |
| EtherNet/IP/Modbus TCP | Optional |
| BACnet | Optional |

Note

^① The EMI filter is optional in FR10 and larger.

Enclosed 18-Pulse Drives

| Description | Specification |
|--|--|
| Performance Features | |
| Sensorless vector control | Standard |
| Volts/hertz control | Standard |
| IR and slip compensation | Standard |
| Electronic reversing | Standard |
| Dynamic braking | Optional |
| DC braking | Standard |
| PID set point controller | Programmable |
| Critical speed lockout | Standard |
| Current (torque) limit | Standard |
| Adjustable acceleration/deceleration | Standard |
| Linear or S curve accel/decel | Standard |
| Jog at preset speed | Standard |
| Thread/preset speeds | 7 |
| Automatic restart | Selectable |
| Coasting motor start | Standard |
| Coast or ramp stop selection | Standard |
| Elapsed time meter | Optional |
| Carrier frequency adjustment | 1–16 kHz |
| Standard Conditions for Application and Service | |
| Maximum operating ambient temperature | 0–50 °C up to FR9 0–40 °C FR10 and larger, consult factory for 50 °C rating above FR9 |
| Storage temperature | –40 to 60 °C |
| Humidity (maximum), noncondensing | 95% |
| Altitude (maximum without derate) | 3300 ft (1000 m) |
| Line voltage variation | +10/–15% |
| Line frequency variation | 45–66 Hz |
| Efficiency | >95% |
| Power factor (displacement) | 0.99+ |
| Power factor (apparent) | 0.99 |

Standard I/O Specifications

| Description | Specification |
|--|--|
| Six–digital input programmable | 24 V: “0” ≤10 V, “1” ≥18V, R _i >5 kohms |
| Two–analog input configurable w/jumpers | Voltage: 0–±10 V, R _i >200 kohms Current: 0 (4)–20 mA, R _i = 250 ohms |
| Two–digital output programmable | Form C relays 250 Vac 30 Vdc 2 amp resistive |
| One–analog output programmable configurable w/jumper | 0–20 mA, R _L max. 500 ohms 10 bits ±2% |

I/O Specifications for Control/Communication Options


| Description | Specification |
|-------------------------------------|---|
| Analog voltage, input | 0–±10 V, R _i ≥200 kilohms |
| Analog current, input | 0 (4)–20 mA, R _i = 250 ohms |
| Digital input | 24 V: “0” ≤10 V, “1” ≥18V, R _i >5 kilohms |
| Auxiliary voltage | 24 V (±20%), max. 50 mA |
| Reference voltage | 10 V ±3%, max. 10 mA |
| Analog current, output | 0 (4)–20 mA, R _L = 500 kilohms, resolution 10 bit, accuracy ≤±2% |
| Analog voltage, output | 0 (2)–10 V, R _L ≥1 kilohm, resolution 10 bit, accuracy ≤±2% |
| Relay output max. switching voltage | 300 Vdc, 250 Vac |
| Relay output max. switching load | 3 A/24 Vdc, 300 Vdc, 250 Vac ^① |
| Relay output max. continuous load | 2 A rms |
| Thermistor input | R _{trip} = 4.7 kohms |

Note


^① For applications above 3 A consult instruction manual.

Wiring Diagrams


Power Diagram Up to FR9

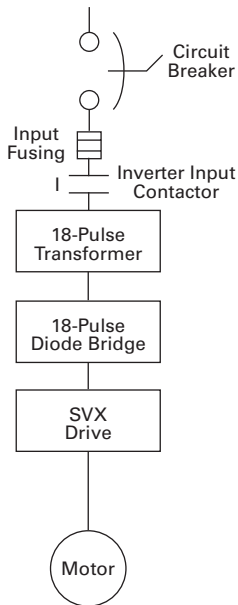


Power Diagram Up to FR9 with Bypass

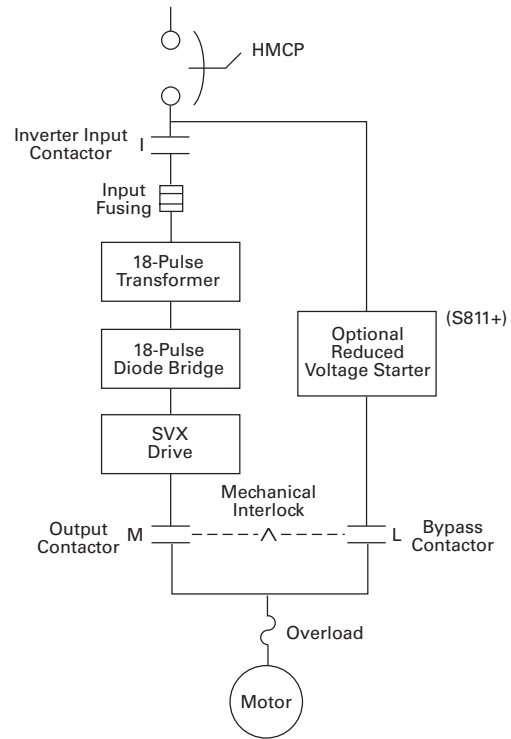

Power Diagram FR10 and Larger

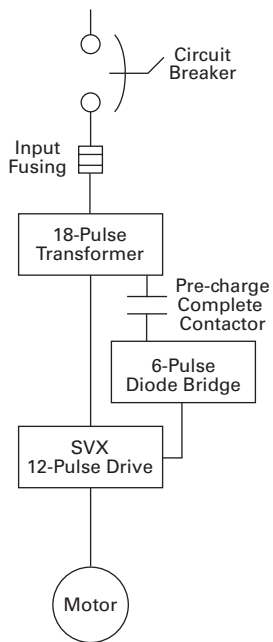

Power Diagram FR10 and Larger with Bypass

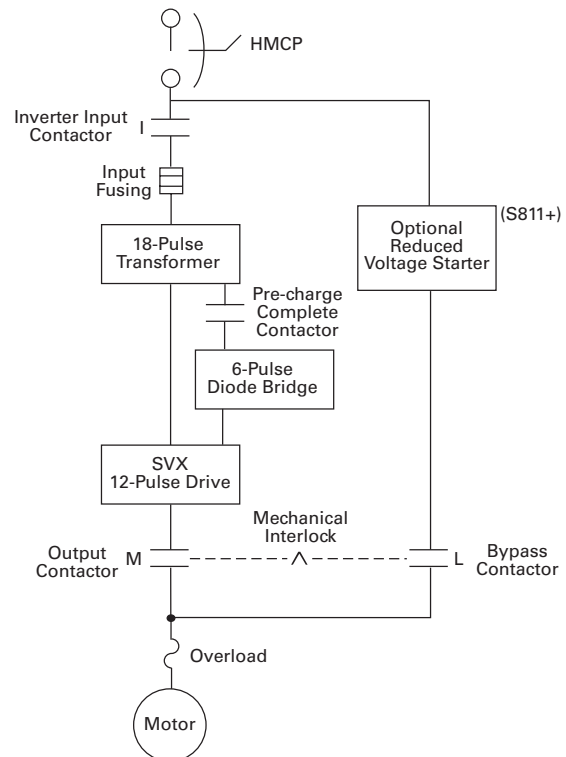

2.11

Adjustable Frequency Drives

Clean Power Drives


Dimensions

Approximate Dimensions in Inches (mm)

2

Enclosure Size 7


25–150 hp I_L and 25–125 hp I_H 480 V—25–100 hp I_L and 25–75 hp I_H 575 V

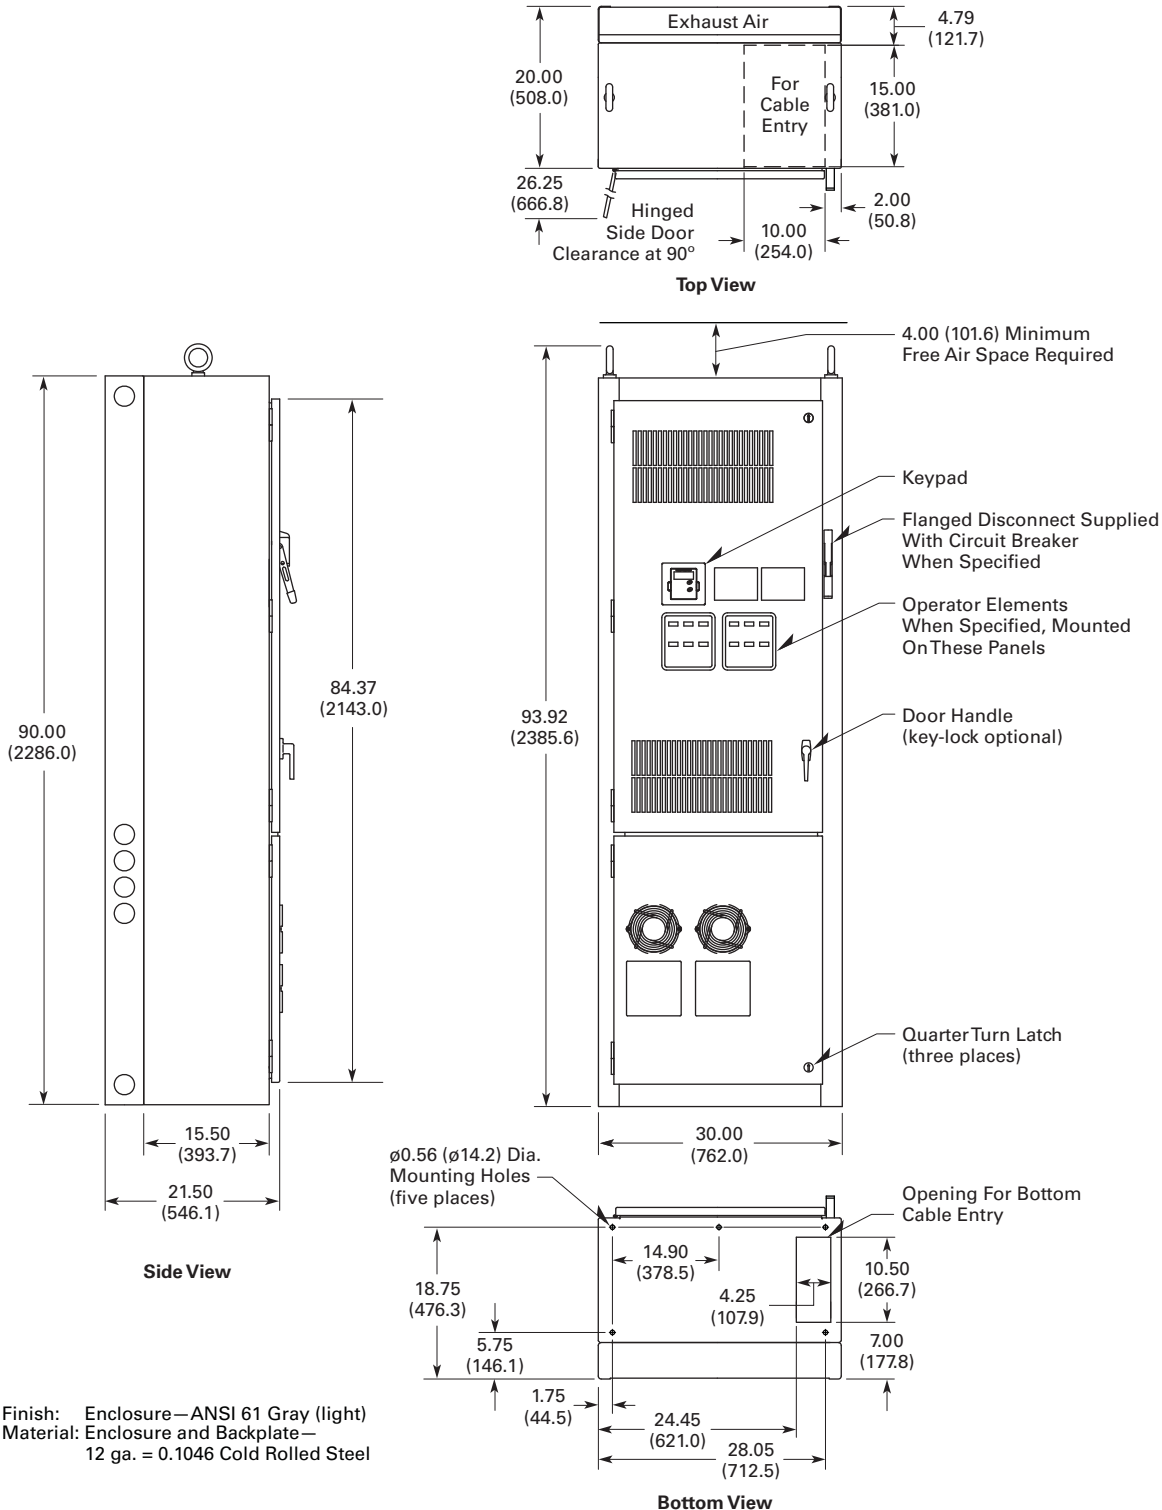

Approximate Dimensions in Inches (mm)

Enclosure Size 8

200–250 hp I_L and 150–200 hp I_H 480 V — 125–200 hp I_L and 100–150 hp I_H 575 V

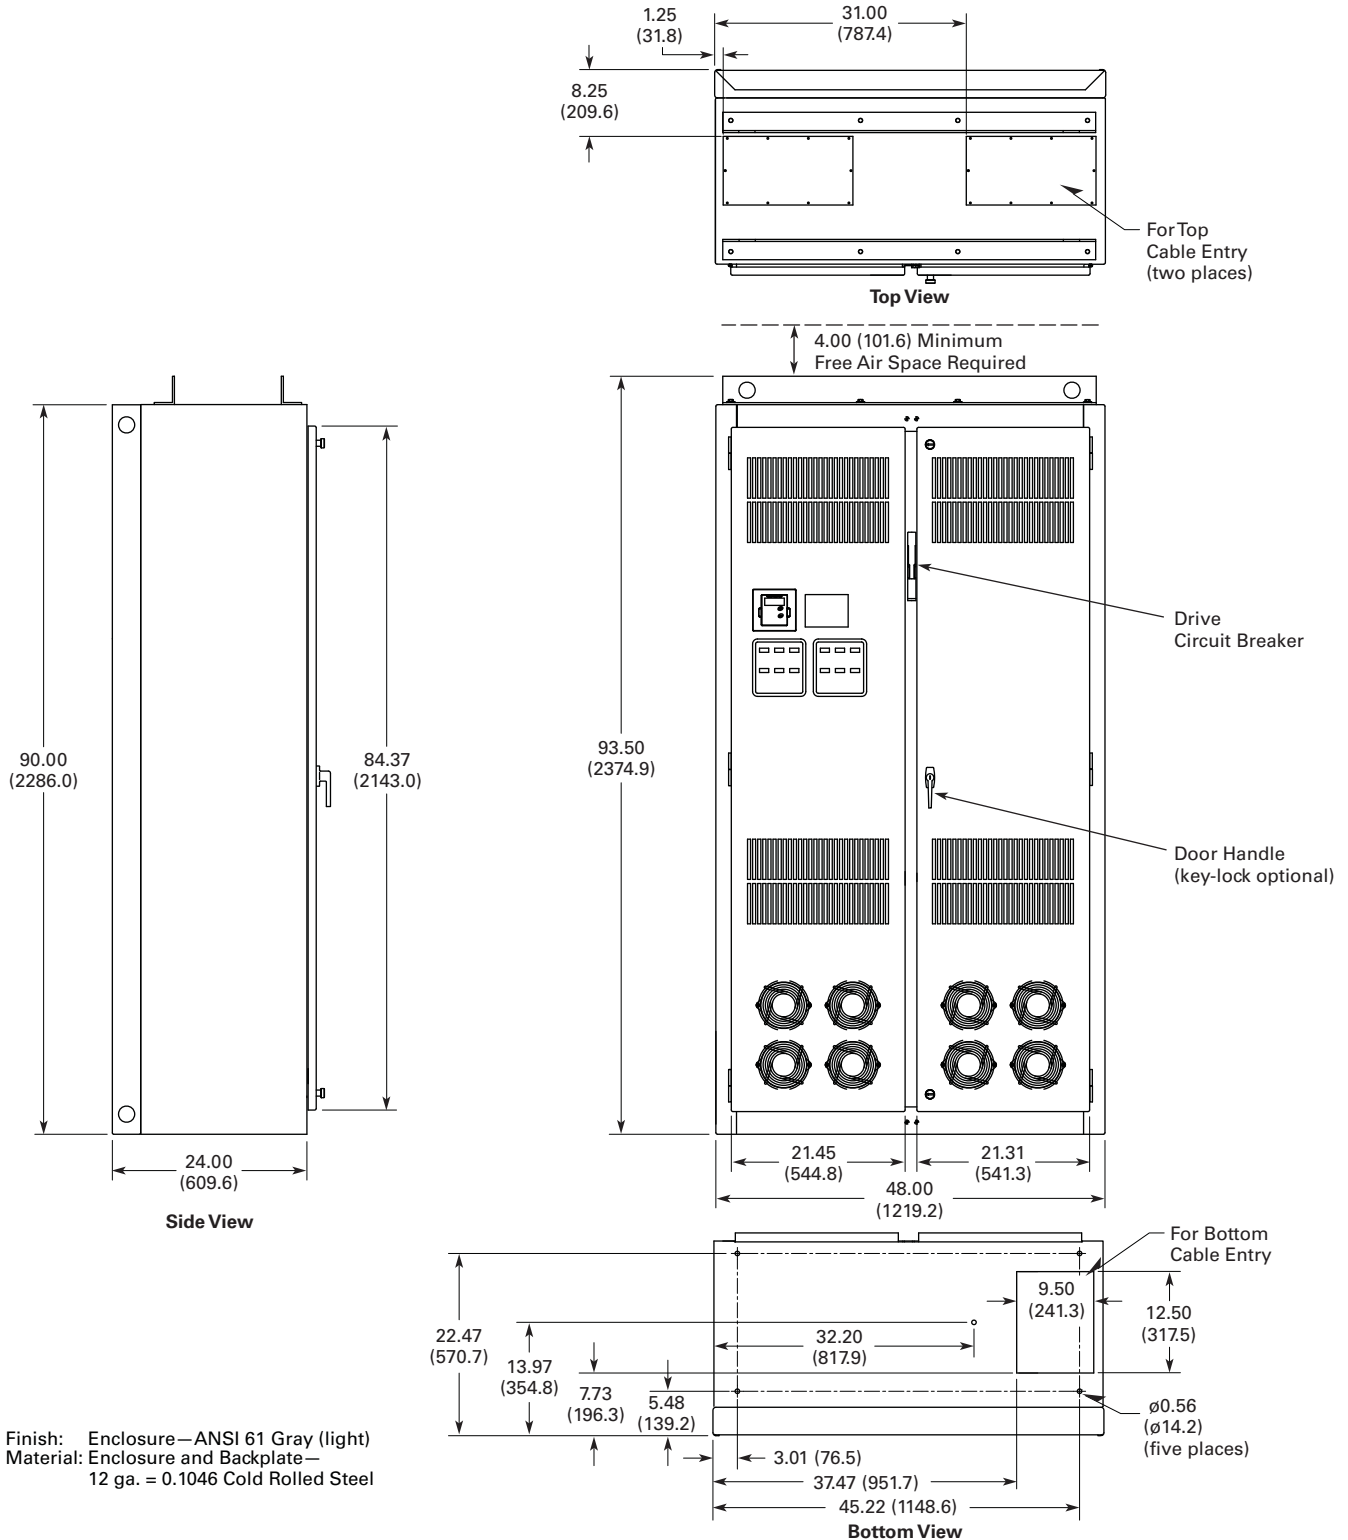

2.11

Adjustable Frequency Drives


Clean Power Drives

Approximate Dimensions in Inches (mm)

Enclosure Size 9

2


300–400 hp I_L and 250–350 hp I_H 480 V—250–400 hp I_L and 200–300 hp I_H 575 V

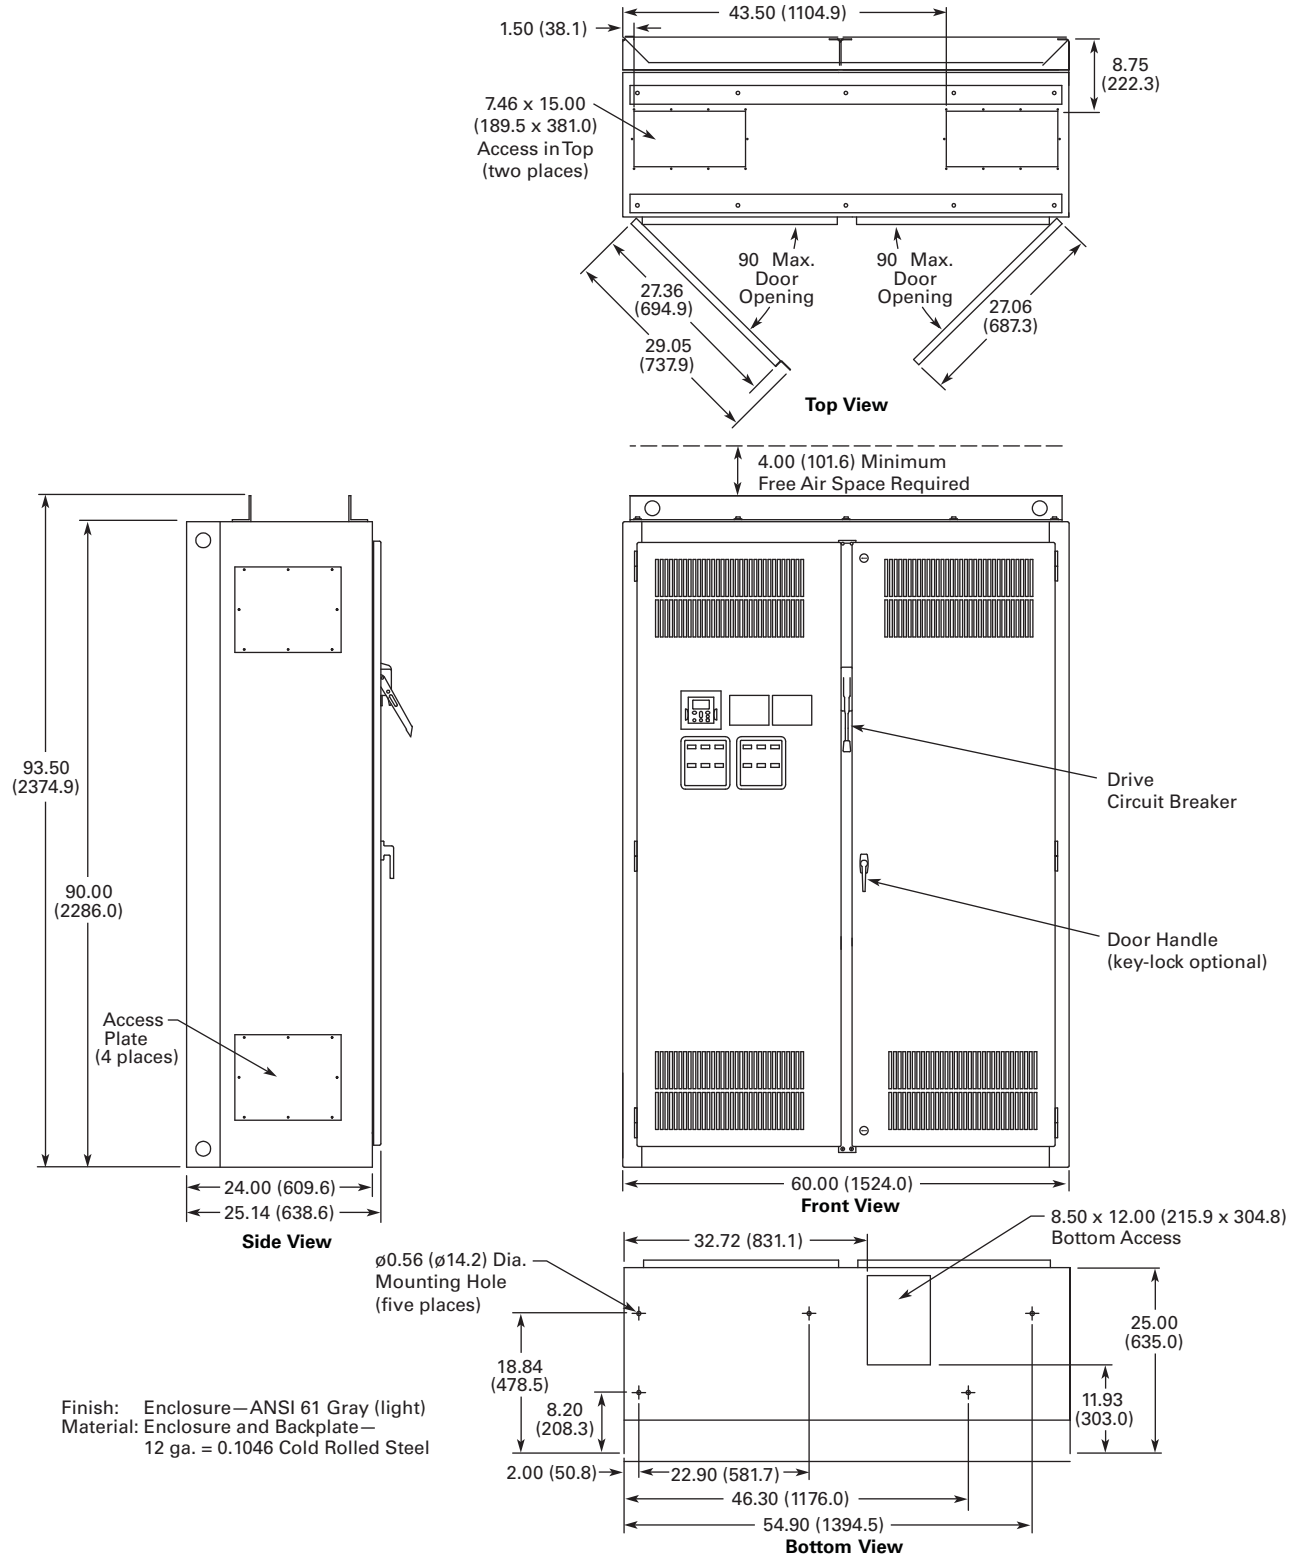

Approximate Dimensions in Inches (mm)

Enclosure Size 10

500–600 hp I_L and 400–500 hp I_H 480 V—500–600 hp I_L and 400–500 hp I_H 575 V

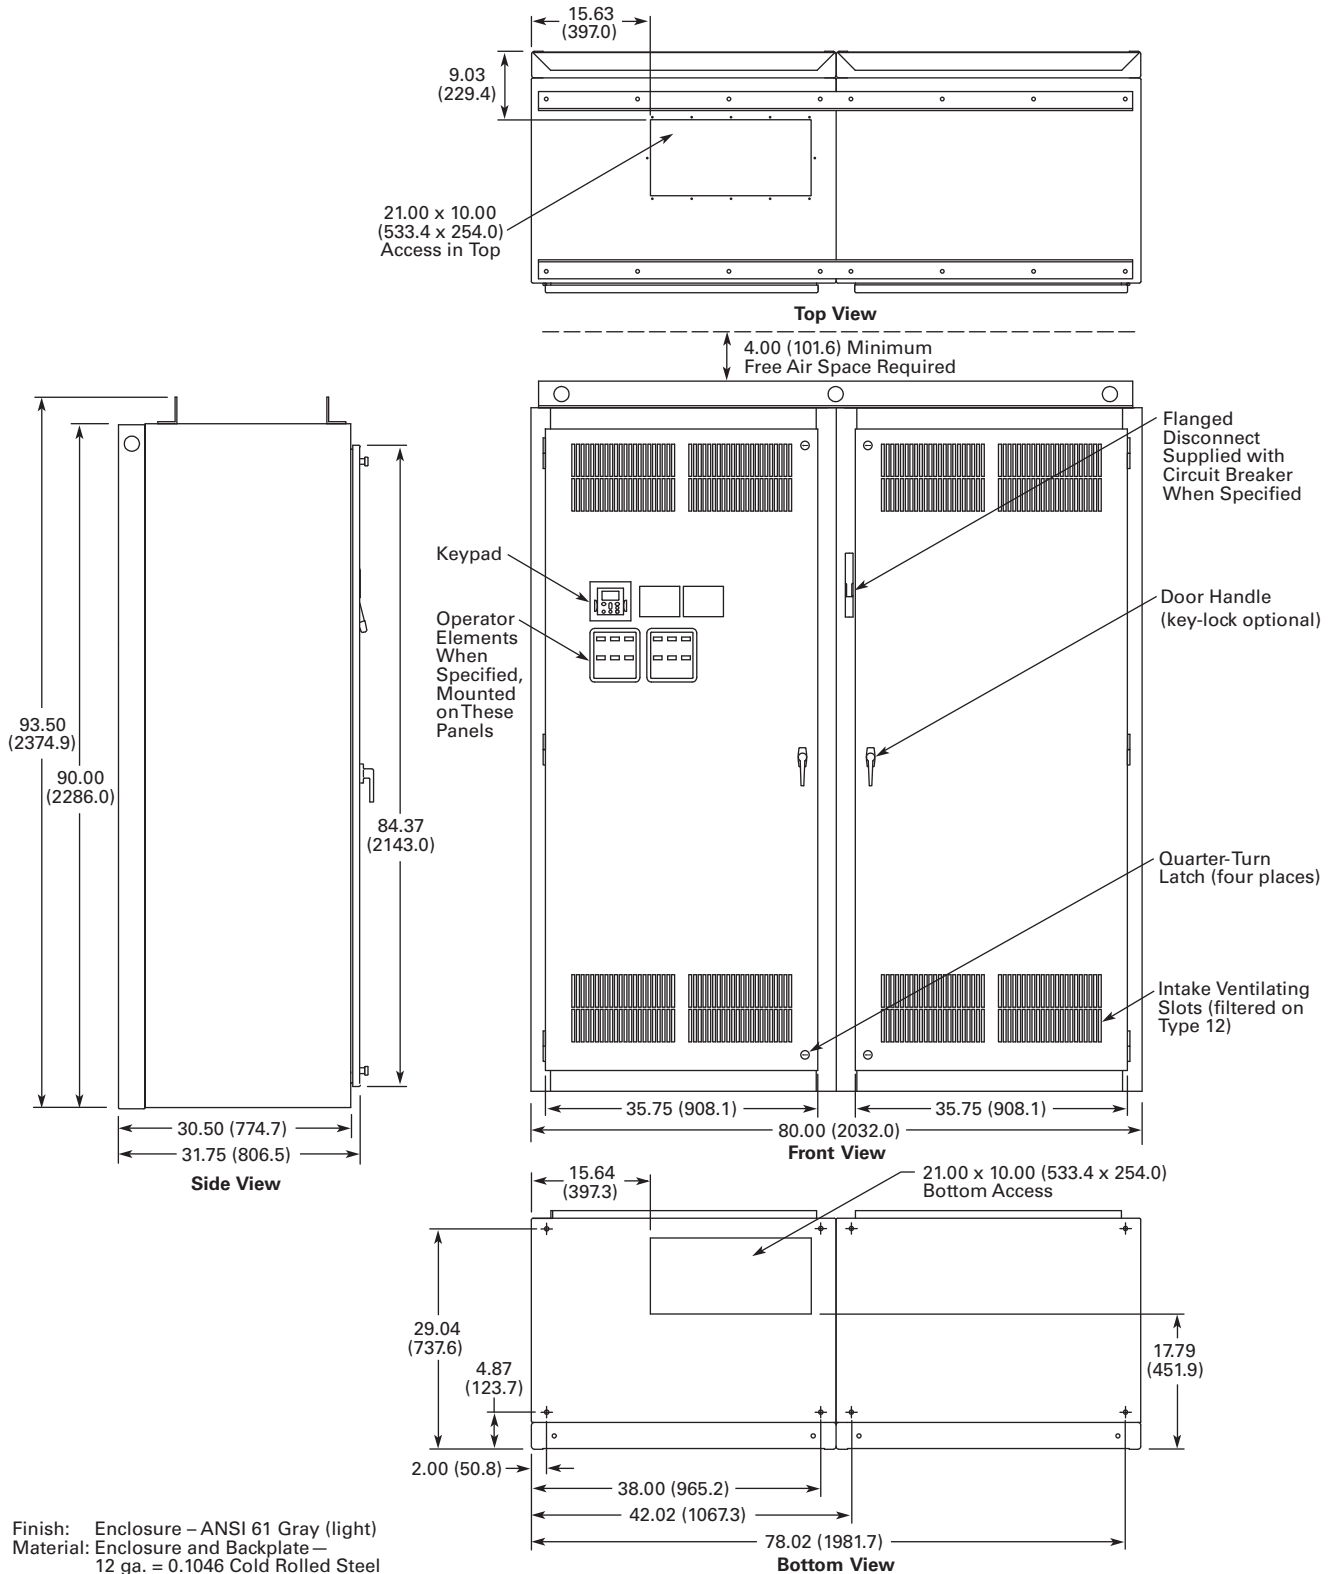

Finish: Enclosure – ANSI 61 Gray (light)
 Material: Enclosure and Backplate –
 12 ga. = 0.1046 Cold Rolled Steel

2.11

Adjustable Frequency Drives


Clean Power Drives

Approximate Dimensions in Inches (mm)

Enclosure Size F Type 3R Drives

2

25–250 hp I_L and 25–200 hp I_H 480 V – 25–200 hp I_L and 25–150 hp I_H 575 V Type 3R Drives

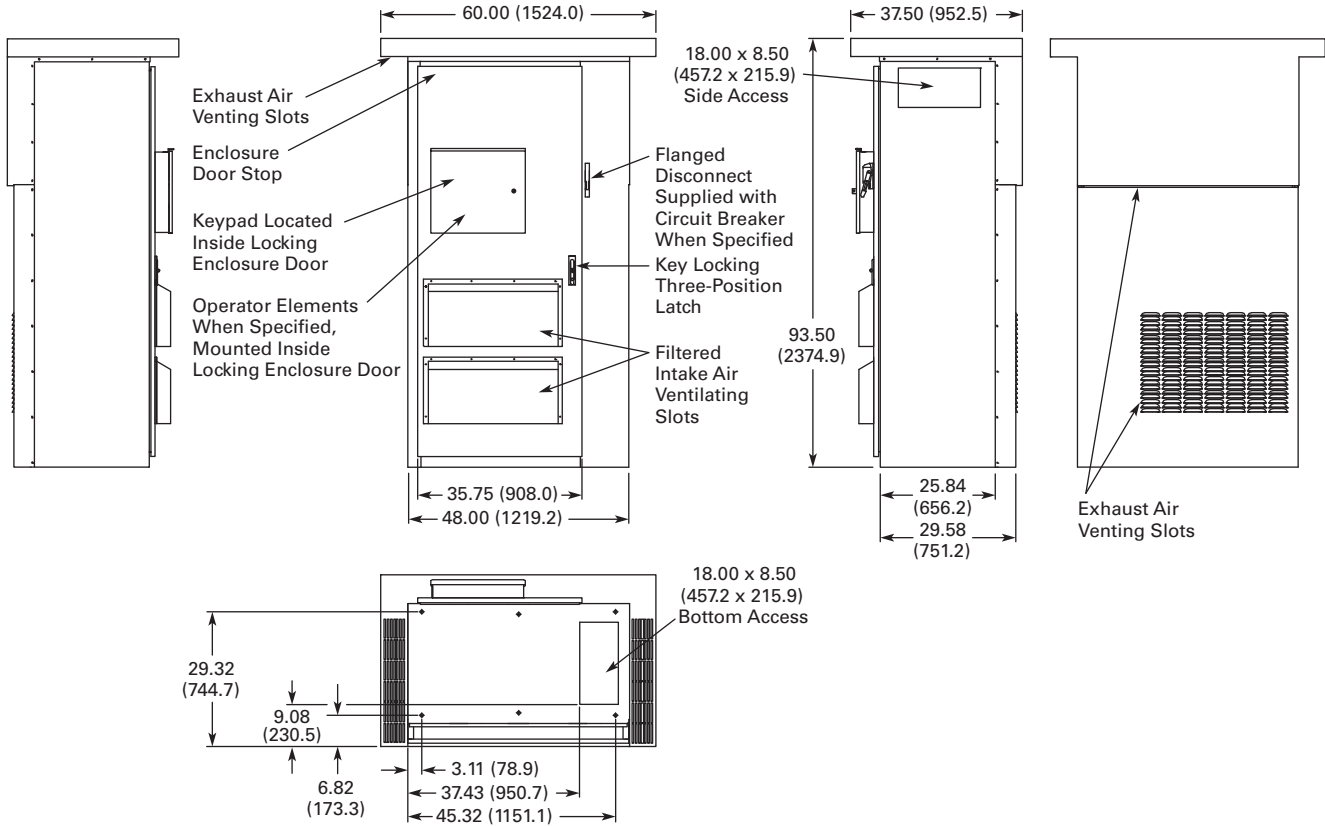

Enclosed 18-Pulse Drive Enclosure Dimensions

| Enclosure Size ① | Width | Height | Depth | Approx. Shipping Weight in Lbs (kg) |
|------------------|-----------------|----------------|---------------|-------------------------------------|
| 7 | 30.00 (762.0) | 90.00 (2286.0) | 21.50 (546.1) | 1000 (454) |
| 8 | 48.00 (1219.2) | 90.00 (2286.0) | 26.14 (664.0) | 1400 (636) |
| 9 | 60.00 (1524.0) | 90.00 (2286.0) | 25.74 (653.8) | 1800 (817) |
| 10 | 80.00 (2032.0) | 90.00 (2286.0) | 31.75 (806.5) | 2100 (953) |
| 11 ②③ | 120.00 (3048.0) | 90.00 (2286.0) | 25.74 (653.8) | 2500 (1,135) |
| F ④ | 60.00 (1524.0) | 93.50 (2374.9) | 37.50 (952.5) | 2500 (1,135) |

Notes

- ① Enclosure sizes accommodate drive and options, including bypass and disconnect. For other power options, consult your Eaton representative.
- ② Consult factory. Limited power options available.
- ③ Enclosure size 11 consists of two of the enclosure size 9.
- ④ All Type 3R drives use the Size F enclosure.

Enclosed Regenerative Drives



RGX Enclosed Regenerative Drives

Product Description

The RGX is an enclosed solution to meet the needs of customer's regenerative load applications. It combines Eaton's comprehensive family of DC common DC bus drive products together with the necessary circuit protection and filtering to give the customer an all-in-one package. The RGX is available in 480 V and 575 V configurations in sizes up through 900 hp.

Base Assembly Components

LCL Filter

An LCL filter is applied on the line side of the of the front end unit and integrated into the enclosed solution. This unit corrects the voltage wave form to return clean power back to the power system.

Front-End Unit

The RGX uses the SPA drive module, which is an active bi-directional converter. This converter allows power to flow from the main voltage to the DC bus and back from the DC bus to the main voltage.

Inverter Unit

The RGX uses an SPI drive module, which is a DC-fed power inverter for the supply and control of AC motors. This inverter is specifically designed to also allow power to flow back to the DC bus in a regenerative load application.

Harmonic Distortion

Harmonics are distorted electrical waveforms that produce inefficiencies, which could negatively affect your system. These inefficiencies can cause increased electrical usage, power quality problems, increased machine wear and utility penalties. The RGX takes control of high harmonics and reduces distortion to below the IEEE 519 recommendations. This minimal harmonic output allows the RGX drive to increase user energy efficiency, extend system life and reduce maintenance costs.

Regeneration

The active front end module gives the system power regeneration capabilities. Through the use of IGBT bridge components, power

Contents

Description

| Description | Page |
|---|-----------|
| Enclosed Passive Filtered Drives | V6-T2-304 |
| CPX Enclosed 18-Pulse Drives | V6-T2-355 |
| RGX Enclosed Regenerative Drives | |
| Catalog Number Selection | V6-T2-381 |
| Product Selection | V6-T2-382 |
| Options | V6-T2-384 |
| Technical Data and Specifications | V6-T2-385 |
| Dimensions | V6-T2-386 |

Application Description

The RGX Series encompasses a wide range of application solutions, including belt conveyor, ball mill, extruder, centrifugal pump, center driver winder and a variety of test stands.

Standards and Certifications

- UL
- cUL
- EN 61800-5-1 (2003)



flows bi-directionally through the drive unit and can be converted back to an AC voltage. Additionally, the LCL filter corrects distorted voltage wave form on the output, thus producing clean power with low harmonics suitable to be returned to utility line. With power regeneration, the system does not need large resistor banks for ridding excess energy. Eliminating resistors increases energy savings while simplifying design.

Energy Savings

The RGX provides exceptional energy savings through the use of regenerative braking. Regenerative braking uses the electric motor as a generator when slowing, and in turn, power is regenerated. Recovered, clean power can then be returned to the line or utility for other uses. Comparatively, regenerative braking reduces energy consumption greatly over traditional mechanical and resistive braking because power is returned to the line rather than released as heat.

2.11

Adjustable Frequency Drives

Clean Power Drives


Product Identification ^①

2


Power Flow Diagram and Components

- Power flows from the utility through the LCL filter, active-front end IGBT bridge and component inverter to the motor
- IGBT bridge components allow bi-directional current conversion and flow for power regeneration needs
- The active rectifier draws linear current off of the line, reducing peak currents on the input and reducing THDI to 2–3%
- During regeneration, the LCL filter corrects the voltage wave form to return clean power back to the utility


Power Flow Diagram and Components

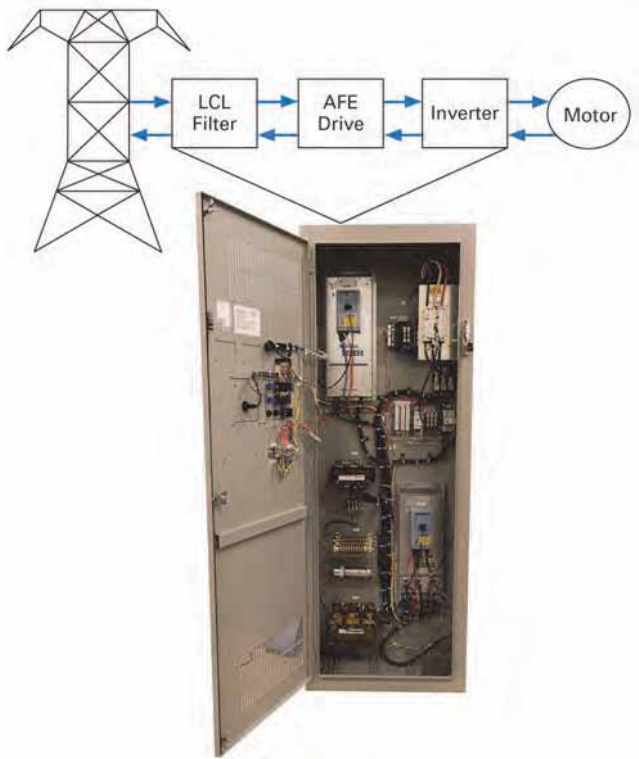

RGX Size 9 Enclosure ^②

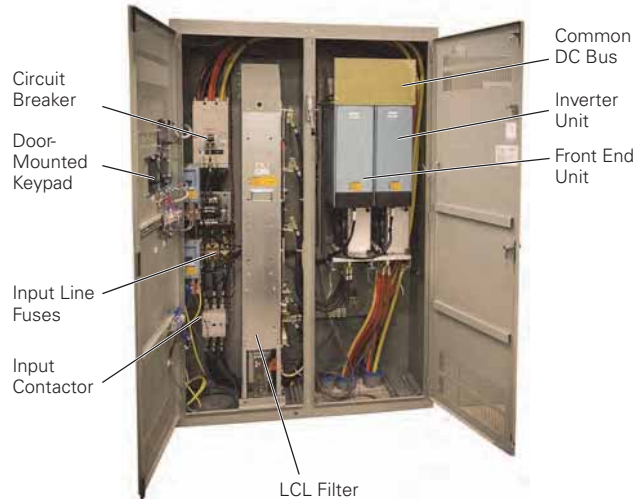


RGX Size 3 Enclosure ^③

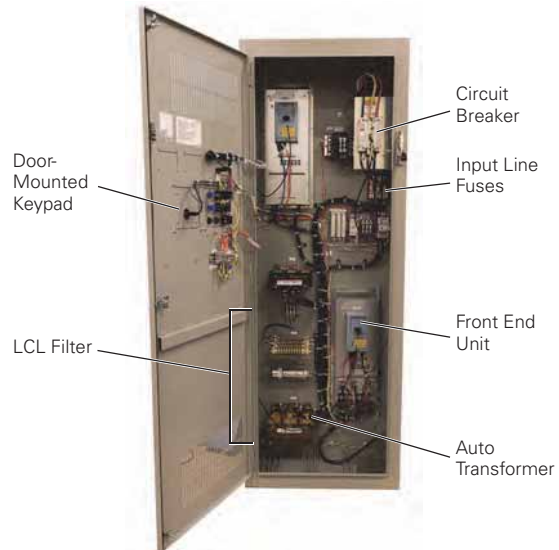

Notes

- ^① Product identification section serves as example products and does not encompass full RGX product range.
- ^② Size 9 enclosure example is used as a solution for the RGX product range of 100–250 hp.
- ^③ Size 3 enclosure example is used as a solution for a 30 hp RGX product.

Catalog Number Selection

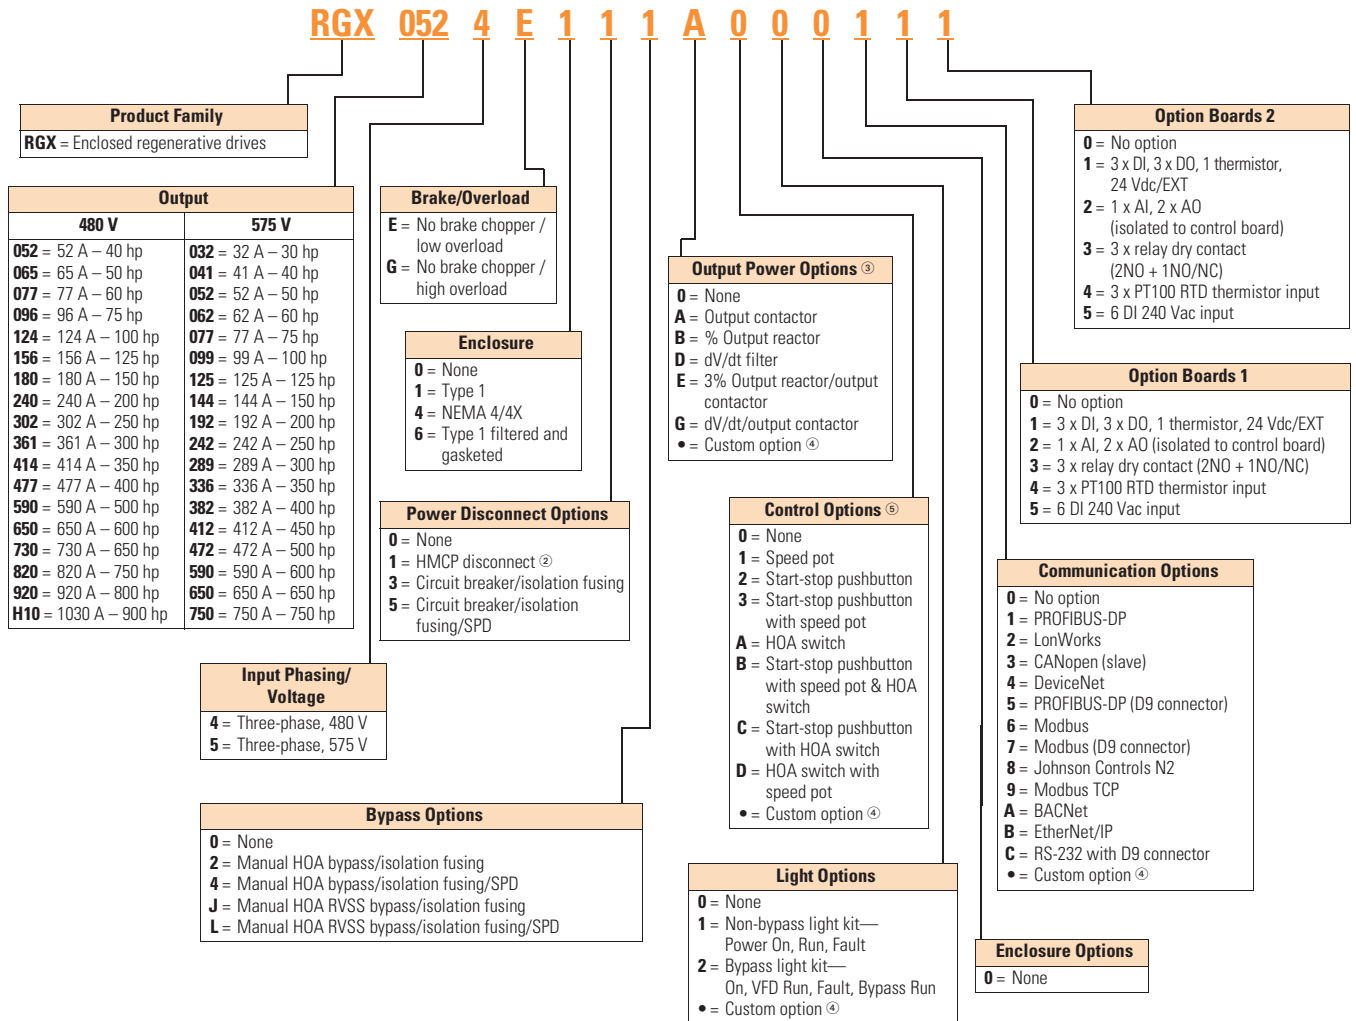Enclosed Regenerative Drives ^①**Notes**

- ^① Catalog number selection is for illustration purpose only and not to be used to create new catalog numbers.
- ^② HMCP disconnect is standard when bypass is selected.
- ^③ Output contactor not available with bypass. Bypass comes standard with output contactor.
- ^④ More options are available as Engineered to Order (ETO) through the BidManager tool.
- ^⑤ Pilot devices are 22 mm standard. 30 mm options are available as Engineered to Order (ETO) through the BidManager tool.

Product Selection

2

480 V Drives

RGX Drive



RGX 480 V—NEMA Type 1/IP21

| Enclosure Size | hp | Current (A) | Frame Size | Catalog Number ^① |
|---|-----|-------------|------------|-----------------------------|
| Low Overload Drive and Enclosure (VT) | | | | |
| 7 | 50 | 65 | 7 | RGX0654E1 |
| | 60 | 77 | 7 | RGX0774E1 |
| | 75 | 96 | 7 | RGX0964E1 |
| 5 | 100 | 124 | 8 | RGX1244E1 |
| | 125 | 156 | 9 | RGX1564E1 |
| | 150 | 180 | 9 | RGX1804E1 |
| | 200 | 240 | 9 | RGX2404E1 |
| 8 | 250 | 302 | 9 | RGX3024E1 |
| | 300 | 361 | 10 | RGX3614E1 |
| | 350 | 414 | 10 | RGX4144E1 |
| | 400 | 477 | 10 | RGX4774E1 |
| Consult factory | 500 | 590 | 12 | RGX5904E1 |
| | 600 | 650 | 12 | RGX6504E1 |
| | 650 | 730 | 12 | RGX7304E1 |
| | 750 | 820 | 12 | RGX8204E1 |
| | 800 | 920 | 12 | RGX9204E1 |
| | 900 | 1030 | 12 | RGX10304E1 |
| High Overload Drive and Enclosure (CT) | | | | |
| 7 | 40 | 52 | 7 | RGX0524G1 |
| | 50 | 65 | 7 | RGX0654G1 |
| | 60 | 77 | 7 | RGX0774G1 |
| | 75 | 96 | 8 | RGX0964G1 |
| 5 | 100 | 124 | 9 | RGX1244G1 |
| | 125 | 156 | 9 | RGX1564G1 |
| | 150 | 180 | 9 | RGX1804G1 |
| | 200 | 240 | 9 | RGX2404G1 |
| 8 | 250 | 300 | 10 | RGX3004G1 |
| | 300 | 361 | 10 | RGX3614G1 |
| | 350 | 414 | 10 | RGX4144G1 |
| Consult factory | 450 | 515 | 12 | RGX5154G1 |
| | 500 | 590 | 12 | RGX5904G1 |
| | 600 | 650 | 12 | RGX6504G1 |
| | 650 | 730 | 12 | RGX7304G1 |
| | 750 | 820 | 12 | RGX8204G1 |
| | 800 | 920 | 12 | RGX9204G1 |

Note

^① “_” denotes that catalog numbers are incomplete, base catalog numbers.

575 V Drives

RGX Drive



RGX 575 V—NEMA Type 1/IP21

| Enclosure Size | hp | Current (A) | Frame Size | Catalog Number ^① |
|---|-----|-------------|------------|-----------------------------|
| Low Overload Drive and Enclosure (VT) | | | | |
| 7 | 40 | 41 | 7 | RGX0415E1 |
| | 50 | 52 | 7 | RGX0525E1 |
| | 50 | 62 | 8 | RGX0625E1 |
| | 75 | 77 | 8 | RGX0775E1 |
| | 100 | 99 | 8 | RGX0995E1 |
| 5 | 125 | 125 | 9 | RGX1255E1 |
| | 150 | 144 | 9 | RGX1445E1 |
| | 150 | 192 | 9 | RGX1925E1 |
| | 200 | 242 | 9 | RGX2425E1 |
| | 250 | 289 | 10 | RGX2895E1 |
| 8 | 300 | 336 | 10 | RGX3365E1 |
| | 400 | 382 | 10 | RGX3825E1 |
| Consult factory | 450 | 412 | 12 | RGX4125E1 |
| | 500 | 472 | 12 | RGX4725E1 |
| | 600 | 590 | 12 | RGX5905E1 |
| | 650 | 650 | 12 | RGX6505E1 |
| | 750 | 750 | 12 | RGX7505E1 |
| High Overload Drive and Enclosure (CT) | | | | |
| 7 | 30 | 032 | 7 | RGX0325G1 |
| | 40 | 041 | 7 | RGX0415G1 |
| | 50 | 052 | 8 | RGX0525G1 |
| | 60 | 062 | 8 | RGX0625G1 |
| | 75 | 077 | 8 | RGX0775G1 |
| 5 | 100 | 099 | 9 | RGX0995G1 |
| | 125 | 125 | 9 | RGX1255G1 |
| | 150 | 144 | 9 | RGX1445G1 |
| | 150 | 170 | 9 | RGX1705G1 |
| 8 | 200 | 192 | 10 | RGX1925G1 |
| | 250 | 242 | 10 | RGX2425G1 |
| | 300 | 289 | 10 | RGX2895G1 |
| Consult factory | 400 | 382 | 12 | RGX3825G1 |
| | 450 | 412 | 12 | RGX4125G1 |
| | 500 | 472 | 12 | RGX4725G1 |
| | 600 | 590 | 12 | RGX5905G1 |
| | 650 | 650 | 12 | RGX6505G1 |

Note

① “_” denotes that catalog numbers are incomplete, base catalog numbers.

2.11

Adjustable Frequency Drives

Clean Power Drives

Options


2

RGX Series Option Board Kits

The RGX Series drives can accommodate a wide selection of expander and adapter option boards to customize the drive for your application needs. The drive's control unit is designed to accept a total of five option boards.

The RGX Series factory installed standard board configuration includes an A9 I/O board and an A2 relay output board, which are installed in slots A and B.

Option Boards



Option Board Kits

| Option Kit Description ^① | Allowed Slot Locations ^② | Field Installed Catalog Number |
|---|-------------------------------------|--------------------------------|
| Standard I/O Cards | | |
| 2 RO (NC-NO) | B | OPTA2 |
| 6 DI, 1 DO, 2 AI, 1 AO, 1 +10 Vdc ref, 2 ext +24 Vdc/EXT +24 Vdc | A | OPTA9 |
| Extended I/O Cards | | |
| 2 RO, therm | B | OPTA3 |
| Encoder low volt +5 V/15 V 24 V | C | OPTA4 |
| Encoder high volt +15 V/24 V | C | OPTA5 |
| Double encoder | C | OPTA7 |
| 6 DI, 1 DO, 2 AI, 1 AO | A | OPTA8 |
| 3 DI (encoder 10–24 V), out +15 V/+24 V, 2 DO (pulse+direction) | C | OPTAE |
| 6 DI, 1 ext +24 Vdc/EXT +24 Vdc | B, C, D , E | OPTB1 |
| 1 RO (NC-NO), 1 RO (NO), 1 therm | B, C, D , E | OPTB2 |
| 1 AI (mA isolated), 2 AO (mA isolated), 1 ext +24 Vdc/EXT +24 Vdc | B, C, D , E | OPTB4 |
| 3 RO (NO) | B, C, D , E | OPTB5 |
| 1 ext +24 Vdc/EXT +24 Vdc, 3 Pt100 | B, C, D , E | OPTB8 |
| 1 RO (NO), 5 DI 42–240 Vac input | B, C, D , E | OPTB9 |
| SPI, absolute encoder | C | OPTBB |
| Communication Cards ^③ | | |
| Modbus | D, E | OPTC2 |
| Johnson Controls N2 | D, E | OPTC2 |
| Modbus TCP | D, E | OPTC1 |
| BACnet | D, E | OPTCJ |
| EtherNet/IP | D, E | OPTCQ |
| PROFIBUS-DP | D, E | OPTC3 |
| LonWorks | D, E | OPTC4 |
| PROFIBUS-DP (D9 connector) | D, E | OPTC5 |
| CANopen (slave) | D, E | OPTC6 |
| DeviceNet | D, E | OPTC7 |
| Modbus (D9 type connector) | D, E | OPTC8 |
| Adapter | D, E | OPTD1 |
| Adapter | D, E | OPTD2V |
| RS-232 with D9 connection | D, E | OPTD3 |

Notes

- ① AI = Analog Input; AO = Analog Output, DI = Digital Input, DO = Digital Output, RO = Relay Output
- ② Option card must be installed in one of the slots listed for that card. Slot indicated in bold is the preferred location.
- ③ OPTC2 is a multi-protocol option card.

Technical Data and Specifications

Enclosed Regenerative Drives

| Description | Specification |
|---|--|
| Supply Connection | |
| Input voltage U_{in} (AC) front end modules | 380–500 Vac/525–690 Vac –10% to +10% |
| Input voltage U_{in} (DC) inverter | 465–800 Vdc/640–1100 Vdc –0% to 0%, the waviness of the inverter supply voltage, formed in rectification of the electric network's alternating voltage in basic frequency, must be less than 50 V peak-to-peak |
| Output voltage U_{out} (AC) inverter | $3 \sim 0 - U_{in}/1.4$ |
| Output voltage U_{out} (DC) active front end module | $1.35 \times U_{in}$ (factory default) |
| Output voltage U_{out} (DC) non-regenerative front end module | $1.35 \times U_{in}$ |
| Ambient Conditions | |
| Ambient operating temperature | 14 (no frost) to +104 °F (–10 °C to +40 °C) |
| Storage temperature | –40 °F to +158 °F (–40 °C to +70 °C) |
| Relative humidity | 0 to 95% RH, non-condensing, non-corrosive, no dripping water |
| Air quality | |
| Chemical vapors | IEC 721-3-3, unit in operation, class 3C2 |
| Mechanical particles | IEC 721-3-3, unit in operation, class 3S2 |
| Altitude | 100% load capacity (no derating) up to 1000 m 1% derating for each 100 m above 1000 m; max. 3000 m |
| Vibration | 5–150 Hz |
| EN50178/EN60068-2-6 | Displacement amplitude 0.25 mm (peak) at 3–15.8 Hz Max. acceleration amplitude 1 G at 15.8–150 Hz |
| Shock EN50178, EN60068-2-27 | UPS Drop Test (for applicable UPS weights) Storage and shipping: max. 15 G, 11 ms (in package) |
| Cooling capacity required | Approximately 2% |
| Cooling air required | FR4 41 cfm, FR6 250 cfm, FR7 250 cfm, FR8 383 cfm F19 677 cfm, F110 824 cfm, F112 1648 cfm, F113 2472 cfm |
| Unit enclosure class | FR4–FR7 NEMA Type 1/IP21; FR8, F19–F114 chassis (IP00) |
| EMC (at fault settings) | |
| Immunity | Fulfill all EMC immunity requirements |
| Safety | |
| Approvals | UL, cUL, EN 61800-5-1 (2003), see unit nameplate for more detailed approvals |
| Control Connections | |
| Analog input voltage | 0–10 V, $R_i = 200$ kohms, (–10 V to +10 V joystick control) Resolution 0.1%, accuracy $\pm 1\%$ |
| Analog input current | 0(4)–20 mA, $R_i = 250$ ohms differential |
| Digital inputs | 6, positive or negative logic; 18–30 Vdc |
| Auxiliary voltage | +24 V, $\pm 15\%$, max. 250 mA |
| Output reference voltage | +10 V, +3%, max. load 10 mA |
| Analog output | 0(4)–20 mA; RL max. 500 ohms; resolution 10 bits Accuracy $\pm 2\%$ |
| Digital outputs | Open collector output, 50 mA/48 V |
| Relay outputs | 2 programmable change-over relay outputs Switching capacity: 24 Vdc/8 A, 250 Vac/8 A, 125 Vdc/0.4 A Min. switching load: 5 V/10 mA |

2.11

Adjustable Frequency Drives


Clean Power Drives

Dimensions

Approximate Dimensions in Inches (mm)

2

Enclosure Size 3

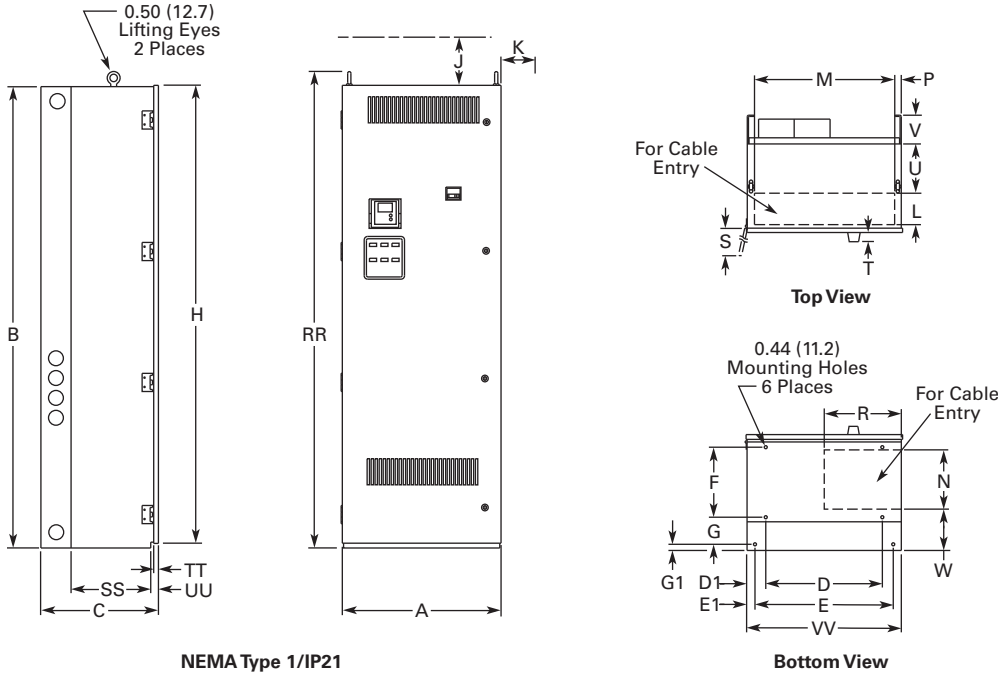


For reference only, dimensions are subject to change.

| Wide | High | Deep | Mounting | | | | | | | | Door Height | Min. Air Space | |
|------------|-------------|------------|------------|----------|------------|----------|------------|-----------|----------|-------------|-------------|----------------|--|
| A | B | C | D | D1 | E | E1 | F | G | G1 | H | J | K | |
| 26.4 (671) | 77.0 (1956) | 19.4 (493) | 19.5 (495) | 3.3 (83) | 23.0 (584) | 1.5 (38) | 11.7 (298) | 5.5 (140) | 0.9 (24) | 76.4 (1939) | 4.0 (102) | 3.0 (76) | |

| Cable Entry | | Door Clearance | | CB Handle | | | | | | | | | | Max. Approx. Shipping Weight | |
|-------------|------------|----------------|----------|------------|------------|----------|-----------|-----------|-----------|-------------|-------------|----------|----------|------------------------------|-----------|
| L | M | N | P | R | S | T | U | V | W | RR | SS | TT | UU | VV | Lbs (kg) |
| 5.3 (133) | 23.4 (594) | 10.0 (254) | 1.3 (32) | 12.9 (328) | 26.4 (669) | 1.5 (38) | 8.0 (203) | 4.8 (121) | 6.8 (173) | 79.5 (2018) | 13.40 (340) | 0.8 (19) | 1.3 (32) | 26.0 (660) | 690 (313) |

Approximate Dimensions in Inches (mm)

Enclosure Size 5

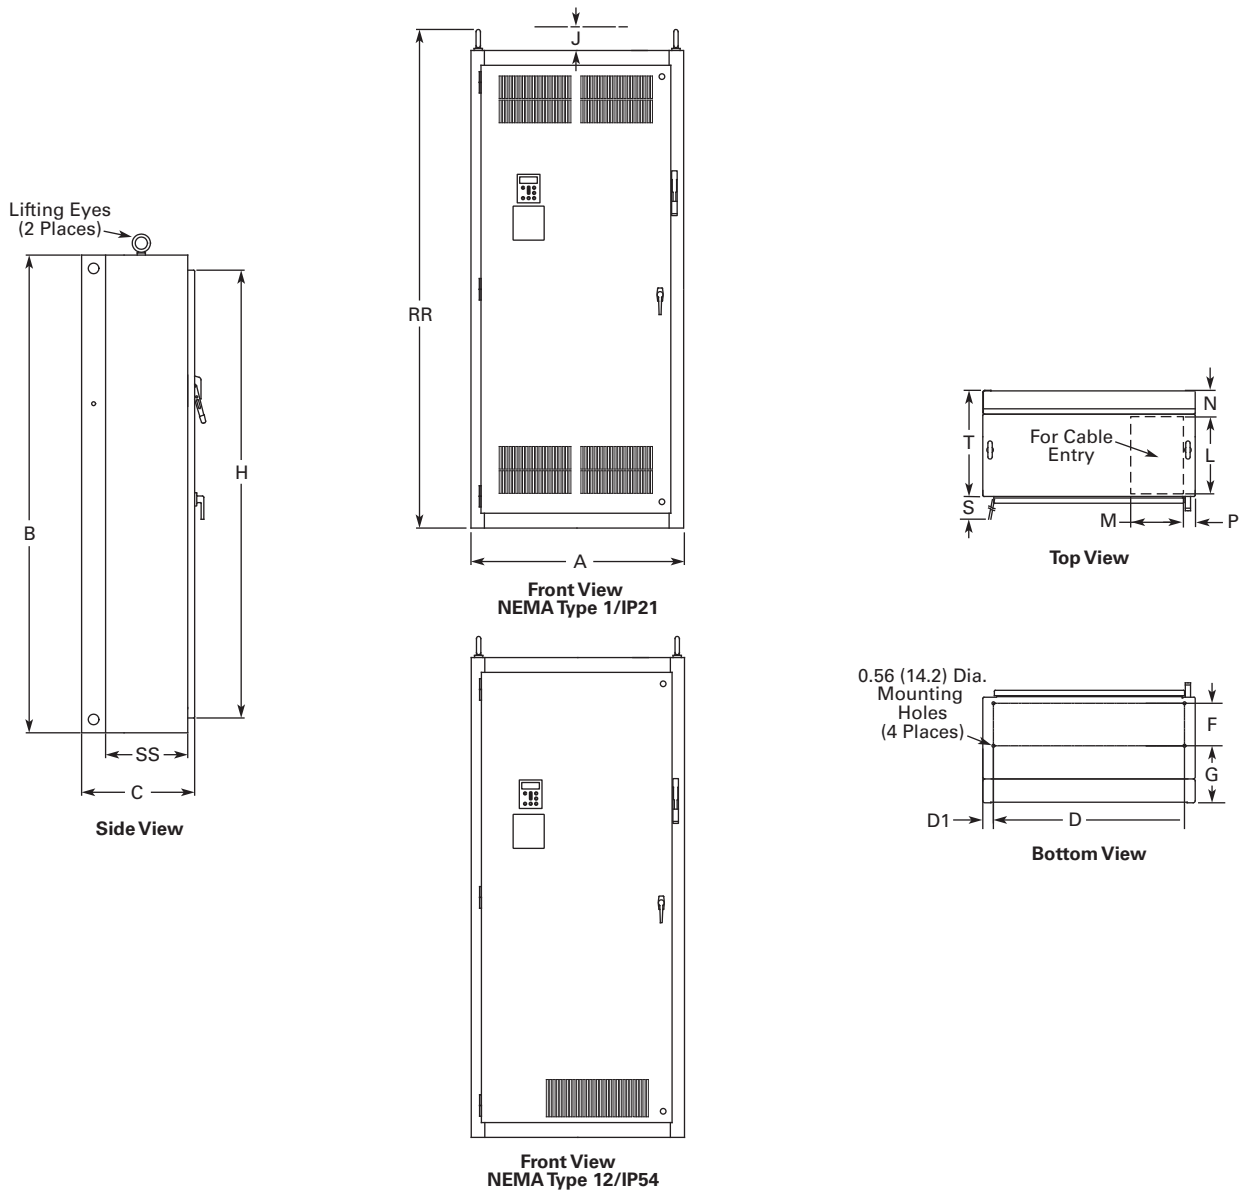

For reference only, dimensions are subject to change.

| Wide | High | Deep | Mounting | | | | | | | | Door Height | Min. Air Space | |
|-------------|-------------|------------|------------|----------|---|----|-----------|------------|----|-------------|-------------|----------------|--|
| A | B | C | D | D1 | E | E1 | F | G | G1 | H | J | K | |
| 40.0 (1016) | 90.0 (2286) | 21.3 (541) | 36.0 (914) | 2.0 (51) | — | — | 8.0 (203) | 10.8 (273) | — | 84.4 (2143) | 4.0 (102) | — | |

| Cable Entry | | | Door Clearance | | | | | | | | | | Max. Approx. Shipping Weight | | |
|-------------|------------|-----------|----------------|---|------------|------------|---|---|---|-------------|------------|----|------------------------------|----|------------|
| L | M | N | P | R | S | T | U | V | W | RR | SS | TT | UU | VV | Lbs (kg) |
| 15.0 (381) | 10.0 (254) | 4.8 (122) | 2.0 (51) | — | 36.3 (921) | 20.0 (508) | — | — | — | 94.0 (2387) | 15.5 (394) | — | — | — | 1275 (579) |

2.11


Adjustable Frequency Drives

Clean Power Drives

Approximate Dimensions in Inches (mm)

Enclosure Size 7


2

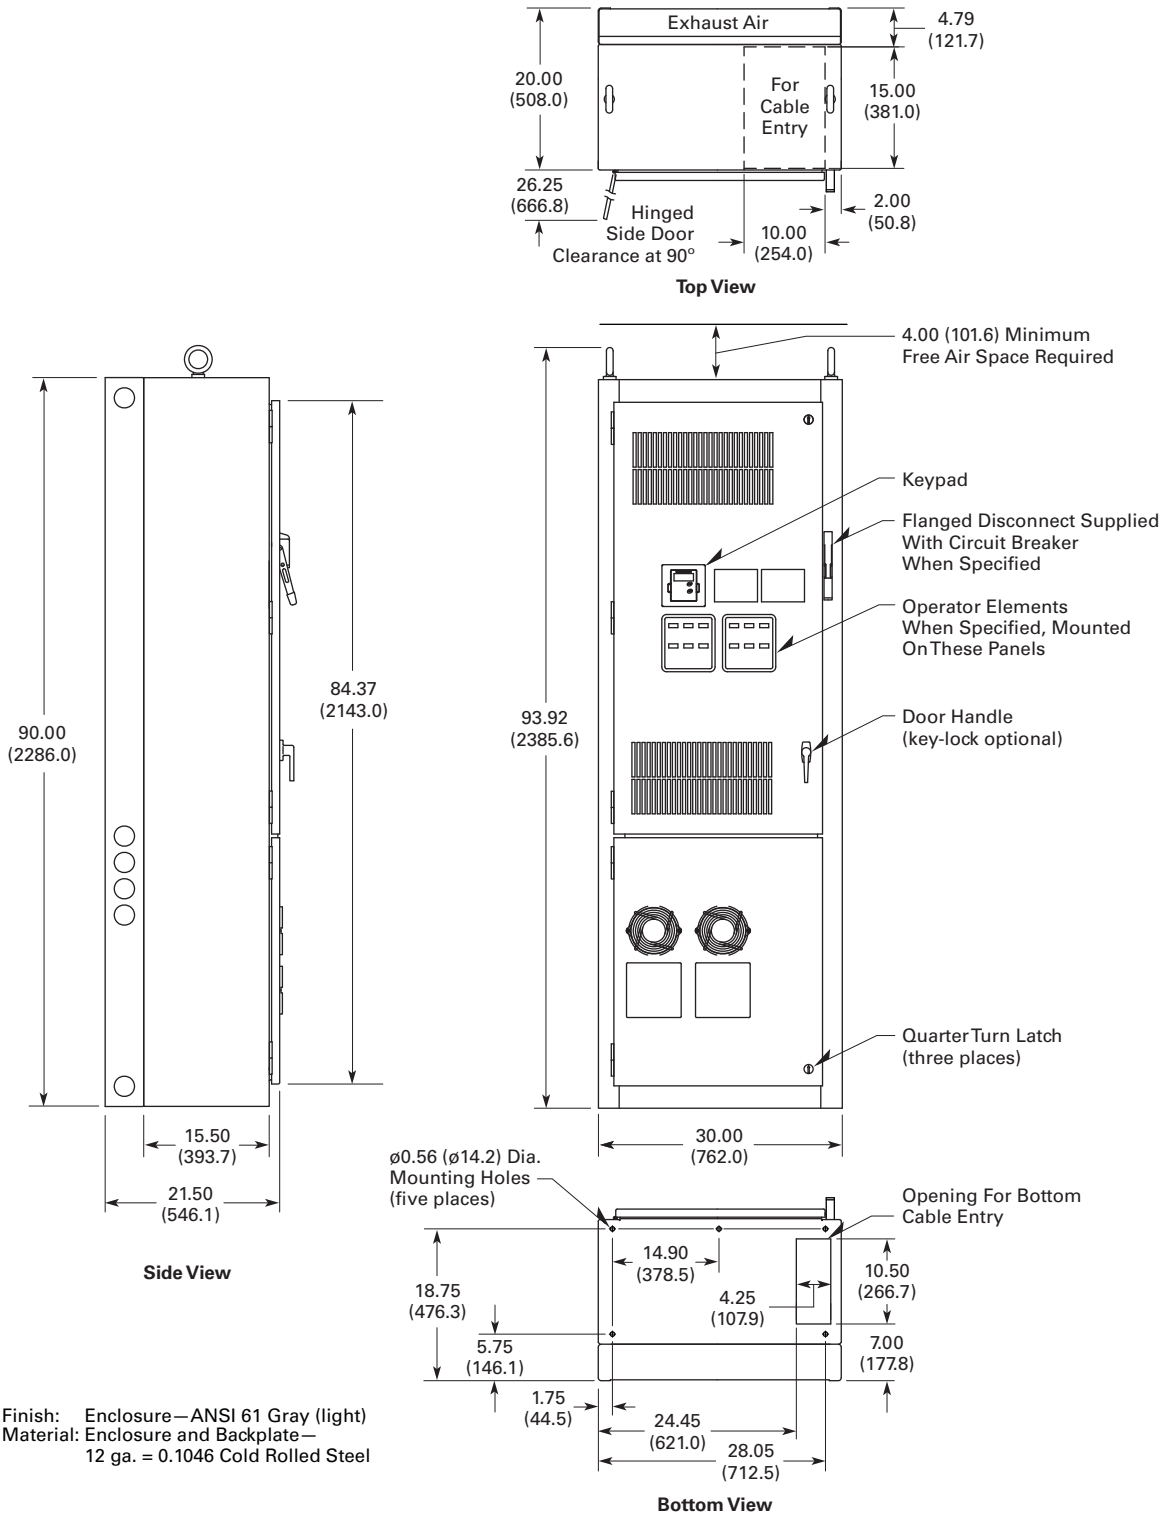

Finish: Enclosure—ANSI 61 Gray (light)
 Material: Enclosure and Backplate—
 12 ga. = 0.1046 Cold Rolled Steel

Approximate Dimensions in Inches (mm)

Enclosure Size 8

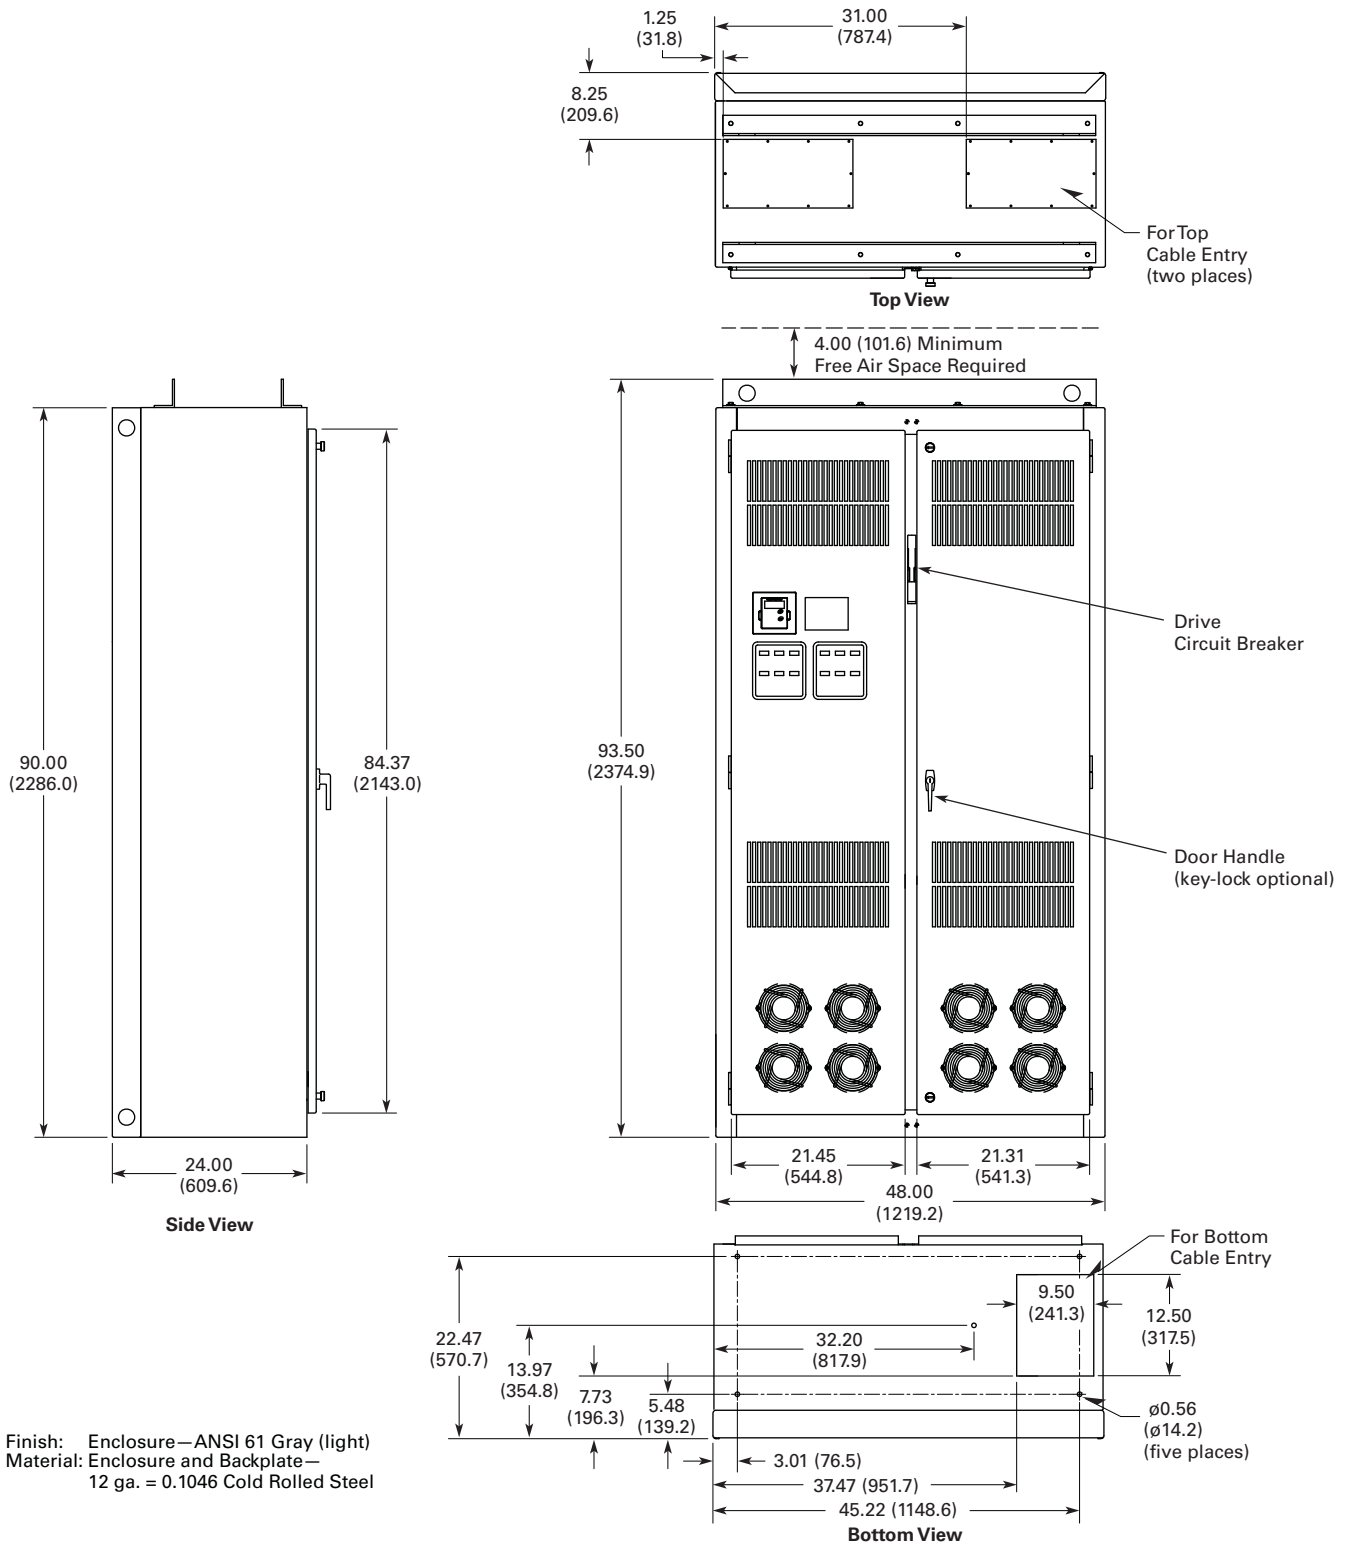

2.11


Adjustable Frequency Drives

Clean Power Drives

Approximate Dimensions in Inches (mm)


Enclosure Size 9

2

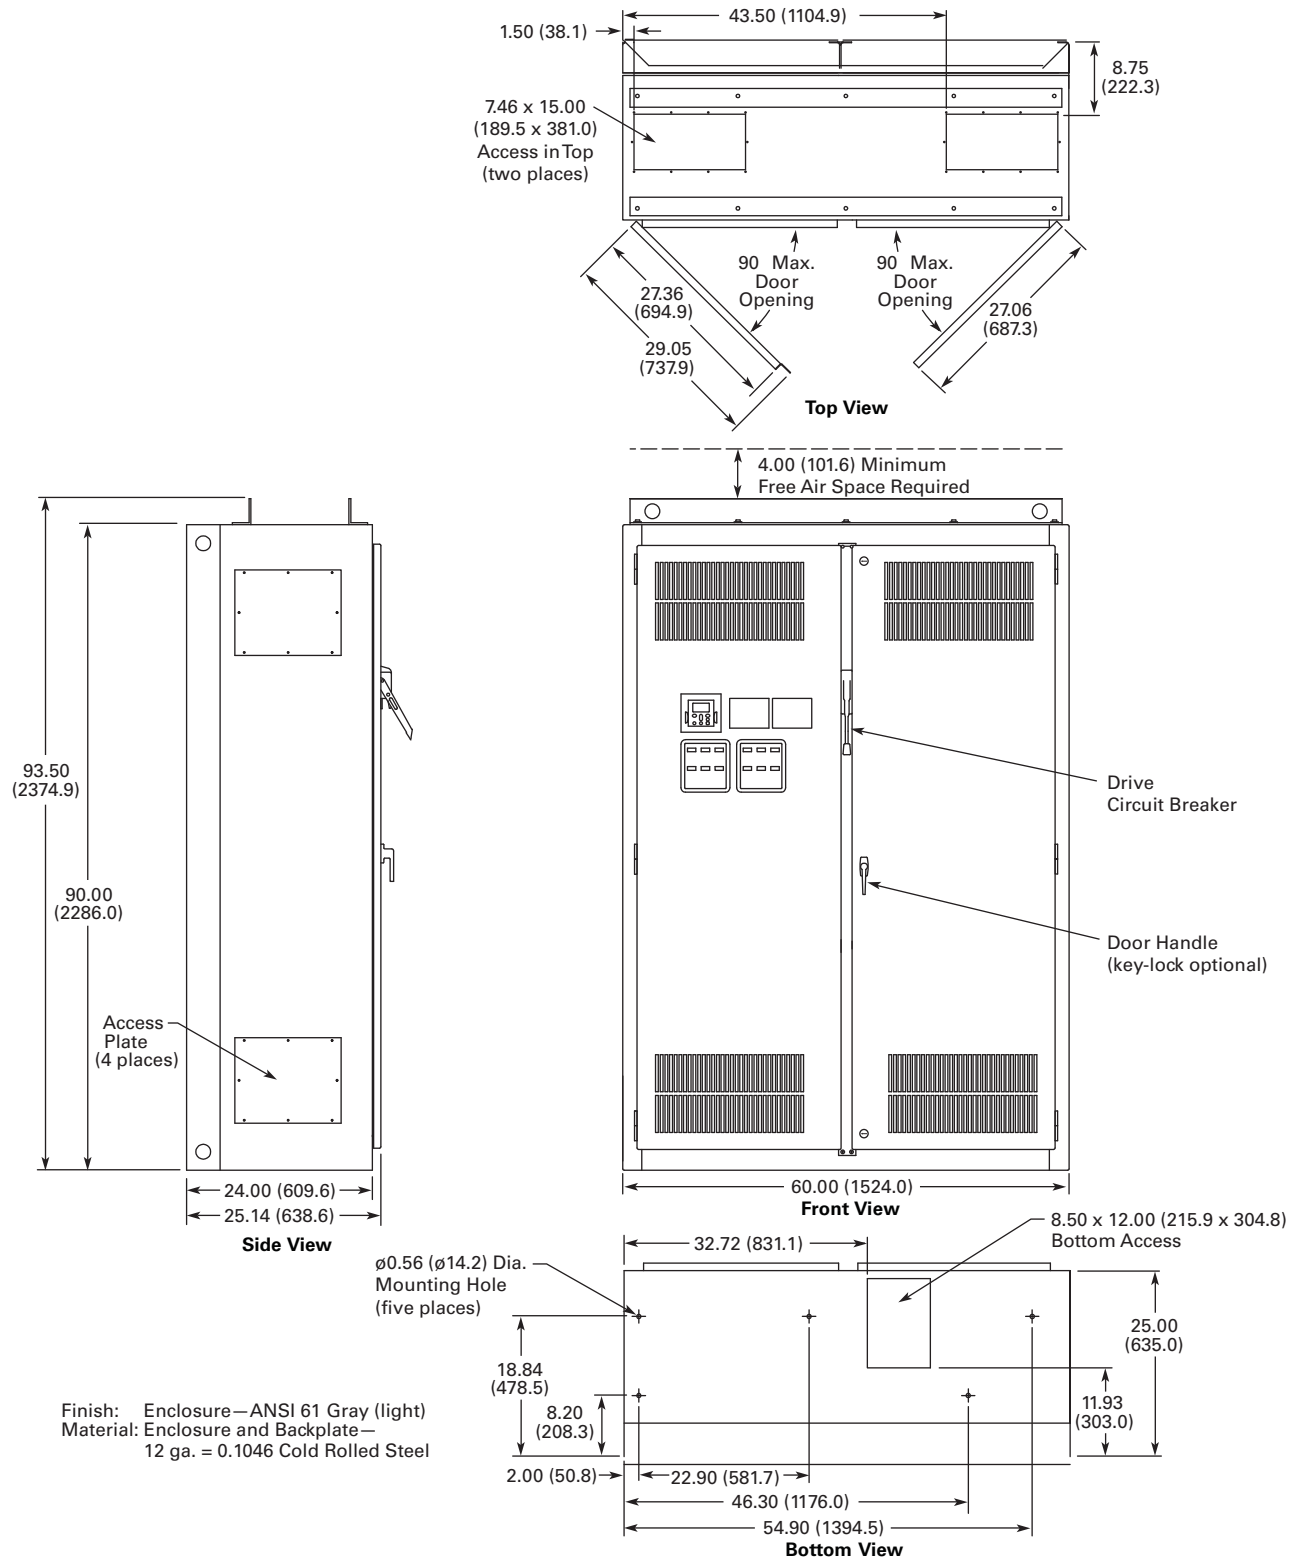

Approximate Dimensions in Inches (mm)

Enclosure Size 10

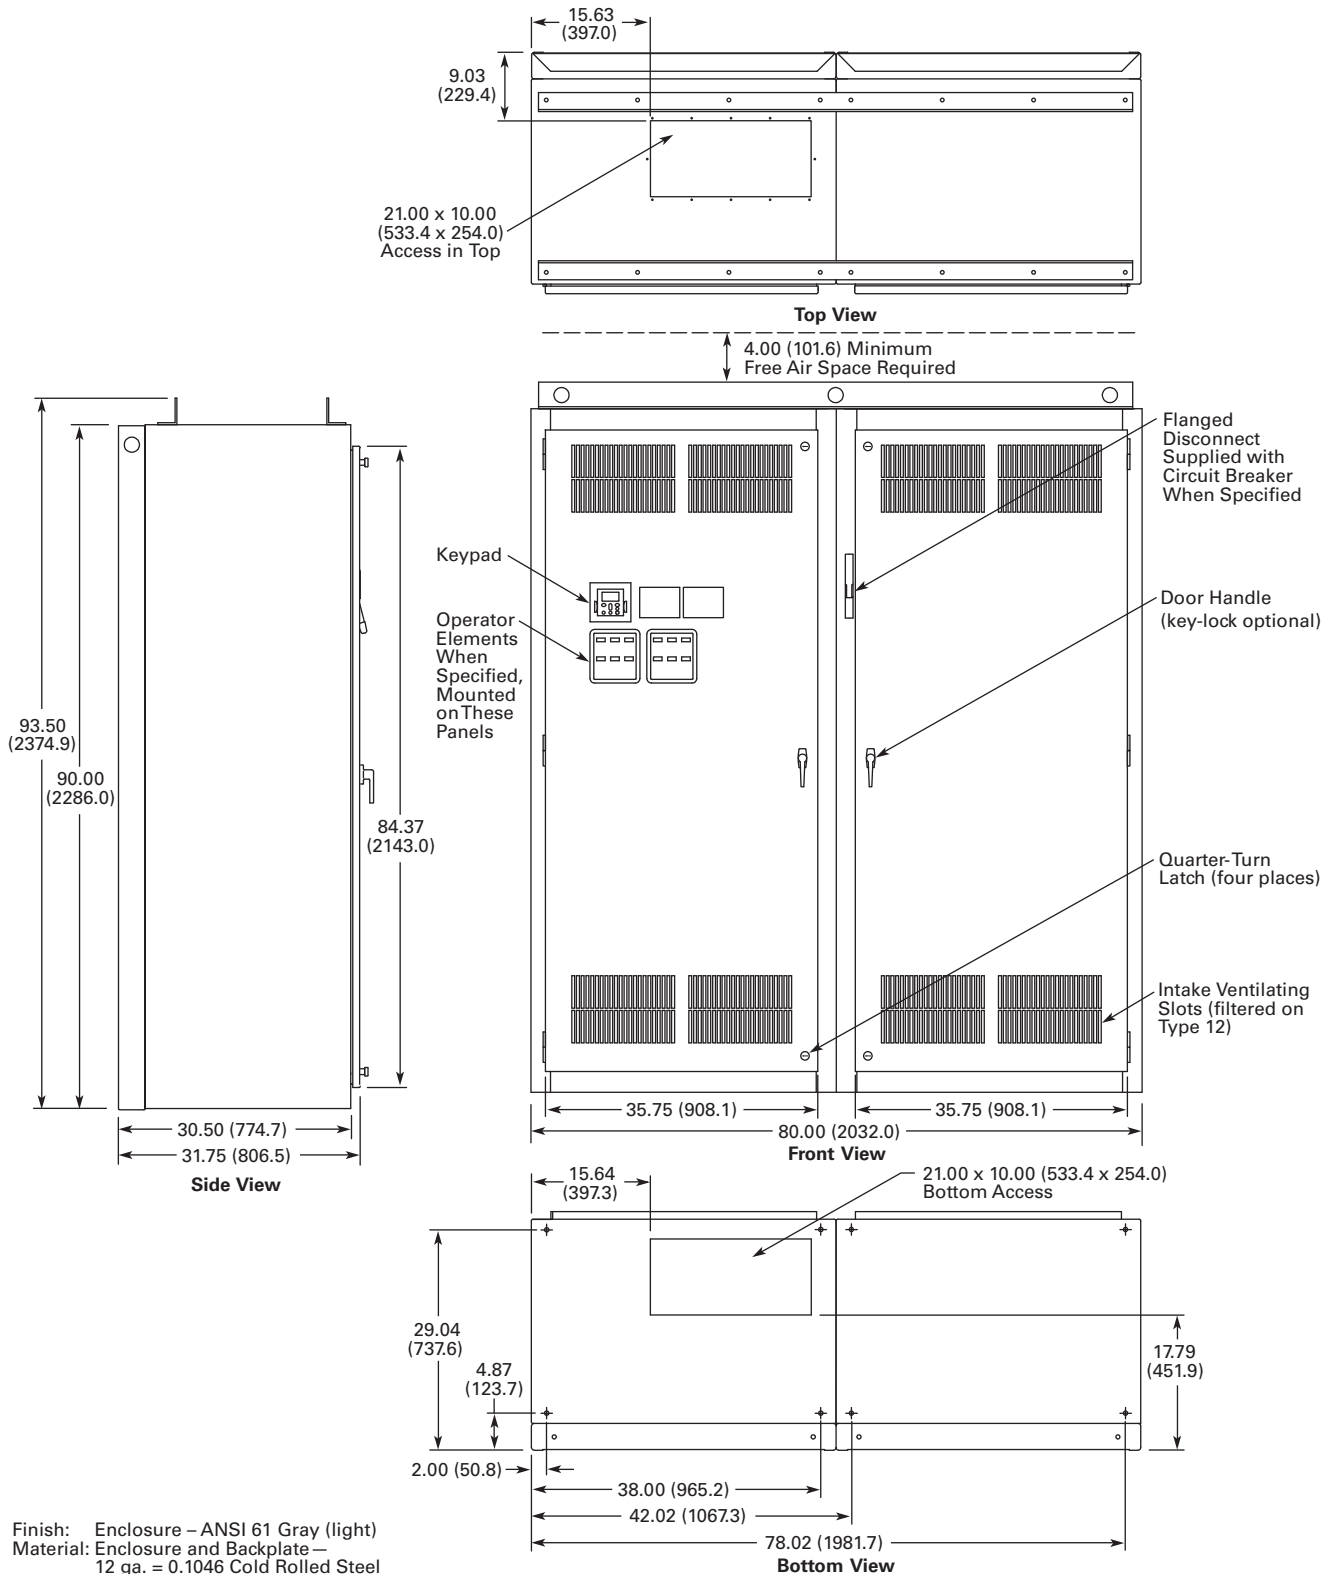

Finish: Enclosure – ANSI 61 Gray (light)
 Material: Enclosure and Backplate –
 12 ga. = 0.1046 Cold Rolled Steel


2.12

Adjustable Frequency Drives

LCX Liquid Cooled Drives

LCX Liquid Cooled Adjustable Frequency Drives

2

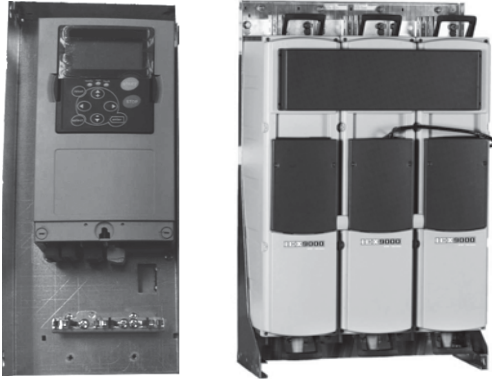

Contents

Description

Page

| | |
|---|------------------|
| LCX Drives | |
| Catalog Number Selection | V6-T2-393 |
| Product Selection | V6-T2-394 |
| Options | V6-T2-397 |
| Technical Data and Specifications | V6-T2-398 |
| Wiring Diagrams | V6-T2-399 |
| Dimensions | V6-T2-401 |

Product Description

The LCX Liquid Cooled Drive family continues Eaton's tradition of providing state-of-the-industry products, by taking advantage of liquid cooling technology in lieu of air-cooling techniques.

The LCX drives are liquid-cooled products that utilize potable water or a water-glycol mixture as a cooling medium.

Features and Benefits

- Compact size and low heat transfer rates allow enclosure size to be greatly reduced, which is especially beneficial in UL Type 4X applications
- Design is modular, with control and power modules independent of each other. Connection between power and control modules can be direct or extended via a fiber optic cable
- Same reliable control module and operating system as the SPX air-cooled drives
- CE mark ensures compliance with the Electromagnetic Compatibility Directive (EMC) and the Low Voltage Directive (LVD)
- Reliable drive with over 500,000 hours MTBF based on MIL 217
- Currently supports DeviceNet, PROFIBUS-DP, Modbus RTU and Modbus TCP communication protocols
- Separately mounted line reactor included with AC fed models


Standards and Certifications

- UL
- cUL
- CE
- IEC



Catalog Number Selection

LCX Liquid Cooled Adjustable Frequency Drives

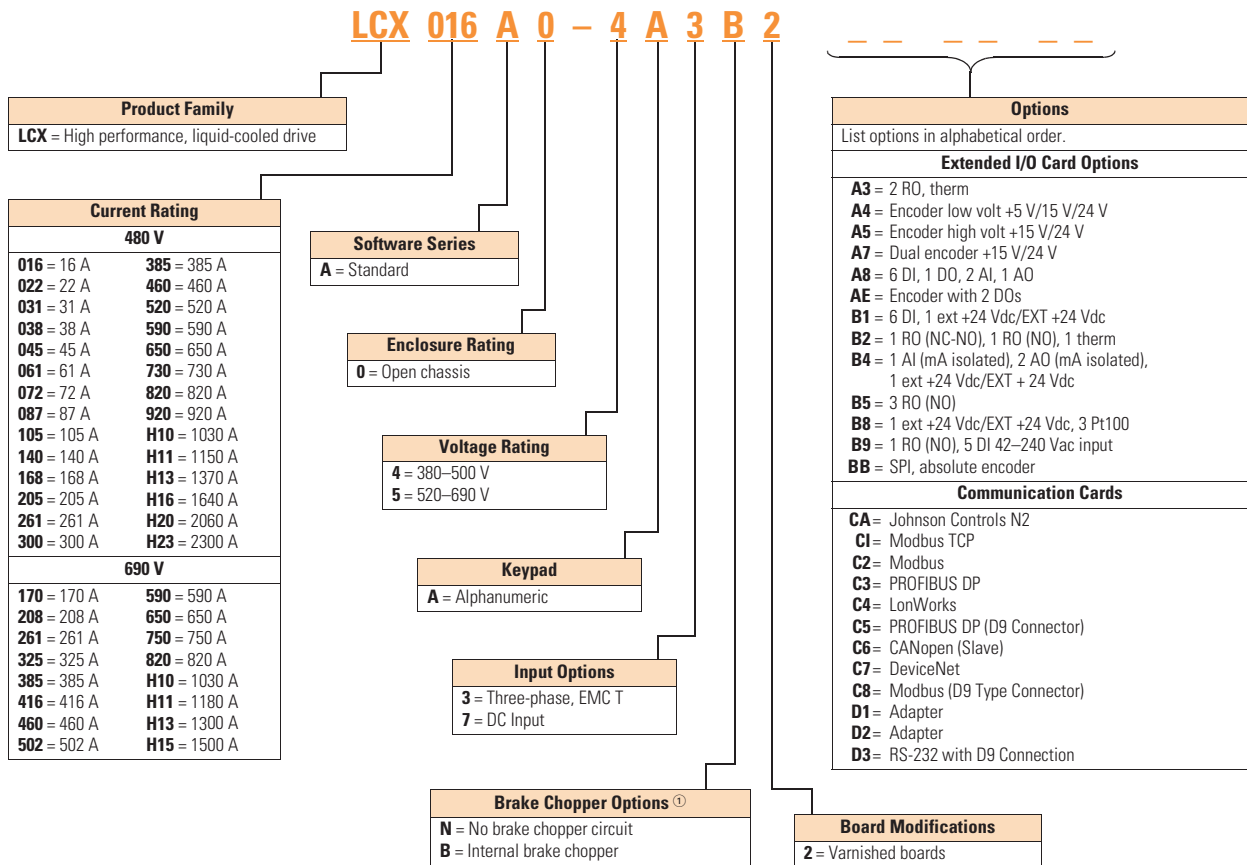**Note**

① Brake chopper is only available in 480 V CH3 drives.

Product Selection

2

LCX Liquid Cooled
Drives

380–500 Vac Liquid Cooled Drives

Motor Output

Current

| Thermal, I _{th} (A) | I _L (A) | I _H (A) | kW | Chassis | Catalog Number |
|------------------------------|--------------------|--------------------|------|---------|----------------|
| 16 | 15 | 11 | 7.5 | CH3 | LCX016A0-4A3N2 |
| 22 | 20 | 15 | 11 | CH3 | LCX022A0-4A3N2 |
| 31 | 28 | 21 | 15 | CH3 | LCX031A0-4A3N2 |
| 38 | 35 | 25 | 18.5 | CH3 | LCX038A0-4A3N2 |
| 45 | 41 | 30 | 22 | CH3 | LCX045A0-4A3N2 |
| 61 | 55 | 41 | 30 | CH3 | LCX061A0-4A3N2 |
| 72 | 65 | 48 | 37 | CH4 | LCX072A0-4A3N2 |
| 87 | 79 | 58 | 45 | CH4 | LCX087A0-4A3N2 |
| 105 | 95 | 70 | 55 | CH4 | LCX105A0-4A3N2 |
| 140 | 127 | 93 | 75 | CH4 | LCX140A0-4A3N2 |
| 168 | 153 | 112 | 90 | CH5 | LCX168A0-4A3N2 |
| 205 | 186 | 137 | 110 | CH5 | LCX205A0-4A3N2 |
| 261 | 237 | 174 | 132 | CH5 | LCX261A0-4A3N2 |
| 300 | 273 | 200 | 160 | CH61 | LCX300A0-4A3N2 |
| 385 | 350 | 257 | 200 | CH61 | LCX385A0-4A3N2 |
| 460 | 418 | 307 | 250 | CH72 | LCX460A0-4A3N2 |
| 520 | 473 | 347 | 250 | CH72 | LCX520A0-4A3N2 |
| 590 | 536 | 393 | 315 | CH72 | LCX590A0-4A3N2 |
| 650 | 591 | 433 | 355 | CH72 | LCX650A0-4A3N2 |
| 730 | 664 | 487 | 400 | CH72 | LCX730A0-4A3N2 |
| 820 | 745 | 547 | 450 | CH63 | LCX820A0-4A3N2 |
| 920 | 836 | 613 | 500 | CH63 | LCX920A0-4A3N2 |
| 1030 | 936 | 687 | 560 | CH63 | LCXH10A0-4A3N2 |
| 1150 | 1045 | 766 | 600 | CH63 | LCXH11A0-4A3N2 |
| 1370 | 1245 | 913 | 700 | CH74 | LCXH13A0-4A3N2 |
| 1640 | 1491 | 1093 | 900 | CH74 | LCXH16A0-4A3N2 |
| 2060 | 1873 | 1373 | 1100 | CH74 | LCXH20A0-4A3N2 |
| 2300 | 2091 | 1533 | 1200 | CH74 | LCXH23A0-4A3N2 |

LCX Liquid Cooled Drives



525–690 Vac Liquid Cooled Drives

Motor Output

Current

| Thermal, I_{th} (A) | I_L (A) | I_H (A) | kW | Chassis | Catalog Number |
|-----------------------|-----------|-----------|------|---------|----------------|
| 170 | 155 | 113 | 110 | CH61 | LCX170A0-5A3N2 |
| 208 | 189 | 139 | 132 | CH61 | LCX208A0-5A3N2 |
| 261 | 237 | 174 | 160 | CH72 | LCX261A0-5A3N2 |
| 325 | 295 | 217 | 200 | CH72 | LCX325A0-5A3N2 |
| 385 | 350 | 257 | 250 | CH72 | LCX385A0-5A3N2 |
| 416 | 378 | 277 | 250 | CH72 | LCX416A0-5A3N2 |
| 460 | 418 | 307 | 300 | CH72 | LCX460A0-5A3N2 |
| 502 | 456 | 335 | 355 | CH72 | LCX502A0-5A3N2 |
| 590 | 536 | 393 | 400 | CH63 | LCX590A0-5A3N2 |
| 650 | 591 | 433 | 450 | CH63 | LCX650A0-5A3N2 |
| 750 | 682 | 500 | 500 | CH63 | LCX750A0-5A3N2 |
| 820 | 745 | 547 | 560 | CH74 | LCX820A0-5A3N2 |
| 920 | 836 | 613 | 650 | CH74 | LCX920A0-5A3N2 |
| 1030 | 936 | 687 | 700 | CH74 | LCXH10A0-5A3N2 |
| 1180 | 1073 | 787 | 800 | CH74 | LCXH11A0-5A3N2 |
| 1300 | 1182 | 867 | 900 | CH74 | LCXH13A0-5A3N2 |
| 1500 | 1364 | 1000 | 1000 | CH74 | LCXH15A0-5A3N2 |

540–675 Vdc Liquid Cooled Inverter Units

Drive Output

Current

| Thermal I_{th} (A) | Rated Cont. I_L (A) | Rated Cont. I_H (A) | Motor Output Power | | Power Loss c/a/T (kW) | Chassis | Catalog Number |
|----------------------|-----------------------|-----------------------|--------------------------------------|--------------------------------------|-----------------------|---------|----------------|
| | | | Optimum Motor at I_{th} 400 V (kW) | Optimum Motor at I_{th} 500 V (kW) | | | |
| 16 | 15 | 11 | 7.5 | 11 | 0.4/0.2/0.6 | CH3 | LCX016A0-4A7B2 |
| 22 | 20 | 15 | 11 | 15 | 0.5/0.2/0.7 | CH3 | LCX022A0-4A7B2 |
| 31 | 28 | 21 | 15 | 18.5 | 0.7/0.2/0.9 | CH3 | LCX031A0-4A7B2 |
| 38 | 35 | 25 | 18.5 | 22 | 0.8/0.2/1.0 | CH3 | LCX038A0-4A7B2 |
| 45 | 41 | 30 | 22 | 30 | 1.0/0.3/1.3 | CH3 | LCX045A0-4A7B2 |
| 61 | 55 | 41 | 30 | 37 | 1.3/0.3/1.5 | CH3 | LCX061A0-4A7B2 |
| 72 | 65 | 48 | 37 | 45 | 1.2/0.3/1.5 | CH4 | LCX072A0-4A7N2 |
| 87 | 79 | 58 | 45 | 55 | 1.5/0.3/1.8 | CH4 | LCX087A0-4A7N2 |
| 105 | 95 | 70 | 55 | 75 | 1.8/0.3/2.1 | CH4 | LCX105A0-4A7N2 |
| 140 | 127 | 93 | 75 | 90 | 2.3/0.3/2.6 | CH4 | LCX140A0-4A7N2 |
| 168 | 153 | 112 | 90 | 110 | 2.5/0.3/2.8 | CH5 | LCX168A0-4A7N2 |
| 205 | 186 | 137 | 110 | 132 | 3.0/0.4/3.4 | CH5 | LCX205A0-4A7N2 |
| 261 | 237 | 174 | 132 | 160 | 4.0/0.4/4.4 | CH5 | LCX261A0-4A7N2 |
| 300 | 273 | 200 | 160 | 200 | 4.5/0.4/4.9 | CH61 | LCX300A0-4A7N2 |
| 385 | 350 | 257 | 200 | 250 | 5.5/0.5/6.0 | CH61 | LCX385A0-4A7N2 |
| 460 | 418 | 307 | 250 | 315 | 5.5/0.5/6.0 | CH62 | LCX460A0-4A7N2 |
| 520 | 473 | 347 | 250 | 355 | 6.5/0.5/7.0 | CH62 | LCX520A0-4A7N2 |
| 590 | 536 | 393 | 315 | 400 | 7.5/0.6/8.1 | CH62 | LCX590A0-4A7N2 |

2.12

Adjustable Frequency Drives

LCX Liquid Cooled Drives

LCX Liquid Cooled Drives

2



540–675 Vdc Liquid Cooled Inverter Units, continued

Drive Output

| Current | | | Motor Output Power | | Power Loss c/a/T (kW) | Chassis | Catalog Number |
|-------------------------|--------------------------|--------------------------|---|---|-----------------------------|---------|----------------|
| Thermal I_{th} (A) | Rated Cont. I_L (A) | Rated Cont. I_H (A) | Optimum Motor at I_{th} 400 V (kW) | Optimum Motor at I_{th} 500 V (kW) | | | |
| 650 | 591 | 433 | 355 | 450 | 8.5/0.6/9.1 | CH62 | LCX650A0-4A7N2 |
| 730 | 664 | 487 | 400 | 500 | 10.0/0.7/10.7 | CH62 | LCX730A0-4A7N2 |
| 820 | 745 | 547 | 450 | 560 | 12.5/0.8/13.3 | CH63 | LCX820A0-4A7N2 |
| 920 | 836 | 613 | 500 | 600 | 14.4/0.9/15.3 | CH63 | LCX920A0-4A7N2 |
| 1030 | 936 | 687 | 560 | 700 | 16.5/1.0/17.5 | CH63 | LCXH10A0-4A7N2 |
| 1150 | 1045 | 766 | 600 | 750 | 18.4/1.0/19.5 | CH63 | LCXH11A0-4A7N2 |
| 1370 | 1245 | 913 | 700 | 900 | 15.5/1.0/16.5 | CH64 | LCXH13A0-4A7N2 |
| 1640 | 1491 | 1093 | 900 | 1100 | 19.5/1.2/20.7 | CH64 | LCXH16A0-4A7N2 |
| 2060 | 1873 | 1373 | 1100 | 1400 | 26.5/1.5/28.0 | CH64 | LCXH20A0-4A7N2 |
| 2300 | 2091 | 1533 | 1250 | 1500 | 29.6/1.7/31.3 | CH64 | LCXH23A0-4A7N2 |
| 2470 | 2245 | 1647 | 1300 | 1600 | 36.0/2.0/38.0 | 2*CH64 | LCXH24A0-4A7N2 |
| 2950 | 2681 | 1967 | 1550 | 1950 | 39.0/2.4/41.4 | 2*CH64 | LCXH29A0-4A7N2 |
| 3710 | 3372 | 2473 | 1950 | 2450 | 48.0/2.7/50.7 | 2*CH64 | LCXH37A0-4A7N2 |
| 4140 | 3763 | 2760 | 2150 | 2700 | 53.0/3.0/66.0 | 2*CH64 | LCXH41A0-4A7N2 |

710–930 Vdc Liquid Cooled Inverter Unit

Drive Output

| Current | | | Motor Output Power | | Power Loss c/a/T (kW) | Chassis | Catalog Number |
|-------------------------|--------------------------|--------------------------|---|---|-----------------------------|---------|----------------|
| Thermal I_{th} (A) | Rated Cont. I_L (A) | Rated Cont. I_H (A) | Optimum Motor at I_{th} 400 V (kW) | Optimum Motor at I_{th} 500 V (kW) | | | |
| 170 | 155 | 113 | 110 | 160 | 4.5/0.2/4.7 | CH61 | LCX170A0-5A7N2 |
| 208 | 189 | 139 | 132 | 200 | 5.5/0.3/5.8 | CH61 | LCX208A0-5A7N2 |
| 261 | 237 | 174 | 160 | 250 | 5.5/0.3/5.8 | CH61 | LCX261A0-5A7N2 |
| 325 | 295 | 217 | 200 | 300 | 6.5/0.3/6.8 | CH62 | LCX325A0-5A7N2 |
| 385 | 350 | 257 | 250 | 355 | 7.5/0.4/7.9 | CH62 | LCX385A0-5A7N2 |
| 416 | 378 | 277 | 250 | 355 | 8.0/0.4/8.4 | CH62 | LCX416A0-5A7N2 |
| 460 | 418 | 307 | 300 | 400 | 8.5/0.4/8.9 | CH62 | LCX460A0-5A7N2 |
| 502 | 456 | 335 | 355 | 450 | 10.0/0.5/10.5 | CH62 | LCX502A0-5A7N2 |
| 590 | 536 | 393 | 400 | 560 | 10.0/0.5/10.5 | CH63 | LCX590A0-5A7N2 |
| 650 | 591 | 433 | 450 | 600 | 13.5/0.7/14.2 | CH63 | LCX650A0-5A7N2 |
| 750 | 682 | 500 | 500 | 700 | 16.0/0.8/16.8 | CH63 | LCX750A0-5A7N2 |
| 820 | 745 | 547 | 560 | 800 | 16.0/0.8/16.8 | CH64 | LCX820A0-5A7N2 |
| 920 | 836 | 613 | 650 | 850 | 18.0/0.9/18.9 | CH64 | LCX920A0-5A7N2 |
| 1030 | 936 | 687 | 700 | 1000 | 19.0/1.0/20.0 | CH64 | LCXH10A0-5A7N2 |
| 1180 | 1073 | 787 | 800 | 1100 | 21.0/1.0/20.1 | CH64 | LCXH11A0-5A7N2 |
| 1300 | 1182 | 867 | 900 | 1200 | 27.0/1.4/28.4 | CH64 | LCXH13A0-5A7N2 |
| 1500 | 1364 | 1000 | 1050 | 1400 | 32.0/1.6/33.6 | CH64 | LCXH15A0-5A7N2 |
| 1700 | 1545 | 1133 | 1150 | 1550 | N/A | CH64 | LCXH17A0-5A7N2 |
| 1850 | 1682 | 1233 | 1250 | 1650 | 34.2/1.8/36.0 | 2*CH64 | LCXH18A0-5A7N2 |
| 2120 | 1927 | 1413 | 1450 | 1900 | 37.8/2.0/39.8 | 2*CH64 | LCXH21A0-5A7N2 |
| 2340 | 2127 | 1560 | 1600 | 2100 | 48.6/2.5/51.1 | 2*CH64 | LCXH23A0-5A7N2 |
| 2700 | 2455 | 1800 | 1850 | 2450 | 57.6/3.0/60.6 | 2*CH64 | LCXH27A0-5A7N2 |
| 3100 | 2818 | 2066 | 2150 | 2800 | N/A | 2*CH64 | LCXH31A0-5A7N2 |


Options

9000X Series Option Board Kits

The 9000X Series drives can accommodate a wide selection of expander and adapter option boards to customize the drive for your application needs. The drive's control unit is designed to accept a total of five option boards.

The 9000X Series factory installed standard board configuration includes an A9 I/O board and an A2 relay output board, which are installed in slots A and B.

Option Boards



Option Board Kits

| Option Kit Description ^① | Allowed Slot Locations ^② | Field Installed Catalog Number | Factory Installed Option Designator | SVX Ready Programs | | | | | | |
|---|-------------------------------------|--------------------------------|-------------------------------------|--------------------|--------------|----------|-----|-----|----------|-----|
| | | | | Basic | Local/Remote | Standard | MSS | PID | Multi-P. | PFC |
| Standard I/O Cards | | | | | | | | | | |
| 2 RO (NC-NO) | B | OPTA2 | — | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| 6 DI, 1 DO, 2 AI, 1 AO, 1 +10 Vdc ref, 2 ext +24 Vdc/EXT +24 Vdc | A | OPTA9 | — | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Extended I/O Cards | | | | | | | | | | |
| 2 RO, therm | B | OPTA3 | A3 | — | ■ | ■ | ■ | ■ | ■ | ■ |
| Encoder low Volt +5 V/15 V/24 V | C | OPTA4 | A4 | — | ■ | ■ | ■ | ■ | ■ | ■ |
| Encoder high Volt +15 V/24 V | C | OPTA5 | A5 | — | ■ | ■ | ■ | ■ | ■ | ■ |
| Dual encoder +15 V/24 V | C | OPTA7 | A7 | — | ■ | ■ | ■ | ■ | ■ | ■ |
| 6 DI, 1 DO, 2 AI, 1 AO | A | OPTA8 | A8 | — | ■ | ■ | ■ | ■ | ■ | ■ |
| 3 DI (encoder 10–24 V), out +15 V/+24 V, 2 DO (pulse+direction)—SPX only | C | OPTAE | AE | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| 6 DI, 1 ext +24 Vdc/EXT +24 Vdc | B, C, D , E | OPTB1 | B1 | — | — | — | — | — | ■ | ■ |
| 1 RO (NC-NO), 1 RO (NO), 1 therm | B, C, D , E | OPTB2 | B2 | — | — | — | — | — | ■ | ■ |
| 1 AI (mA isolated), 2 AO (mA isolated), 1 ext +24 Vdc/EXT +24 Vdc | B, C, D , E | OPTB4 | B4 | — | ■ | ■ | ■ | ■ | ■ | ■ |
| 3 RO (NO) | B, C, D , E | OPTB5 | B5 | — | — | — | — | — | ■ | ■ |
| 1 ext +24 Vdc/EXT +24 Vdc, 3 Pt100 | B, C, D , E | OPTB8 | B8 | — | — | — | — | — | — | — |
| 1 RO (NO), 5 DI 42–240 Vac input | B, C, D , E | OPTB9 | B9 | — | — | — | — | — | ■ | ■ |
| SPI, absolute encoder | C | OPTBB | BB | — | — | — | — | — | — | — |
| Communication Cards ^③ | | | | | | | | | | |
| Modbus | D , E | OPTC2 | C2 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Johnson Controls N2 | D , E | OPTC2 | CA | — | — | — | — | — | — | — |
| PROFIBUS DP | D , E | OPTC3 | C3 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| LonWorks | D , E | OPTC4 | C4 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| PROFIBUS DP (D9 connector) | D , E | OPTC5 | C5 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| CANopen (slave) | D , E | OPTC6 | C6 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| DeviceNet | D , E | OPTC7 | C7 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Modbus (D9 Type connector) | D , E | OPTC8 | C8 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Modbus TCP | D , E | OPTC1 | C1 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Adapter—SPX only | D , E | OPTD1 | D1 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Adapter—SPX only | D , E | OPTD2V | D2 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| RS-232 with D9 connection | D , E | OPTD3 | D3 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Keypad | | | | | | | | | | |
| 9000X Series standard keypad | — | KEYPAD-STD | — | — | — | — | — | — | — | ■ |
| 9000X Series remote mount keypad unit (keypad not included, includes 10 ft cable, keypad holder, mounting hardware) | — | OPTRMT-KIT-9000X | — | — | — | — | — | — | — | — |

Notes

① AI = Analog Input; AO = Analog Output, DI = Digital Input, DO = Digital Output, RO = Relay Output

② Option card must be installed in one of the slots listed for that card. Slot indicated in bold is the preferred location.

③ OPTC2 is a multi-protocol option card.

Technical Data and Specifications

2

LCX Products

| Description | Specification |
|--------------------------------|---|
| General Specifications | |
| Line voltage | 400 to 500 Vac; 525 to 690 Vac; (–10% to 10%) 465 to 800 Vdc; 640 to 1100 Vdc; (–0 to 0%) |
| Frequency | 50/60 Hz |
| Line voltage variation | –10% to 10% |
| Input frequency variation | 45–66 Hz |
| Continuous output current | Rated current at incoming cooling liquid temperature of 30 °C |
| Output frequency | 0–320 Hz |
| Drive efficiency | >95% |
| Power factor (displacement) | 0.96 |
| Liquid coolant pressure | 87 psi (6 bar) maximum |
| Liquid coolant flow rate | 1.3 to 7.9 gal./min. (5 to 30 liter/min.) minimum depending on drive size |
| Liquid coolant fittings | Standard quick connect, NPT |
| Operating ambient temperature | –10/50 °C |
| Storage temperature | –40/70 °C |
| Humidity | 95% maximum (non-condensing) |
| Altitude | 3300 ft (1000 m) maximum without derating |
| Enclosure | IP00 |
| Warranty | Standard terms, 3 years with certified start-up |
| Mains Connection | |
| Input voltage (V_{in}) | 400–500 Vac; 525–690 Vac; (–10%–10%) 465–800 Vdc; 640–1100 Vdc; (–0–0%) |
| Input frequency (f_{in}) | 45–66 Hz |
| Connection to mains | Once per minute or less (normal case) |
| Motor Connection | |
| Output voltage | 0– V_{in} |
| Continuous output current | Rated current at nominal inflow cooling water temperature of 30 °C; Overload 2 sec./20 sec. |
| Starting current | Rated current at 2 sec./20 sec. if output frequency <30 Hz and temperature of heatsink <149 °F (65 °C) |
| Output frequency | 0–320 Hz (standard); 7200 Hz (special software) |
| Frequency resolution | Application dependent |
| Control Characteristics | |
| Control method | Frequency control (V/f) Open loop: Sensorless vector control Closed loop: Frequency control Closed loop: Vector control |
| Switching frequency 480 V ① | Adjustable with parameter 2.6.9 Up to and including 61-Amp size: 1–16 kHz (factory default, 10 kHz) From 72-Amp size: 1–12 kHz (factory default, 3.6 kHz) |
| 575 V ① | 1–6 kHz (factory default, 1.5 kHz) |
| Frequency reference | Analog input: resolution 0.1% (10 bits); accuracy ±1% Panel reference: resolution 0.01 Hz |
| Field weakening point | 30–320 Hz |
| Acceleration time | 0.1–3000 seconds |
| Deceleration time | 0.1–3000 seconds |
| Braking torque | DC brake: 30% x T_n (without brake option) |

| Description | Specification |
|-------------------------------|--|
| Ambient Conditions | |
| Ambient operating temperature | 14 °F (–10 °C), no frost to 122 °F (50 °C) at I_{th} 122 to 158 °F (50 to 70 °C), derating required |
| Storage temperature | –40 °F to 158 °F (–40 to 70 °C) No liquid in heatsink under 32 °F (0 °C) |
| Relative humidity | 5–96% RH, noncondensing, no dripping water |
| Air quality | Chemical vapors: IEC 721-3-3, unit in operation, class 3C2 Mechanical particles: IEC 721-3-3, unit in operation, class 3S2 (no conductive dust allowed); No corrosive gases |
| Altitude | Up to 1,000 m: 100% load capacity (no derating) Above 1,000 m: Derating of 1% per each 100 m required |
| Vibration | EN 50178, EN 60068-2-6; 5–150 Hz Displacement amplitude: 0.25 mm (peak) at 3–31 Hz Max. acceleration amplitude: 1G at 31–150 Hz |
| Shock | EN 50178, EN 60068-2-27, UPS drop test (for applicable UPS weights) Storage and shipping: Max. 15 g, 11 ms (in package) |
| Enclosure class | IP00 open frame standard in entire kW/hp range |
| EMC | |
| Immunity | Fulfills all EMC immunity requirements |
| Emissions | EMC level N; EMC level T for IT networks |
| Safety | |
| Approvals | EN 50178, EN 60204-1, CE, UL, CUL, FI, GOST R, IEC 61800-5 (See unit nameplate for more detailed approvals.) |
| Control Connections | |
| Analog input voltage | 0 to +10 V, $R_i = 200$ kohm (–10 V to +10 V joystick control) Resolution 0.1%; accuracy ±1% |
| Analog input current | 0(4)–20 mA, $R_i = 250$ ohm differential |
| Digital inputs | 6 positive or negative logic; 18–24 Vdc |
| Auxiliary voltage | +24 V, ±15%, max. 250 mA |
| Output reference voltage | +10 V, +3%, max. load 10 mA |
| Analog output | 0(4)–20 mA, R_i max. 500 ohm Resolution 10 bits; accuracy ±2% |
| Digital outputs | Open collector output, 50 mA/48V |
| Relay outputs | Two programmable change-over relay outputs Switching capacity: 24 Vdc/8 A, 250 Vac/8 A, 125 Vdc/0.4 A Min. switching load: 5 V/10 mA |

Note

① Derating required if higher switching frequency than the default is used.

LCX Products, continued


| Description | Specification |
|---------------------------------|--|
| Protections | |
| Overvoltage protection | |
| 480 V | 911 V |
| 575 V | 1200 V |
| Undervoltage protection | |
| 480 V | 333 V |
| 575 V | 461 V |
| Ground fault protection | In case of ground fault in motor or motor cable, only the drive is protected |
| Mains supervision | Trips if any of the input phases are missing (drives only) |
| Motor phase supervision | Trips if any of the output phases are missing |
| Unit overtemperature protection | |
| Alarm limit | 149 °F (65 °C) for heatsink, 158 °F (70 °C) for circuit boards |
| Trip limit | 158 °F (70 °C) for heatsink, 185 °F (85 °C) for circuit boards |

| Description | Specification |
|---------------------------------|---|
| Protections, continued | |
| Overcurrent protection | Yes |
| Motor overload protection | Yes |
| Motor stall protection | Yes |
| Motor underload protection | Yes |
| Short-circuit protection | Yes (+24 V and +10 V reference voltages) |
| Liquid Cooling | |
| Allowed cooling agents | Drinking water Water-glycol mixture |
| Temperature of cooling agent | 32 to 86 °F (0 to 30 °C) at I_{th} for input; 86 to 149 °F (30 to 65 °C) Max. temperature rise during circulation: 9 °F (5 °C), no condensation allowed |
| System max. working pressure | 87 psi (6 bar) |
| System max. peak pressure | 580 psi (40 bar) |
| Pressure loss (at nominal flow) | Varies according to size |

Wiring Diagrams

Cooling System Diagrams

Example of a Typical Cooling System

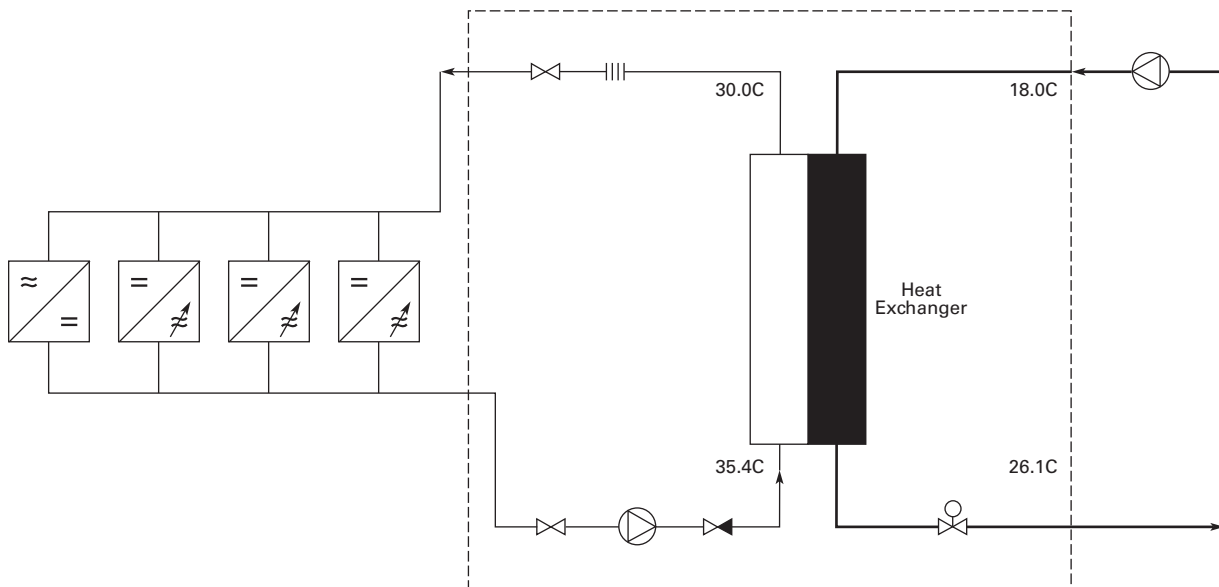


2.12

Adjustable Frequency Drives

LCX Liquid Cooled Drives


Example PI-Diagram of a Typical Cooling System and Connections

2

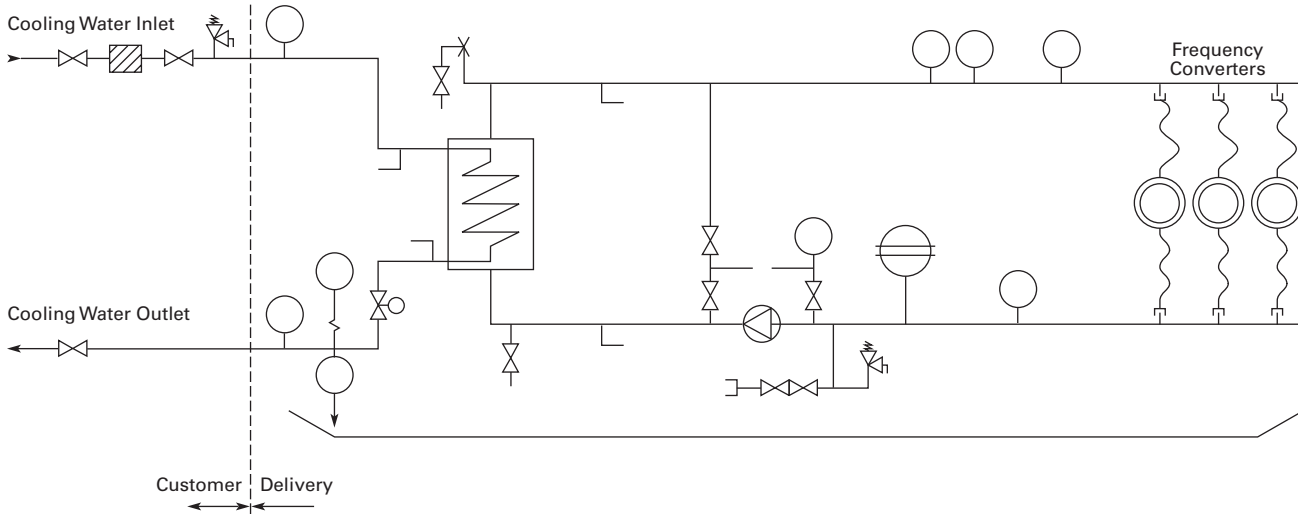


I/O Board Diagrams

A9 Option Board Control Wiring

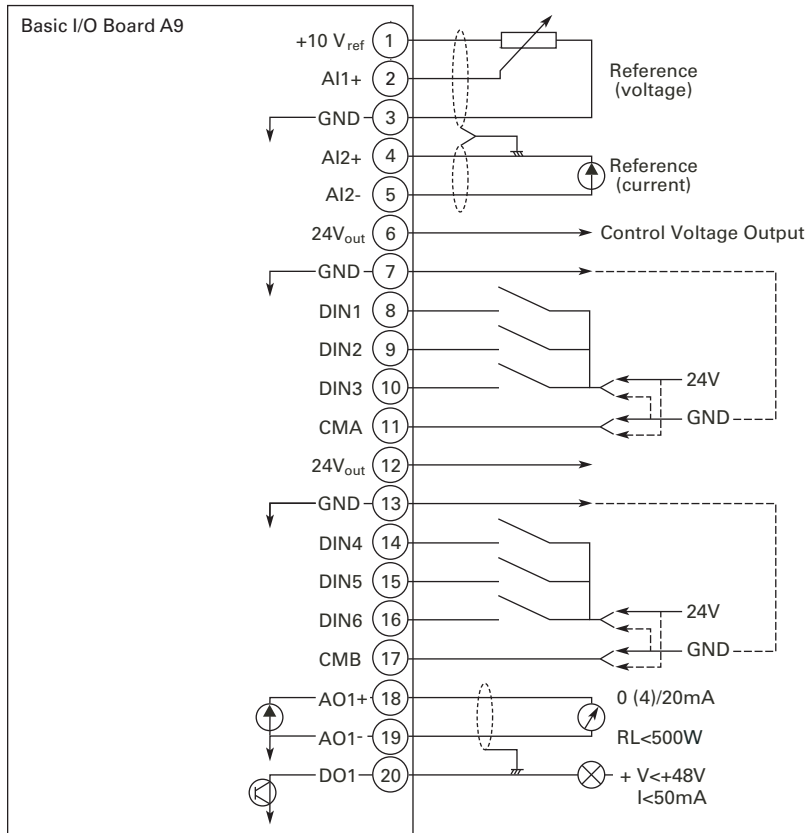

Dotted lines indicate the connections for inverted signals

A2 Option Board Wiring

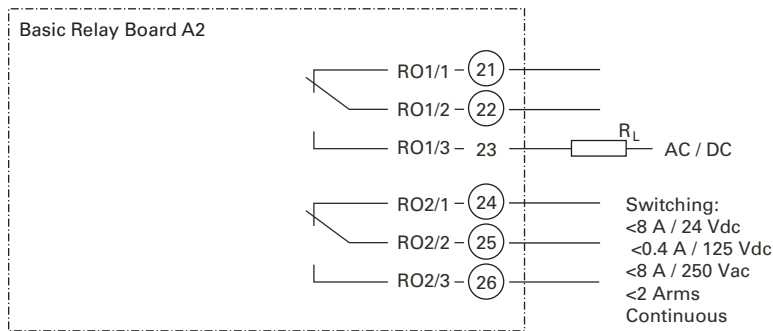


Dimensions

Approximate Dimensions in Inches (mm)

LCX Drives

Chassis Size, CH3

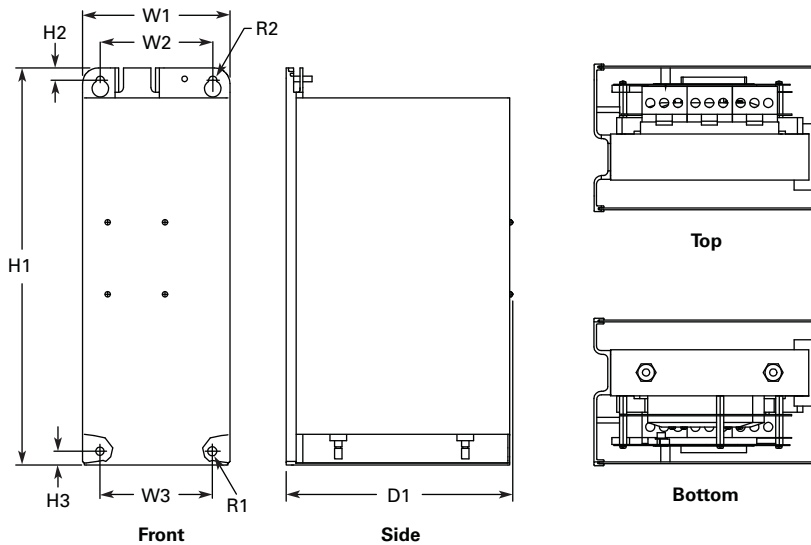

| Voltage | Amps | H1 | H2 | H3 | D1 | W1 | W2 | W3 | R1 Dia. | R2 Dia. | Weight Lbs (kg) |
|-------------|-------|------------------|----------------|----------------|-----------------|-----------------|-----------------|-----------------|----------------|---------------|--------------------|
| 380-500 Vac | 16-61 | 16.97 (431.0) | 0.53 (13.5) | 0.59 (15.0) | 9.69 (246.0) | 6.30 (160.0) | 4.80 (122.0) | 4.80 (122.0) | 0.39 (10.0) | 0.35 (9.0) | 66 (30) |

2.12


Adjustable Frequency Drives

LCX Liquid Cooled Drives

Approximate Dimensions in Inches (mm)


Chassis Size, CH4

2

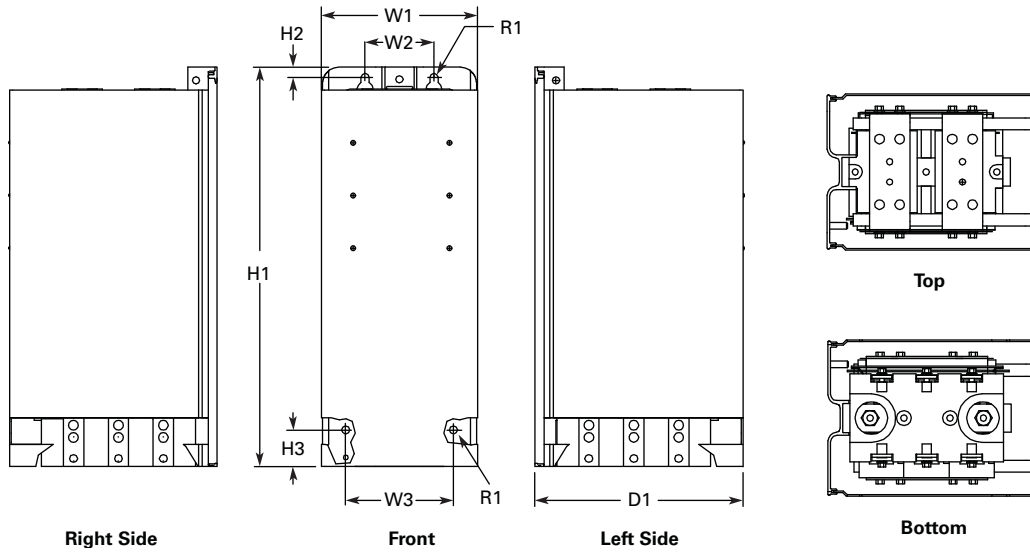

| Voltage | Amps | H1 | H2 | H3 | D1 | W1 | W2 | W3 | R1 Dia. | R2 Dia. | Weight Lbs (kg) |
|-------------|--------|------------------|----------------|----------------|------------------|-----------------|----------------|-----------------|----------------|---------|--------------------|
| 380–500 Vac | 72–140 | 19.41 (493.0) | 0.49 (12.5) | 1.77 (45.0) | 10.14 (257.5) | 7.60 (193.0) | 3.35 (85.0) | 5.24 (133.0) | 0.39 (10.0) | — | 77 (35) |


Chassis Size, CH5

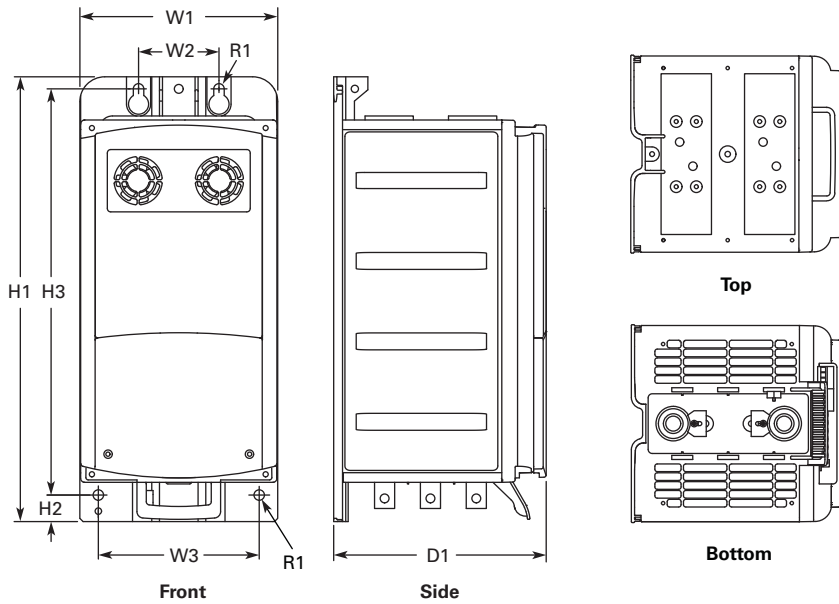

| Voltage | Amps | H1 | H2 | H3 | D1 | W1 | W2 | W3 | R1 Dia. | R2 Dia. | Weight Lbs (kg) |
|-------------|---------|------------------|----------------|------------------|------------------|---------------|-----------------|-----------------|----------------|---------|--------------------|
| 380–500 Vac | 168–261 | 21.77 (553.0) | 1.30 (33.0) | 19.88 (505.0) | 10.39 (264.0) | 9.69 (246) | 3.94 (100.0) | 7.87 (200.0) | 0.51 (13.0) | — | 88 (40) |


Approximate Dimensions in Inches (mm)

Chassis Size, CH61

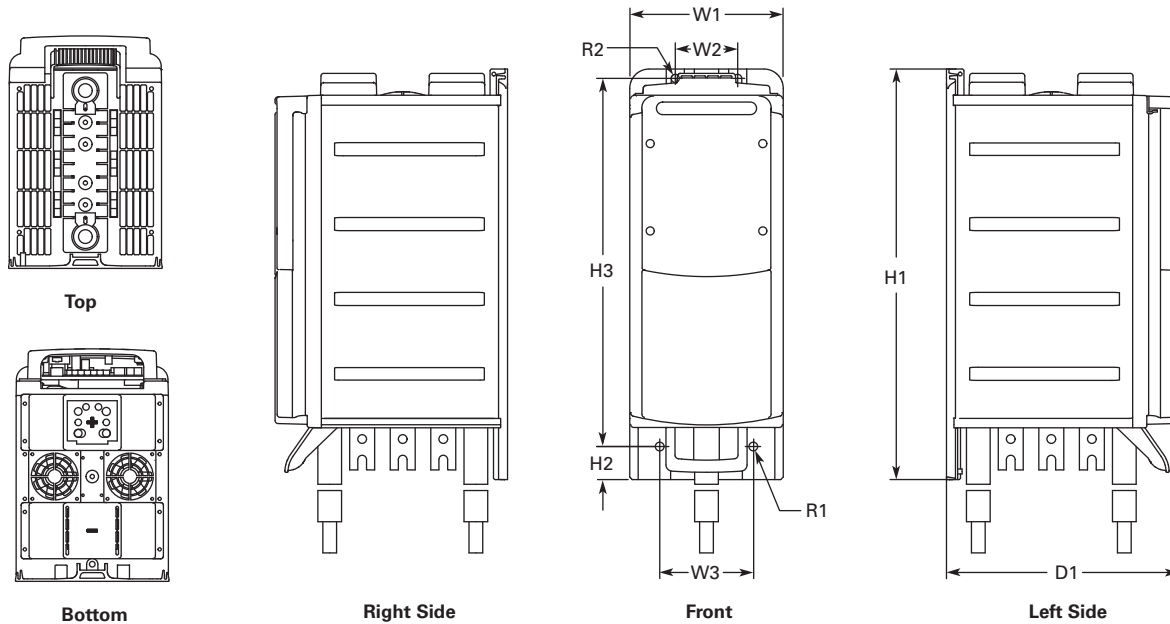

| Voltage | Amps | H1 | H2 | H3 | D1 | W1 | W2 | W3 | R1 Dia. | R2 Dia. | Weight Lbs (kg) |
|-------------|---------|------------------|----------------|------------------|------------------|-----------------|-----------------|-----------------|----------------|----------------|--------------------|
| 380–500 Vac | 300–385 | 25.91 (658.0) | 2.09 (53.0) | 23.23 (590.0) | 14.69 (373.0) | 9.69 (246.0) | 3.94 (100.0) | 5.91 (150.0) | 0.55 (14.0) | 0.51 (13.0) | 121 (55) |
| 525–690 Vac | 170–208 | | | | | | | | | | |

Liquid-Cooled Inverter—Chassis Size, CH62

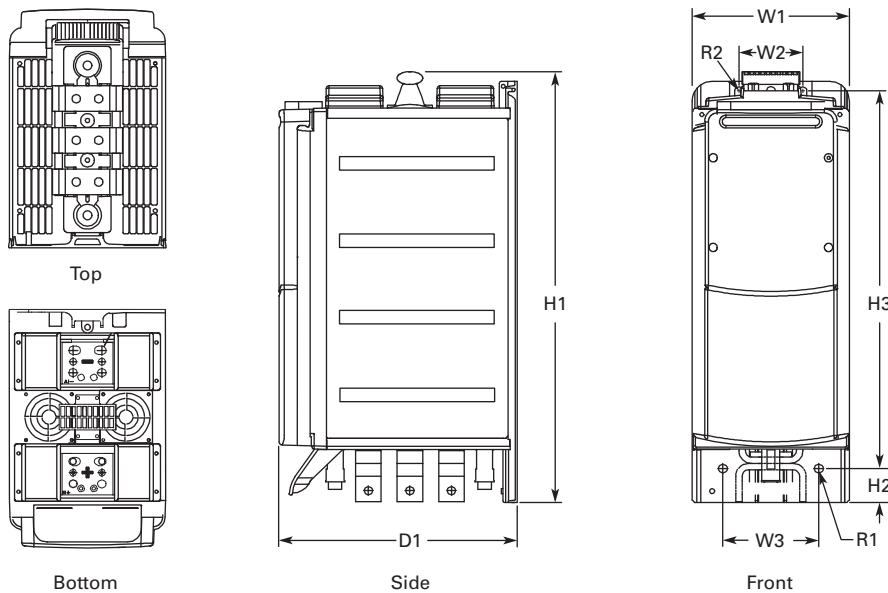

| Voltage | Amps | H1 | H2 | H3 | D1 | W1 | W2 | W3 | R1 Dia. | R2 Dia. |
|-------------|---------|----------------|-------------|----------------|----------------|---------------|---------------|---------------|--------------|--------------|
| 540–675 Vdc | 460–730 | 26.50 (673) | 2.0 (53) | 23.23 (590) | 14.69 (373) | 9.69 (246) | 3.94 (100) | 5.91 (150) | 0.55 (14) | 0.51 (13) |
| 710–930 Vdc | 325–502 | | | | | | | | | |

2.12


Adjustable Frequency Drives

LCX Liquid Cooled Drives

Approximate Dimensions in Inches (mm)

2


Chassis Size, CH63

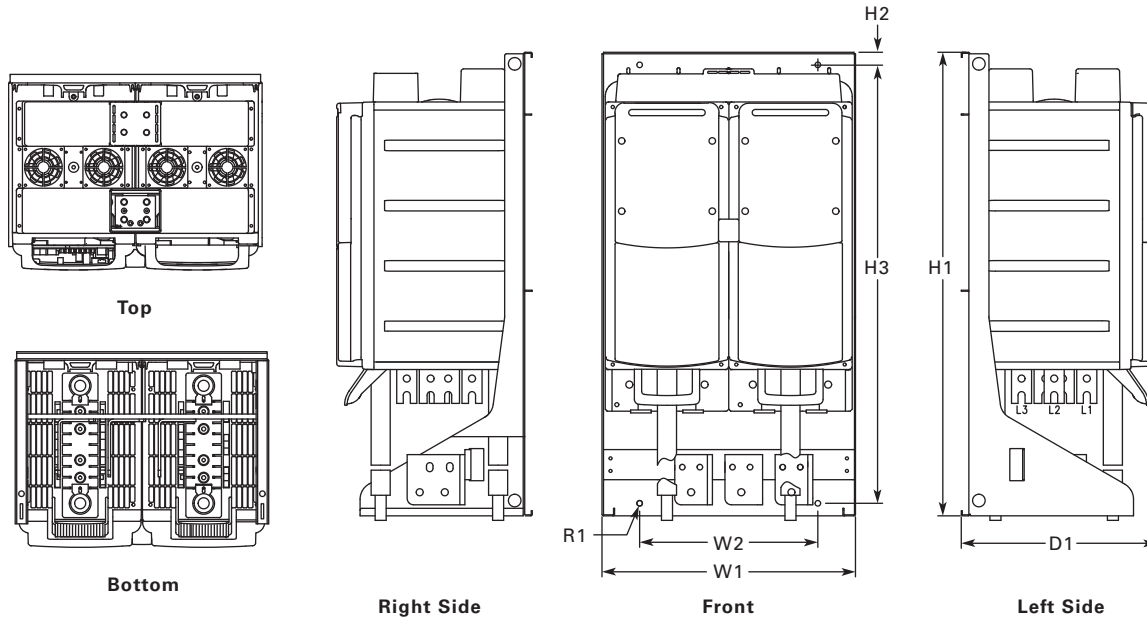


| Voltage | Amps | H1 | H2 | H3 | D1 | W1 | W2 | R1 Dia. | Weight Lbs (kg) |
|-------------|----------|------------------|----------------|------------------|------------------|------------------|------------------|----------------|--------------------|
| 380–500 Vac | 820–1030 | 36.36 (923.5) | 0.91 (23.0) | 34.39 (873.5) | 15.35 (390.0) | 19.88 (505.0) | 13.98 (355.0) | 0.43 (11.0) | 264 (120) |
| 525–690 Vac | 590–750 | | | | | | | | |

Approximate Dimensions in Inches (mm)


Liquid-Cooled Inverter with Mounting Bracket, Chassis Size CH64, IP90

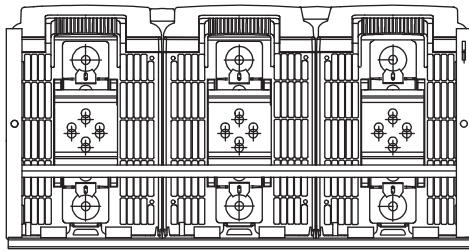

Bottom

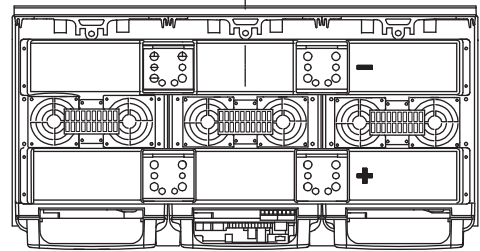

Top

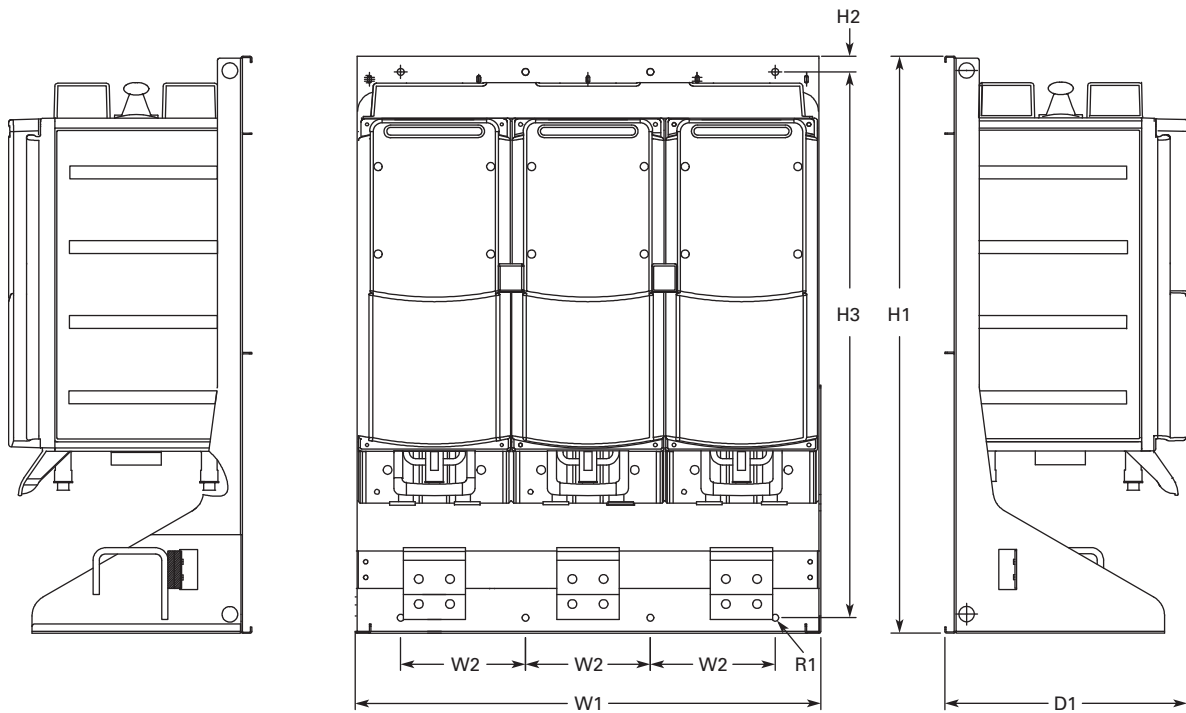

Right Side

Front

Left Side

| Voltage | Amps | H1 | H2 | H3 | D1 | W1 | W2 | R1 Dia. |
|-------------|-----------|-------|------|-------|-------|-------|-------|---------|
| 540–675 Vdc | 1370–4140 | 36.38 | 1.03 | 34.37 | 15.35 | 29.37 | 7.87 | 0.43 |
| 710–930 Vdc | 820–3100 | (924) | (26) | (873) | (390) | (746) | (200) | (11) |

2.12


Adjustable Frequency Drives

LCX Liquid Cooled Drives

Approximate Dimensions in Inches (mm)

Chassis Size, CH72


2

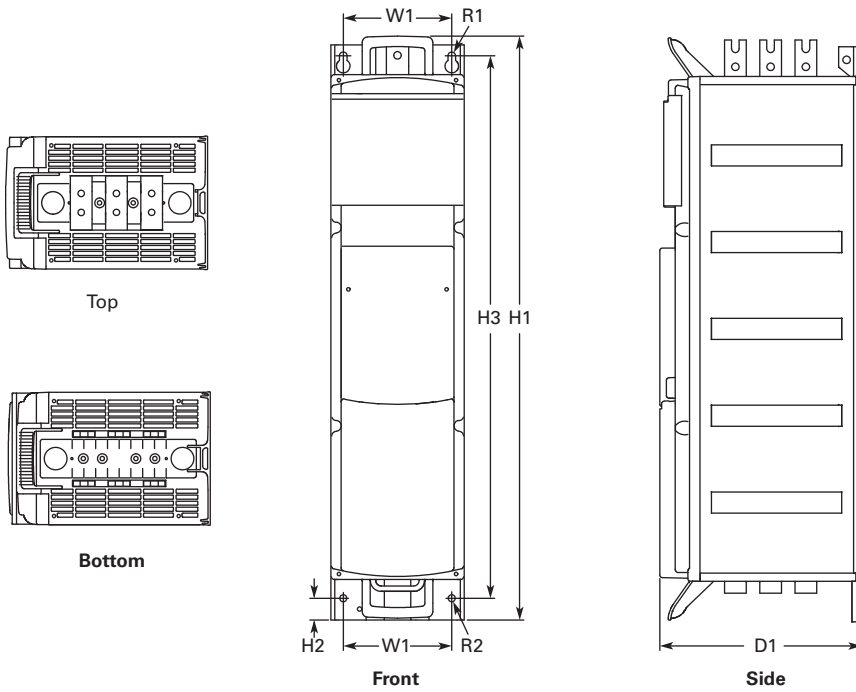

| Voltage | Amps | H1 | H2 | H3 | D1 | W1 | R1 Dia. | R2 Dia. | Weight Lbs (kg) |
|-------------|---------|----------|--------|----------|---------|---------|---------|---------|--------------------|
| 380–500 Vac | 460–730 | 42.38 | 1.57 | 39.37 | 14.65 | 7.87 | 0.55 | 0.51 | 198 (90) |
| 525–690 Vac | 261–502 | (1076.5) | (40.0) | (1000.0) | (372.0) | (200.0) | (14.0) | (13.0) | |


Approximate Dimensions in Inches (mm)

Chassis Size, CH74

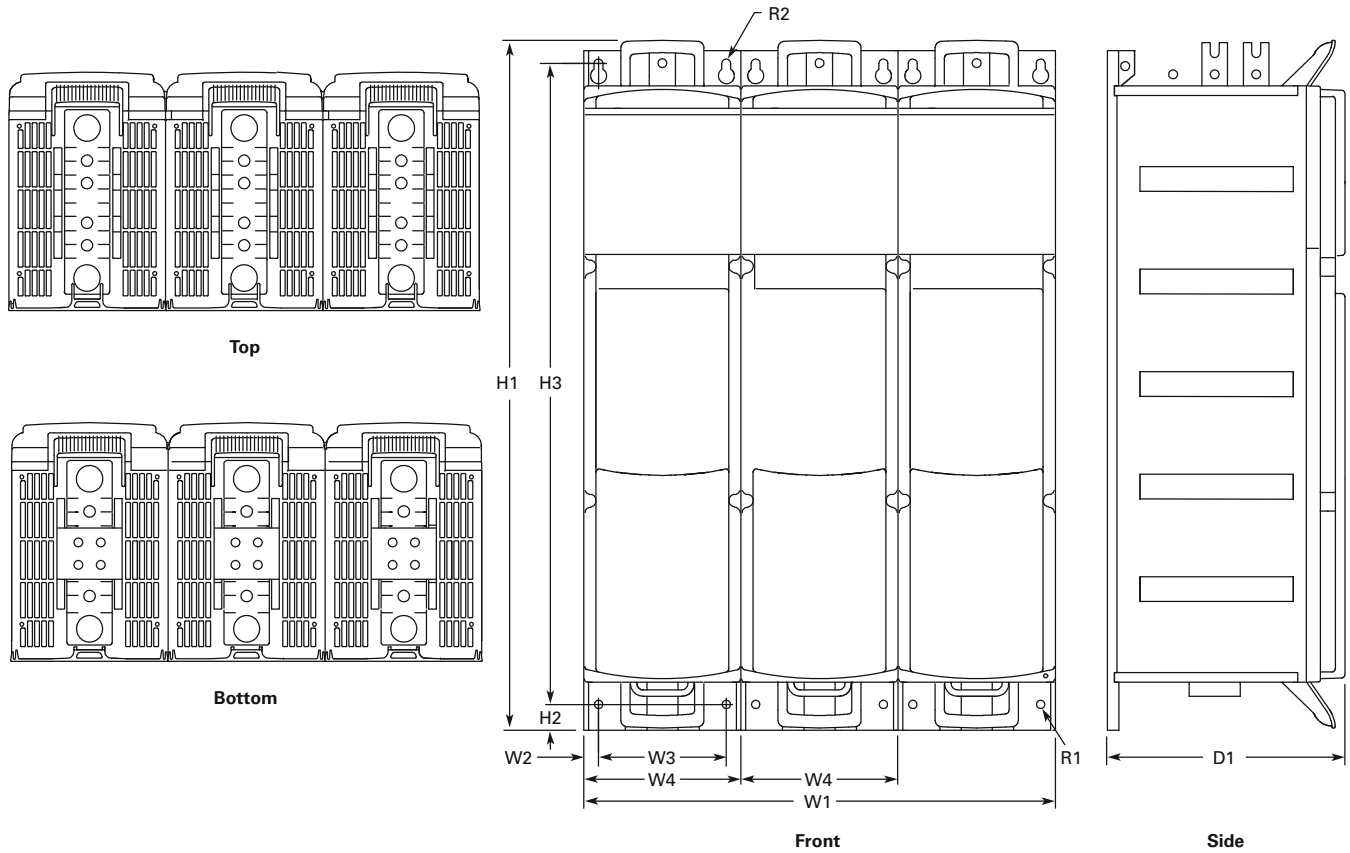

| Voltage | Amps | H1 | H2 | H3 | D1 | W1 | W2 | W3 | W4 | R1 Dia. | R2 Dia. | Weight Lbs (kg) |
|-------------|-----------|-------------------|----------------|-------------------|------------------|------------------|----------------|-----------------|---------------|----------------|----------------|--------------------|
| 380–500 Vac | 1370–2300 | 42.38 (1076.5) | 1.57 (40.0) | 39.37 (1000.0) | 14.65 (372.0) | 29.06 (738.0) | 0.91 (23.0) | 7.87 (200.0) | 9.69 (246) | 0.51 (13.0) | 0.55 (14.0) | 617 (280) |
| 525–690 Vac | 820–1500 | | | | | | | | | | | |

Control Unit

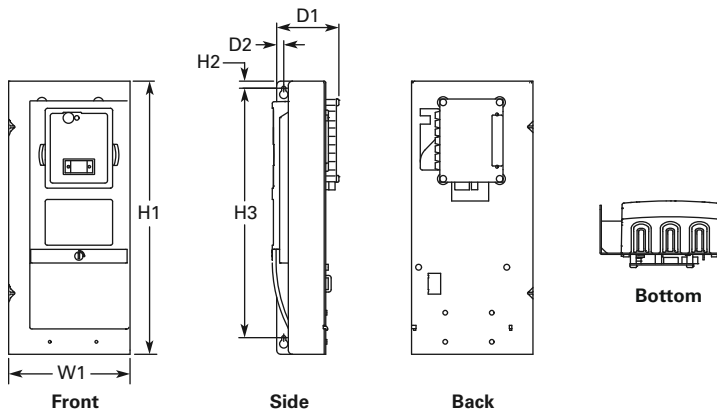

| H1 | H2 | H3 | D1 | D2 | W1 |
|------------------|---------------|------------------|----------------|---------------|-----------------|
| 12.93 (328.5) | 0.33 (8.5) | 11.81 (300.0) | 2.95 (75.0) | 0.33 (8.5) | 5.75 (146.0) |

SPA/SPN/SPI Common DC Bus Drive Products

2



Contents

Description

Page

| | |
|-----------------------------------|-----------|
| SPA/SPN/SPI Common DC Bus Drives | |
| Application Description | V6-T2-409 |
| Product Comparison | V6-T2-409 |
| Features | V6-T2-410 |
| Standards and Certifications | V6-T2-410 |
| Catalog Number Selection | V6-T2-410 |
| Product Selection | V6-T2-412 |
| Options | V6-T2-414 |
| Technical Data and Specifications | V6-T2-415 |
| Wiring Diagrams | V6-T2-417 |
| Dimensions | V6-T2-418 |

Product Description

Eaton offers a comprehensive range of common DC bus drive products. The product family covers a number of front-end units and inverter units in the entire power range from 1-1/2 to 2000 horsepower at 460 V and 690 V. The drive components are built on the SPX technology.

Front-End Units

The front-end units convert a mains AC voltage and current into a DC voltage and current. The power is transferred from the mains to a common DC bus (and, in certain cases, vice versa).

The SPA (active front-end) unit is a bidirectional (regenerative) power converter for the front end of a common DC bus drive line up. An external LCL filter is used at the input. This unit is suitable in applications where low mains harmonics are required.

The SPN (non-regenerative front-end) unit is a unidirectional (motoring) power converter for the front-end of a common DC bus drive line-up. The device operates as a diode bridge using diode/thyristor components. A dedicated external choke is used at the input. The unit has the capacity to charge a common DC bus. This unit is suitable as a rectifying device when a "normal" level of harmonics is accepted and no regeneration to the mains is required.

Inverter Unit


The SPI Inverter Unit is a bidirectional DC-fed power inverter for the supply and control of AC motors. The inverter is supplied from a common DC bus drive line-up. A charging circuit is needed in case a connection to a live DC bus is required. The DC side charging circuit is integrated up to 75 kW (FR4–FR8) and external for higher power ratings (F19–F114).

Application Description

The common DC bus product portfolio fulfills all solution demands with a flexible architecture.


Front end units are selected according to the level of harmonics and power requirements. Typical drive system configurations are illustrated the following figures.

SPA + Inverters




- Low harmonics, $-P_{\text{mains}} \approx +P_{\text{mains}}/P_{\text{mains}} \leq \Sigma P_{\text{INU}}$
- Suitable for almost every application

SPN + Inverters



- Low total mains power, $P_{\text{mains}} \leq \Sigma P_{\text{INU}}$
- Suitable e.g. for small processing line with un- and recoiler, em-stop coasting

Combination Configuration

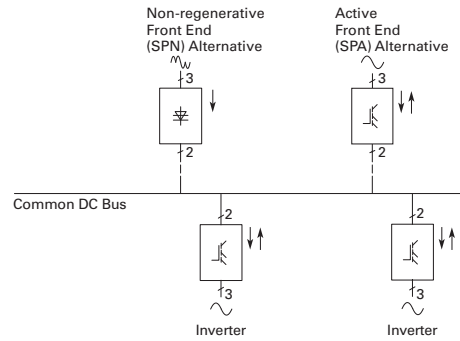

Common DC bus components are used in a multitude of combinations. Drives which are braking can transfer the energy directly to the drives in motoring mode.

Product Comparison

Advantages over Conventional Front Ends

Eaton Front Ends vs. Conventional

| | Non-Regenerative Front End | Active Front End | Conventional Regenerative Front End ① |
|--------------------|---|---|--|
| Input device | Choke (L) | Filter (LCL) | Choke or auto-transformer (L) |
| Bridge type | Diode/thyristor bridge | IGBT bridge, two-level type | Anti-parallel connected thyristor bridge |
| Type of operation | Controlled half-bridge | High frequency modulation (1.5 to 3.6 kHz) | Firing angle controlled |
| Direction of power | Motoring | Motoring and regenerating | Motoring and regenerating |
| Charging | Constant current | External required | Usually internal |
| DC voltage | Nominal (approx. 1.35 alternative U_N) | Stable at +10% of nominal (approx. 110% of 1.35 alternative U_N) | Lowered DC voltage for commutation margin (e.g. 17% if approx. 83% of 1.35 alternative U_N) or autotransformer on regenerative bridge |
| THD | Similar to six-pulse bridge normal <40% | Very low | Similar to six-pulse bridge or worse |

Note

① Conventional regenerative front end (a.k.a. "anti-parallel thyristor bridge") is not available from Eaton.

2.13

Adjustable Frequency Drives

SPA/SPN/SPI Common DC Bus Drives

Features

2

Standard Features

| Feature | SPI | | SPA | | SPN |
|--|-----------|-----|----------|----------|-----|
| | FR4, 6, 7 | FR8 | FI9-F114 | FI9-F114 | FI9 |
| IP00 | — | ■ | ■ | ■ | ■ |
| IP21 | ■ | — | — | — | — |
| Air cooling | ■ | ■ | ■ | ■ | ■ |
| Standard board | ■ | ■ | ■ | ■ | — |
| Varnished board | — | — | — | — | — |
| Alphanumeric keypad | ■ | ■ | ■ | ■ | — |
| EMC class T (EN 61800-3 for IT networks) | ■ | ■ | ■ | ■ | ■ |
| Safety CE/UL | ■ | ■ | ■ | ■ | ■ |
| Input choke | — | — | — | — | ■ |
| LCL filter | — | — | — | ■ | — |
| No integrated charging | — | — | ■ | ■ | — |
| Integrated charging (DC side) | ■ | ■ | — | — | ■ |
| Diode/thyristor rectifier | — | — | — | — | ■ |
| IGBT | ■ | ■ | ■ | ■ | — |


Standards and Certifications

- CE
- UL
- cUL
- EN 61800-5-1 (2003)




Catalog Number Selection


Active Front End

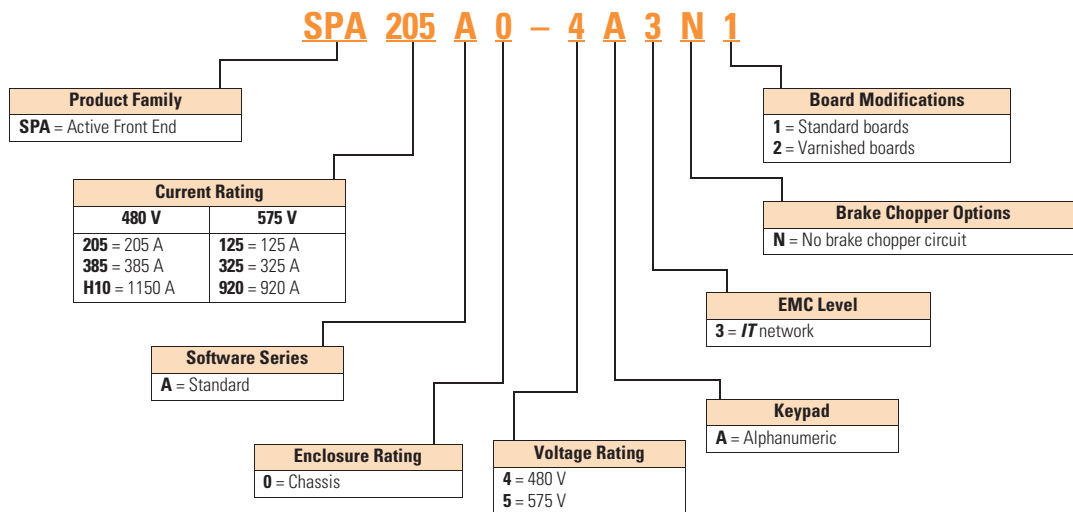

Non-Regenerative Front End

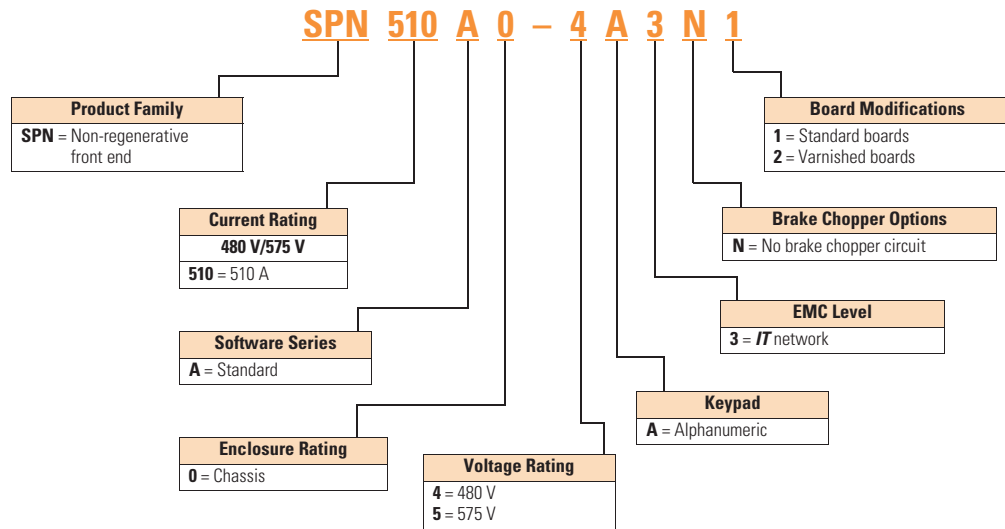

SPI Inverter Unit

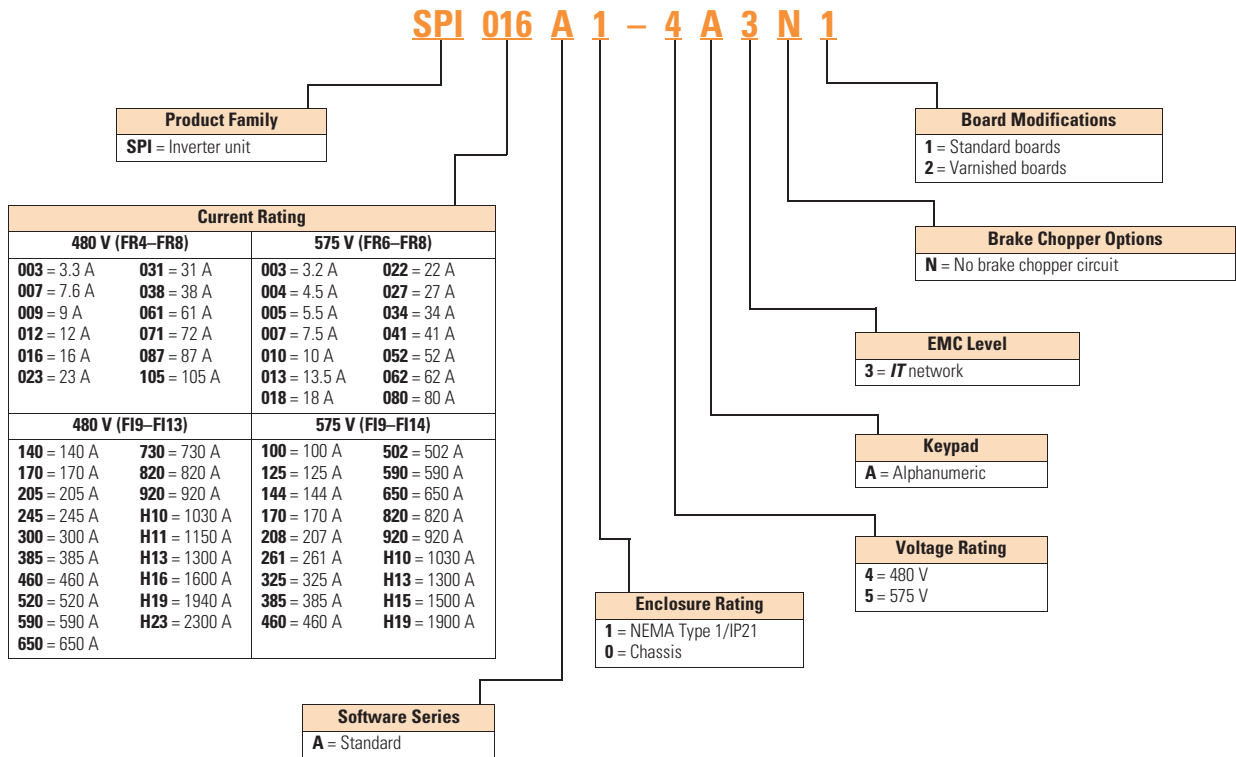

Product Selection

2

Common DC Bus Drive Products



SPA Active Front End 480 V

| Frame | Low Overload (AC Current) | | High Overload (AC Current) | | I _{max} I _{2s} (A) | Catalog Number |
|-------|---------------------------|------------------------|----------------------------|------------------------|---|----------------|
| | I _{L-cont} (A) | I _{1 min} (A) | I _{H-cont} (A) | I _{1 min} (A) | | |
| FI9 | 261 | 287 | 205 | 308 | 349 | SPA205A0-4A3N1 |
| FI10 | 460 | 506 | 385 | 578 | 693 | SPA385A0-4A3N1 |
| FI13 | 1300 | 1430 | 1150 | 1725 | 2070 | SPAH11A0-4A3N1 |

SPN Non-Regenerative Front End 480 V

| Frame | Low Overload (AC Current) | | High Overload (AC Current) | | I _{max} I _{2s} (A) | Catalog Number |
|-------|---------------------------|------------------------|----------------------------|------------------------|---|----------------|
| | I _{L-cont} (A) | I _{1 min} (A) | I _{H-cont} (A) | I _{1 min} (A) | | |
| FI9 | 520 | 572 | 460 | 690 | 828 | SPN460A0-4A3N1 |

SPI Inverter Unit 480 V

| Frame | Low Overload (AC Current) | | High Overload (AC Current) | | I _{max} I _{2s} (A) | Catalog Number |
|-------|---------------------------|------------------------|----------------------------|------------------------|---|----------------|
| | I _{L-cont} (A) | I _{1 min} (A) | I _{H-cont} (A) | I _{1 min} (A) | | |
| FR4 | 4.3 | 4.7 | 3.3 | 5 | 6.2 | SPI003A1-4A3N1 |
| | 9 | 9.9 | 7.6 | 11.4 | 14 | SPI007A1-4A3N1 |
| | 12 | 13.2 | 9 | 13.5 | 18 | SPI009A1-4A3N1 |
| FR6 | 16 | 17.6 | 12 | 18 | 24 | SPI012A1-4A3N1 |
| | 23 | 25.3 | 16 | 24 | 32 | SPI016A1-4A3N1 |
| | 31 | 34 | 23 | 35 | 46 | SPI023A1-4A3N1 |
| | 38 | 42 | 31 | 47 | 62 | SPI031A1-4A3N1 |
| | 46 | 51 | 38 | 57 | 76 | SPI038A1-4A3N1 |
| FR7 | 72 | 79 | 61 | 92 | 122 | SPI061A1-4A3N1 |
| | 87 | 96 | 72 | 108 | 144 | SPI072A1-4A3N1 |
| | 105 | 116 | 87 | 131 | 174 | SPI087A1-4A3N1 |
| FR8 | 140 | 154 | 105 | 158 | 210 | SPI105A0-4A3N1 |
| FI9 | 170 | 187 | 140 | 210 | 280 | SPI140A0-4A3N1 |
| | 205 | 226 | 170 | 255 | 336 | SPI170A0-4A3N1 |
| | 261 | 287 | 205 | 308 | 349 | SPI205A0-4A3N1 |
| | 300 | 330 | 245 | 379 | 444 | SPI245A0-4A3N1 |
| FI10 | 385 | 424 | 300 | 450 | 540 | SPI300A0-4A3N1 |
| | 460 | 506 | 385 | 578 | 693 | SPI385A0-4A3N1 |
| | 520 | 572 | 460 | 690 | 828 | SPI460A0-4A3N1 |
| FI12 | 590 | 649 | 520 | 780 | 936 | SPI520A0-4A3N1 |
| | 650 | 715 | 590 | 885 | 1062 | SPI590A0-4A3N1 |
| | 730 | 803 | 650 | 975 | 1170 | SPI650A0-4A3N1 |
| | 820 | 902 | 730 | 1095 | 1314 | SPI730A0-4A3N1 |
| | 920 | 1012 | 820 | 1230 | 1476 | SPI820A0-4A3N1 |
| FI13 | 1030 | 1133 | 920 | 1380 | 1656 | SPI920A0-4A3N1 |
| | 1150 | 1265 | 1030 | 1545 | 1854 | SPIH10A0-4A3N1 |
| | 1300 | 1430 | 1150 | 1720 | 2070 | SPIH11A0-4A3N1 |
| FI14 | 1450 | 1595 | 1300 | 1950 | 2340 | SPIH13A0-4A3N1 |
| | 1770 | 1947 | 1600 | 2400 | 2880 | SPIH16A0-4A3N1 |
| | 2150 | 2365 | 1940 | 2910 | 3492 | SPIH19A0-4A3N1 |

Common DC Bus Drive Products



SPA Active Front End 575 V

| Frame | Low Overload (AC Current) | | High Overload (AC Current) | | I _{max} I _{2s} (A) | Catalog Number |
|-------|---------------------------|------------------------|----------------------------|------------------------|---|----------------|
| | I _{L-cont} (A) | I _{1 min} (A) | I _{H-cont} (A) | I _{1 min} (A) | | |
| FI9 | 144 | 158 | 125 | 188 | 213 | SPA125A0-5A3N1 |
| FI10 | 385 | 424 | 325 | 488 | 585 | SPA325A0-5A3N1 |
| FI13 | 1030 | 1133 | 920 | 1380 | 1656 | SPA920A0-5A3N1 |

SPN Non-Regenerative Front End 575 V

| Frame | Low Overload (AC Current) | | High Overload (AC Current) | | I _{max} I _{2s} (A) | Catalog Number |
|-------|---------------------------|------------------------|----------------------------|------------------------|---|----------------|
| | I _{L-cont} (A) | I _{1 min} (A) | I _{H-cont} (A) | I _{1 min} (A) | | |
| FI9 | 600 | 660 | 510 | 732 | 888 | SPN510A0-5A3N1 |

SPI Inverter Unit 575 V

| Frame | Low Overload (AC Current) | | High Overload (AC Current) | | I _{max} I _{2s} (A) | Catalog Number |
|-------|---------------------------|------------------------|----------------------------|------------------------|---|----------------|
| | I _{L-cont} (A) | I _{1 min} (A) | I _{H-cont} (A) | I _{1 min} (A) | | |
| FR6 | 4.5 | 5 | 3.2 | 5 | 6.4 | SPI003A1-5A3N1 |
| | 5.5 | 6 | 4.5 | 7 | 9 | SPI004A1-5A3N1 |
| | 7.5 | 8 | 5.5 | 8 | 11 | SPI005A1-5A3N1 |
| | 10 | 11 | 7.5 | 11 | 15 | SPI007A1-5A3N1 |
| | 13.5 | 15 | 10 | 15 | 20 | SPI010A1-5A3N1 |
| | 18 | 20 | 13.5 | 20 | 27 | SPI013A1-5A3N1 |
| | 22 | 24 | 18 | 27 | 36 | SPI018A1-5A3N1 |
| | 27 | 30 | 22 | 33 | 44 | SPI022A1-5A3N1 |
| FR7 | 34 | 37 | 27 | 41 | 54 | SPI027A1-5A3N1 |
| | 41 | 45 | 34 | 51 | 68 | SPI034A1-5A3N1 |
| FR8 | 52 | 57 | 41 | 62 | 82 | SPI041A1-5A3N1 |
| | 62 | 68 | 52 | 78 | 104 | SPI052A0-5A3N1 |
| FR9 | 80 | 88 | 62 | 93 | 124 | SPI062A0-5A3N1 |
| | 100 | 110 | 80 | 120 | 160 | SPI080A0-5A3N1 |
| | 125 | 138 | 100 | 150 | 200 | SPI100A0-5A3N1 |
| FI9 | 144 | 158 | 125 | 188 | 213 | SPI125A0-5A3N1 |
| | 170 | 187 | 144 | 216 | 245 | SPI144A0-5A3N1 |
| | 208 | 229 | 170 | 255 | 289 | SPI170A0-5A3N1 |
| | 261 | 287 | 208 | 312 | 375 | SPI208A0-5A3N1 |
| FI10 | 325 | 358 | 261 | 392 | 470 | SPI261A0-5A3N1 |
| | 385 | 424 | 325 | 488 | 585 | SPI325A0-5A3N1 |
| | 460 | 506 | 385 | 578 | 693 | SPI385A0-5A3N1 |
| FI12 | 502 | 552 | 460 | 690 | 828 | SPI460A0-5A3N1 |
| | 590 | 649 | 502 | 753 | 904 | SPI502A0-5A3N1 |
| | 650 | 715 | 590 | 885 | 1062 | SPI590A0-5A3N1 |
| | 750 | 825 | 650 | 975 | 1170 | SPI650A0-5A3N1 |
| | 920 | 1012 | 820 | 1230 | 1476 | SPI820A0-5A3N1 |
| FI13 | 1030 | 1133 | 920 | 1380 | 1656 | SPI920A0-5A3N1 |
| | 1180 | 1298 | 1030 | 1464 | 1755 | SPIH10A0-5A3N1 |
| | 1500 | 1650 | 1300 | 1950 | 2340 | SPIH13A0-5A3N1 |
| FI14 | 1900 | 2090 | 1500 | 2250 | 2700 | SPIH15A0-5A3N1 |
| | 2250 | 2475 | 1900 | 2782 | 3335 | SPIH19A0-5A3N1 |

Line Reactor

Line Reactor for Non-Regenerative Front End (480/575 VV)

| Amps | Watts Losses | Catalog Number |
|------|--------------|----------------|
| 600 | 493 | CHK600 |

2.13

Adjustable Frequency Drives

SPA/SPN/SPI Common DC Bus Drives

Options


SVX Series Option Board Kits

2

The SVX Series drives can accommodate a wide selection of expander and adapter option boards to customize the drive for your application needs. The drive's control unit is designed to accept a total of five option boards.

The SVX Series factory installed standard board configuration includes an A9 I/O board and an A2 relay output board, which are installed in slots A and B.

Option Boards



Option Board Kits

| Option Kit Description ^① | Allowed Slot Locations ^② | Field Installed Catalog Number | Factory Installed Option Designator | SVX Ready Programs | | | | | | |
|---|-------------------------------------|--------------------------------|-------------------------------------|--------------------|--------------|----------|-----|-----|----------|-----|
| | | | | Basic | Local/Remote | Standard | MSS | PID | Multi-P. | PFC |
| Standard I/O Cards | | | | | | | | | | |
| 2 RO (NC-NO) | B | OPTA2 | — | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| 6 DI, 1 DO, 2 AI, 1 AO, 1 +10 Vdc ref, 2 ext +24 Vdc/EXT +24 Vdc | A | OPTA9 | — | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Extended I/O Cards | | | | | | | | | | |
| 2 RO, therm | B | OPTA3 | A3 | — | ■ | ■ | ■ | ■ | ■ | ■ |
| Encoder low volt +5 V/15 V/24 V | C | OPTA4 | A4 | — | ■ | ■ | ■ | ■ | ■ | ■ |
| Encoder high volt +15 V/24 V | C | OPTA5 | A5 | — | ■ | ■ | ■ | ■ | ■ | ■ |
| Double encoder | C | OPTA7 | A7 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| 6 DI, 1 DO, 2 AI, 1 AO | A | OPTA8 | A8 | — | ■ | ■ | ■ | ■ | ■ | ■ |
| 3 DI (encoder 10–24 V), out +15 V/+24 V, 2 DO (pulse+direction) | C | OPTAE | AE | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| 6 DI, 1 ext +24 Vdc/EXT +24 Vdc | B, C, D , E | OPTB1 | B1 | — | — | — | — | — | ■ | ■ |
| 1 RO (NC-NO), 1 RO (NO), 1 therm | B, C, D , E | OPTB2 | B2 | — | — | — | — | — | ■ | ■ |
| 1 AI (mA isolated), 2 AO (mA isolated), 1 ext +24 Vdc/EXT +24 Vdc | B, C, D , E | OPTB4 | B4 | — | ■ | ■ | ■ | ■ | ■ | ■ |
| 3 RO (NO) | B, C, D , E | OPTB5 | B5 | — | — | — | — | — | ■ | ■ |
| 1 ext +24 Vdc/EXT +24 Vdc, 3 Pt100 | B, C, D , E | OPTB8 | B8 | — | — | — | — | — | — | — |
| 1 RO (NO), 5 DI 42–240 Vac input | B, C, D , E | OPTB9 | B9 | — | — | — | — | — | ■ | ■ |
| SPI, absolute encoder | C | OPTBB | BB | — | — | — | — | — | — | — |
| Communication Cards ^③ | | | | | | | | | | |
| Modbus | D, E | OPTC2 | C2 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Johnson Controls N2 | D, E | OPTC2 | CA | — | — | — | — | — | — | — |
| Modbus TCP | D, E | OPTCI | CI | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| BACnet | D, E | OPTCJ | CJ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| EtherNet/IP | D, E | OPTCQ | CQ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| PROFIBUS DP | D, E | OPTC3 | C3 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| LonWorks | D, E | OPTC4 | C4 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| PROFIBUS DP (D9 connector) | D, E | OPTC5 | C5 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| CANopen (slave) | D, E | OPTC6 | C6 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| DeviceNet | D, E | OPTC7 | C7 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Modbus (D9 type connector) | D, E | OPTC8 | C8 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Adapter | D, E | OPTD1 | D1 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Adapter | D, E | OPTD2V | D2 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| RS-232 with D9 connection | D, E | OPTD3 | D3 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Keypad | | | | | | | | | | |
| 9000X Series local/remote keypad (replacement keypad) | — | KEYPAD-LOC/REM | — | — | — | — | — | — | — | ■ |
| 9000X Series remote mount keypad unit (keypad not included, includes 10 ft cable, keypad holder, mounting hardware) | — | OPTRMT-KIT-9000X | — | — | — | — | — | — | — | — |
| 9000X Series RS-232 cable, 13 ft | — | PP00104 | — | — | — | — | — | — | — | — |

Notes

- ① AI = Analog Input; AO = Analog Output; DI = Digital Input; DO = Digital Output; RO = Relay Output
- ② Option card must be installed in one of the slots listed for that card. Slot indicated in bold is the preferred location.
- ③ OPTC2 is a multi-protocol option card.

Technical Data and Specifications

SPA/SPN/SPI

| Description | Specification |
|---|--|
| Supply Connection | |
| Input voltage U_{in} (AC) front end modules | 380–500 Vac/525–690 Vac –10% to 10% |
| Input voltage U_{in} (DC) inverter | 465–800 Vdc/640–1100 Vdc –0% to 0%, the waviness of the inverter supply voltage, formed in rectification of the electric network's alternating voltage in basic frequency, must be less than 50 V peak-to-peak |
| Output voltage U_{out} (AC) inverter | $3 \sim 0 - U_{in}/1.4$ |
| Output voltage U_{out} (DC) active front end module | $10.10 \times 1.35 \times U_{in}$ (factory default) |
| Output voltage U_{out} (DC) non-regenerative front end module | $1.35 \times U_{in}$ |
| Ambient Conditions | |
| Ambient operating temperature | 14 (no frost) to 122 °F (–10 to 50 °C): I_H 14 (no frost) to 104 °F (–10 to 40 °C): I_L |
| Storage temperature | –40 to 158 °F (–40 to 70 °C) |
| Relative humidity | 0 to 95% RH, non-condensing, non-corrosive, no dripping water |
| Air quality | |
| Chemical vapors | IEC 721-3-3, unit in operation, class 3C2 |
| Mechanical particles | IEC 721-3-3, unit in operation, class 3S2 |
| Altitude | 100% load capacity (no derating) up to 1000 m 1% derating for each 100 m above 1000 m; max. 3000 m |
| Vibration | 5–150 Hz |
| EN50178/EN60068-2-6 | Displacement amplitude 0.25 mm (peak) at 3–15.8 Hz Max acceleration amplitude 1G at 15.8–150 Hz |
| Shock EN50178, EN60068-2-27 | UPS Drop Test (for applicable UPS weights) Storage and shipping: max 15 g, 11 ms (in package) |
| Cooling capacity required | Approximately 2% |
| Cooling air required | FR4 41 cfm, FR6 250 cfm, FR7 250 cfm, FR8 383 cfm FI9 677 cfm, FI10 824 cfm, FI12 1648 cfm, FI13 2472 cfm |
| Unit enclosure class | FR4–FR7 NEMA Type 1/IP21; FR8, FI9–FI14 chassis (IP00) |
| EMC (at fault settings) | |
| Immunity | Fulfill all EMC immunity requirements |
| Safety | |
| Approvals | CE, UL, cUL, EN 61800-5-1 (2003), see unit nameplate for more detailed approvals |
| Control Connections | |
| Analog input voltage | 0–10 V, $R_i = 200$ kohms, (–10 V to 10 V joystick control) Resolution 0.1%, accuracy $\pm 1\%$ |
| Analog input current | 0(4)–20 mA, $R_i = 250$ ohms differential |
| Digital inputs | 6, positive or negative logic; 18–30 Vdc |
| Auxiliary voltage | +24 V, $\pm 15\%$, max. 250 mA |
| Output reference voltage | +10 V, +3%, max. load 10 mA |
| Analog output | 0(4)–20 mA; RL max. 500 ohms; resolution 10 bits Accuracy $\pm 2\%$ |
| Digital outputs | Open collector output, 50 mA/48V |
| Relay outputs | 2 programmable change-over relay outputs Switching capacity: 24 Vdc/8 A, 250 Vac/8 A, 125 Vdc/0.4 A Min. switching load: 5 V/10 mA |

SPA/SPN/SPI, continued

| Description | Specification |
|--|---|
| Protections | |
| Overvoltage protection | 480 V/911 Vdc, 575 V/1200 Vdc |
| Undervoltage protection | 480 V/333 Vdc, 575 V/460 Vdc |
| Ground fault protection | In case of ground fault in motor or motor cable, only the inverter is protected |
| Motor phase supervision | Trips if any of the output phases is missing |
| Overcurrent protection | Yes |
| Unit overtemperature protection | Yes |
| Motor overload protection | Yes |
| Motor stall protection | Yes |
| Motor underload protection | Yes |
| Short-circuit protection of 24 V and 10 V reference voltages | Yes |

Input Fuses

SHT fuses can be assembled into same-size DIN fuse base.

SPA/SPN/SPI

| Module Component | Frame | Bussmann Fuse Type (aR) | Size | U _N (V) | I _N (A) | Qty. |
|-----------------------|-------|-------------------------|------|--------------------|--------------------|-------|
| Inverter Units | | | | | | |
| SPI003A1-4 | FR4 | 170M1560 | 0 | 690 | 20 | 2 |
| SPI007A1-4 | FR4 | 170M1562 | 0 | 690 | 63 | 2 |
| SPI009A1-4 | FR4 | 170M1562 | 0 | 690 | 63 | 2 |
| SPI012A1-4 | FR6 | 170M1565 | 0 | 690 | 63 | 2 |
| SPI016A1-4 | FR6 | 170M1565 | 0 | 690 | 63 | 2 |
| SPI023A1-4 | FR6 | 170M1565 | 0 | 690 | 63 | 2 |
| SPI031A1-4 | FR6 | 170M1567 | 0 | 690 | 100 | 2 |
| SPI038A1-4 | FR6 | 170M1567 | 0 | 690 | 100 | 2 |
| SPI061A1-4 | FR7 | 170M1570 | 0 | 690 | 200 | 2 |
| SPI072A1-4 | FR7 | 170M1570 | 0 | 690 | 200 | 2 |
| SPI087A1-4 | FR7 | 170M1571 | 0 | 690 | 250 | 2 |
| SPI105A0-4 | FR8 | 170M3819 | DIN1 | 690 | 400 | 2 |
| SPI140A0-4 | FR8 | 170M3819 | DIN1 | 690 | 400 | 2 |
| SPI170A0-4 | FR8 | 170M3819 | DIN1 | 690 | 400 | 2 |
| SPI205A0-4 | FI9 | 170M6812 | DIN3 | 690 | 800 | 2 |
| SPI245A0-4 | FI9 | 170M6812 | DIN3 | 690 | 800 | 2 |
| SPI300A0-4 | FI10 | 170M8547 | 3SHT | 690 | 1250 | 2 |
| SPI385A0-4 | FI10 | 170M8547 | 3SHT | 690 | 1250 | 2 |
| SPI460A0-4 | FI10 | 170M8547 | 3SHT | 690 | 1250 | 2 |
| SPI520A0-4 | FI12 | 170M8547 | 3SHT | 690 | 1250 | 2 x 2 |
| SPI590A0-4 | FI12 | 170M8547 | 3SHT | 690 | 1250 | 2 x 2 |
| SPI650A0-4 | FI12 | 170M8547 | 3SHT | 690 | 1250 | 2 x 2 |
| SPI730A0-4 | FI12 | 170M8547 | 3SHT | 690 | 1250 | 2 x 2 |
| SPI820A0-4 | FI12 | 170M8547 | 3SHT | 690 | 1250 | 2 x 2 |
| SPI920A0-4 | FI12 | 170M8547 | 3SHT | 690 | 1250 | 2 x 2 |
| SPIH10A0-4 | FI13 | 170M8547 | 3SHT | 690 | 1250 | 6 |
| SPIH11A0-4 | FI13 | 170M8547 | 3SHT | 690 | 1250 | 6 |
| SPIH13A0-4 | FI13 | 170M8547 | 3SHT | 690 | 1250 | 6 |
| SPIH16A0-4 | FI14 | 170M8547 | 3SHT | 690 | 1250 | 2 x 6 |
| SPIH19A0-4 | FI14 | 170M8547 | 3SHT | 690 | 1250 | 2 x 6 |
| SPIH23A0-4 | FI14 | 170M8547 | 3SHT | 690 | 1250 | 2 x 6 |


SHT fuses can be assembled into same-size DIN fuse base.

SPA/SPN/SPI, continued


| Module Component | Frame | Bussmann Fuse Type (aR) | Size | U_N (V) | I_N (A) | Qty. |
|------------------------------------|-------|-------------------------|------|-----------|-----------|-------|
| Active Front Ends | | | | | | |
| SPA205 A0-4 | FI9 | 170 m6202 | 3SHT | 1250 | 500 | 3 |
| SPA385 A0-4 | FI10 | 170 m6277 | 3SHT | 1250 | 1000 | 3 |
| SPAH10 A0-4 | FI13 | 170 m6277 | 3SHT | 1250 | 1000 | 3 x 3 |
| Non-Regenerative Front Ends | | | | | | |
| SPN468 A0-4 | FI9 | 170 m8547 | 3SHT | 690 | 1250 | 3 |

Wiring Diagrams


SPA – Active Front End

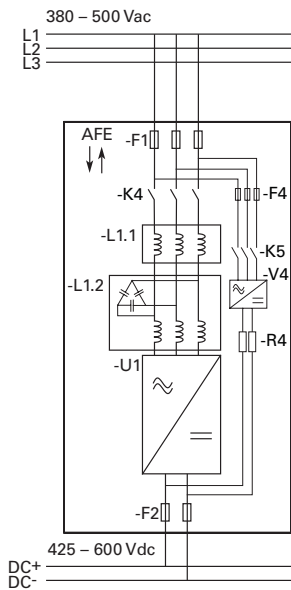


SPN – Non-Regenerative Front End

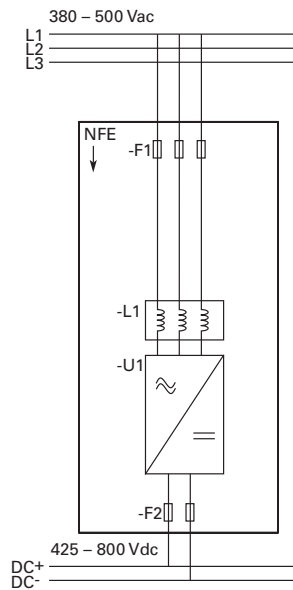

SPI – Inverter Unit (FR4–FR8)

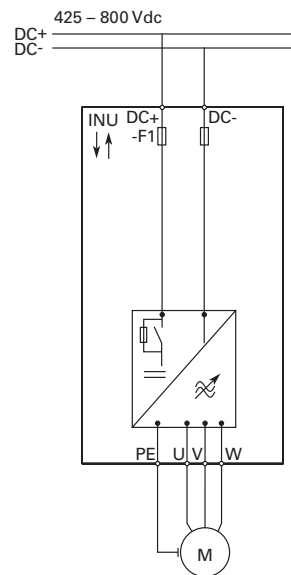

SPI – Inverter Unit (F19–F114)

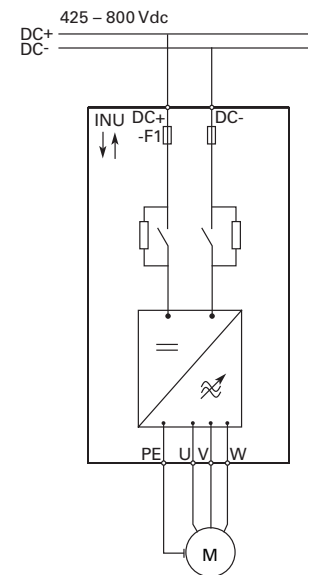

2.13

Adjustable Frequency Drives

SPA/SPN/SPI Common DC Bus Drives

Dimensions

Approximate Dimensions in Inches (mm)

2

SPA/SPN/SPI

| Frame | Height | Width | Depth | Weight Lbs (kg) |
|------------------------------------|-------------|--------------------|------------|--------------------|
| Active Front Ends | | | | |
| FI9 | 40.6 (1030) | 9.4 (239) | 14.6 (372) | 148 (67) |
| FI10 | 40.6 (1032) | 9.4 (239) | 21.7 (552) | 220 (100) |
| FI12 | 40.6 (1032) | 2 x 9.4 (2 x 239) | 21.7 (552) | 441 (200) |
| FI13 | 40.6 (1032) | 27.9 (708) | 21.8 (553) | 674 (306) |
| FI14 | 40.6 (1032) | 2 x 27.9 (2 x 708) | 21.8 (553) | 1348 (612) |
| Non-Regenerative Front Ends | | | | |
| FI9 | 40.6 (1030) | 9.4 (239) | 14.6 (372) | 148 (67) |
| Inverter Units | | | | |
| FR4 | 11.5 (292) | 5.0 (128) | 7.5 (190) | 11 (5) |
| FR6 | 20.4 (519) | 7.7 (195) | 9.3 (237) | 35 (16) |
| FR7 | 23.3 (591) | 9.3 (237) | 10.1 (257) | 64 (29) |
| FR8 | 29.8 (758) | 11.4 (289) | 13.5 (344) | 106 (48) |
| FI9 | 40.6 (1030) | 9.4 (239) | 14.6 (372) | 148 (67) |
| FI10 | 40.6 (1032) | 9.4 (239) | 21.7 (552) | 220 (100) |
| FI12 | 40.6 (1032) | 2 x 9.4 (2 x 239) | 21.7 (552) | 441 (200) |
| FI13 | 40.6 (1032) | 27.9 (708) | 21.8 (553) | 674 (306) |
| FI14 | 40.6 (1032) | 2 x 27.9 (2 x 708) | 21.8 (553) | 1348 (612) |