

# ADV200 AC DRIVE FAMILY



# GEFRAN



Gefran, With forty years of experience, Gefran is the world's leading designer and producer of solutions for **measuring, controlling, and driving industrial production processes.**

We have branches in 14 countries and a network of over 80 worldwide distributors.

## QUALITY AND TECHNOLOGY

Gefran components are a **concentration of technology**, the result of constant research and of **cooperation with major research centers.**

This makes Gefran synonymous with quality and expertise in the design and production of:

- **sensors** for measuring main variables such as **temperature, pressure, position and force**
- **state-of-the-art components and solutions for indication and control**, satisfying demands for optimization of processes and intelligent management of energy consumption
- **automation platforms** of various complexities
- **electronic drives and electric motors** in AC and DC for all industrial automation, HVAC, water treatment and lift needs.

**Gefran's know-how and experience guarantee continuity and tangible solutions.**


## SERVICES

A team of Gefran experts works with each customer to select the ideal product for its application and to help install and configure devices ([technohelp@gefran.com](mailto:technohelp@gefran.com)).


Gefran offers a wide range of courses at different levels for the technical-commercial study of its product as well as specific courses *on demand*.



## APPLICATIONS




PLASTIC



METAL



TEXTILE



INDUSTRIAL HOISTING



TEST BENCHES



MATERIAL HANDLING



CONVEYORS



MATERIAL RECYCLING MACHINERY



MIXER / HIGH DYNAMICS CENTRIFUGEE

In addition to foreseeing the market's application needs, Gefran forms partnerships with its customers to find **the best way to optimise and boost the performance of various applications.**

Gefran products communicate with one another to provide integrated solutions, and can dialogue with devices by other companies thanks to compatibility with numerous fieldbuses.

CANopen

EtherCAT

GDNET  
Gefran Deterministic Network

DeviceNet

EtherNet/IP

Modbus

PROFI  
BUS

PROFI  
NET

## ADV200 • DESCRIPTION



The new inverter series “**ADV200**” represents an innovative concept in drive technology, as a result of the constant technological research and of the experience that the Gefran Group has acquired keeping a constant presence aside that of the major sector players.

The new range has been engineered and developed to satisfy the real needs of System Integrators and OEM’s in order to provide them the best innovations and economical competitiveness in the international markets. Based on full mechanical modularity and on a powerful, intuitive and “fully open” programming platform, **ADV200** offers absolute integration flexibility with high-end performance in any system architectures of the most advanced automation environments.



The ADV200 are also available in a range of panel-mounted configurations. It is designed as a compact, ready-for-use solution fully compatible with the maximum operating conditions of the drive.

Panels are available with power ratings from 90 kW to 1.65 MW with standard input bridge or the “Active Front End” solution, in two main versions Ready to use and Basic.



## POWER RANGE

| Models    | Power (kW) |     |     |        |     |     |        |    |    |        |    |    |        |    |    |        |    |     |        |     |     |                     |     |     |     |     |     |     |     |      |      |
|-----------|------------|-----|-----|--------|-----|-----|--------|----|----|--------|----|----|--------|----|----|--------|----|-----|--------|-----|-----|---------------------|-----|-----|-----|-----|-----|-----|-----|------|------|
|           | 0.75       | 1.5 | 2.2 | 3.0    | 4.0 | 5.5 | 7.5    | 11 | 15 | 18.5   | 22 | 30 | 37     | 45 | 55 | 75     | 90 | 110 | 132    | 160 | 200 | 250                 | 315 | 355 | 400 | 500 | 630 | 710 | 900 | 1000 | 1350 |
| ADV200-4  | Size 1     |     |     | Size 2 |     |     | Size 3 |    |    | Size 4 |    |    | Size 5 |    |    | Size 6 |    |     | Size 7 |     |     | Parallel size 7 (*) |     |     |     |     |     |     |     |      |      |
| ADV200-DC | Size 3     |     |     |        |     |     |        |    |    | Size 4 |    |    | Size 5 |    |    | Size 6 |    |     | Size 7 |     |     | Parallel size 7 (*) |     |     |     |     |     |     |     |      |      |
| ADV200-6  | S.5        |     |     |        |     |     |        |    |    |        |    |    |        |    |    | Size 6 |    |     | Size 7 |     |     | Parallel size 7 (*) |     |     |     |     |     |     |     |      |      |

Higher power ratings on request.

(\*) Inverters of over 400 kW comprise one master MASTER unit and one or more SLAVE units..

## GENERAL CHARACTERISTICS

|                                          |                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                      |                               |               |
|------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|---------------|
| <b>Power supply</b>                      | ADV200-4: 3 x 380Vac -15% ... 500Vac +5%<br>ADV200-4/4A-DC: 450...750Vdc;<br>ADV200-6/6A-DC: 840 ... 1120Vdc (5750 ... 61320); 600 ... 1120Vdc (> 71600).<br>ADV200-6: 3 x 690Vac ±10%; 50-60 HZ ± 2% (5750 ... 61320), 3 x 500...690Vac ±10%; 50-60 HZ ± 2% (71600 ... 1.65MW),                                                                                                |                                                                                                                                                                                                                                                                                                                                      |                               |               |
| <b>Power ratings</b>                     | ADV200-4: from 0.75kW to 1.0MW                                                                                                                                                                                                                                                                                                                                                  | ADV200-DC: from 18.5kW to 1.65MW                                                                                                                                                                                                                                                                                                     | ADV200-6: from 75kW to 1.65MW |               |
| <b>Maximum output voltage</b>            | 0,98 x Vin                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                      |                               |               |
| <b>Maximum output frequency f2</b>       | 500Hz (1007 ... 72000), 200Hz (72500 ... 1650kW)                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                      |                               |               |
| <b>IGBT braking unit</b>                 | Sizes 1007 ... 5550: Internal (with external resistor); braking torque 150 % MAX<br>Sizes ≥ 5750: External optional (BUy series)                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                      |                               |               |
| <b>Overload (for Synchronous motor)</b>  | ADV200-4, ADV200-4-DC, ADV200-6-DC:<br>Heavy Duty: 160 % x In (1' each 5'), 200 % x In (for 3"). Light Duty: 110 % x In (1' each 5').<br>ADV200-6 (5750 ... 6110)<br>Heavy Duty: 150 % x In (1' each 5'), 200 % x In (for 3"). Light Duty: n.d.<br>ADV200-6 (72000 ... 1.65MW)<br>Heavy Duty: 160 % x In (1' each 5'), 200 % x In (for 3"). Light Duty: 110 % x In (for 60").   |                                                                                                                                                                                                                                                                                                                                      |                               |               |
| <b>Overload (for Asynchronous motor)</b> | ADV200-4, ADV200-4-DC, ADV200-6-DC<br>Heavy Duty: 150 % x In (1' each 5'), 180 % x In (for 0.5").<br>Light Duty: 110 % x In (1' each 5').<br>ADV200-6 (5750 ... 6110)<br>Heavy Duty: 136 % x In (for 60"), 183 % x In (for 0.5"). Light Duty: n.d.<br>ADV200-6 (72000 ... 1.65MW)<br>Heavy Duty: 150 % x In (for 60"), 180 % x In (for 0.5"). Light Duty: 110 % x In (for 60"). |                                                                                                                                                                                                                                                                                                                                      |                               |               |
| <b>Control mode</b>                      | Open-loop vector control<br>Vector control with feedback<br>Open loop V/f and V/f with feedback                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                      |                               |               |
| <b>Optional cards</b>                    | Integration of up to 3 options onboard the drive<br>"Safety STO" card compliant with SIL3 machine safety directive (for ADV200-...+SI models)                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                      |                               |               |
| <b>Multi-language programming SW</b>     | GF-eXpress (5 languages)                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                      |                               |               |
| <b>PLC</b>                               | PLC with advanced IEC61131-3 programming environment                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                      |                               |               |
| <b>Rated protection</b>                  | IP20-rated protection (IP00 size 7 and parallel)                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                      |                               |               |
| <b>Fieldbus management</b>               | DeviceNet, CANopen®, Modbus RTU, EtherCAT, GDnet, PROFIBUS, Ethernet IP, PROFINET                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                                                      |                               |               |
| <b>Precision</b>                         | Asynch.                                                                                                                                                                                                                                                                                                                                                                         | Control mode                                                                                                                                                                                                                                                                                                                         | Speed control precision (*)   | Control Range |
|                                          |                                                                                                                                                                                                                                                                                                                                                                                 | FOC with feedback                                                                                                                                                                                                                                                                                                                    | ± 0.01% motor speed rating    | 1 : 1000      |
|                                          |                                                                                                                                                                                                                                                                                                                                                                                 | Open-loop FOC                                                                                                                                                                                                                                                                                                                        | ± 30% motor slip rating       | 1 : 100       |
|                                          | Synch.                                                                                                                                                                                                                                                                                                                                                                          | V/F                                                                                                                                                                                                                                                                                                                                  | ± 60% motor slip rating       | 1 : 30        |
|                                          |                                                                                                                                                                                                                                                                                                                                                                                 | FOC with feedback                                                                                                                                                                                                                                                                                                                    | ± 0.01% motor speed rating    | 1 : 1500      |
|                                          |                                                                                                                                                                                                                                                                                                                                                                                 | Open-loop FOC                                                                                                                                                                                                                                                                                                                        | ± 0,1% motor speed rating     | 1 : 20        |
| (*) for standard 4-pole motor            |                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                      |                               |               |
| <b>Standard supply configuration</b>     | <b>Programming keypad</b>                                                                                                                                                                                                                                                                                                                                                       | Integrated KB_ADV                                                                                                                                                                                                                                                                                                                    |                               |               |
|                                          | <b>Regulation</b>                                                                                                                                                                                                                                                                                                                                                               | <ul style="list-style-type: none"> <li>• 2 bipolar analog inputs (Voltage/Current)</li> <li>• 2 bipolar analog outputs (1: Voltage/Current, 1: Voltage)</li> <li>• 6 digital inputs (PNP/NPN)</li> <li>• 2 digital outputs (PNP/NPN)</li> <li>• 2 relay outputs, single contact</li> <li>• RS485 serial line (Modbus RTU)</li> </ul> |                               |               |
|                                          | <b>Power</b>                                                                                                                                                                                                                                                                                                                                                                    | <ul style="list-style-type: none"> <li>• Integrated choke DC side (up to 132 kW)</li> <li>• Integrated mains filter</li> <li>• Integrated dynamic braking module (up to 55kW)</li> </ul>                                                                                                                                             |                               |               |
|                                          | <b>Reference resolution</b>                                                                                                                                                                                                                                                                                                                                                     | <ul style="list-style-type: none"> <li>• Digital = 15bit + sign</li> <li>• Analog input = 11-bit + sign</li> <li>• Analog output = 11-bit + sign</li> </ul>                                                                                                                                                                          |                               |               |
| <b>Conformity</b>                        | <b>Immunity/Emissions</b>                                                                                                                                                                                                                                                                                                                                                       | CEE - EN 61800-3                                                                                                                                                                                                                                                                                                                     |                               |               |
|                                          | <b>Safety standards</b>                                                                                                                                                                                                                                                                                                                                                         | EN 50178, EN 61800-5-1, UL508C, UL840 degree of pollution 2<br>STO (Safe Torque Off): IEC 61508<br>SIL 3, EN 954-1 Cat. 3<br>EN 61508 and EN 61800-5-2                                                                                                                                                                               |                               |               |
| <b>Environmental conditions</b>          | <b>Ambient temperature</b>                                                                                                                                                                                                                                                                                                                                                      | -10°C ... +40°C (+14°F ... +104°F), +40°C...+50°C (+104°F...+122°F) with derating                                                                                                                                                                                                                                                    |                               |               |
|                                          | <b>Altitude</b>                                                                                                                                                                                                                                                                                                                                                                 | Max 2000 m. (up to 1000 m without derating)                                                                                                                                                                                                                                                                                          |                               |               |
| <b>Markings</b>                          |                                                                                                                                                                                                                                                                                              | Complies with the EC directive concerning low voltage equipment (Directives LVD 2014/35/EC, EMC 2014/30/EC)                                                                                                                                                                                                                          |                               |               |
|                                          |                                                                                                                                                                                                                                                                                              | UL and cULus, Complies with directives for the American and Canadian markets (with power supply <600Vac)                                                                                                                                                                                                                             |                               |               |

# GENERAL CHARACTERISTICS

## MODULARITY

An innovative concept of integrated technology that offers full modularity. Mountable side by side and with accessories specifically dedicated to system solutions, **ADV200** has been engineered to make installation easy for any operator, both in existing systems and in specific machine solutions, always offering a real reduction of required space in the cabinet and the best manageability.




## FAST ACCESS

Structured to offer simple and fast management of the product in any situation of installation and mounting.

From the **terminal** access to the rack assembling of the **options**, each operation is quick and easy.

## INTEGRATED QUALITY

ADV200 **integrates** the fundamental devices for an absolute quality level, such as the **DC choke** that ensures maximum reliability in any conditions of working and the **input filter** that renders the drive in compliance with the EMC normative EN61800-3.

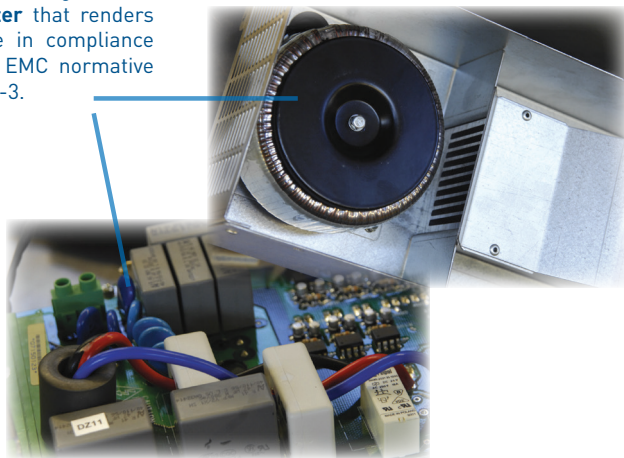

## PROGRAMMING KEYPAD

Structured with 2 setting modes Easy and Expert, to satisfy each level of user's skill and programming needs both for complex or easy installation.

A powerful platform but at the same time with a structure of menu/parameters that offers quick understanding, also facilitated by functionality of the keypad and the display.

Intuitive navigation and **easy start-up function** thanks to the **"Wizard"** tool.

ADV200 offers as standard **10 language** programming (English, Italian, French, German, Spanish, Polish, Romanian, Russian, Turkish and Portuguese).




- > 4 lines display for 21 characters
- > Clear alphanumeric text
- > Full information of any parameters
- > Fast Navigating Keys
- > Key for displaying the last 10 parameters that have been changed
- > DISP key for rapid display of operating parameters
- > Upload - Download and storage of 5 complete sets of drive parameters
- > Remotable up to 10 meters.

# ADV200 FIELD-ORIENTED VECTOR INVERTER

## OPTIONS

ADV200 manages up to 3 option cards:

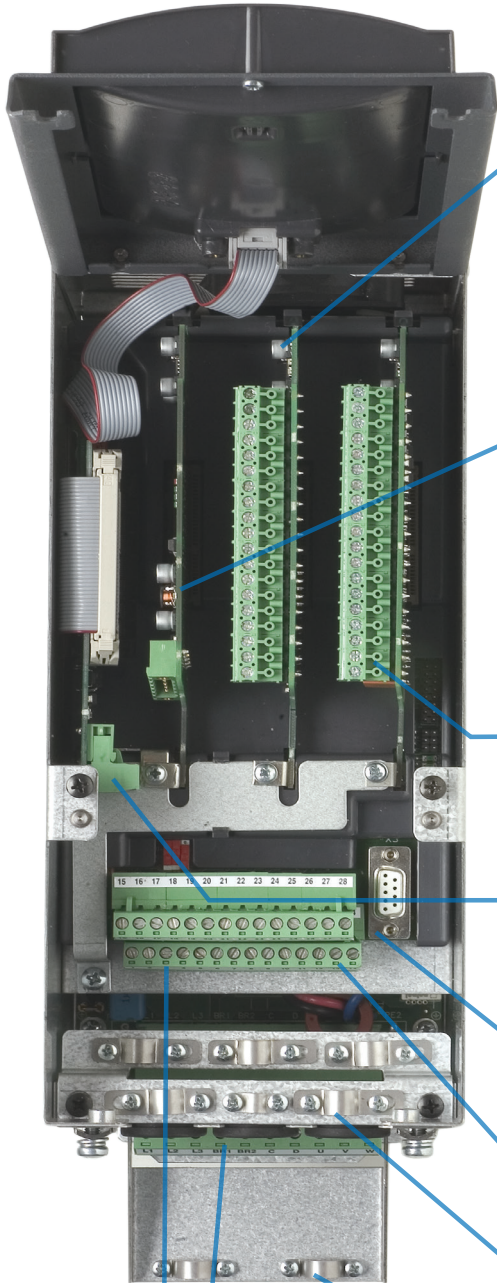


### > ENCODER INTERFACE



### > FIELDBUS INTERFACE



### > I/O EXPANSIONS



| Option                | Code  | Description                                                                                                   |
|-----------------------|-------|---------------------------------------------------------------------------------------------------------------|
| EXP-DE-I1R1F2-ADV     | S5L30 | TTL/HTL digital incremental encoder expansion card<br>1 encoder input - 1 encoder output - 2 freeze channels  |
| EXP-DE-I2R1F2-ADV     | S5L35 | TTL/HTL digital incremental encoder expansion card<br>2 encoder inputs - 1 encoder output - 2 freeze channels |
| EXP-SE-I1R1F2-ADV     | S5L31 | Sinusoidal incremental encoder expansion card<br>1 encoder input - 1 encoder output - 2 freeze channels       |
| EXP-SESC-I1R1F2-ADV   | S5L32 | Sincos incremental encoder expansion card<br>1 encoder input - 1 encoder output - 2 freeze channels           |
| EXP-EN/SSI-I1R1F2-ADV | S5L33 | Absolute EnDat/SSI encoder expansion card<br>1 encoder input - 1 encoder output - 2 freeze channels           |
| EXP-HIP-I1R1F2-ADV    | S5L34 | Absolute Hiperface encoder expansion card<br>1 encoder input - 1 encoder output - 2 freeze channels           |
| EXP-ASC-I1-ADV        | S5L42 | Absolute SinCos expansion card<br>1 encoder input                                                             |
| EXP-RES-I1R1-ADV      | S5L43 | Resolver expansion card<br>1 Resolver input - 1 Resolver repetition output                                    |

|                    |       |                                                      |
|--------------------|-------|------------------------------------------------------|
| EXP-CAN-ADV        | S527L | Expansion card for CANopen © and DeviceNet interface |
| EXP-PDP-ADV        | S530L | Expansion card for Profibus_DP interface             |
| EXP-ETH-GD-ADV200  | S5L29 | Ethernet GD-net interface expansion card             |
| EXP-ETH-CAT-ADV200 | S5L09 | EtherCAT interface expansion card                    |
| EXP-ETH-IP-ADV200  | S5L19 | Ethernet IP interface expansion card                 |
| EXP-ETH-PN-ADV     | S5L60 | Profinet interface expansion card                    |

|                      |       |                                                                                                     |
|----------------------|-------|-----------------------------------------------------------------------------------------------------|
| EXP-IO-DSR8-ADV      | S5L38 | 4 digital inputs / 1 digital output / 8 relay output                                                |
| EXP-IO-D6A4R1-ADV    | S526L | 4 digital inputs / 2 digital outputs / 2 analog inputs / 2 analog outputs / 2 double contact relays |
| EXP-FL-XCAN-ADV      | S5L41 | Master CAN controller and Fast Link interface                                                       |
| EXP-IO-SENS-100-ADV  | S5L40 | To acquire signals from PT100 (PT1000), (NI1000), 0-10V, 0/4...20mA, KTY84, PTC                     |
| EXP-IO-SENS-1000-ADV | S5L37 |                                                                                                     |

### SAFETY CARD

Integrated on board the drive as the 4th option, the **EXP-SFTy** card allows the motor to be disabled without the use of a safety contactor on the drive output. It guarantees compliance with the machine safety directive and meets the following standards:  
 PL=e under EN ISO 13849-1  
 SIL 3 under IEC 61508  
 EN 954-1 Cat. 3.

### SERIAL LINE

Integrated standard RS485 serial line with **Modbus RTU** protocol, for peer-to-peer or multidrop connections (with **OPT-485-ADV** card).

### BACK-UP SUPPLY

ADV200 can be supplied through an external +24Vdc supply in order to be kept active in case of mains input loss, ensuring in this situation the operation of all monitoring functions, programming and any connected fieldbus network.

### CABLES SHIELD

OMEGA clamp to grounding 360° of shielded cables.

**Modbus**

### SMART CONNECTIONS

Dedicated accessories and fully removable terminals, ensure simple and fast installation and start-up in compliance with the EMC normative.

## ADV200-4 • CHOOSING THE INVERTER – INPUT AND OUTPUT DATA

The combinations of motor power ratings and inverters listed in the table shows the use of motors in which the voltage rating is equal to that of the mains power.

For motors with different voltage ratings the inverter must be chosen according to the current rating of the motor.

The combinations listed in the table thus show the current that can be delivered by the drive during continuous operation and overload conditions, according to the mains voltage.

The same engineering criteria apply for operations with additional derating factors (see drive instruction manual).

| SIZES<br>ADV200-4 | AC input current for continuous operation I <sub>N</sub> |                                 | Inverter Output |            | P <sub>n</sub> mot<br>(Recommended asynchronous motor rating, f <sub>sw</sub> = default) |                               |                               |                               |
|-------------------|----------------------------------------------------------|---------------------------------|-----------------|------------|------------------------------------------------------------------------------------------|-------------------------------|-------------------------------|-------------------------------|
|                   | Heavy Duty<br>(150% overload)                            | Light Duty<br>(110% overload)   | Heavy Duty      | Light Duty | Heavy Duty<br>(150% overload)                                                            |                               | Light Duty<br>(110% overload) |                               |
|                   | Ⓢ 400 V <sub>AC</sub><br>[Arms]                          | Ⓢ 400 V <sub>AC</sub><br>[Arms] | [kVA]           | [kVA]      | Ⓢ 400 V <sub>AC</sub><br>[kW]                                                            | Ⓢ 460 V <sub>AC</sub><br>[HP] | Ⓢ 400 V <sub>AC</sub><br>[kW] | Ⓢ 460 V <sub>AC</sub><br>[HP] |
| 1007              | 2.1                                                      | 3.7                             | 1.7             | 3          | 0.75                                                                                     | 1                             | 1.5                           | 2                             |
| 1015              | 3.7                                                      | 4.9                             | 3               | 4          | 1.5                                                                                      | 2                             | 2.2                           | 3                             |
| 1022              | 4.9                                                      | 6.5                             | 4               | 5.3        | 2.2                                                                                      | 3                             | 3                             | 5                             |
| 1030              | 6.5                                                      | 8.1                             | 5.3             | 6.6        | 3                                                                                        | 5                             | 4                             | 5                             |
| 1040              | 8.1                                                      | 11.1                            | 6.6             | 9          | 4                                                                                        | 5                             | 5.5                           | 7.5                           |
| 2055              | 11.1                                                     | 14                              | 9               | 11.4       | 5.5                                                                                      | 7.5                           | 7.5                           | 10                            |
| 2075              | 14                                                       | 19.6                            | 11.4            | 15.9       | 7.5                                                                                      | 10                            | 11                            | 15                            |
| 2110              | 19.6                                                     | 26.4                            | 15.9            | 21.5       | 11                                                                                       | 15                            | 15                            | 20                            |
| 3150              | 26.4                                                     | 32.3                            | 21.5            | 26.3       | 15                                                                                       | 20                            | 18.5                          | 25                            |
| 3185              | 32.3                                                     | 39                              | 26.3            | 32         | 18.5                                                                                     | 25                            | 22                            | 30                            |
| 3220              | 39                                                       | 53                              | 32              | 43         | 22                                                                                       | 30                            | 30                            | 40                            |
| 4300              | 53                                                       | 64                              | 43              | 52         | 30                                                                                       | 40                            | 37                            | 50                            |
| 4370              | 64                                                       | 74                              | 52              | 60         | 37                                                                                       | 50                            | 45                            | 60                            |
| 4450              | 74                                                       | 100                             | 60              | 73         | 45                                                                                       | 60                            | 55                            | 75                            |
| 5550              | 100                                                      | 143                             | 73              | 104        | 55                                                                                       | 75                            | 75                            | 100                           |
| 5750              | 143                                                      | 171                             | 104             | 125        | 75                                                                                       | 100                           | 90                            | 125                           |
| 5900              | 171                                                      | 200                             | 125             | 145        | 90                                                                                       | 125                           | 110                           | 150                           |
| 61100             | 200                                                      | 238                             | 145             | 173        | 110                                                                                      | 150                           | 132                           | 175                           |
| 61320             | 238                                                      | 285                             | 173             | 208        | 132                                                                                      | 175                           | 160                           | 200                           |
| 71600             | 300                                                      | 350                             | 208             | 267        | 160                                                                                      | 200                           | 200                           | 250                           |
| 72000             | 350                                                      | 420                             | 267             | 319        | 200                                                                                      | 250                           | 250                           | 300                           |
| 72500             | 420                                                      | 580                             | 319             | 409        | 250                                                                                      | 300                           | 315                           | 400                           |
| 73150             | 580                                                      | 640                             | 409             | 450        | 315                                                                                      | 400                           | 355                           | 450                           |
| 73551             | 640                                                      | 710                             | 450             | 506        | 355                                                                                      | 450                           | 400                           | 500                           |
| 400 kW            | 665                                                      | 800                             | 506             | 603        | 400                                                                                      | 500                           | 500                           | 650                           |
| 500 kW            | 800                                                      | 1100                            | 603             | 776        | 500                                                                                      | 650                           | 630                           | 850                           |
| 630 kW            | 1100                                                     | 1215                            | 776             | 852        | 630                                                                                      | 850                           | 710                           | 950                           |
| 710 kW            | 1215                                                     | 1350                            | 852             | 956        | 710                                                                                      | 950                           | 800                           | 1100                          |
| 900 kW            | 1650                                                     | 1800                            | 1108            | 1247       | 900                                                                                      | 1200                          | 1000                          | 1300                          |
| 1000 kW           | 1800                                                     | 2020                            | 1247            | 1420       | 1000                                                                                     | 1300                          | 1200                          | 1600                          |



# ADV200 FIELD-ORIENTED VECTOR INVERTER

| SIZES<br>ADV200-4 | Rated output current $I_n$ (fsw = default) |                             |                                           |                             |                                            |                             |                                           |                             | Switching frequency fsw |              |
|-------------------|--------------------------------------------|-----------------------------|-------------------------------------------|-----------------------------|--------------------------------------------|-----------------------------|-------------------------------------------|-----------------------------|-------------------------|--------------|
|                   | Heavy Duty                                 |                             |                                           |                             | Light Duty                                 |                             |                                           |                             | Default                 | Higher       |
|                   | For Asynchronous motors<br>(150% overload) |                             | For Synchronous motors<br>(160% overload) |                             | For Asynchronous motors<br>(110% overload) |                             | For Synchronous motors<br>(110% overload) |                             |                         |              |
|                   | @400 V <sub>AC</sub><br>[A]                | @460 V <sub>AC</sub><br>[A] | @400 V <sub>AC</sub><br>[A]               | @460 V <sub>AC</sub><br>[A] | @400 V <sub>AC</sub><br>[A]                | @460 V <sub>AC</sub><br>[A] | @400 V <sub>AC</sub><br>[A]               | @460 V <sub>AC</sub><br>[A] |                         |              |
| 1007              | 2.5                                        | 2.3                         | 2.3                                       | 2.1                         | 4.3                                        | 3.9                         | 3.9                                       | 3.5                         | 8                       | 10, 12       |
| 1015              | 4.3                                        | 3.9                         | 3.9                                       | 3.5                         | 5.8                                        | 5.2                         | 5.2                                       | 4.7                         | 8                       | 10, 12       |
| 1022              | 5.8                                        | 5.2                         | 5.2                                       | 4.7                         | 7.6                                        | 6.8                         | 6.8                                       | 6.1                         | 4                       | 6, 8, 10, 12 |
| 1030              | 7.6                                        | 6.8                         | 6.8                                       | 6.1                         | 9.5                                        | 8.6                         | 8.6                                       | 7.7                         | 4                       | 6, 8, 10, 12 |
| 1040              | 9.5                                        | 8.6                         | 8.6                                       | 7.7                         | 13                                         | 11.7                        | 11.7                                      | 10.5                        | 4                       | 6, 8, 10, 12 |
| 2055              | 13                                         | 11.7                        | 11.7                                      | 10.5                        | 16.5                                       | 14.9                        | 15                                        | 13.5                        | 4                       | 6, 8, 10, 12 |
| 2075              | 16.5                                       | 14.9                        | 15                                        | 13.5                        | 23                                         | 20.7                        | 21                                        | 18.9                        | 4                       | 6, 8, 10, 12 |
| 2110              | 23                                         | 20.7                        | 21                                        | 18.9                        | 31                                         | 27.9                        | 28                                        | 25.2                        | 4                       | 6, 8, 10, 12 |
| 3150              | 31                                         | 27.9                        | 28                                        | 25.2                        | 38                                         | 34.2                        | 34                                        | 30.6                        | 4                       | 6, 8, 10, 12 |
| 3185              | 38                                         | 34.2                        | 34                                        | 30.6                        | 46                                         | 41.4                        | 41                                        | 36.9                        | 4                       | 6, 8, 10, 12 |
| 3220              | 46                                         | 41.4                        | 41                                        | 36.9                        | 62                                         | 55.8                        | 56                                        | 50.4                        | 4                       | 6, 8, 10, 12 |
| 4300              | 62                                         | 55.8                        | 56                                        | 50.4                        | 75                                         | 67.5                        | 68                                        | 61.2                        | 4                       | 6, 8, 10, 12 |
| 4370              | 75                                         | 67.5                        | 68                                        | 61.2                        | 87                                         | 78.3                        | 78                                        | 70.2                        | 4                       | 6, 8, 10, 12 |
| 4450              | 87                                         | 78                          | 78                                        | 70.2                        | 105                                        | 94.5                        | 95                                        | 85.5                        | 4                       | 6, 8         |
| 5550              | 105                                        | 94.5                        | 95                                        | 85.5                        | 150                                        | 135                         | 135                                       | 121.5                       | 4                       | 6, 8         |
| 5750              | 150                                        | 135                         | 135                                       | 122                         | 180                                        | 162                         | 162                                       | 146                         | 4                       | 6, 8         |
| 5900              | 180                                        | 162                         | 162                                       | 146                         | 210                                        | 189                         | 189                                       | 170                         | 4                       | 6, 8         |
| 61100             | 210                                        | 189                         | 189                                       | 170                         | 250                                        | 225                         | 225                                       | 203                         | 4                       | 6, 8         |
| 61320             | 250                                        | 225                         | 225                                       | 203                         | 300                                        | 270                         | 270                                       | 243                         | 4                       | 6, 8         |
| 71600             | 300                                        | 270                         | 270                                       | 243                         | 385                                        | 347                         | 347                                       | 312                         | 4                       | -            |
| 72000             | 385                                        | 347                         | 347                                       | 312                         | 460                                        | 414                         | 414                                       | 373                         | 4                       | -            |
| 72500             | 460                                        | 414                         | 414                                       | 373                         | 590                                        | 531                         | 521                                       | 469                         | 2                       | 4            |
| 73150             | 590                                        | 531                         | 521                                       | 469                         | 650                                        | 585                         | 585                                       | 527                         | 2                       | -            |
| 73551             | 650                                        | 585                         | 585                                       | 527                         | 730                                        | 657                         | 657                                       | 591                         | 2                       | -            |
| 400 kW            | 730                                        | 657                         | 657                                       | 591                         | 870                                        | 783                         | 783                                       | 705                         | 4                       | -            |
| 500 kW            | 870                                        | 783                         | 783                                       | 705                         | 1120                                       | 1008                        | 1008                                      | 907                         | 2                       | 4            |
| 630 kW            | 1120                                       | 1008                        | 1008                                      | 907                         | 1230                                       | 1107                        | 1107                                      | 996                         | 2                       | -            |
| 710 kW            | 1230                                       | 1107                        | 1107                                      | 996                         | 1380                                       | 1242                        | 1242                                      | 1118                        | 2                       | -            |
| 900 kW            | 1600                                       | 1440                        | 1440                                      | 1296                        | 1800                                       | 1620                        | 1620                                      | 1458                        | 2                       | -            |
| 1000 kW           | 1800                                       | 1620                        | 1620                                      | 1458                        | 2050                                       | 1845                        | 1845                                      | 1661                        | 2                       | -            |

# ADV200-DC • CHOOSING THE INVERTER – INPUT AND OUTPUT DATA

The combinations of motor power ratings and inverters listed in the table shows the use of motors in which the voltage rating is equal to that of the mains power.

For motors with different voltage ratings the inverter must be chosen according to the current rating of the motor.

The combinations listed in the table thus show the current that can be delivered by the drive during continuous operation and overload conditions, according to the mains voltage.

The same engineering criteria apply for operations with additional derating factors (see drive instruction manual).

| SIZES<br>ADV200-DC | DC input current for continuous operation I <sub>N</sub> |                                          |                                          |                                          | Inverter Output |                 | P <sub>n</sub> mot<br>(Recommended asynchronous motor rating,<br>f <sub>sw</sub> = default) |             |             |                               |             |             |
|--------------------|----------------------------------------------------------|------------------------------------------|------------------------------------------|------------------------------------------|-----------------|-----------------|---------------------------------------------------------------------------------------------|-------------|-------------|-------------------------------|-------------|-------------|
|                    | Heavy Duty<br>(150% overload)                            |                                          | Light Duty<br>(110% overload)            |                                          | Heavy<br>Duty   | Light<br>Duty   | Heavy Duty<br>(150% overload)                                                               |             |             | Light Duty<br>(110% overload) |             |             |
|                    | -4/4A<br>@ 540 V <sub>DC</sub><br>[Arms]                 | -6/6A<br>@ 930 V <sub>DC</sub><br>[Arms] | -4/4A<br>@ 540 V <sub>DC</sub><br>[Arms] | -6/6A<br>@ 930 V <sub>DC</sub><br>[Arms] | @ 400V<br>[kVA] | @ 400V<br>[kVA] | (1)<br>[kW]                                                                                 | (2)<br>[HP] | (3)<br>[HP] | (1)<br>[kW]                   | (2)<br>[HP] | (3)<br>[HP] |
| 3185               | 39                                                       | -                                        | 48                                       | -                                        | 26.3            | 32              | 18.5                                                                                        | 25          |             | 22                            | 30          |             |
| 3220               | 48                                                       | -                                        | 65                                       | -                                        | 32              | 43              | 22                                                                                          | 30          |             | 30                            | 40          |             |
| 4300               | 65                                                       | -                                        | 80                                       | -                                        | 43              | 52              | 30                                                                                          | 40          |             | 37                            | 50          |             |
| 4370               | 80                                                       | -                                        | 90                                       | -                                        | 52              | 60              | 37                                                                                          | 50          |             | 45                            | 60          |             |
| 4450               | 90                                                       | -                                        | 125                                      | -                                        | 60              | 73              | 45                                                                                          | 60          |             | 55                            | 75          |             |
| 5550               | 125                                                      | -                                        | 175                                      | -                                        | 73              | 104             | 55                                                                                          | 75          |             | 75                            | 100         |             |
| 5750               | 175                                                      | -                                        | 210                                      | -                                        | 104             | 125             | 75                                                                                          | 100         |             | 90                            | 125         |             |
| 5900               | 210                                                      | -                                        | 240                                      | -                                        | 125             | 145             | 90                                                                                          | 125         |             | 110                           | 150         |             |
| 61100              | 240                                                      | -                                        | 290                                      | -                                        | 145             | 173             | 110                                                                                         | 150         |             | 132                           | 175         |             |
| 61320              | 290                                                      | -                                        | 350                                      | -                                        | 173             | 208             | 132                                                                                         | 175         |             | 160                           | 200         |             |
| 71600              | 370                                                      | 190                                      | 430                                      | 235                                      | 208             | 267             | 160                                                                                         | 200         | 150         | 200                           | 250         | 200         |
| 72000              | 430                                                      | 235                                      | 510                                      | 300                                      | 267             | 319             | 200                                                                                         | 250         | 200         | 250                           | 300         | 250         |
| 72500              | 510                                                      | 300                                      | 710                                      | 370                                      | 319             | 409             | 250                                                                                         | 300         | 250         | 315                           | 400         | 350         |
| 73150              | 710                                                      | 370                                      | 780                                      | 420                                      | 409             | 450             | 315                                                                                         | 400         | 350         | 355                           | 450         | 400         |
| 73550 / 73551      | 780                                                      | 420                                      | 850                                      | 470                                      | 450             | 506             | 355                                                                                         | 450         | 400         | 400                           | 500         | 450         |
| 400 kW             | 860                                                      | 514                                      | 1020                                     | 637                                      | 506             | 603             | 400                                                                                         | 500         | 450         | 500                           | 650         | 500         |
| 500 kW             | 1020                                                     | 653                                      | 1420                                     | 797                                      | 603             | 776             | 500                                                                                         | 650         | 550         | 630                           | 850         | 700         |
| 630 kW             | 1420                                                     | 814                                      | 1560                                     | 925                                      | 776             | 852             | 630                                                                                         | 850         | 700         | 710                           | 950         | 800         |
| 710 kW             | 1560                                                     | 926                                      | 1700                                     | 1032                                     | 852             | 956             | 710                                                                                         | 950         | 800         | 800                           | 1100        | 900         |
| 900 kW             | 2130                                                     | 1236                                     | 2610                                     | 1445                                     | 1108            | 1247            | 900                                                                                         | 1200        | 1000        | 1000                          | 1300        | 1100        |
| 1 MW               | 2340                                                     | 1445                                     | 2550                                     | 1542                                     | 1247            | 1420            | 1000                                                                                        | 1300        | 1100        | 1200                          | 1600        | 1300        |
| 1.35 MW            | -                                                        | 1684                                     | -                                        | 1855                                     | -               | -               | 1350                                                                                        | -           | 1500        | -                             | -           | 1600        |
| 1.65 MW            | -                                                        | 2058                                     | -                                        | 2254                                     | -               | -               | 1650                                                                                        | -           | 1800        | -                             | -           | 2000        |

(1) ADV200-...-4/4A-DC = @400 V<sub>AC</sub>; ADV200-...-6/6A-DC = @690 V<sub>AC</sub>.

(2) ADV200-...-4/4A-DC = @460 V<sub>AC</sub>.

(3) ADV200-...-6/6A-DC = @575 V<sub>AC</sub>.

# ADV200 FIELD-ORIENTED VECTOR INVERTER

| SIZES<br>ADV200-DC | Rated output current I <sub>n</sub> (f <sub>sw</sub> = default) |                             |                             |                               |                             |                             |                               |                             |                             |                             |                             |                             |
|--------------------|-----------------------------------------------------------------|-----------------------------|-----------------------------|-------------------------------|-----------------------------|-----------------------------|-------------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|
|                    | Light Duty<br>(110% overload)                                   |                             |                             | Heavy Duty<br>(160% overload) |                             |                             | Light Duty<br>(110% overload) |                             |                             |                             |                             |                             |
|                    | (For Asynchronous motors)                                       |                             |                             | (For Synchronous motors)      |                             |                             | (For Asynchronous motors)     |                             |                             | (For Synchronous motors)    |                             |                             |
|                    | @540 V <sub>DC</sub><br>[A]                                     | @650 V <sub>DC</sub><br>[A] | @930 V <sub>DC</sub><br>[A] | @540 V <sub>DC</sub><br>[A]   | @650 V <sub>DC</sub><br>[A] | @930 V <sub>DC</sub><br>[A] | @540 V <sub>DC</sub><br>[A]   | @650 V <sub>DC</sub><br>[A] | @930 V <sub>DC</sub><br>[A] | @540 V <sub>DC</sub><br>[A] | @650 V <sub>DC</sub><br>[A] | @930 V <sub>DC</sub><br>[A] |
| 3185               | 38                                                              | 34.2                        | -                           | 34                            | 30.6                        | -                           | 46                            | 41.4                        | -                           | 41                          | 36.9                        | -                           |
| 3220               | 46                                                              | 41.4                        | -                           | 41                            | 36.9                        | -                           | 62                            | 55.8                        | -                           | 56                          | 50.4                        | -                           |
| 4300               | 62                                                              | 55.8                        | -                           | 56                            | 50.4                        | -                           | 75                            | 67.5                        | -                           | 68                          | 61.2                        | -                           |
| 4370               | 75                                                              | 67.5                        | -                           | 68                            | 61.2                        | -                           | 87                            | 78.3                        | -                           | 78                          | 70.2                        | -                           |
| 4450               | 87                                                              | 78                          | -                           | 78                            | 70.2                        | -                           | 105                           | 94.5                        | -                           | 95                          | 85.5                        | -                           |
| 5550               | 105                                                             | 94.5                        | -                           | 95                            | 85.5                        | -                           | 150                           | 135                         | -                           | 135                         | 121.5                       | -                           |
| 5750               | 150                                                             | 135                         | -                           | 135                           | 122                         | -                           | 180                           | 162                         | -                           | 162                         | 146                         | -                           |
| 5900               | 180                                                             | 162                         | -                           | 162                           | 146                         | -                           | 210                           | 189                         | -                           | 189                         | 170                         | -                           |
| 61100              | 210                                                             | 189                         | -                           | 189                           | 170                         | -                           | 250                           | 225                         | -                           | 225                         | 203                         | -                           |
| 61320              | 250                                                             | 225                         | -                           | 225                           | 203                         | -                           | 300                           | 270                         | -                           | 270                         | 243                         | -                           |
| 71600              | 300                                                             | 270                         | 170                         | 270                           | 243                         | 153                         | 385                           | 347                         | 210                         | 347                         | 312                         | 189                         |
| 72000              | 385                                                             | 347                         | 210                         | 347                           | 312                         | 189                         | 460                           | 414                         | 265                         | 414                         | 373                         | 238                         |
| 72500              | 460                                                             | 414                         | 265                         | 414                           | 373                         | 238                         | 590                           | 531                         | 330                         | 521                         | 469                         | 297                         |
| 73150              | 590                                                             | 531                         | 330                         | 521                           | 469                         | 297                         | 650                           | 585                         | 375                         | 585                         | 527                         | 337                         |
| 73550 / 73551      | 650                                                             | 585                         | 375 (3)                     | 585                           | 527                         | 337                         | 730                           | 657                         | 415 (3)                     | 657                         | 591                         | 373                         |
| 400 kW             | 730                                                             | 657                         | 400                         | 657                           | 591                         | 360                         | 870                           | 783                         | 500                         | 783                         | 705                         | 450                         |
| 500 kW             | 870                                                             | 783                         | 500                         | 783                           | 705                         | 450                         | 1120                          | 1008                        | 630                         | 1008                        | 907                         | 567                         |
| 630 kW             | 1120                                                            | 1008                        | 630                         | 1008                          | 907                         | 567                         | 1230                          | 1107                        | 710                         | 1107                        | 996                         | 639                         |
| 710 kW             | 1230                                                            | 1107                        | 710 (3)                     | 1107                          | 996                         | 639                         | 1380                          | 1242                        | 790 (3)                     | 1242                        | 1118                        | 711                         |
| 900 kW             | 1600                                                            | 1440                        | 900                         | 1440                          | 1296                        | 810                         | 1800                          | 1620                        | 1000                        | 1620                        | 1458                        | 900                         |
| 1 MW               | 1800                                                            | 1620                        | 1000 (3)                    | 1620                          | 1458                        | 900                         | 2050                          | 1845                        | 1150 (3)                    | 1845                        | 1661                        | 1035                        |
| 1.35 MW            | -                                                               | -                           | 1300 (3)                    | -                             | -                           | 1170 (3)                    | -                             | -                           | 1450                        | -                           | -                           | 1305                        |
| 1.65 MW            | -                                                               | -                           | 1600                        | -                             | -                           | 1440                        | -                             | -                           | 1770                        | -                           | -                           | 1593                        |

| ADV200-DC-4/4A  | Switching frequency f <sub>sw</sub> |                  |
|-----------------|-------------------------------------|------------------|
|                 | Default                             | Higher           |
| 3185 ... 4370   | 4 kHz                               | 6, 8, 10, 12 kHz |
| 4450 ... 61320  | 4 kHz                               | 6, 8 kHz         |
| 71600 ... 72000 | 4 kHz                               | -                |
| 72500 ... 73551 | 2 kHz                               | - (6)            |
| 400 kW          | 4 kHz (5)                           | -                |
| 500 kW          | 2 kHz                               | 4 kHz (5)        |
| 630 kW ... 1 MW | 2 kHz                               | -                |

| ADV200-DC-6/6A     | Switching frequency f <sub>sw</sub> |         |
|--------------------|-------------------------------------|---------|
|                    | Maximum (default)                   | Minimum |
| 71600              | 2 kHz / 4 kHz (4)                   | 2 kHz   |
| 72000              | 2 kHz / 4 kHz (4)                   | 2 kHz   |
| 72500 ... 73550    | 2 kHz                               | 2 kHz   |
| 400 kW ... 1.65 MW | 2 kHz                               | 2 kHz   |

- (3) Current values with an ambient temperature of 35°C.  
(4) 4 kHz in "variable frequency" mode (PAR 568 Switch freq. mode =1).  
from fw 6.03  
(5) 72500 = 4 kHz  
(6)

## ADV200-6 • CHOOSING THE INVERTER – INPUT AND OUTPUT DATA

The combinations of motor power ratings and inverters listed in the table shows the use of motors in which the voltage rating is equal to that of the mains power.

For motors with different voltage ratings the inverter must be chosen according to the current rating of the motor.

The combinations listed in the table thus show the current that can be delivered by the drive during continuous operation and overload conditions, according to the mains voltage.

The same engineering criteria apply for operations with additional derating factors (see drive instruction manual).

| SIZES<br>ADV200-6 | AC input current                |                                 | Pn mot<br>(Recommended asynchronous motor rating,<br>fsw = default) |                              |                              |                              | Rated output current In<br>(for Asynchronous motor)<br>(fsw = default) |               | Rated output current In<br>(For Synchronous motors)<br>(fsw = default) |               | Switching frequency<br>"Fixed frequency" mode<br>(PAR 568 Switch freq. mode =0,<br>default) |         |
|-------------------|---------------------------------|---------------------------------|---------------------------------------------------------------------|------------------------------|------------------------------|------------------------------|------------------------------------------------------------------------|---------------|------------------------------------------------------------------------|---------------|---------------------------------------------------------------------------------------------|---------|
|                   | Heavy<br>Duty                   | Light<br>Duty                   | Heavy<br>Duty                                                       |                              | Light<br>Duty                |                              | Heavy<br>Duty                                                          | Light<br>Duty | Heavy<br>Duty                                                          | Light<br>Duty | Maximum<br>(default)                                                                        | Minimum |
|                   | @ 690 V <sub>AC</sub><br>[Arms] | @ 690 V <sub>AC</sub><br>[Arms] | @690 V <sub>AC</sub><br>[kW]                                        | @575 V <sub>AC</sub><br>[kW] | @690 V <sub>AC</sub><br>[kW] | @575 V <sub>AC</sub><br>[kW] | [A]                                                                    | [A]           | [A]                                                                    | [A]           | (kHz)                                                                                       | (kHz)   |
| 5750              | 90                              | -                               | 75                                                                  | -                            | -                            | -                            | 92                                                                     | -             | 75                                                                     | -             | 4                                                                                           | 2       |
| 6900              | 109                             | -                               | 90                                                                  | -                            | -                            | -                            | 110                                                                    | -             | 90                                                                     | -             | 4                                                                                           | 2       |
| 61100             | 129                             | -                               | 110                                                                 | -                            | -                            | -                            | 133                                                                    | -             | 110                                                                    | -             | 2                                                                                           | 2       |
| 61320             | 157                             | -                               | 132                                                                 | -                            | -                            | -                            | 159                                                                    | -             | 130                                                                    | -             | 2                                                                                           | 2       |
| 71600             | 172                             | 210                             | 160                                                                 | 150                          | 200                          | 200                          | 170                                                                    | 210           | 153                                                                    | 189           | 4                                                                                           | 2       |
| 72000             | 214                             | 263                             | 200                                                                 | 200                          | 250                          | 250                          | 210                                                                    | 265           | 189                                                                    | 238           | 2                                                                                           | 2       |
| 72500             | 263                             | 336                             | 250                                                                 | 250                          | 315                          | 350                          | 265                                                                    | 330           | 238                                                                    | 297           | 2                                                                                           | 2       |
| 73150             | 336                             | 382                             | 315                                                                 | 350                          | 355                          | 400                          | 330                                                                    | 375           | 297                                                                    | 337           | 2                                                                                           | 2       |
| 73550             | 382                             | 420                             | 355                                                                 | 400                          | 400                          | 450                          | 375 (1)                                                                | 415           | 337 (1)                                                                | 373           | 2                                                                                           | 2       |
| 400 kW            | 420                             | 520                             | 400                                                                 | 450                          | 500                          | 500                          | 400                                                                    | 500           | 360                                                                    | 450           | 2                                                                                           | 2       |
| 500 kW            | 533                             | 651                             | 500                                                                 | 550                          | 630                          | 700                          | 500                                                                    | 630           | 450                                                                    | 567           | 2                                                                                           | 2       |
| 630 kW            | 665                             | 755                             | 630                                                                 | 700                          | 710                          | 800                          | 630                                                                    | 710           | 567                                                                    | 639           | 2                                                                                           | 2       |
| 710 kW            | 756                             | 843                             | 710                                                                 | 800                          | 800                          | 900                          | 710 (1)                                                                | 790 (1)       | 639 (1)                                                                | 711           | 2                                                                                           | 2       |
| 900 kW            | 1009                            | 1180                            | 900                                                                 | 1000                         | 1000                         | 1100                         | 900                                                                    | 1000          | 810                                                                    | 900           | 2                                                                                           | 2       |
| 1 MW              | 1180                            | 1259                            | 1000                                                                | 1100                         | 1150                         | 1300                         | 1000 (1)                                                               | 1150 (1)      | 900 (1)                                                                | 1035          | 2                                                                                           | 2       |
| 1.35 MW           | 1375                            | 1515                            | 1350                                                                | 1500                         | 1500                         | 1600                         | 1300 (1)                                                               | 1450          | 1170 (1)                                                               | 1305          | 2                                                                                           | 2       |
| 1.65 MW           | 1680                            | 1840                            | 1650                                                                | 1800                         | 1800                         | 2000                         | 1600                                                                   | 1770          | 1440                                                                   | 1593          | 2                                                                                           | 2       |

(1) Current values with an ambient temperature of 35°C.

## TOOLS & SOFTWARE

### GF-eXpress PROGRAMMING SOFTWARE

#### Applications

- > Parameter configuration of Gefran devices (Instruments, Drives, Sensors)
- > Tuning of control parameters with on-line tests and trends
- > Management of parameter archive for multiple configuration

#### Features

- > Guided product selection
- > Simplified settings
- > Multiple languages
- > Parameter printout
- > Creation and storing of recipes
- > Network autoscan
- > Oscilloscope


GF\_eXpress is the software used to configure the parameters of the automation components, drives and sensors in the Gefran catalogue.

The procedures for selecting and configuring parameters are easy and intuitive, thanks to the graphic interface and devices are grouped according to product type and functions.

Product searches are performed by means of a context search and a visual selection from among actual images of the products.

This makes it possible to have a single library of devices for all Gefran products.

All details for configuration of each single device are set out in XML format to facilitate expansion of the catalogue and parameters.

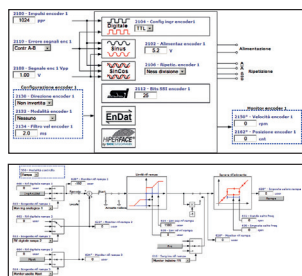

### STANDARD APPLICATIONS

Following applications are available on [www.gefran.com](http://www.gefran.com) web site:

#### > Torque Winder (TW)

Standard Winding/Un-Winding control, torque control in open-loop or closed-loop with load cell.

#### > Positioning control (POS)

Single axis Standard Positioning with Absolute encoder management.

#### > Electric line shaft (ELS)

Standard Electronic Line Shaft control.

The experience GEFRAN has acquired in the major application sectors has also produced an extensive range of specific and/or custom solutions for managing the most complex configurations in machines.

### SOFTSCOPE

SoftScope is a software oscilloscope with synchronous sampling (buffered with a minimum sampling time of 1ms). Using SoftScope the user can easily display in a fast way some specific variables, for example commissioning variables, variables to test performance levels achieved or to tune the control loops.

SoftScope allows the definition of the following parameters:

- > Trigger conditions (e.g. climbing leading edge of a specific signal)
- > Recording quality (a multiple of the basic clock at 1ms)
- > Recording duration period
- > System sizes to be recorded.

### “MDPLC” ADVANCED DEVELOPMENT ENVIRONMENT

The Motion Drive Programmable logic controller (MDPLc) development environment is a tool for the development of industrial applications based on the ADV200 series of drives.

It is an integrated tool that allows writing, compiling, downloading and debugging of the applications.

MDPLc allows complete personalisation of the drives according to the application requirements using a “friendly” and powerful graphic interface. The importance of the MDPLc’s performance is particularly evident when defining advanced applications.


The primary feature of MDPLc is its ability to create an application code for the drives in assembly language, by compiling the application written in the MDPLc environment with PLC languages in compliance with the IEC 61131-3 international standard.

When using an MDPLc application with the ADV200, the drive’s basic functions continue to be executed. Two MDPLc application programs can be stored on the drive. One of the two applications (1 or 2) is enabled via a parameter.


The languages that can be used to program specific custom applications are:

- Instruction List (IL)
- Structured Text (ST)
- Ladder Diagram (LD)
- Function Block Diagram (FBD)
- Sequential Flow Chart (SFC)

CD-ROM MDPLc cod. 1S3A56

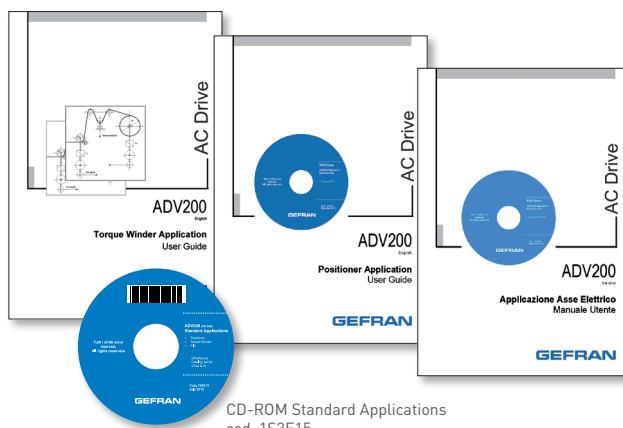


CD-ROM Standard Applications cod. 1S3E15



#### Speed cycle

Start, ramp reference 1500 rpm, ramp output reaches 1500 rpm, Stop, ramp reference 0 rpm, ramp output reaches 0 rpm.


- 1) start command
- 2) ramp input speed reference
- 3) ramp output



#### Zoom

Ramp output phase from 0 rpm to 1500 rpm of the previous cycle.

- 1) start command
- 2) ramp input speed reference
- 3) ramp output

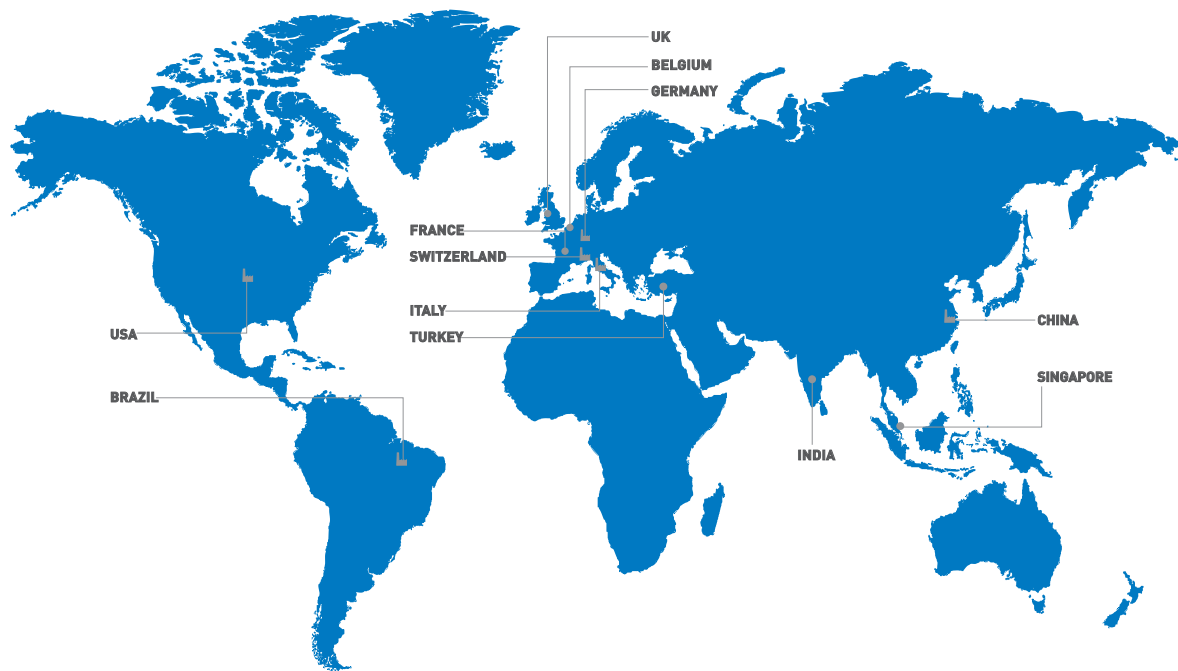

#### GEFRAN DEUTSCHLAND GmbH

Philipp-Reis-Straße 9a  
D-63500  
Seligenstadt  
Ph. +49 (0) 61828090  
Fax +49 (0) 6182809222  
vertrieb@gefran.de

#### GEFRAN BENELUX NV

ENA 23 Zone 3, nr. 3910  
Lammerdries-Zuid 14A  
B-2250 OLEN  
Ph. +32 (0) 14248181  
Fax +32 (0) 14248180  
info@gefran.be

#### GEFRAN SIEI - ASIA

31 Ubi Road 1  
#02-07,  
Aztech Building,  
Singapore 408694  
Ph. +65 6 8418300  
Fax +65 6 7428300  
info@gefran.com.sg

#### GEFRAN HEADQUARTER

Via Sebina, 74  
25050 PROVAGLIO D'ISEO (BS) ITALY  
Ph. +39 03098881  
Fax +39 0309839063

#### SIEI AREG - GERMANY

Gottlieb-Daimler Strasse 17/3  
D-74385  
Pleidelsheim  
Ph. +49 (0) 7144 897360  
Fax +49 (0) 7144 8973697  
info@sieiareg.de

#### GEFRAN UK Ltd

Unit 7 Brook Business Centre  
54a Cowley Mill Road  
Uxbridge  
UB8 2FX  
Ph. +44 (0) 8452 604555  
Fax +44 (0) 8452 604556  
sales@gefran.co.uk

#### GEFRAN INDIA

Survey No. 191/A/1,  
Chinchwad Station Road, Chinchwad,  
Pune-411033, Maharashtra  
Ph. +91 20 6614 6500  
Fax +91 20 6614 6501  
gefran.india@gefran.in

#### Drive & Motion Control Unit

Via Carducci, 24  
21040 GERENZANO (VA) ITALY  
Ph. +39 02967601  
Fax +39 029682653  
info.motion@gefran.com

#### SENSORMATE AG

Steigweg 8,  
CH-8355 Aadorf, Switzerland  
Ph. +41(0)52-2421818  
Fax +41(0)52-3661884  
http://www.sensormate.ch

#### GEFRAN MIDDLE EAST ELEKTRIK VE ELEKTRONIK San. ve Tic. Ltd. Sti

Yesilkoy Mah. Ataturk  
Cad. No: 12/1 B1 Blok K:12  
D: 389 Bakirkoy /Istanbul TURKIYE  
Ph. +90212 465 91 21  
Fax +90212 465 91 22

#### GEFRAN Inc.

8 Lowell Avenue  
WINCHESTER - MA 01890  
Toll Free 1-888-888-4474  
Fax +1 (781) 7291468  
info.us@gefran.com

**Technical Assistance:**  
technohelp@gefran.com

#### Customer Service

motioncustomer@gefran.com  
Ph. +39 02 96760500  
Fax +39 02 96760278

#### GEFRAN FRANCE SA

4, rue Jean Desparmet  
BP 8237  
69355 LYON Cedex 08  
Ph. +33 (0) 478770300  
Fax +33 (0) 478770320  
commercial@gefran.fr

#### GEFRAN SIEI

#### Drives Technology Co., Ltd

No. 1285, Beihe Road, Jiading  
District, Shanghai,  
China 201807  
Ph. +86 21 69169898  
Fax +86 21 69169333  
info@gefran.com.cn

#### GEFRAN BRASIL ELETRÓELETRÔNICA

Avenida Dr. Altino Arantes,  
377 Vila Clementino  
04042-032 SÃO PAULO - SP  
Ph. +55 (0) 1155851133  
Fax +55 (0) 1132974012  
comercial@gefran.com.br



[www.gefran.com](http://www.gefran.com)

# GEFRAN

You know we are there